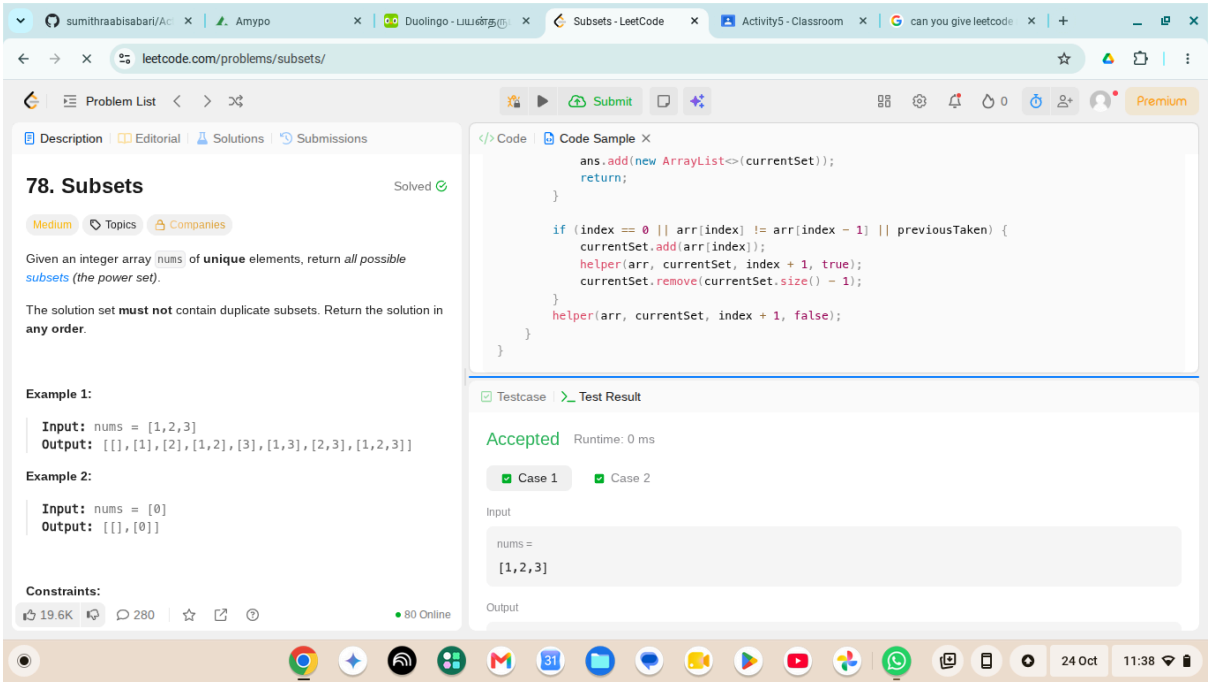
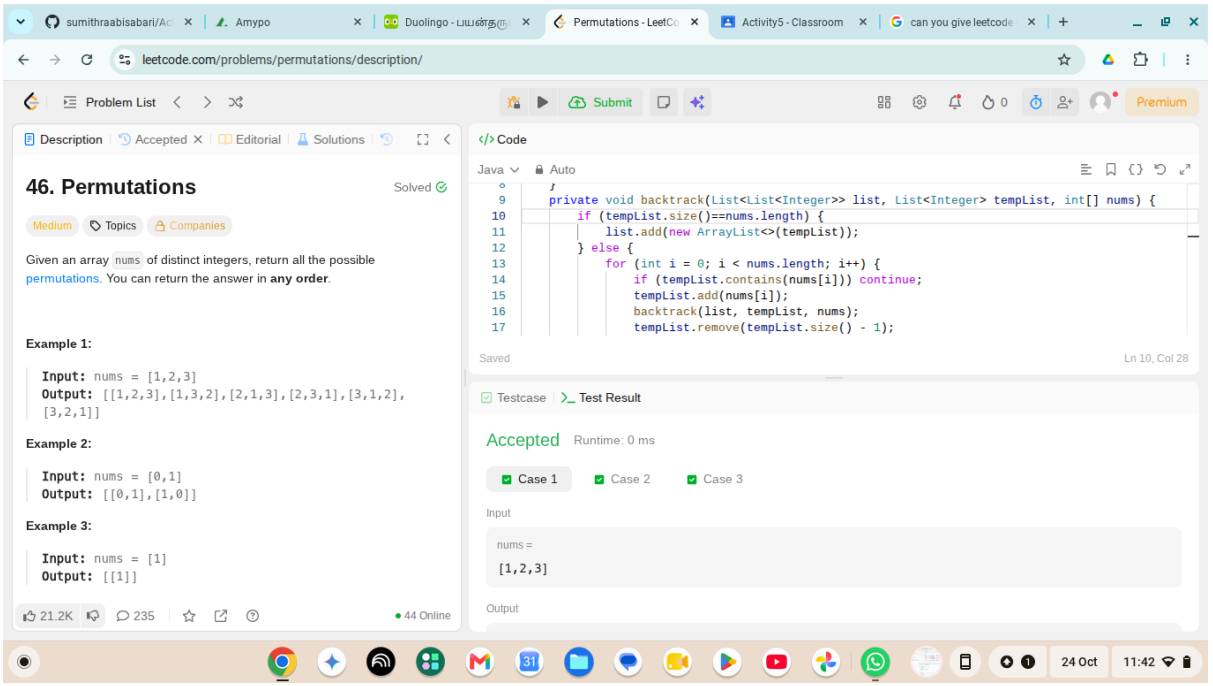

leetcode.com/problems/subsets/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
78. Subsets
Solved
Medium
Topics
Companies
Given an integer array nums of unique elements, return all possible subsets (the power set).
The solution set must not contain duplicate subsets. Return the solution in any order.
Example 1:
Input: nums = [1,2,3]
Output: [[],[1],[2],[1,2],[3],[1,3],[2,3],[1,2,3]]
Example 2:
Input: nums = [0]
Output: [[],[0]]
Constraints:
19.6K
280
80 Online
Code
Code Sample
ans.add(new ArrayList<>(currentSet));
return;
}
if (index == 0 || arr[index] != arr[index - 1] || previousTaken) {
currentSet.add(arr[index]);
helper(arr, currentSet, index + 1, true);
currentSet.remove(currentSet.size() - 1);
}
helper(arr, currentSet, index + 1, false);
}
}
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[1,2,3]
Output
24 Oct
11:38


leetcode.com/problems/permutations/description/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
46. Permutations
Solved
Medium
Topics
Companies
Given an array nums of distinct integers, return all the possible permutations. You can return the answer in any order.
Example 1:
Input: nums = [1,2,3]
Output: [[1,2,3],[1,3,2],[2,1,3],[2,3,1],[3,1,2],[3,2,1]]
Example 2:
Input: nums = [0,1]
Output: [[0,1],[1,0]]
Example 3:
Input: nums = [1]
Output: [[1]]
21.2K
235
44 Online
Code
Java
Auto
private void backtrack(List<List<Integer>> list, List<Integer> tempList, int[] nums) {
if (tempList.size()==nums.length) {
list.add(new ArrayList<>(tempList));
} else {
for (int i = 0; i < nums.length; i++) {
if (tempList.contains(nums[i])) continue;
tempList.add(nums[i]);
backtrack(list, tempList, nums);
tempList.remove(tempList.size() - 1);
Saved
Ln 10, Col 28
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,2,3]
Output
24 Oct
11:42

sumithraabisabari/Ac | Ampyo | Duolingo - பயன்தரு | Combination Sum - Le | Activity5 - Classroom | can you give leetcode

leetcode.com/problems/combination-sum/description/

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissi

39. Combination Sum

Solved

Medium | Topics | Companies

Given an array of **distinct** integers `candidates` and a target integer `target`, return *a list of all* ***unique combinations*** *of* `candidates` *where the chosen numbers sum to* `target`. You may return the combinations in **any order**.

The **same** number may be chosen from `candidates` an **unlimited number of times**. Two combinations are unique if the frequency of at least one of the chosen numbers is different.

The test cases are generated such that the number of unique combinations that sum up to `target` is less than `150` combinations for the given input.

Example 1:

```
Input: candidates = [2,3,6,7], target = 7
Output: [[2,2,3],[7]]
Explanation:
2 and 3 are candidates, and 2 + 2 + 3 = 7. Note that 2
```

21.5K | 282

Code

Java | Auto

```java
import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;
class Solution {
    public List<List<Integer>> combinationSum(int[] candidates, int target) {
        List<List<Integer>> list = new ArrayList<>();
        Arrays.sort(candidates);
        backtrack(list, new ArrayList<>(), candidates, target, 0);
        return list;
```

Saved | Ln 3, Col 23

Testcase | Test Result

Accepted Runtime: 1 ms

Case 1 | Case 2 | Case 3

Input

candidates =

[2,3,6,7]

target =

24 Oct 11:43

sumithraabisabari/Ac | Ampyo | Duolingo - பயன்தரு | N-Queens - LeetCode | Activity5 - Classroom | can you give leetcode

leetcode.com/problems/n-queens/description/

Problem List | Submit | Premium

Description | Editorial | Solutions | Submissions

51. N-Queens

Solved


Hard | Topics | Companies

The **n-queens** puzzle is the problem of placing `n` queens on an `n x n` chessboard such that no two queens attack each other.

Given an integer `n`, return *all distinct solutions to the* ***n-queens puzzle***. You may return the answer in **any order**.

Each solution contains a distinct board configuration of the n-queens' placement, where `'Q'` and `'.'` both indicate a queen and an empty space, respectively.

Example 1:



14.8K | 261 | 35 Online

Code

Java | Auto

```java
import java.util.ArrayList;
import java.util.List;
class Solution {
    public List<List<String>> solveNQueens(int n) {
        List<List<String>> list = new ArrayList<>();
        char[][] board = new char[n][n];
        for (int i = 0; i < n; i++) {
            for (int j = 0; j < n; j++) {
                board[i][j] = '.';
```

Saved | Ln 2, Col 23

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2


Input

n =

4

Output

24 Oct 11:45

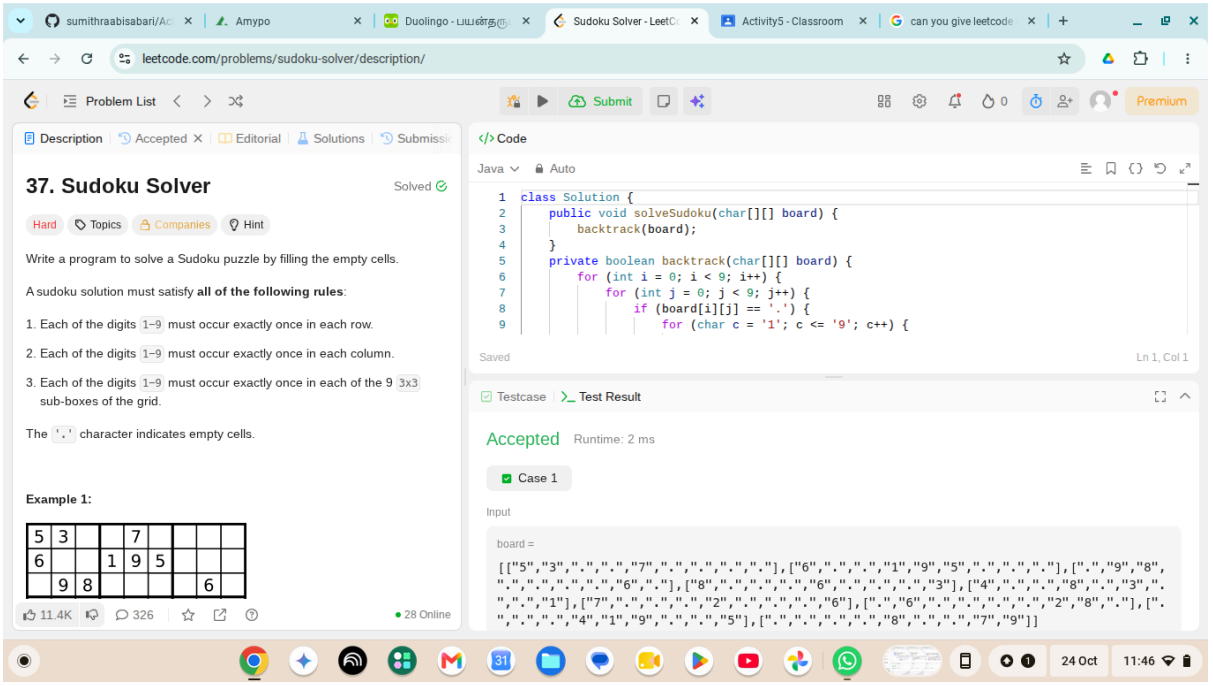
leetcode.com/problems/sudoku-solver/description/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
37. Sudoku Solver
Solved
Hard
Topics
Companies
Hint
Write a program to solve a Sudoku puzzle by filling the empty cells.
A sudoku solution must satisfy all of the following rules:
1. Each of the digits 1-9 must occur exactly once in each row.
2. Each of the digits 1-9 must occur exactly once in each column.
3. Each of the digits 1-9 must occur exactly once in each of the 9 3x3 sub-boxes of the grid.
The '.' character indicates empty cells.
Example 1:
11.4K
326
28 Online
Code
Java
Auto
class Solution {
public void solveSudoku(char[][] board) {
backtrack(board);
}
private boolean backtrack(char[][] board) {
for (int i = 0; i < 9; i++) {
for (int j = 0; j < 9; j++) {
if (board[i][j] == '.') {
for (char c = '1'; c <= '9'; c++) {
Saved
Ln 1, Col 1
Testcase
Test Result
Accepted
Runtime: 2 ms
Case 1
Input
board =
24 Oct
11:46