

DAA SPACE COMPLEXITY PRACTICE PROBLEMS

1.write a program to find sum of first n natural numbers using user defined function.

Code:

```
#include <stdio.h>

int findsum(int n);

int main() {
    int n, result;
    printf("Enter a positive integer: ");
    scanf("%d", &n);
    result = findsum(n);
    printf("Sum of the first %d natural numbers is: %d\n", n, result);
    return 0;
}

int findsum(int n) {
    int sum = 0;
    int i;

    for(i = 1; i <= n; i++) {
        sum += i;
    }
}
```

```
    return sum;
}
```

Output:

```
Enter a positive integer: 10
Sum of the first 10 natural numbers is: 55
-----
```

Space complexity: The space complexity of this program is $O(1)$ - constant space. Because the program uses a **fixed number of variables**, independent of the input size, its space usage does not grow.

2. Write a program to find Sum of Square of first N natural numbers.

Code:

```
#include <stdio.h>

int sumofsquares(int n);

int main() {
    int n, result;
    int i;
    printf("Enter a positive integer: ");
    scanf("%d", &n);
    result = sumofsquares(n);
    printf("Sum of square of the first %d natural numbers is: %d\n", n, result);
    return 0;
}

int sumofsquares(int n) {
    int sum = 0;
    int i;
```

```

for(i = 1; i<=n; i++) {
    sum+=i*i;
}
return sum;
}

```

Output:

```

Enter a positive integer: 10
Sum of square of the first 10 natural numbers is: 385
-----

```

Space complexity: The space complexity of this program is $O(1)$ - constant space . Because there is no recursion, no arrays , no dynamic memory allocation , the amount of memory used **does not depend on n**.

3. Write a program to find Sum of Cubes of first N natural numbers.

Code:

```

#include <stdio.h>

int sumofcubes(int n);

int main() {
    int n, result;
    int i;
    printf("Enter a positive integer: ");
    scanf("%d", &n);
    result = sumofcubes(n);
    printf("Sum of cubes of the first %d natural numbers is: %d\n", n, result);
    return 0;
}

int sumofcubes(int n) {

```

```
int sum = 0;
int i;
for(i = 1; i<=n; i++) {
    sum+=i*i*i
}
return sum;
}
```

Output:

```
enter a positive integer: 10
Sum of cubes of first 10 natural numbers is: 3025
```

Space complexity: The space complexity of this program is $O(1)$ - constant space . Because there is no recursion, no arrays , no dynamic memory allocation , the amount of memory used **does not depend on n**.

4. Write a program to find factorial of a number using recursion.

Code:

```
#include <stdio.h>

long long factorial(int n) {
    if(n == 0 || n == 1) {
        return 1;
    }
    return n * factorial(n - 1);
}


int main() {
    int n;
```

```

printf("Enter a number: ");
scanf("%d", &n);
if(n < 0) {
    printf("Factorial is not defined for negative numbers.\n");
} else {
    printf("Factorial of %d is: %lld\n", n, factorial(n));
}
return 0;
}

```

Output:

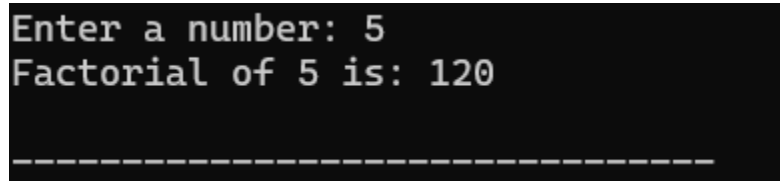

```

Enter a number: 5
Factorial of 5 is: 120
-----

```

Space complexity: The space complexity of this problem is $O(n)$. There are no arrays or dynamic memory allocation, but the recursive call stack makes the memory usage **depend on n**, resulting in **$O(n)$** space complexity.

4. Write a program to transpose a 3x3 matrix.

Code:

```

#include <stdio.h>

int main() {
    int a[3][3], trans[3][3];
    int i, j;
    printf("Enter elements of the 3x3 matrix:\n");
    for(i = 0; i < 3; i++) {
        for(j = 0; j < 3; j++) {
            scanf("%d", &a[i][j]);

```

```

    }
}
for(i = 0; i < 3; i++) {
    for(j = 0; j < 3; j++) {
        trans[j][i] = a[i][j];
    }
}
printf("\nTranspose of the matrix:\n");
for(i = 0; i < 3; i++) {
    for(j = 0; j < 3; j++) {
        printf("%d ", trans[i][j]);
    }
    printf("\n");
}
return 0;
}

```

Output:

```
Enter elements of the 3x3 matrix:
```

```
5  
6  
2  
4  
1  
9  
7  
5  
6
```

```
Transpose of the matrix:
```

```
5 4 7  
6 1 5  
2 9 6
```

Space complexity: The space complexity of this program is $O(1)$ - constant space. Because the memory used does **not grow with input size**, the total space remains constant.

6. Write a program to find fibonacci numbers of a given number.

Code:

```
#include <stdio.h>
```

```
int main() {
```

```
    int n, a = 0, b = 1, c, i;
```

```
    printf("Enter how many Fibonacci numbers you want: ");
```

```
    scanf("%d", &n);
```

```
    printf("Fibonacci Series: ");
```

```
    for(i = 1; i <= n; i++) {
```

```
        printf("%d ", a);
```

```
        c = a + b;
```

```
        a = b;
```

```
        b = c;
    }
    return 0;
}
```

Output:

```
Enter how many Fibonacci numbers you want: 10
Fibonacci Series: 0 1 1 2 3 5 8 13 21 34
-----
```

Space complexity: The space complexity of this program is $O(1)$ - constant space. There are **no arrays**, **no recursion**, and **no dynamic memory allocation**, so the memory usage does **not depend on the number of Fibonacci terms printed**.