

♥ Like

📌 Save

🔗 Share



@thedevspaceio

CSS Transforms Cheatsheet



Common Transform Functions

Function	Description
<code>translateX</code>	Moves the element along the X axis.
<code>translateY</code>	Moves the element along the Y axis.
<code>translate</code>	Moves the element along both X and Y axes.
<code>scale</code>	Scales the element uniformly on both axes.
<code>scaleX</code>	Scales the element along the X axis.
<code>scaleY</code>	Scales the element along the Y axis.
<code>rotate</code>	Rotates the element around its origin.
<code>skewX</code>	Skews (shears) the element along the X axis.
<code>skewY</code>	Skews (shears) the element along the Y axis.
<code>skew</code>	Skews the element along one or both axes.
<code>matrix</code>	Applies a 2D transformation defined by a matrix.

translateX()

Moves an element along the X axis. Accepts lengths or percentages. Percentages are relative to the element's own size.


Positive values move right, negative values move left.

css



```
1 div {  
2   transform: translateX(50px);  
3 }
```


```
transform: translateX(50px)
```



```
transform: translateX(-50px)
```



```
transform: translateX(100%)
```

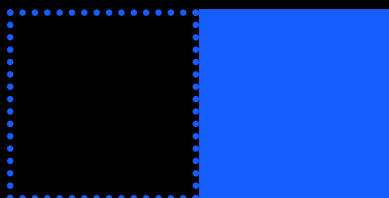


```
transform: translateX(-25%)
```




translateY()

Moves an element along the Y axis. Accepts lengths or percentages. Positive values move down, negative values move up.


```
transform: translateY(-20px)
```



`transform: translateY(50px)`




`transform: translateY(100%)`

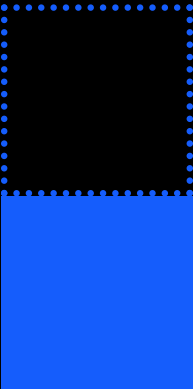


translate()

Moves an element in both X and Y axes. Accepts one or two values.

```
transform: translate(30px, 20px)
```




```
transform: translate(50%, 50%)
```




scale()

Scales an element uniformly in both X and Y directions.

```
transform: scale(1.2)
```




```
transform: scale(0.8)
```




scaleX()

Scales an element only on the X axis.

```
transform: scaleX(1.5)
```




```
transform: scaleX(0.5)
```



scaleY()

Scales an element only on the Y axis.


```
transform: scaleY(0.5)
```



rotate()

Rotates an element around the transform origin.

```
transform: rotate(45deg)
```



skewX()

Skews an element along the X axis.

```
transform: skewX(20deg)
```




```
transform: skewX(-20deg)
```




skewY()

Skews an element along the Y axis.

```
transform: skewY(-6deg)
```




```
transform: skewY(6deg)
```



skew()

Skews an element along both axes.

```
transform: skew(20deg, 10deg)
```



matrix()

Applies a custom 2D matrix transform.

css



```
1  /* matrix(a, b, c, d, tx, ty) */
2  .element {
3      transform: matrix(
4          1,
5          0,
6          0,
7          1,
8          30,
9          20
10 ); /* identity matrix + translate(30px, 20px) */
11 }
```

A 2D matrix maps to the 3x3 transform matrix used by the browser:



```
[ a  c  tx ]
[ b  d  ty ]
[ 0  0  1 ]
```

Parameter	Position in matrix	Description	Example effect
a	row 1, column 1	Horizontal scale and X component of rotation. Values >1 scale wider; values between 0 and 1 shrink.	1 (no horizontal scale)
b	row 2, column 1	Y component of rotation and vertical skew. Non-zero values introduce shearing/rotation.	0
c	row 1, column 2	X component of rotation and horizontal skew. Non-zero values introduce shearing/rotation.	0
d	row 2, column 2	Vertical scale and Y component of rotation. Values >1 scale taller.	1 (no vertical scale)
tx	row 1, column 3	X translation (in CSS units). Moves the element horizontally.	30 → translateX(30px)
ty	row 2, column 3	Y translation (in CSS units). Moves the element vertically.	20 → translateY(20px)