


2nd May: Welcome to Mobile Development

- Jaani

1

⇒ Backend As A Service (BAAS)

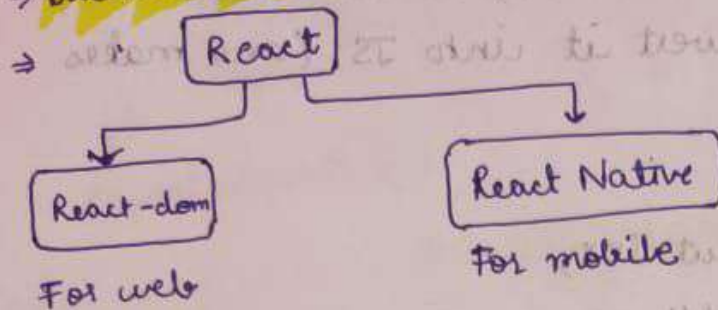

React → A JS library which helps us to build UI's, by breaking the UI into small, reusable pieces called components, used to make SPA.

SPA → Single Page Application.

⇒ To create a react app, use cmd ⇒ `npm create vite@latest`

⇒ Inside "main.jsx"

```
"import { createRoot } from "react-dom/client"
createRoot(document.getElementById("root")).render(
  <h1> Hello Jaani </h1>
)
```

Note: HMR (Hot Module Replacement), lets us update our app in the browser without reloading the page, when we change our code.

JSX (Javascrpt XML), lets you write HTML like code inside JS. 2

⇒ Browser does not understand JSX, so some tools like Babel etc are used to convert it into JS. (and makes it browser-compatible)

⇒ To create the element without JSX,

import React from "react";

React.createElement("h1", null, "Hello Jaani")

↓
type of element

↓
attributes

↓
content

(in form of
key value pairs)

In **JSX**, we use **className**, eg

```
const h1 = React.createElement(
```

```
  "h1",
```

```
  {
```

```
    className = "title",
```

```
    id = "heading",
```

```
  },
```

```
  "Welcome Jaani!",
```

```
);
```

Component → A function that returns JSX.

* new file App.jsx is to be made, now make a **fun** with same name →

```
function App() {
```

```
  return (
```

```
    <div>
```

```
      <h1> App </h1>
```

```
    </div>
```

```
  )
```

```
  export default App;
```

Now we need to render in "main.jsx", then in "main.jsx"

import App from './App';

"createRoot(document.getElementById('root')).render(

```
  <div>
```

```
    <h1 className="title" id="heading">
```

```
      Welcome to Mobile Dev!
```

```
    </h1>
```

```
    <App />
```

```
  </div>
```

```
);
```

or using React fragment : (when you don't want to use extra div)

```
  <>
```

```
    <h1> Hello </h1>
```

```
  </>
```

```
);
```

* Props (Properties) : Props are how we pass data from one component to another.

In react, the props are passed from parent to child.

⇒ in H1.jsx

```
"const H1 = (props) => {
```

```
  return (
```

```
    <h1> { props.title } </h1>
```

```
  )
```

After object destructuring :

```
const H1 = ({ title }) => {  
  return (  
    <h1> { title } </h1>  
  )  
}
```

Now you can use these in App.jsx

```
import H1 from './H1';  
  
function App() {  
  return (  
    <div>  
      <H1 title = "heading 1" desc = "hello i am desc" />  
      <H1 title = "heading 2" />  
    </div>  
  );  
}  
export default App;
```

The flow of content is from parent → child.

Note: If we want to pass data from parent to child instead of giving data directly to the component that needs it, we keep passing it down layer by layer.