

TOP 200



React

INTERVIEW QUESTIONS

HAPPY RAWAT

PREFACE

ABOUT THE BOOK

This book contains 200 very important React interview questions.



ABOUT THE AUTHOR

Happy Rawat has around 15 years of experience in software development. He helps candidates in clearing technical interview in tech companies.



Chapters

Fundamentals

[1. React-Basics - I](#)

[2. React-Basics - II](#)

[3. Project Files & Folders](#)

[4. JSX](#)

[5. Components \(Functional/Class\)](#)

[6. Routing](#)

Redux

[16. Action/ Store/ Reducer](#)

[17. Core Principles/ Pros-Cons](#)

[18. Short Answer](#)

[19. Thunk/ Middleware/ Flux](#)

Hooks

[7. useState/ useEffect](#)

[8. useContext/ useReducer](#)

[9. useCallback/ useMemo/...](#)

[10. Short Answer](#)

Bonus

[20. JS Essentials for React](#)

Advance

[11. LifeCycle Methods - I](#)

[12. LifeCycle Methods - II](#)

[13. Controlled Components](#)

[14. Code Splitting](#)

[15. React - Others](#)

1: React-Basics - I

V. IMP.



Q1. What is **React**? What is the **Role of React** in software development?

Q2. What are the **Key Features** of React?

Q3. What is **DOM**? What is the difference between **HTML** and **DOM**?

Q4. What is **Virtual DOM**? Difference between **DOM** and **Virtual DOM**?

Q5. What are **React Components**? What are the main elements of it?

Q6. What is **SPA(Single Page Application)**?


Q7. What are the **5 Advantages** of React?

Q8. What are the **Disadvantages** of React?

Q9. What is the role of **JSX** in React? (3 points)

Q10. What is the difference between **Declarative** & **Imperative** syntax?

Q. What is **React**? What is the **Role of React** in software development? **V. IMP.**

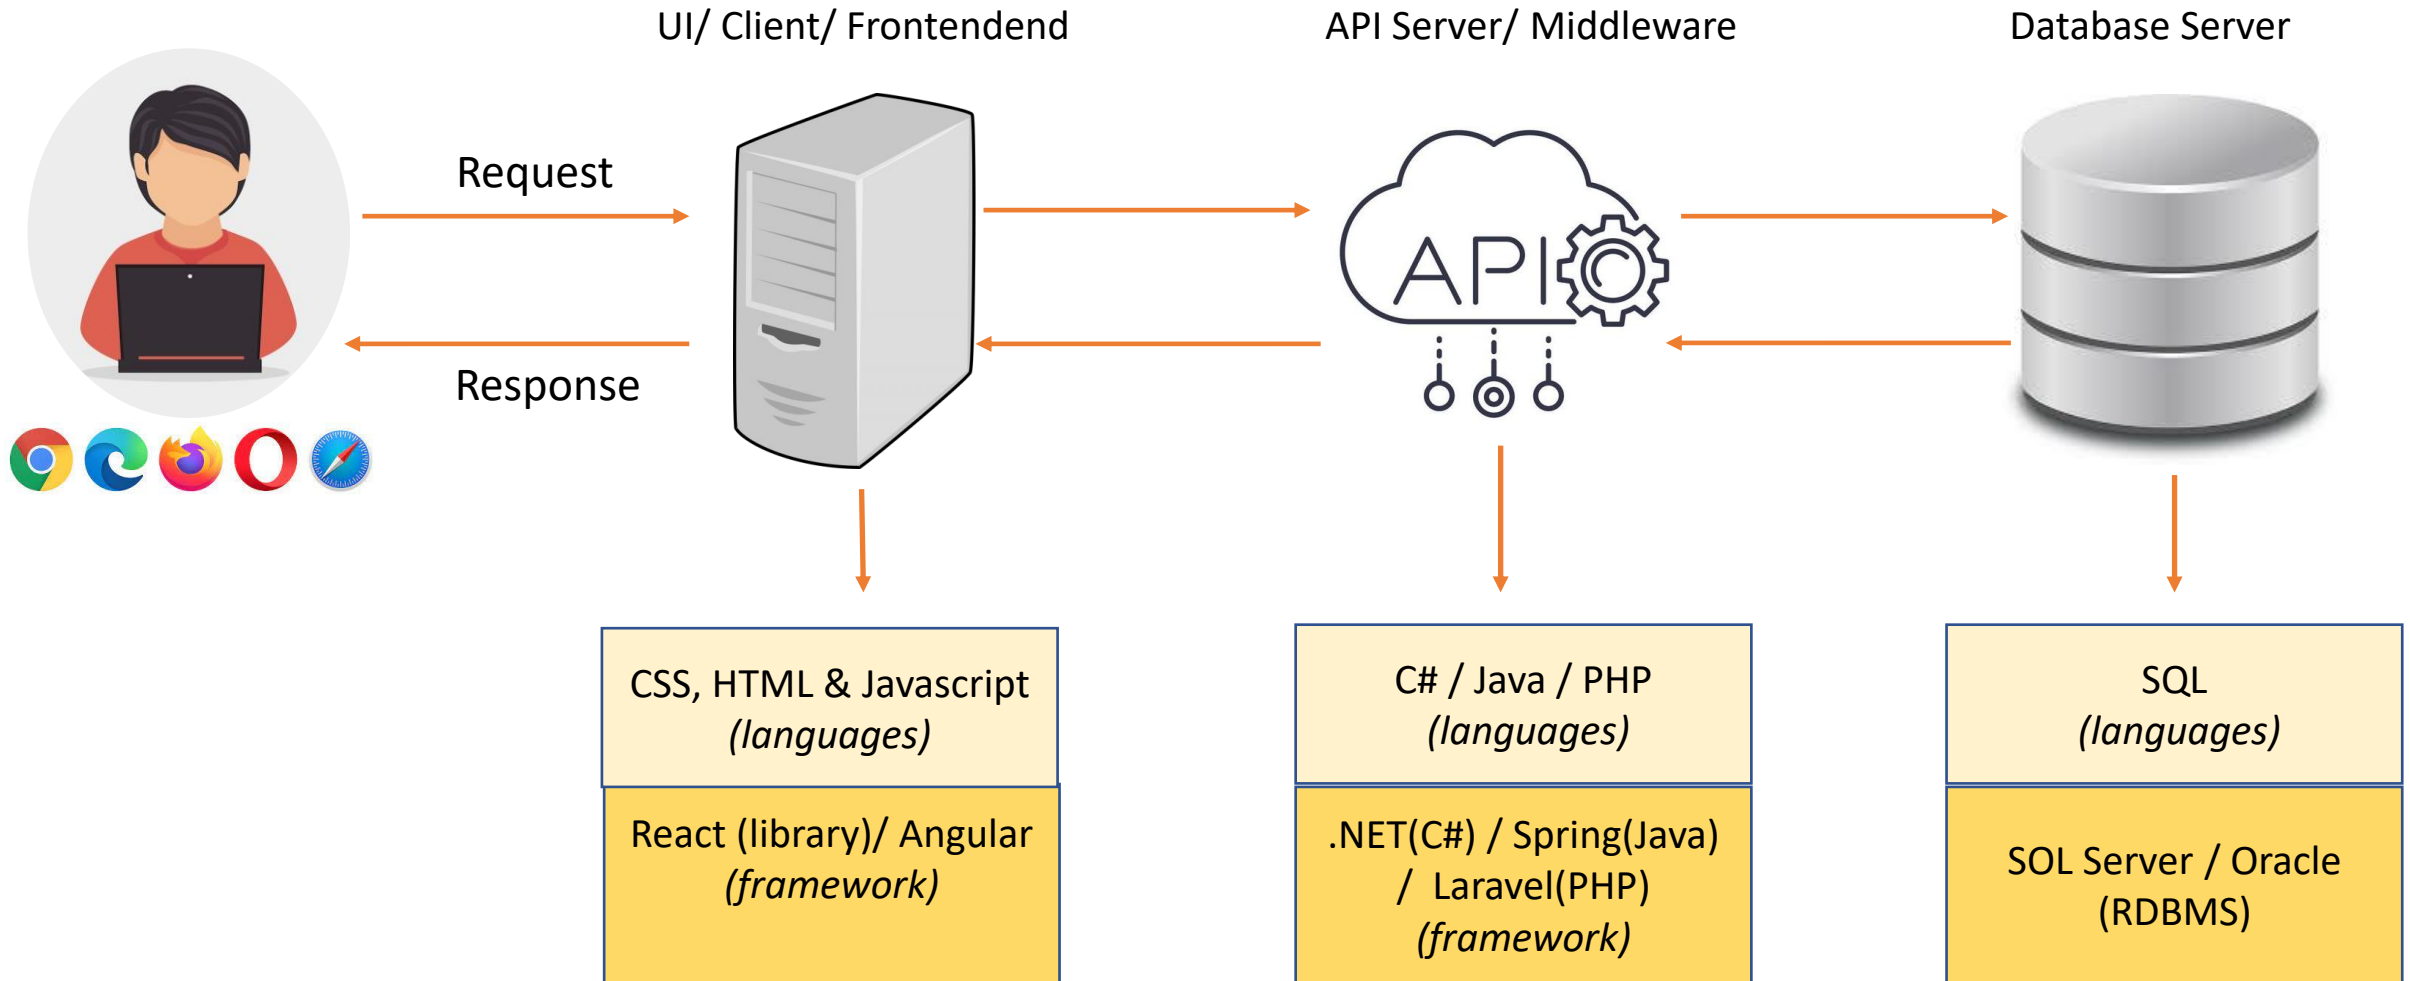


Q. What is **React**? What is the **Role of React** in software development? **V. IMP.**



❖ **3 Main Point about React:**

1. React is an open source Javascript Library.
2. React is used for building user interfaces(UI).
3. React simplifies the creation of SPA by using reusable components.

Q. What are the **Key Features** of React? **V. IMP.**

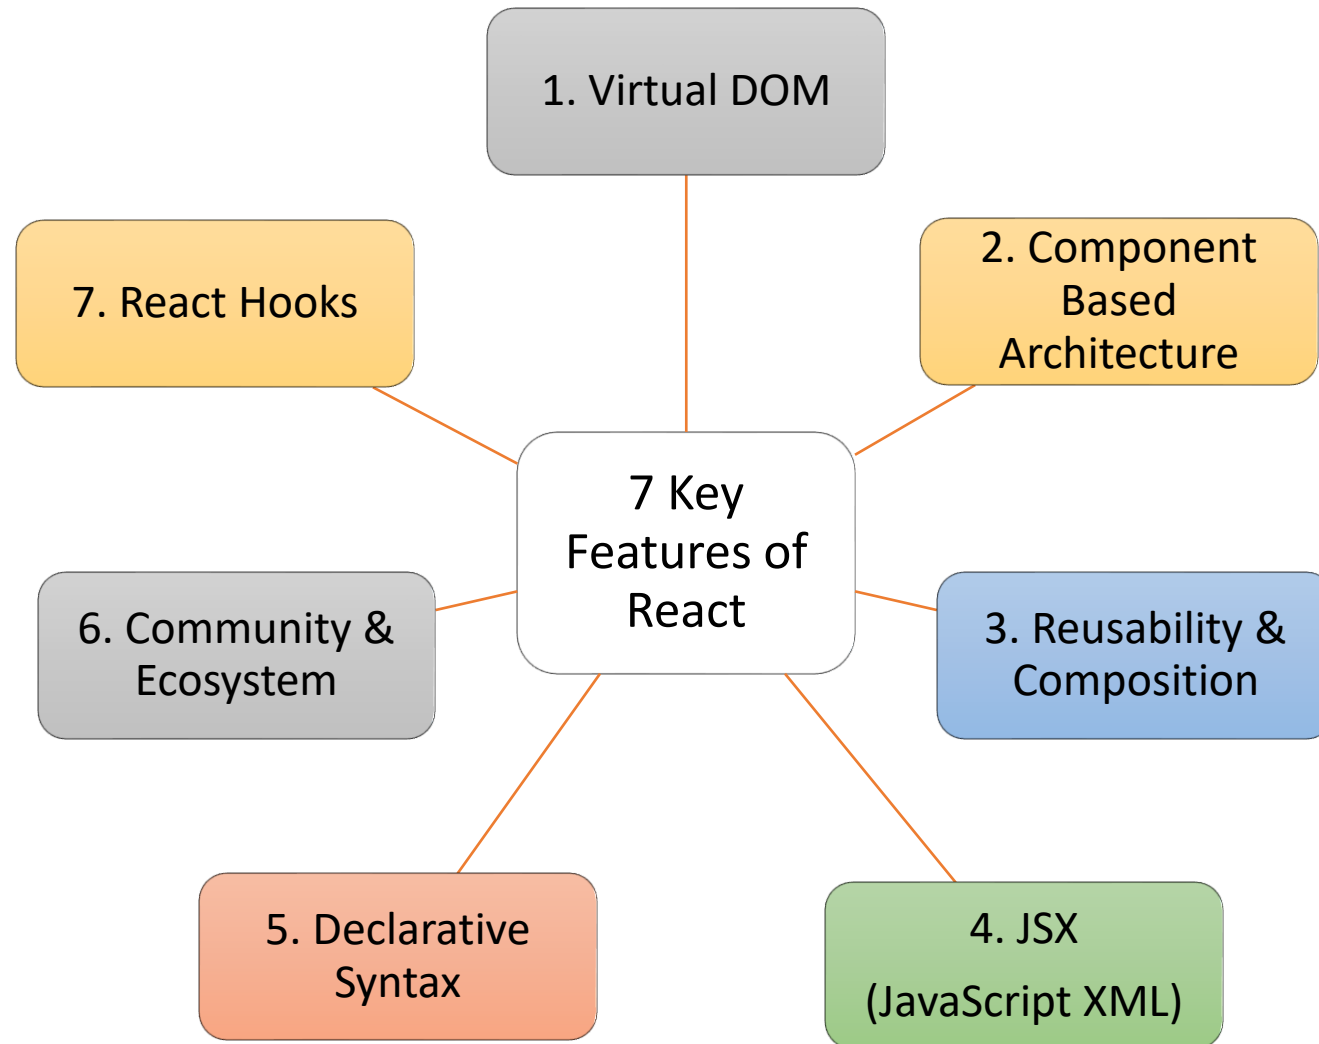

Q. What are the **Key Features** of React? **V. IMP.**




1. Virtual DOM:	React utilizes a virtual representation of the DOM, allowing efficient updates by minimizing direct manipulation of the actual DOM , resulting in improved performance.
2. Component-Based Architecture:	React structures user interfaces as modular, reusable components , promoting a more maintainable and scalable approach to building applications.
3. Reusability & Composition:	React enables the creation of reusable components that can be composed together, fostering a modular and efficient development process.
4. JSX (JavaScript XML):	JSX is a syntax extension for JavaScript used in React, allowing developers to write HTML-like code within JavaScript, enhancing readability and maintainability.
5. Declarative Syntax:	React have a declarative programming style(JSX), where developers focus on "what" the UI should look like and React handles the "how" behind the scenes. This simplify the code.
6. Community & Ecosystem:	React benefits from a vibrant and extensive community , contributing to a rich ecosystem of libraries, tools, and resources, fostering collaborative development and innovation.
7. React Hooks:	Hooks are functions that enable functional components to manage state and lifecycle features , providing a more concise and expressive way to handle component logic.




Q. What is **DOM**? What is the difference between **HTML** and **DOM**?

- ❖ DOM(Document Object Model) represents the web page as a **tree-like structure** which allows JavaScript to dynamically access and manipulate the content and structure of a web page.

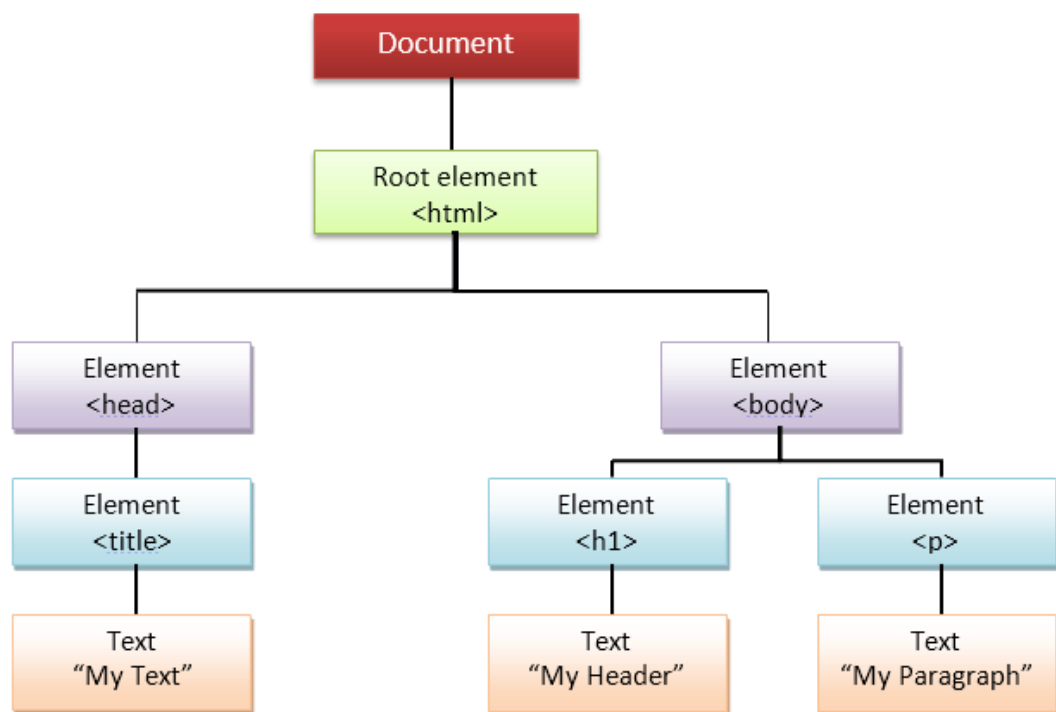

DOM Tree(Real)

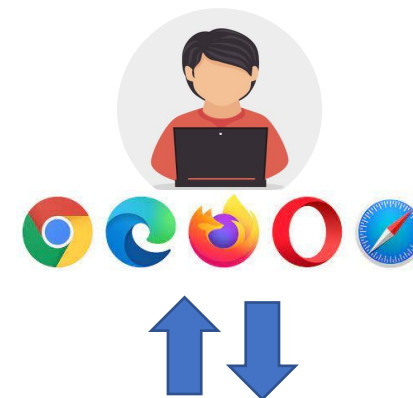

```
<!DOCTYPE html>
<html>

  <head>
    <title>My Text </title>
  </head>

  <body>
    <h1>
      My Header
    </h1>
    <p>My Paragraph </p>
  </body>


</html>
```

Static HTML



Q. What is **Virtual DOM**? Difference between **DOM** and **Virtual DOM**? **V. IMP.**

- ❖ React uses a virtual DOM to efficiently update the UI **without re-render the entire page**, which helps improve performance and make the application more responsive.

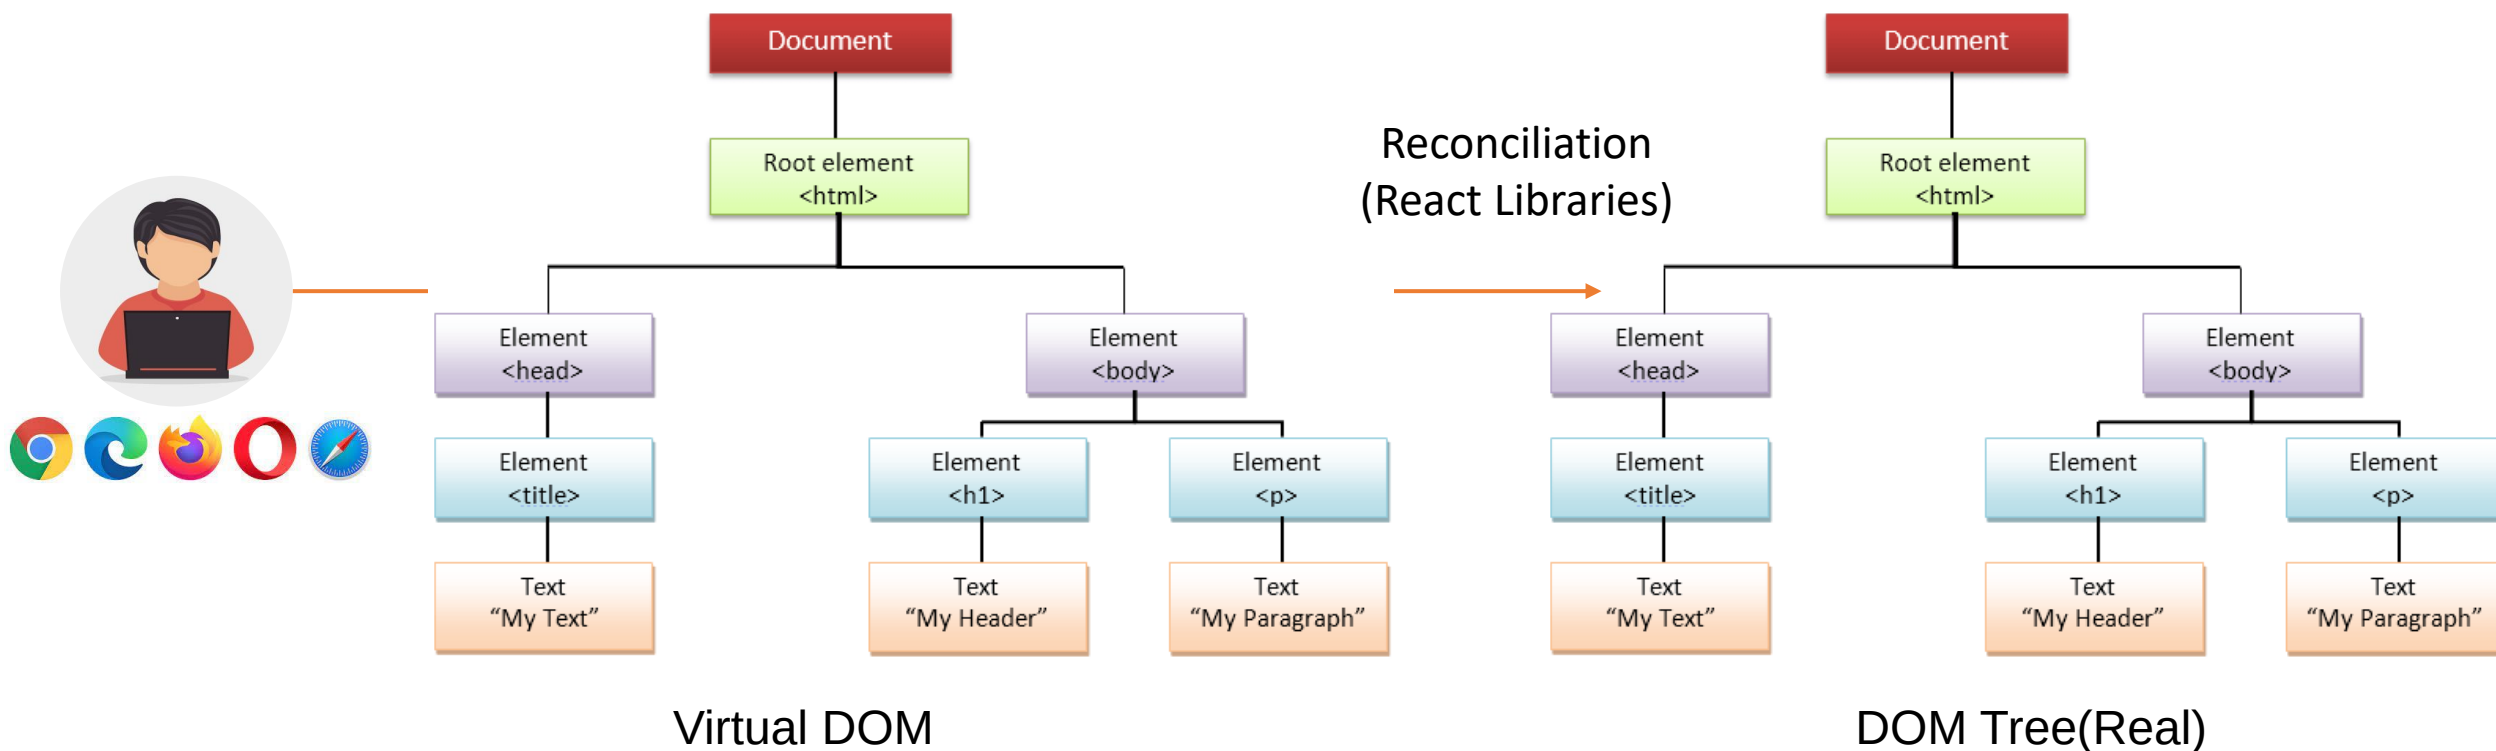

Q. What is **Virtual DOM**? Difference between **DOM** and **Virtual DOM**? **V. IMP.**



DOM	Virtual DOM
1. DOM is actual representation of the webpage.	Virtual DOM is lightweight copy of the DOM.
2. Re-renders the entire page when updates occur.	Re-renders only the changed parts efficiently.
3. Can be slower, especially with frequent updates.	Optimized for faster rendering.
4. Suitable for static websites and simple applications	Ideal for dynamic and complex single-page applications with frequent updates



Q. What are **React Components**? What are the main elements of it? **V. IMP.**

- ❖ In React, a component is a **reusable building block** for creating user interfaces.



```
// 1. Import the React library
import React from "react";

// 2. Define a functional component
function Component() {
  // 3. Return JSX to describe the component's UI
  return (
    <div>
      | <h1>I am a React Reusable Component</h1>
    </div>
  );
}


// 4. Export the component to make it available
// for use in other files
export default Component;
```

I am a React Reusable Component



Q. What is SPA(Single Page Application)?

- ❖ A Single Page Application (SPA) is a web application that have only one **single web page**.
- ❖ Whenever user do some action on the website, then in response content is dynamically updated without refreshing or loading a new page.

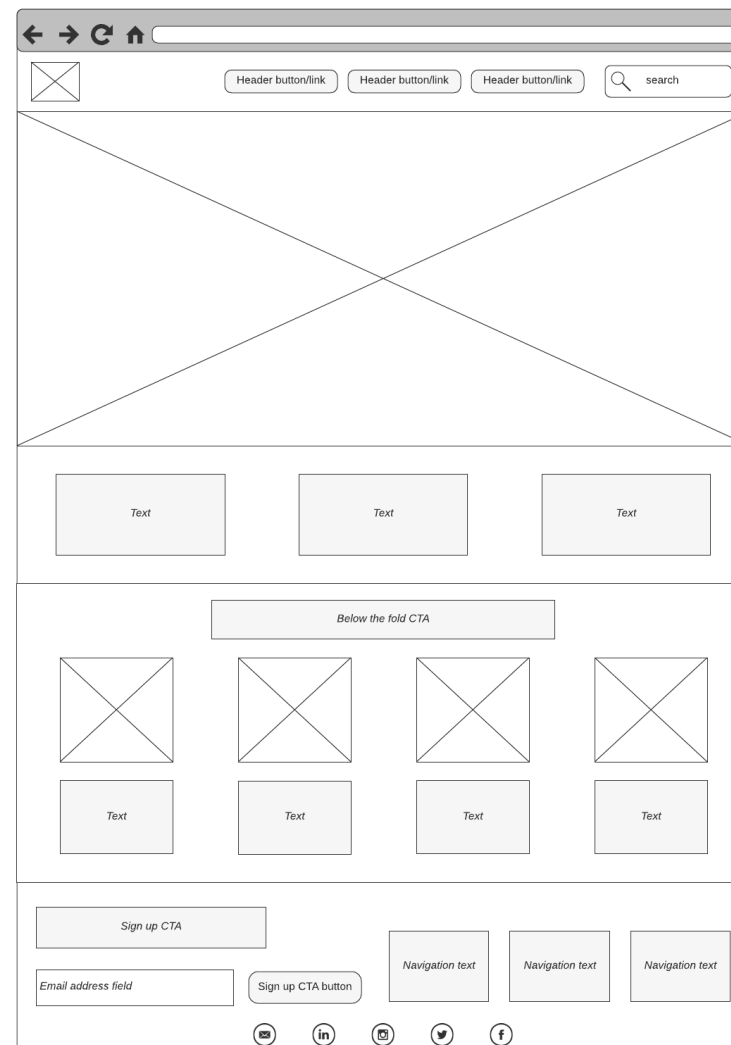

Q. What are the 5 Advantages of React? **V. IMP.**



1. Simple to build Single Page Application (by using Components)



2. React is cross platform and open source(Free to use)



3. Lightweight and very fast (Virtual DOM)



4. Large Community and Ecosystem





5. Testing is easy

Q. What are the **Disadvantages** of React?



- ❖ React is not a good choice for very small applications.

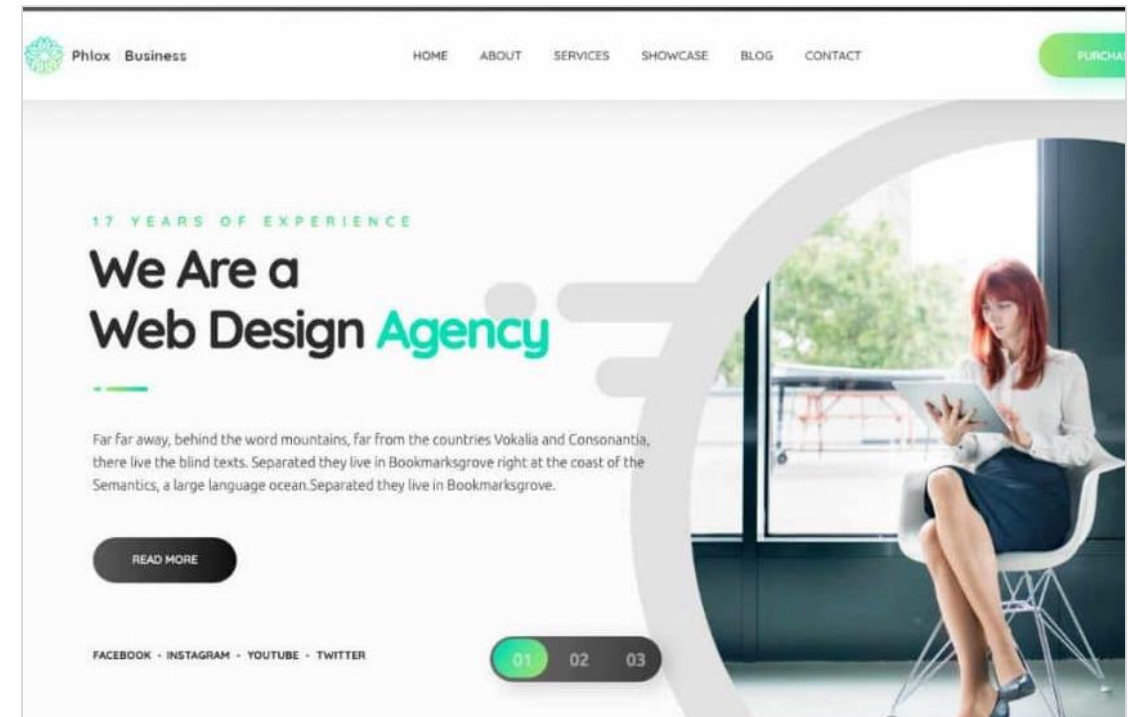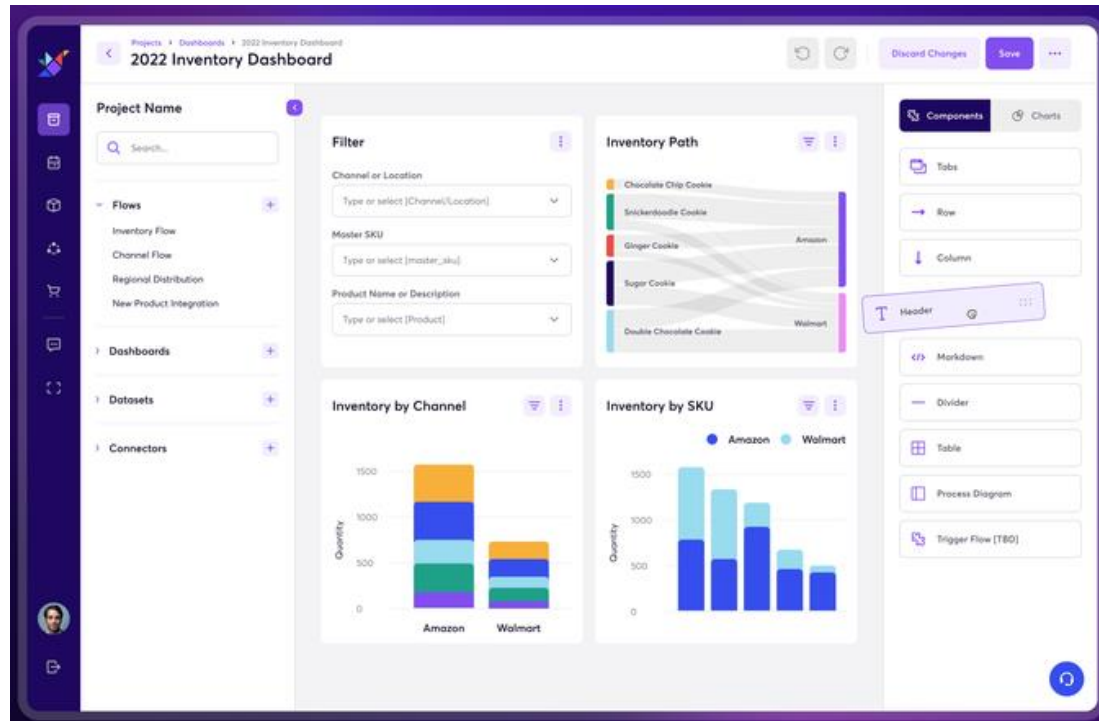



Q. What is the role of **JSX** in React? (3 points) **V. IMP.**


1. JSX stands for **JavaScript XML**.
2. JSX is used by React to write **HTML-like code**.
3. JSX is converted to JavaScript via tools like **Babel**.
Because Browsers understand JavaScript not JSX.

```
function App() {  
  return (  
    <div className="App">  
      <h1>Hello!</h1>  
      <p>Happy</p>  
    </div>  
  );  
}
```

Babel

```
function App() {  
  return React.createElement(  
    'div',  
    { className: 'App' },  
    React.createElement('h1', null, 'Hello!'),  
    React.createElement('p', null, 'Happy')  
  );  
}
```

Q. What is the difference between **Declarative** & **Imperative** syntax?

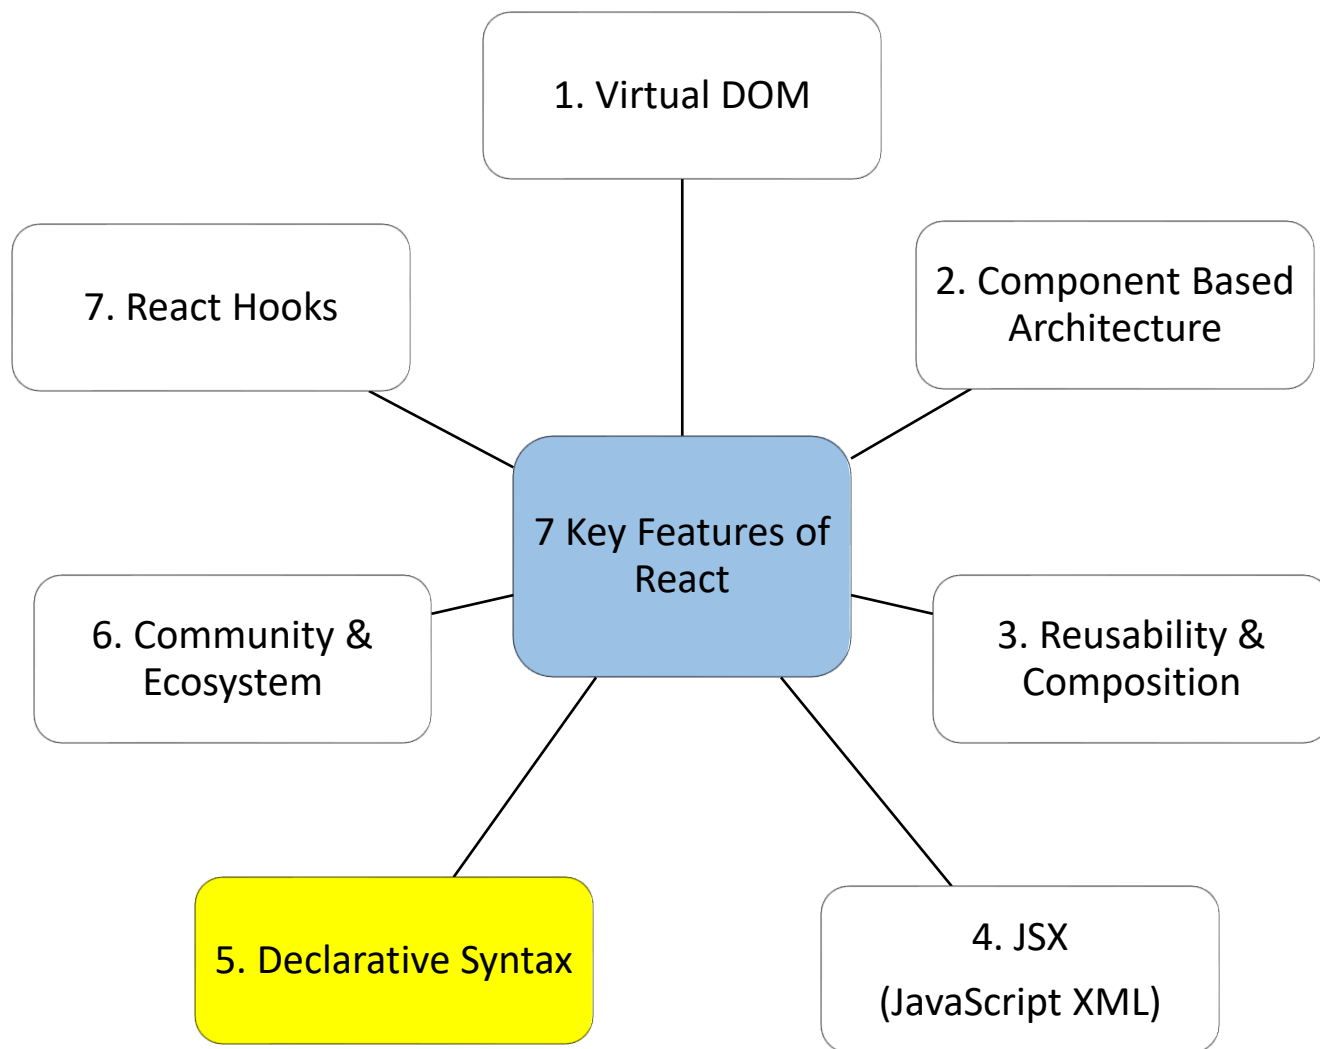

Q. What is the difference between **Declarative** & **Imperative** syntax?




1. Declarative syntax focuses on **describing the desired result** without specifying the step-by-step process.
2. **JSX** in React is used to write declarative syntax.

```
// Declarative syntax using JSX
function App() {
  return <h1>Interview Happy</h1>;
}
```

1. Imperative syntax involves **step by step process** to achieve a particular goal.
2. **JavaScript** has an imperative syntax.

```
// Imperative syntax(non-React) using JavaScript
function App() {
  const element = document.createElement("h1");
  element.textContent = "Interview Happy";
  document.body.appendChild(element);
}
```

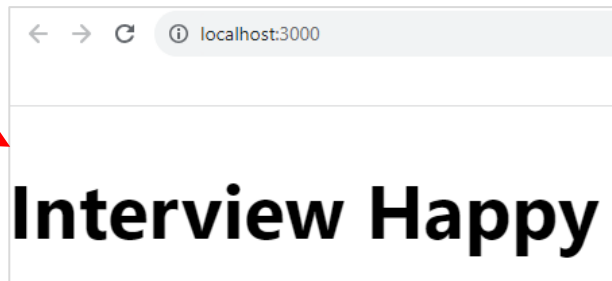

2: React-Basics - II

V. IMP.



Q1. What is Arrow Function Expression in JSX? V. IMP.

Q2. How to Setup React first project?

Q3. What are the Main Files in a React project?

Q4. How React App Load and display the components in browser? V. IMP.

Q5. What is the difference between React and Angular?

Q6. What are other 5 JS frameworks other than React?

Q7. Whether React is a Framework or a Library? What is the difference?

Q8. How React provides Reusability and Composition?

Q9. What are State, Stateless, Stateful and State Management terms?

Q10. What are Props in JSX? V. IMP.



Q. What is **Arrow Function Expression** in JSX?

- ❖ The arrow function expression syntax is a concise way of defining functions.

```
// Regular Function Declaration
function AppFunc(props) {
  return (
    <div>
      <h1>{props.name}</h1>
    </div>
  );
}
export default AppFunc;
```

=

```
// Arrow Function Expression
const ArrowFunc = (props) => {
  return (
    <div>
      <h1>{props.name}</h1>
    </div>
  );
};
export default ArrowFunc;
```



Q. How to **Setup** React first project?

1. Install Node.js from below link:

<https://nodejs.org/en/download>

2. Install code editor (VS Code):

<https://code.visualstudio.com/download>

3. Create first React Project (Open VS Code -> Terminal -> New Terminal)

run command: **"npx create-react-app my-app"**

4. Open Project

Click File -> Open Project Folder "my-app"

5. Run Project


Open terminal(ctrl + `) key -> run **"npm start"**

Q. What are the **Main Files** in a React project?




❖ Main Files in a React project:


1. **index.html**: Single page for React application.
2. **Components/component1.js**: Your application components.
3. **App.js**: Main component or container or Root component.
4. **App.test.js(Optional)**: Used for writing tests for the App.js file.
5. **Index.css(Optional)**: This is a global CSS file that serves as the main stylesheet for the entire application.
6. **index.js**: Entry point for JavaScript. Renders the main React component (App) into the root DOM element.

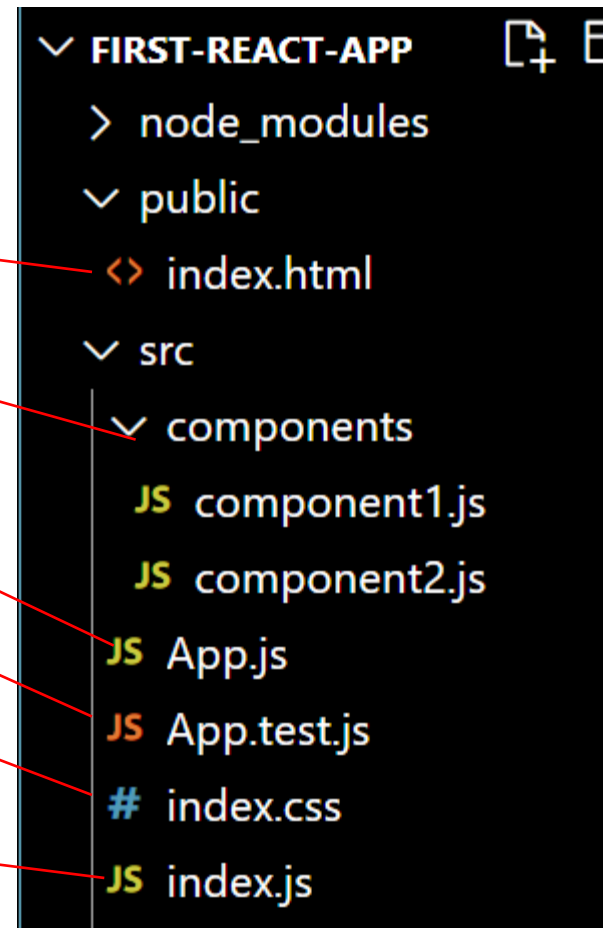

Q. How React App **Load** and display the components in browser? **V. IMP.**

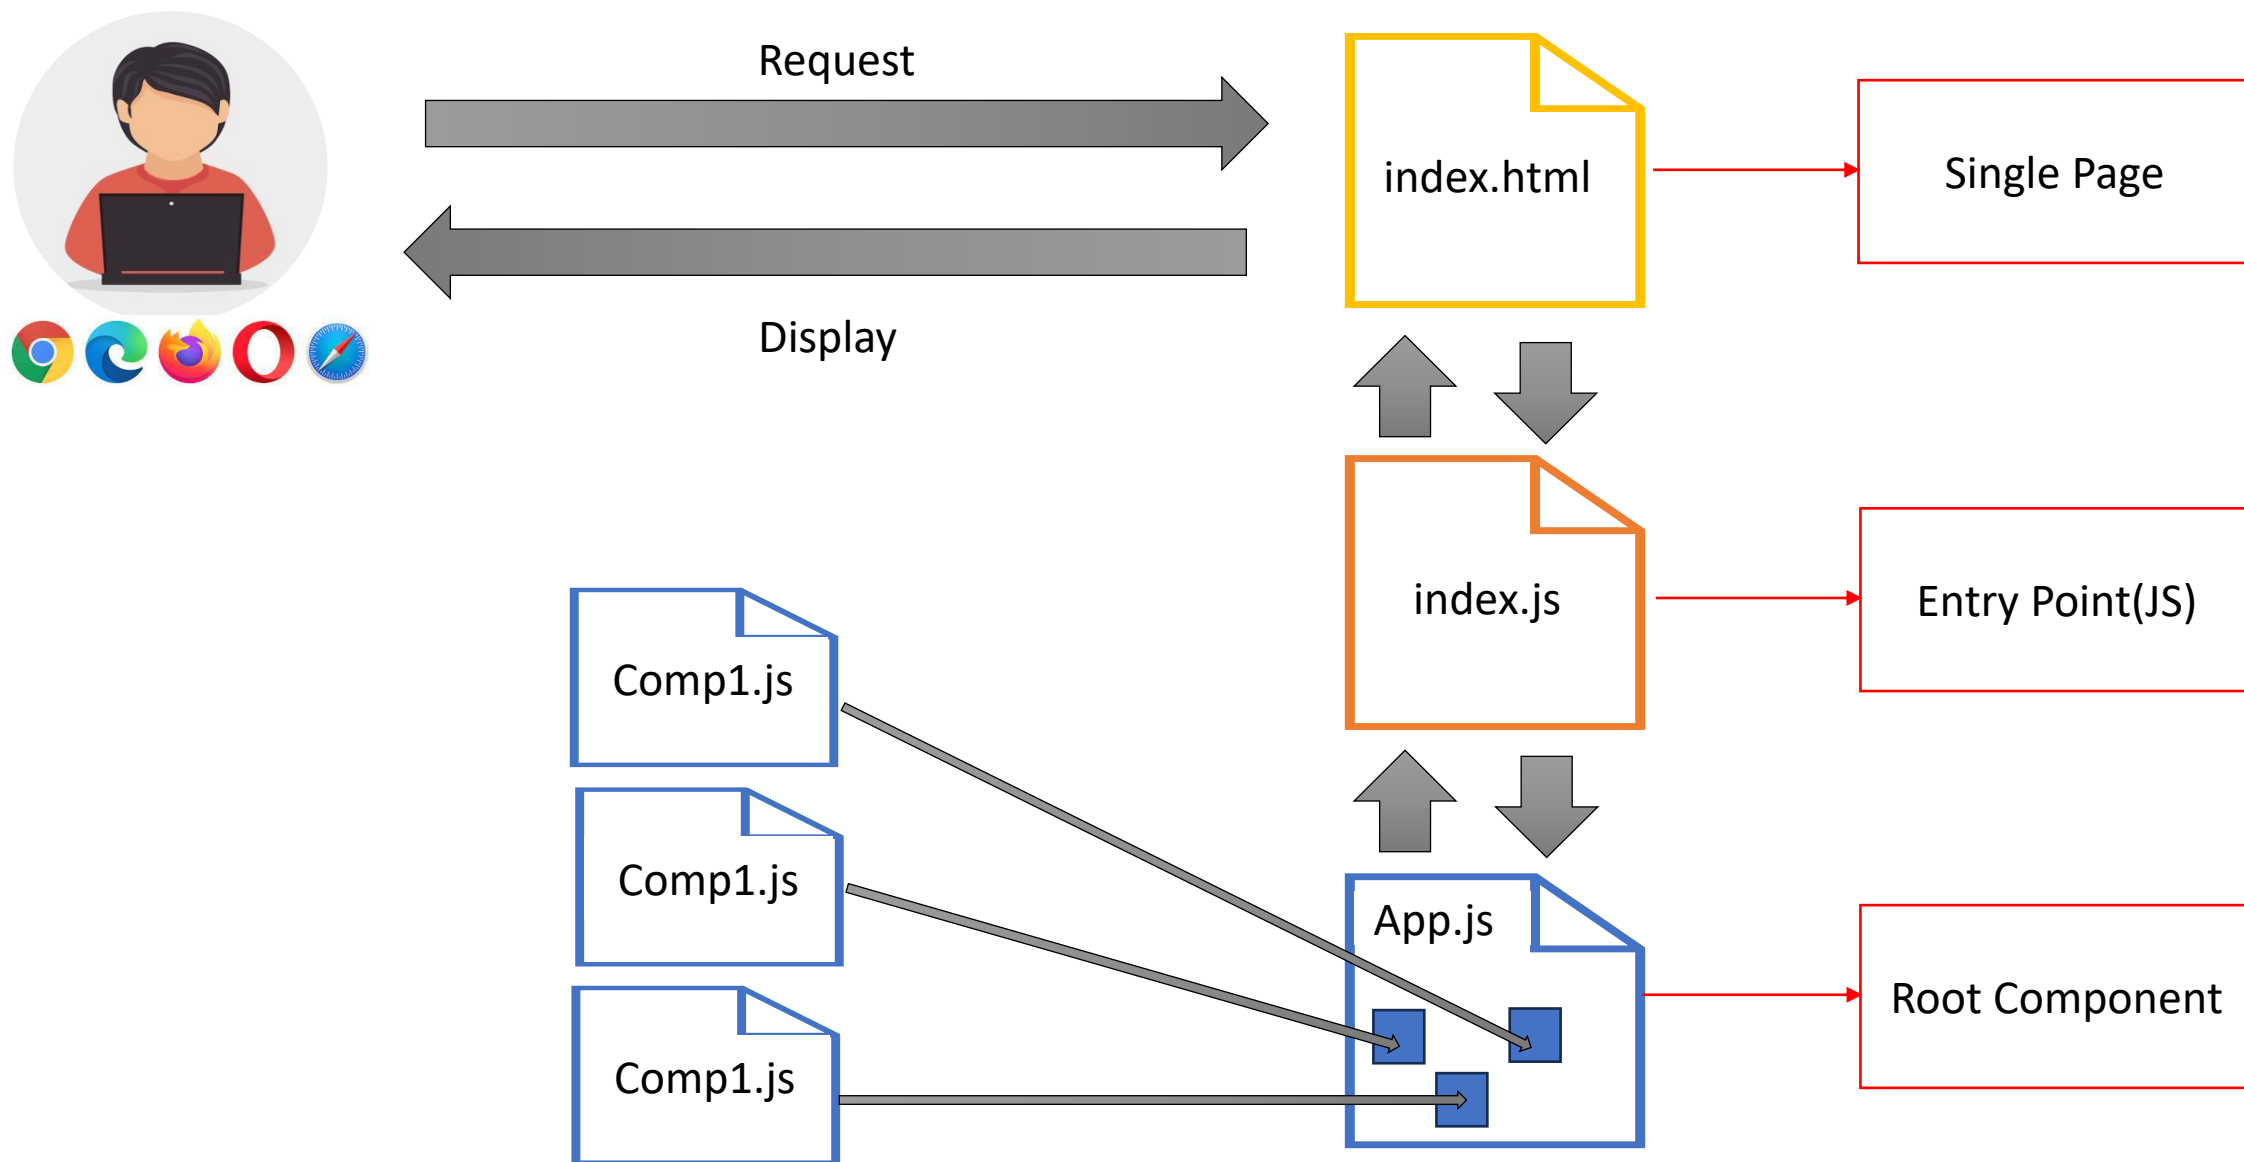

Q. How React App **load** and display the components in browser? **V. IMP.**

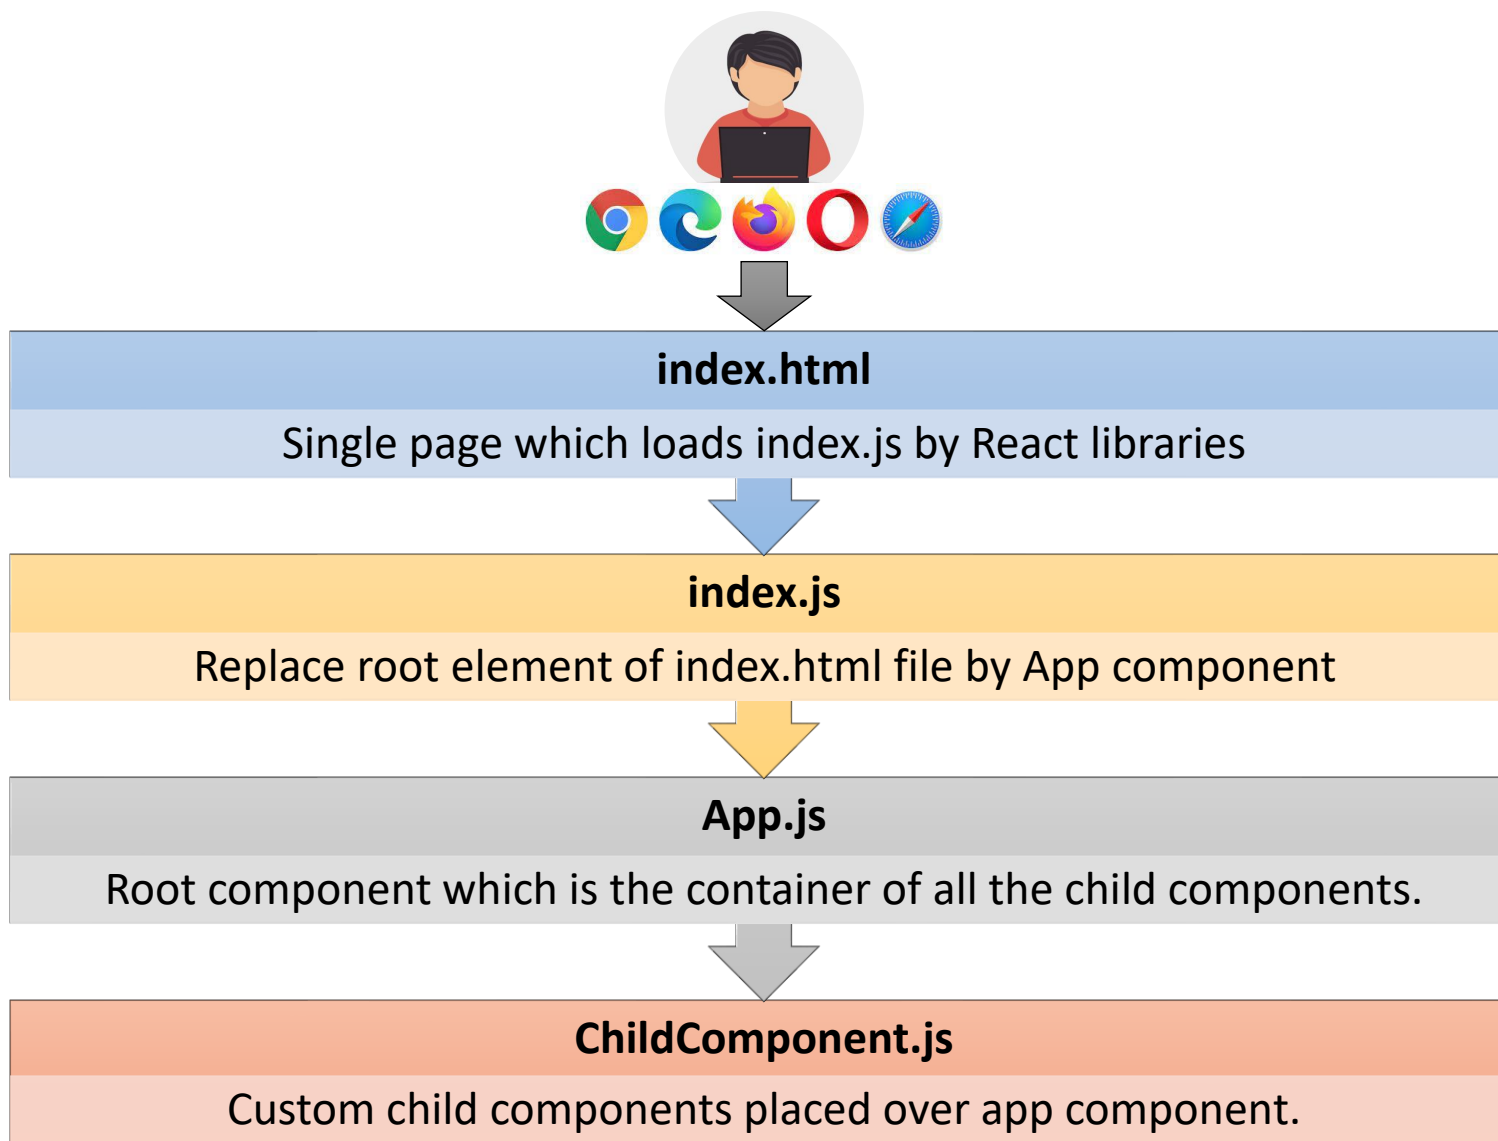




Q. What is the difference between **React** and **Angular**?

 React	 Angular
React and Angular both are used to create single page UI applications using components.	
1. React is a JavaScript library	Angular is a complete framework.
2. React uses a virtual DOM which makes it faster. 	Angular uses a real DOM
3. React is smaller in size and lightweight and therefore faster sometime. 	Angular is bigger because it is a complete framework.
4. React depends on external libraries for many complex features, so developer has to write many lines of code for complex functionalities.	Since Angular is a complete framework, therefore it provide built-in support for features like routing, forms, validation, and HTTP requests. 
5. React is simple to learn and more popular than Angular. 	5. Angular is slightly difficult to learn as it has Typescript, OOPS concept and many more thing.

Q. What are other **5 JS frameworks** other than React?

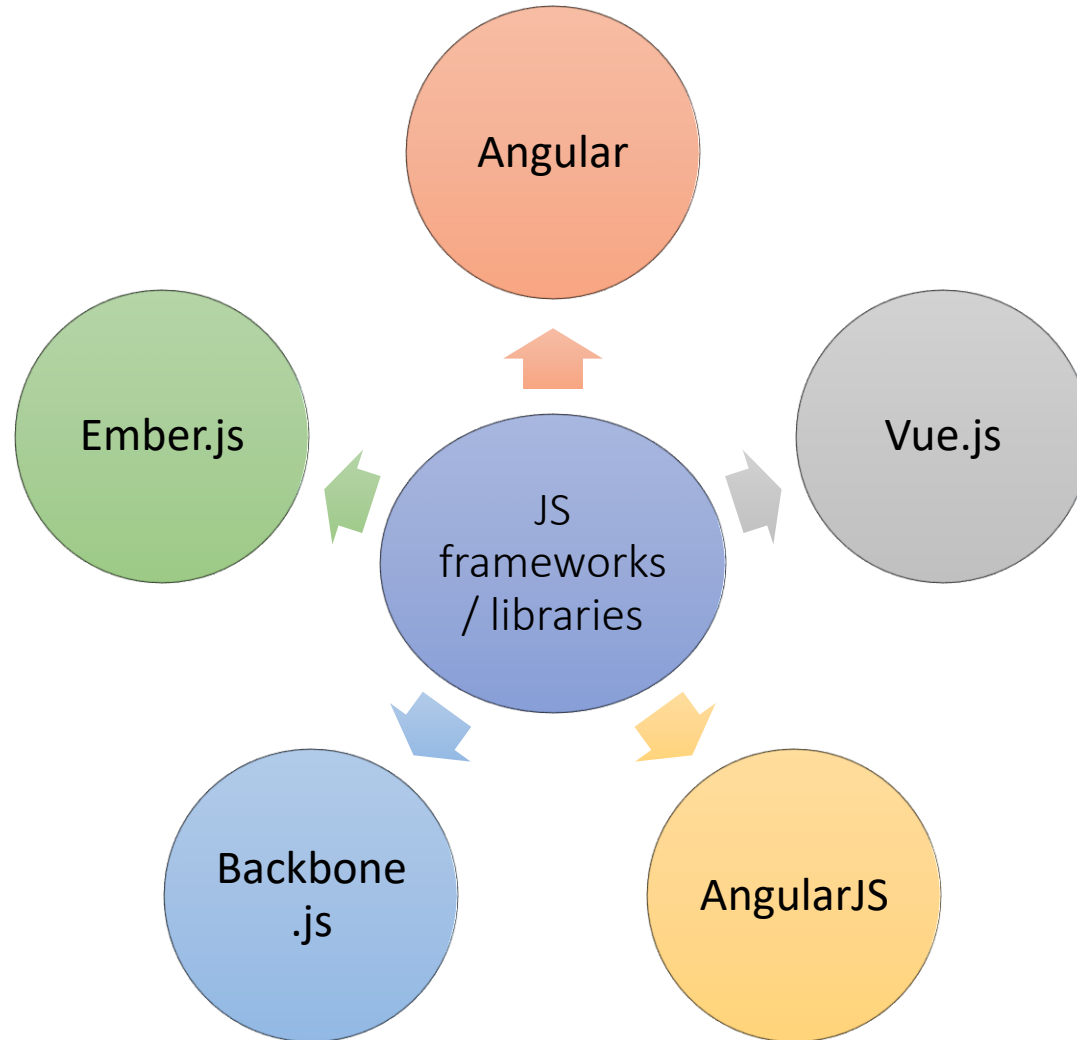

Q. Whether React is a **Framework** or a **Library**? What is the difference?



- ❖ **Library:** Developers import the libraries at the top and then used its functions in components.
- ❖ React is commonly referred to as a JavaScript library.

```
// 1. Import the React library
import React from "react";

function Component() {
  return (
    <div>
      <h1>Hello World</h1>
    </div>
  );
}

export default Component;
```

- ❖ **Framework:** Developers need to follow a specific structure or pattern defined by the framework.
- ❖ Angular is a framework.

```
app.component.ts x TS app.module.ts
1  import { Component } from '@angular/core';
2
3  @Component({
4    selector: 'app-root',
5    templateUrl: './app.component.html',
6    styleUrls: ['./app.component.css']
7  })
8  export class AppComponent {
9    title = 'Hello World';
10 }
11
```

Q. How React provides **Reusability** and **Composition**?





- ❖ React provides reusability and composition through its **component-based architecture**.
- ❖ **Reusability:** Once you create a component, you can **re-use** it in different parts of your application or even in multiple projects.
- ❖ **Composition:** Composition is creating new and big components by **combining existing small components**. Its advantage is, change to one small component will not impact other components.



Q. What are **State**, **Stateless**, **Stateful** and **State Management** terms?



- ❖ "state" refers to the current data of the component.
- ❖ Stateful or state management means, when a user performs some actions on the UI, then the React application should be able to **update and re-render that data or state** on the UI.

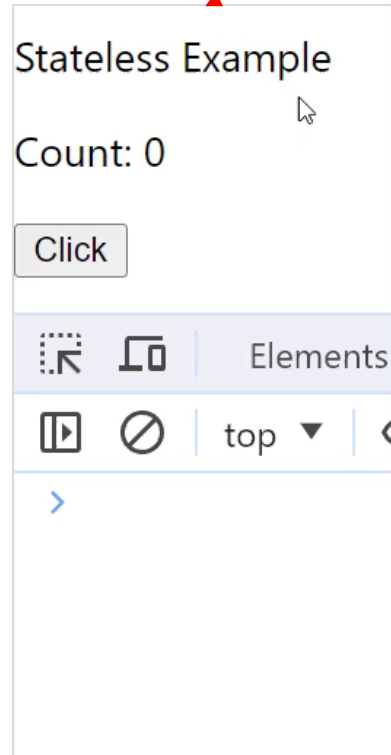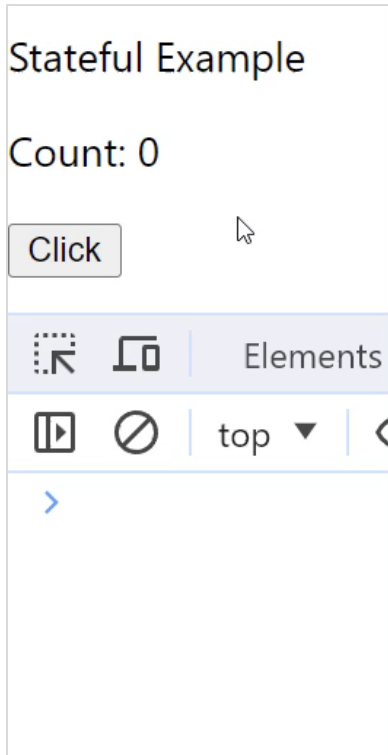

```
books > JS ComponentState.js > ...  
import React from "react";  
  
// Stateless Example  
function ComponentState() {  
  let count = 0; // Initial state  
  
  const increment = () => {  
    count += 1; // State updated  
    console.log(`Count: ${count}`);  
  };  
  
  return (  
    <div>  
      <p>Stateless Example</p>  
      <p>Count: {count}</p> {/* Not updating */}  
      <button onClick={increment}>Click</button>  
    </div>  
  );  
}  
  
export default ComponentState;
```

[back to chapter index](#)

Q. What are Props in JSX? V. IMP.



- ❖ props (properties) are a way to **pass data** from a parent component to a child component.

```
function App() {  
  return (  
    <>  
      <ChildComponent name="Happy" purpose="Interview" />  
    </>  
  );  
}
```

```
function ChildComponent(props) {  
  return <div>{props.name}, {props.purpose}</div>;  
}  
//Output: Happy, Interview!
```



3: React Project - Files & Folders

Q1. What is **NPM**? What is the role of **node modules** folder? **V. IMP.**

Q2. What is the role of **public folder** in React?

Q3. What is the role of **src folder** in React?

Q4. What is the role of **index.html** page in React? **V. IMP.**

Q5. What is the role of **index.js** file and **ReactDOM** in React? **V. IMP.**

Q6. What is the role of **App.js** file in React? **V. IMP.**

Q7. What is the role of **function** and **return** inside App.js?

Q8. Can we have a **function without a return** inside App.js?

Q9. What is the role of **export default** inside App.js?


Q10. Does the file name and the component name must be same in React?



Q. What is **NPM**? What is the role of **node_modules** folder? **V. IMP.**

- ❖ NPM(Node Package Manager) is used to manage the **dependencies** for your React project, including the **React library** itself.


- ❖ node_modules folder contains all the dependencies of the project, including the React libraries.

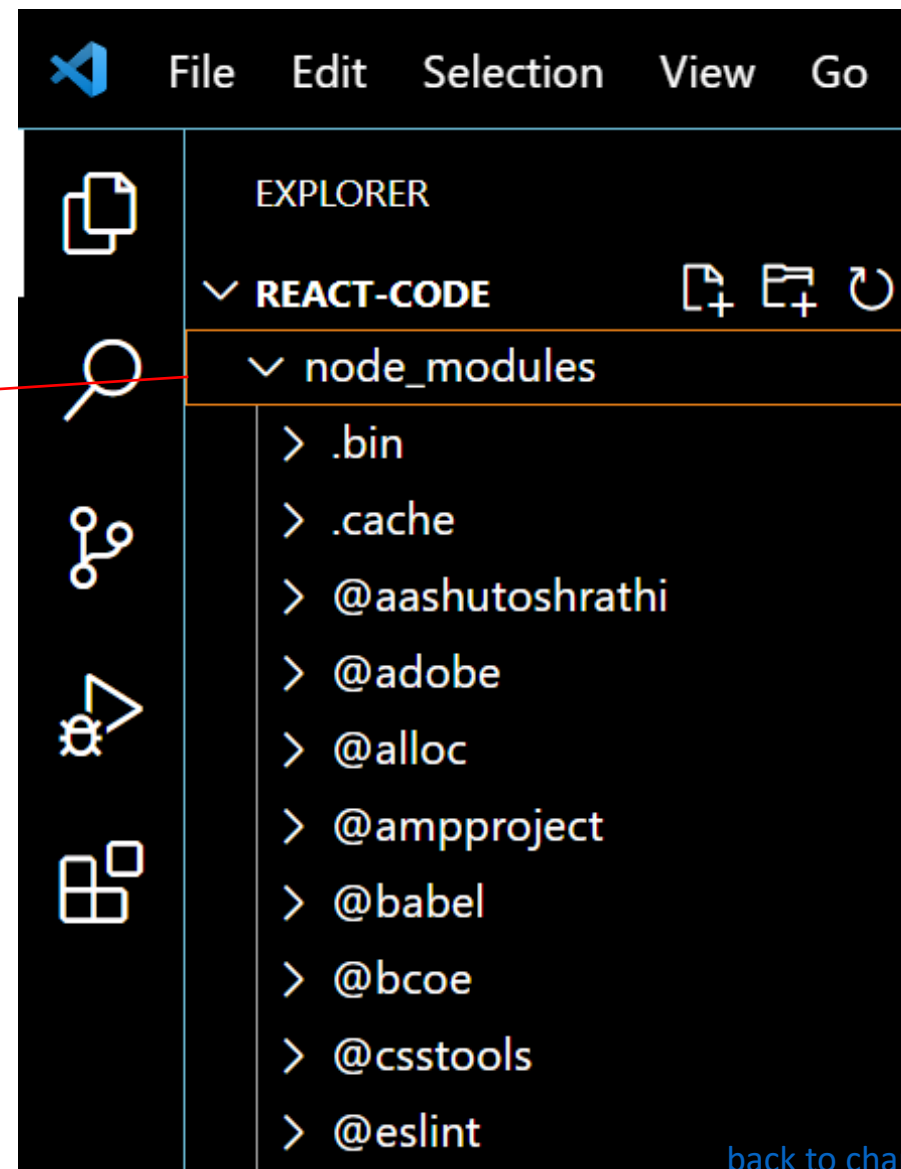



Q. What is the role of **public folder** in React?


- ❖ Public folder contains **static assets** that are served directly to the user's browser, such as images, fonts, and the index.html file.

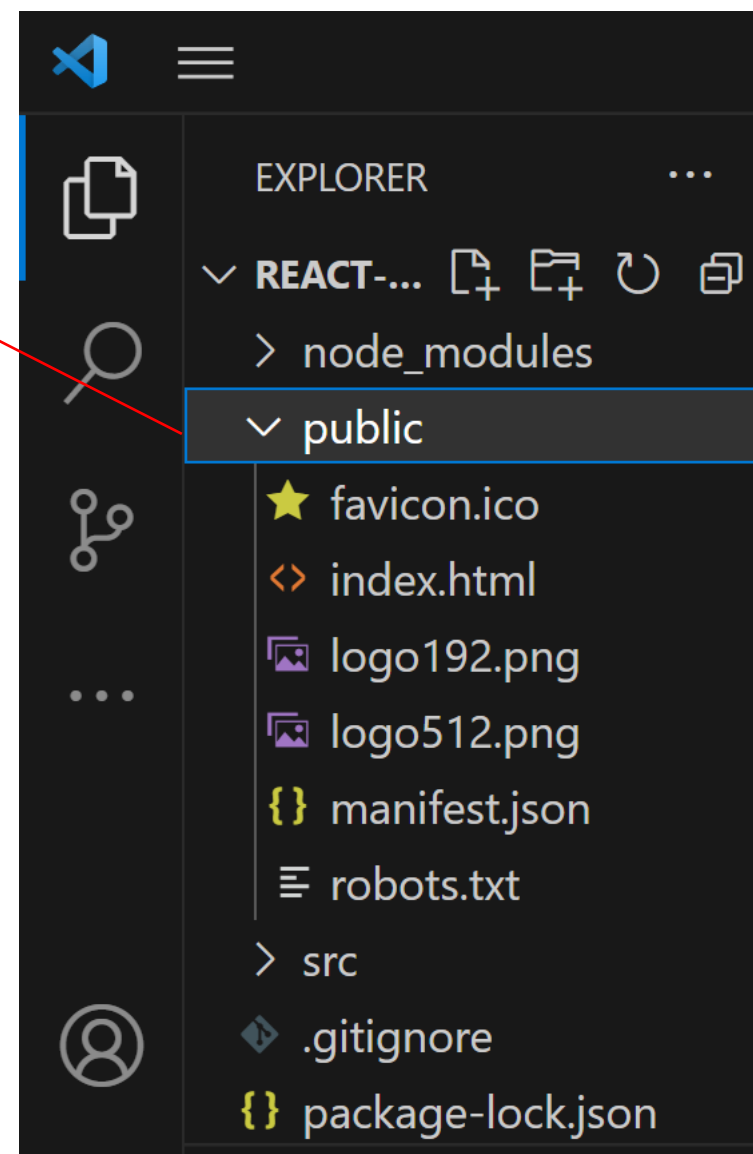



Q. What is the role of **src folder** in React?

- ❖ **src folder** is used to **store all the source code** of the application which is then responsible for the dynamic changes in your web application.

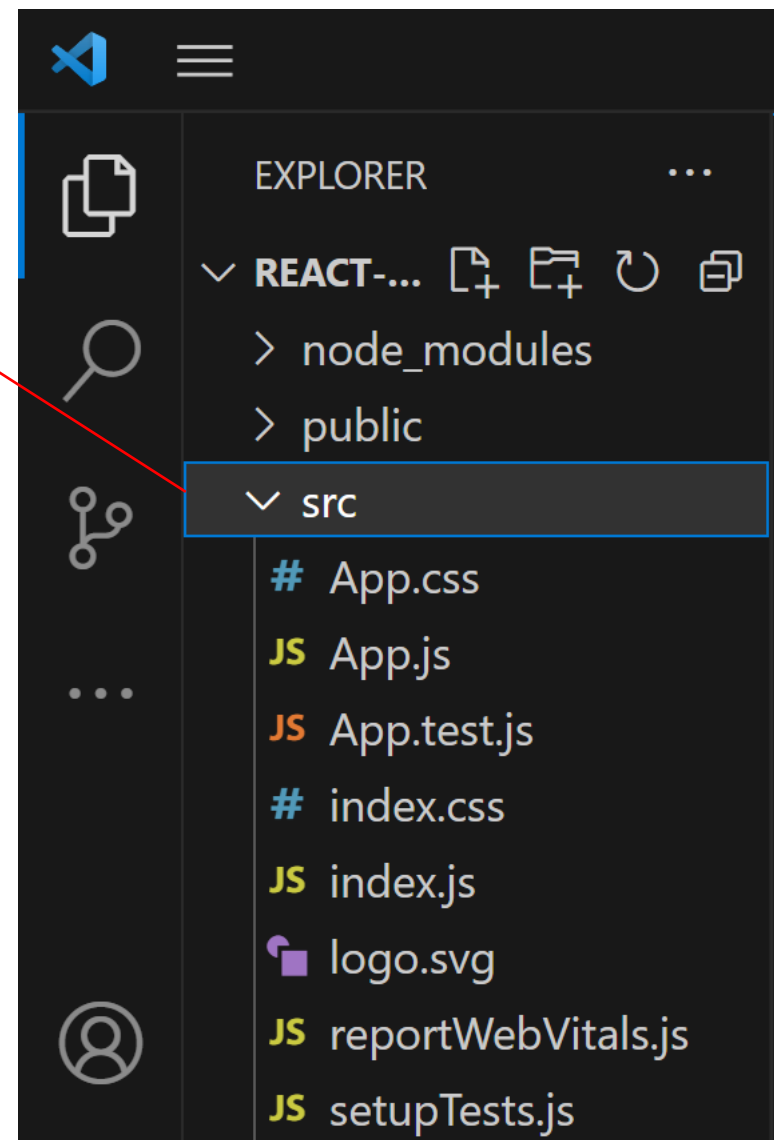



Q. What is the role of `index.html` page in React? **V. IMP.**

- ❖ `index.html` file is the main HTML file(SPA) in React application.
- ❖ Here the div with “`id=root`” will be replaced by the component inside `index.js` file.

```
EXPLORER  ...  <> index.html X

  REACT-CODE
  > node_modules
  > public
    <> index.html
    {} manifest.json
    robots.txt
  > src
  .gitignore
  {} package-lock.json
  {} package.json
  README.md

public > <> index.html > ...

1  <!DOCTYPE html>
2  <html lang="en">
3    <head>
4      <title>React App</title>
5    </head>
6    <body>
7      <div id="root"></div>
8    </body>
9  </html>
10
11
12
```



Q. What is the role of `index.js` file and **ReactDOM** in React? **V. IMP.**

- ❖ ReactDOM is a JavaScript library that renders components to the DOM or browser.
- ❖ The `index.js` file is the JavaScript file that replaces the root element of the `index.html` file with the newly rendered components.


```
<> index.html > ...
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>React App</title>
  </head>
  <body>
    <div id="root"></div>
  </body>
</html>
```

```
JS index.js > ...
import React from "react";
import ReactDOM from "react-dom/client";
import "./index.css";
import App from "./App";

const root = ReactDOM.createRoot(
  document.getElementById("root")
);

root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```

Q. What is the role of **App.js** file in React? **V. IMP.**

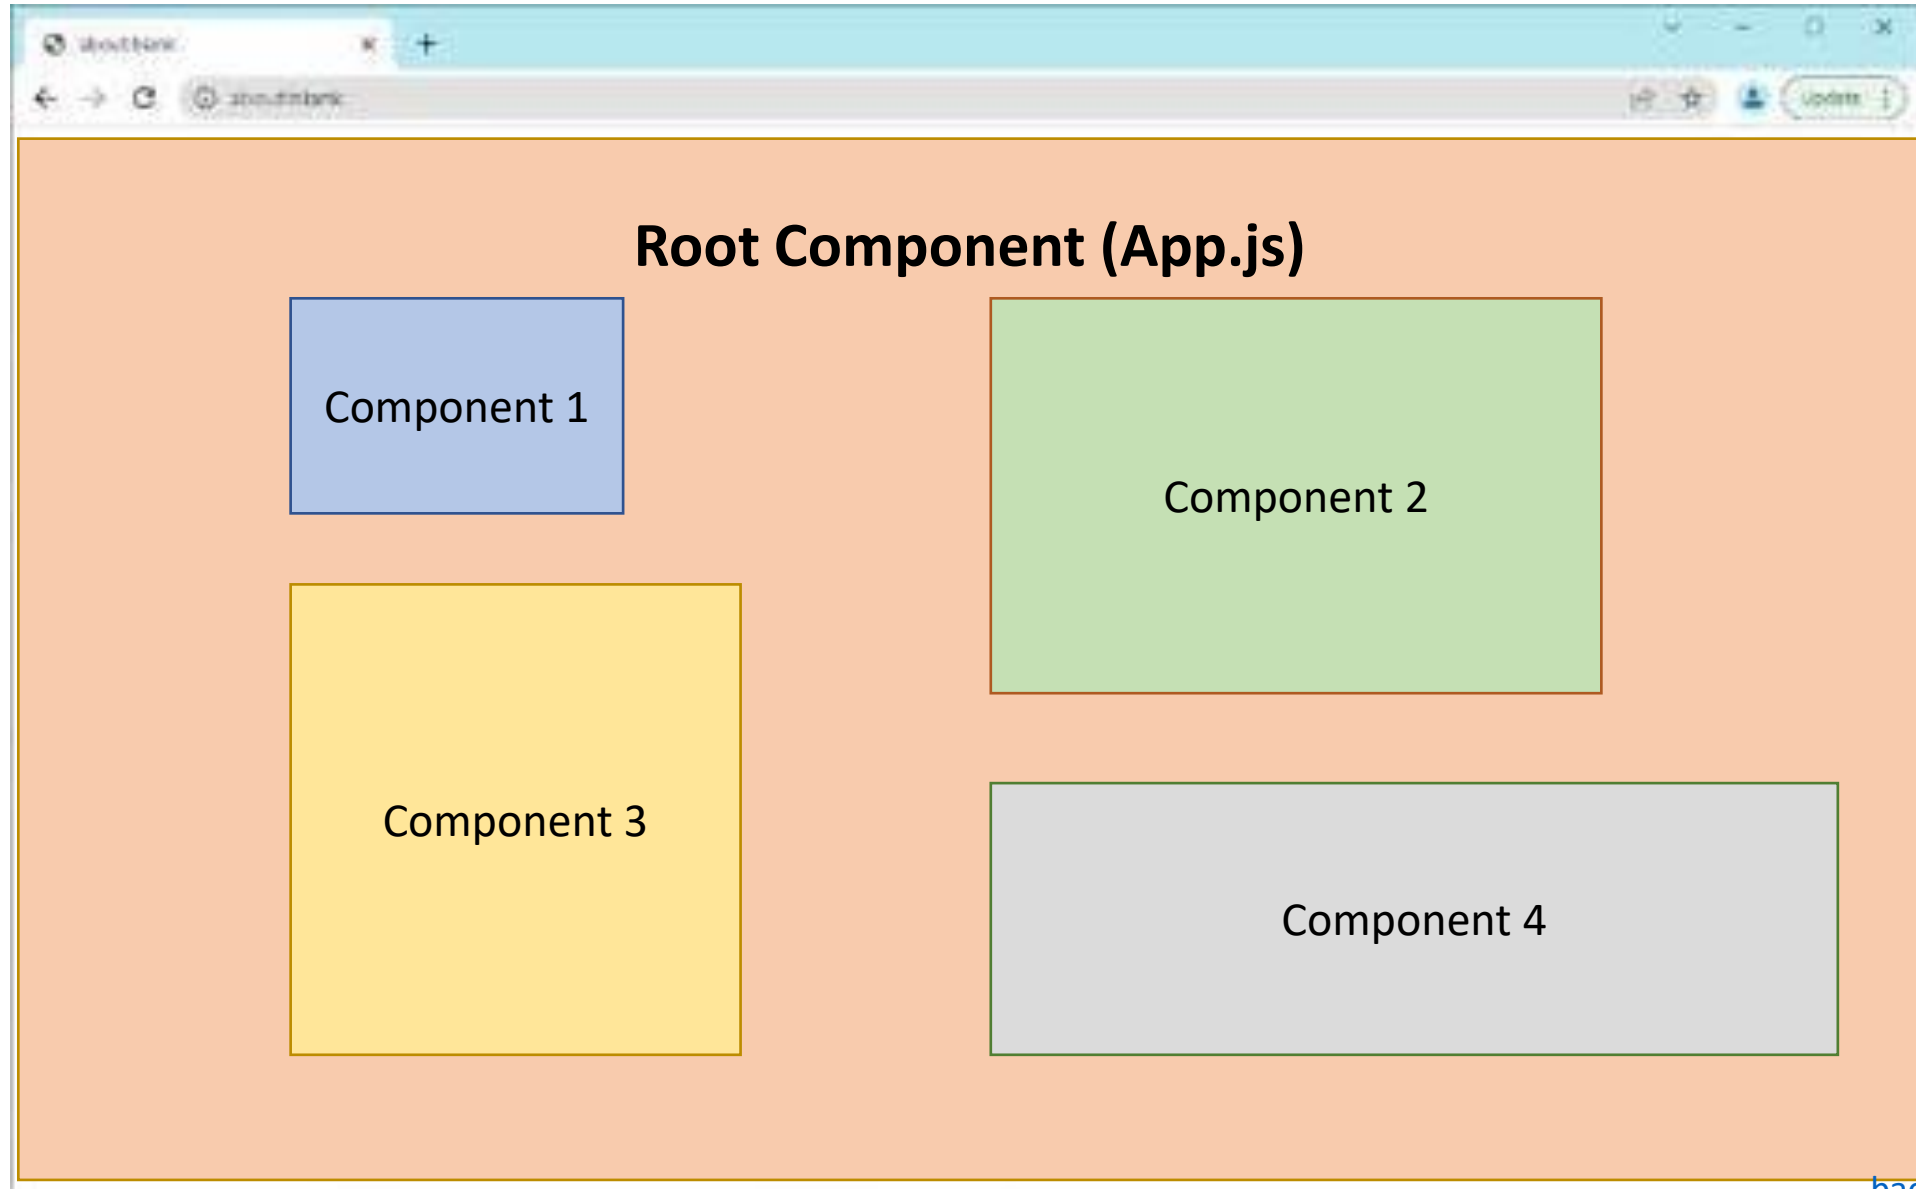



Q. What is the role of **App.js** file in React? **V. IMP.**

- ❖ App.js file contain the **root component(App)** of React application.
- ❖ App component is like a **container** for other components.
- ❖ App.js defines the structure, layout, and routing in the application.

```
JS App.js > ...  
import AppChild from "../Others/AppChild";  
  
function App() {  
  return (  
    <div>  
      <AppChild></AppChild>  
    </div>  
  );  
}  
  
export default App;
```



Q. What is the role of **function** and **return** inside App.js?

- ❖ The function keyword is used to **define a JavaScript function** that represents your React component.
- ❖ function is like a placeholder which contains all the code or logic of component.
- ❖ The function takes in props as its argument (if needed) and returns JSX

- ❖ **return** is used to return the element from the function.

```
JS App.js > ...
import AppChild from "../Others/AppChild";

function App() {
  return (
    <div>
      <h1>Interview Happy</h1>
      <AppChild></AppChild>
    </div>
  );
}


export default App;
```

Q. Can we have a **function without a return** inside App.js?



- ❖ **Yes**, a function without a return statement is possible.
- ❖ In that case, your component will not render anything in UI.
- ❖ The common use case is for **logging** purpose.

```
const FuncWithoutReturn = () => {  
  //   return (  
  //     <div>  
  //       <h1>Interview Happy</h1>  
  //     </div>  
  //   );  
  
  console.log("No Return");  
};  
  
export default FuncWithoutReturn;
```

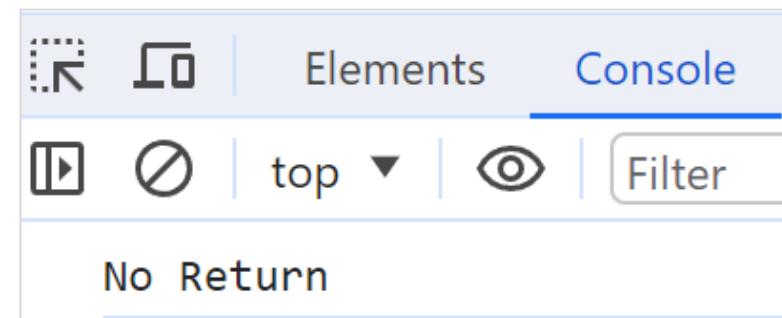

Q. What is the role of **export default** inside App.js?



- ❖ Export statement is used to make a component available for import using “import” statement in other files.

```
import React from "react";

const AppChild = (props) => {
  | return <h1>Hello, {props.name}!</h1>;
};

export default AppChild;
```

```
JS App.js > ...
import AppChild from "../Others/AppChild";

function App() {
  | return (
  |   <div>
  |   | <AppChild></AppChild>
  |   </div>
  | );
}

export default App;
```

Q. Does the file name and the component name must be same in React?



- ❖ **No**, the file name and the component name don't have to be the same.
- ❖ However, it is recommended to keep them same for easier to organize and understand your code.

```
JS ComponentName.js X
src > 1-Basics > JS ComponentName.js > ...
1  import React from "react";
2
3  const DifferentComponentName = () => {
4    return (
5      <div>
6        <h1>Interview Happy</h1>
7      </div>
8    );
9  };
10
11 export default DifferentComponentName;
12
```

4: JSX



Q1. What is the role of **JSX** in React? (3 points)

V. IMP.

Q2. What are the **5 Advantages** of JSX?

V. IMP.

Q3. What is **Babel**?

Q4. What is the role of **Fragment** in JSX?

V. IMP.

Q5. What is **Spread Operator** in JSX?

Q6. What are the types of **Conditional Rendering** in JSX?

V. IMP.

Q7. How do you iterate over a **list** in JSX? What is **map()** method?

Q8. Can a browser **read** a JSX File?

Q9. What is **Transpiler**? What is the difference between **Compiler** & **Transpiler**?

Q10. Is it possible to use **JSX without React**?



Q. What is the role of **JSX** in React? (3 points) **V. IMP.**

1. JSX stands for **JavaScript XML**.
2. JSX is used by React to write **HTML-like code**.
3. JSX is converted to JavaScript via tools like **Babel**.
Because Browsers understand JavaScript not JSX.

```
function App() {  
  return (  
    <div className="App">  
      <h1>Hello!</h1>  
      <p>Happy</p>  
    </div>  
  );  
}
```

Babel

```
function App() {  
  return React.createElement(  
    'div',  
    { className: 'App' },  
    React.createElement('h1', null, 'Hello!'),  
    React.createElement('p', null, 'Happy')  
  );  
}
```

Q. What are the 5 Advantages of JSX? V. IMP.



Advantage of JSX


1. Improve code readability and writability
2. Error checking in advance(Type safety)
3. Support JavaScript expressions
4. Improved performance
5. Code reusability

```
function App() {  
  const name = 'John';  
  
  return (  
    <div>  
      {/* Javascript expressions*/}  
      <h1>Hello, {name}!</h1>  
      <p>{2 + 2} sum</p>  
    </div>  
  );  
  //output: Hello John 4  
}
```



Q. What is Babel?

- ❖ Babel in React is used to transpile JSX syntax into regular JavaScript which browser can understand.

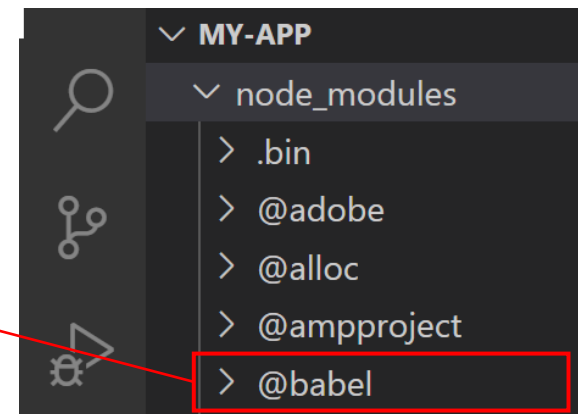

```
return (  
  <div className="App">  
    <h1>Hello!</h1>  
    <p>Happy</p>  
  </div>  
);
```

Babel

```
return React.createElement(  
  'div',  
  { className: 'App' },  
  React.createElement('h1', null, 'Hello!'),  
  React.createElement('p', null, 'Happy')  
);
```





Q. What is the role of **Fragment** in JSX? **V. IMP.**

- ❖ In React, a fragment is a way to **group multiple children's** elements.
- ❖ Using a Fragment prevents the addition of unnecessary nodes to the DOM.

Separate elements(Error)

```
function App() {  
  return (  
    <div>Interview</div>  
    <div>Happy</div>  
  );  
}
```



```
function App() {  
  return (  
    <div>  
      <div>Interview</div>  
      <div>Happy</div>  
    </div>  
  );  
}
```



Fragment (<>, <Fragment>)

```
function App() {  
  return (  
    <>  
      <div>Interview</div>  
      <div>Happy</div>  
    </>  
  );  
}
```



```
function App() {  
  return (  
    <Fragment>  
      <div>Interview</div>  
      <div>Happy</div>  
    </Fragment>  
  );  
}
```



Q. What is **Spread Operator** in JSX?


- ❖ The spread operator (...) is used to expand or spread an array or object.

```
function App() {  
  const props = {name: 'Happy', purpose: 'Interview'};  
  
  return (  
    <>  
      <ChildComponent {...props}/>  
    </>  
  );  
}
```

```
function ChildComponent(props) {  
  return <div>{props.name},  
    {props.purpose}  
  </div>;  
}  
//Output: Happy, Interview!
```




Q. What are the types of **Conditional Rendering** in JSX? **V. IMP.**

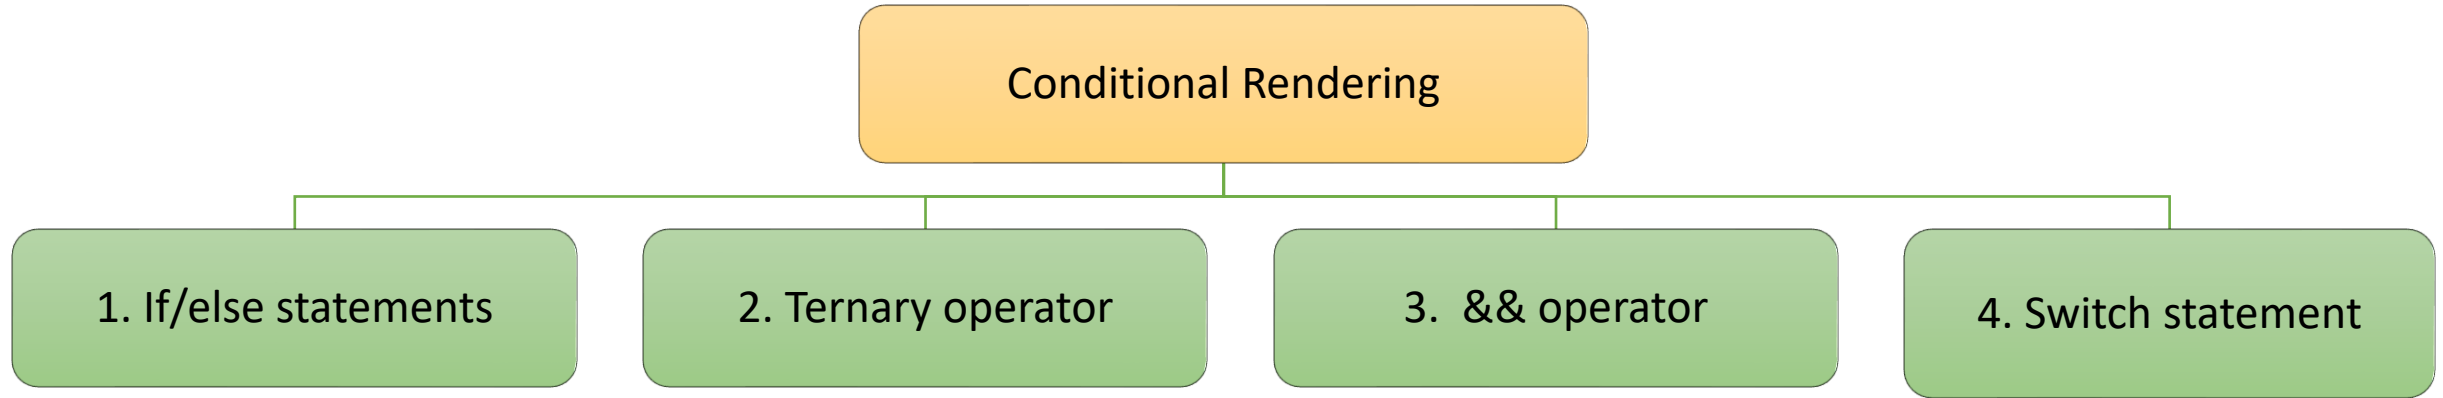

```
function MyComponent() {
  if (2 > 1 )
  {
    return "abc";
  }
  else
  {
    return "xyz";
  }
}
```

```
function MyComponent() {
  return 2>1 ? "abc" : "xyz";
}
```

```
function MyComponent() {
  {return 2 > 1 && "abc"}
}
```

```
function MyComponent() {
  const value = 2;
  switch (value) {
    case 2:
      return 'abc';
    case 1:
      return 'xyz';
    default:
      return null;
  }
}
```



Q. How do you iterate over a **list** in JSX? What is **map()** method?

- ❖ `map()` method allows you to iterate over an array and modify its elements using a callback function.

```
function App() {  
  // Define an array of numbers  
  const numbers = [1, 2, 3, 4, 5];  
  
  return (  
    <>  
      {  
        numbers.map((number) => (number * 2))  
      }  
    </>  
  );  
  //output: 2 4 6 8 10  
}
```

Q. Can a browser **read** a JSX File?




- ❖ **No**, browsers cannot directly interpret or understand JSX files.
- ❖ Babel takes JSX and converts it into equivalent JavaScript code that browsers can understand.

Q. What is **Transpiler**? What is the difference between **Compiler** & **Transpiler**?



- ❖ A Transpiler is a tool that converts source code from one high-level programming language(JSX) to another high-level programming language(JavaScript).
Example: Babel
- ❖ A compiler is a tool that converts high-level programming language(Java) into a lower-level language(machine code or bytecode).

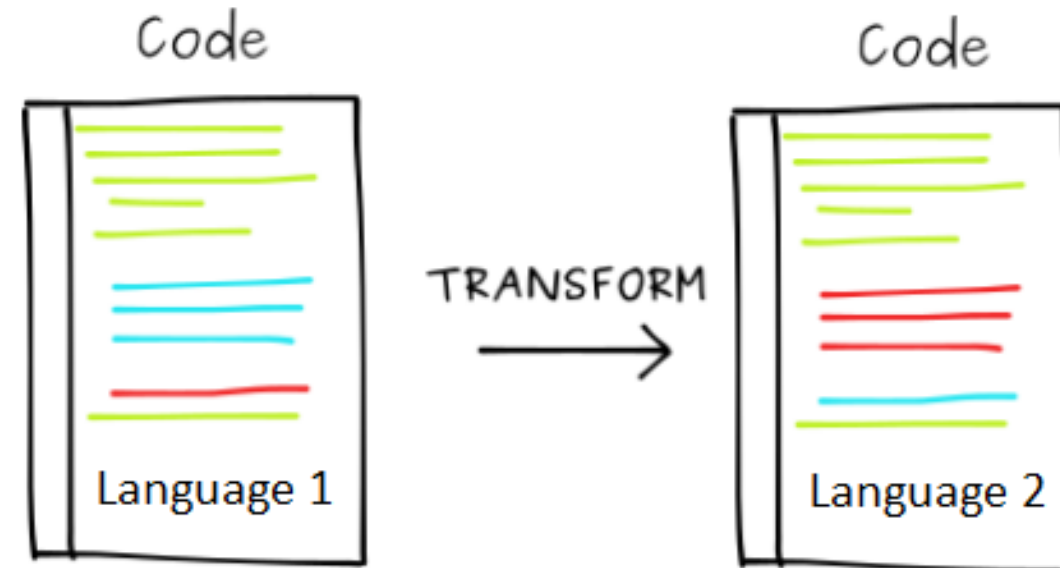

Q. Is it possible to use **JSX without React**?



- ❖ **Yes**, it's possible to use JSX without React by creating your own transpiler like Babel.
- ❖ However, this is not recommended since JSX is tightly integrated with React and relies on many React-specific features.



5: Components - Functional/ Class

Q1. What are **React Components**? What are the main elements of it?

V. IMP.

Q2. What are the Types of React components? What are **Functional Components**?

V. IMP.

Q3. How do you **pass data** between functional components in React?

Q4. What is **Prop Drilling** in React?

V. IMP.

Q5. Why to **Avoid** Prop Drilling? In how many **ways** can avoid Prop Drilling?

V. IMP.

Q6. What are **Class Components** In React?

V. IMP.

Q7. How to **pass data between class components** in React?

Q8. What is the role of **this keyword** in class components?

Q9. What are the 5 differences btw **Functional components** & **Class components**?

V. IMP.



Q. What are **React Components**? What are the main elements of it? **V. IMP.**

- ❖ In React, a component is a **reusable building block** for creating user interfaces.



```
// 1. Import the React library
import React from "react";

// 2. Define a functional component
function Component() {
  // 3. Return JSX to describe the component's UI
  return (
    <div>
      | <h1>I am a React Reusable Component</h1>
    </div>
  );
}


// 4. Export the component to make it available
// for use in other files
export default Component;
```

I am a React Reusable Component

Q. What are the **Types** of React components? What are **Functional Components**? **V. IMP.**



- ❖ Functional components are declared as a **JavaScript function**.
- ❖ They are **stateless component**, but with the help of hooks, they can now manage state also.

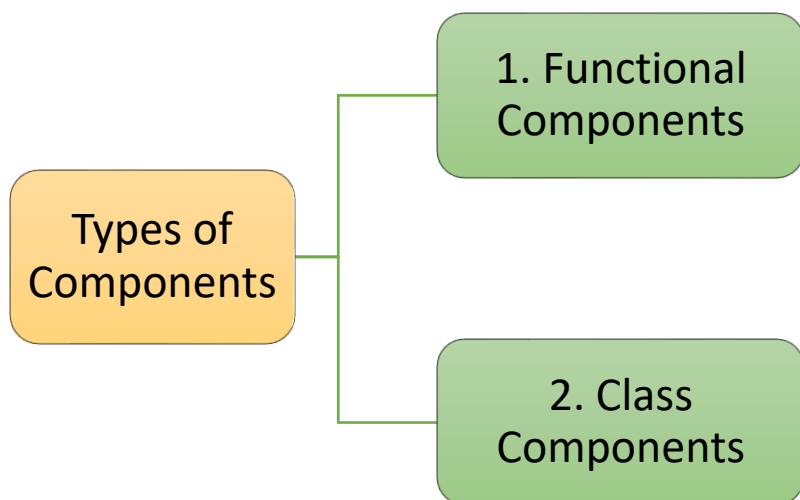

```
// 1. Import the React library
import React from "react";

// 2. Define a functional component
function Component() {
  // 3. Return JSX to describe the component's UI
  return (
    <div>
      | <h1>I am a React Reusable Component</h1>
    </div>
  );
}

// 4. Export the component to make it available
// for use in other files
export default Component;
```

I am a React Reusable Component

Q. How do you **pass data** between functional components in React?



❖ **props (properties)** are a way to pass data from a parent component to a child component.


```
function App() {  
  return (  
    <>  
      <ChildComponent name="Happy" purpose="Interview" />  
    </>  
  );  
}
```

```
function ChildComponent(props) {  
  return <div>{props.name}, {props.purpose}</div>;  
}  
//Output: Happy, Interview!
```



Q. What is **Prop Drilling** in React? **V. IMP.**

- ❖ Prop drilling is the process of **passing down props** through multiple layers of components.

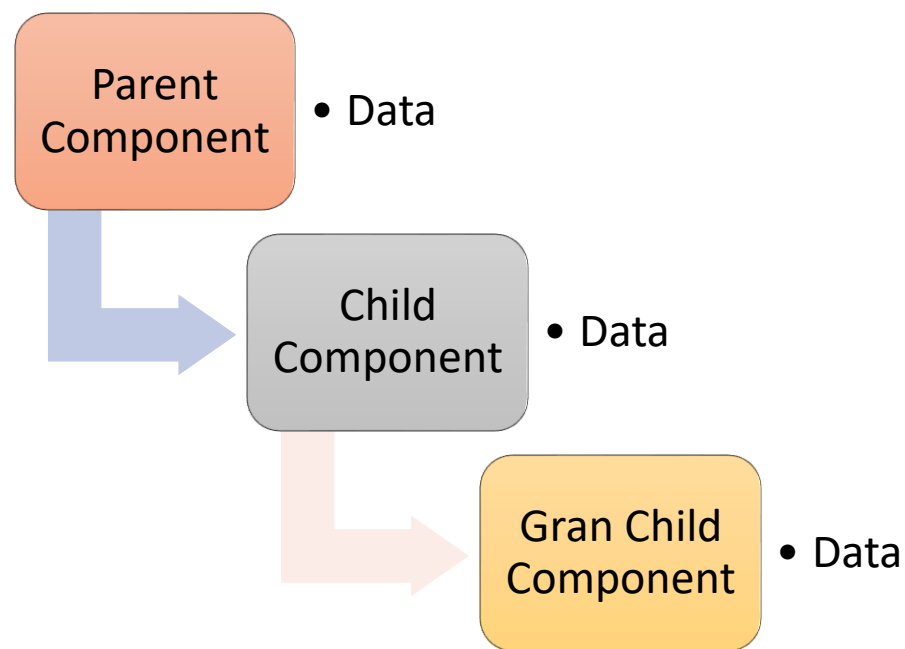


```
function PropParent() {  
  return (  
    <div>  
      | <PropChild message={'data'} />  
    </div>  
  );  
}
```


```
function PropChild({ message }) {  
  return (  
    <div>  
      | <PropGrandChild message={message} />  
    </div>  
  );  
}
```

```
function PropGrandChild({ message }) {  
  return (  
    <div>  
      | <h3>{message}</h3>  
    </div>  
  );  
}
```

Q. Why to **Avoid** Prop Drilling? In how many **ways** can avoid Prop Drilling? **V. IMP.**

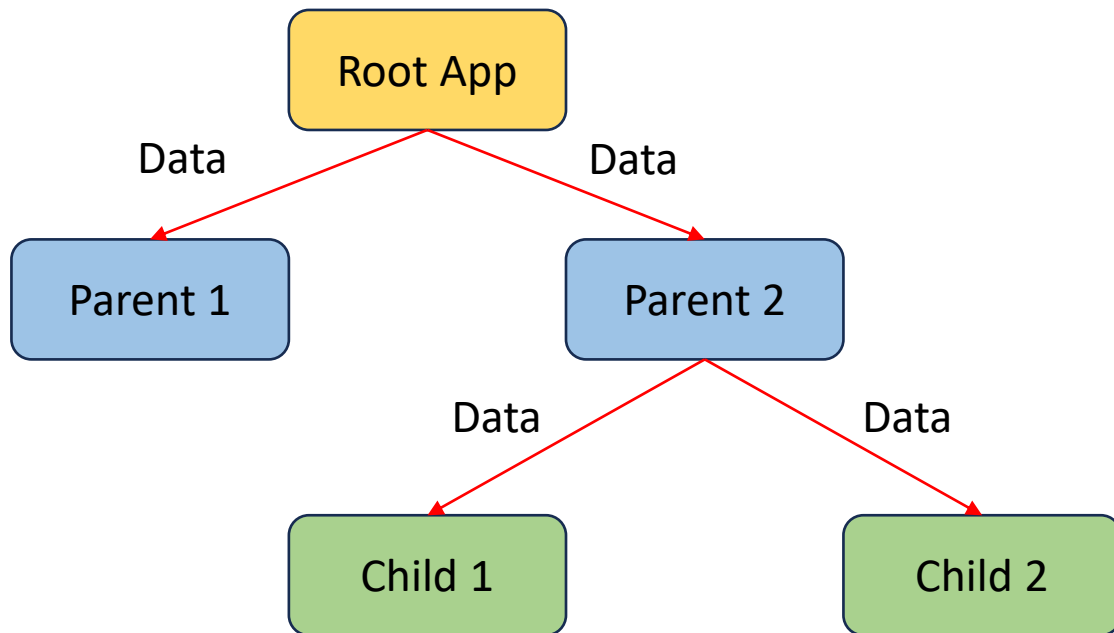

Using Prop Drilling

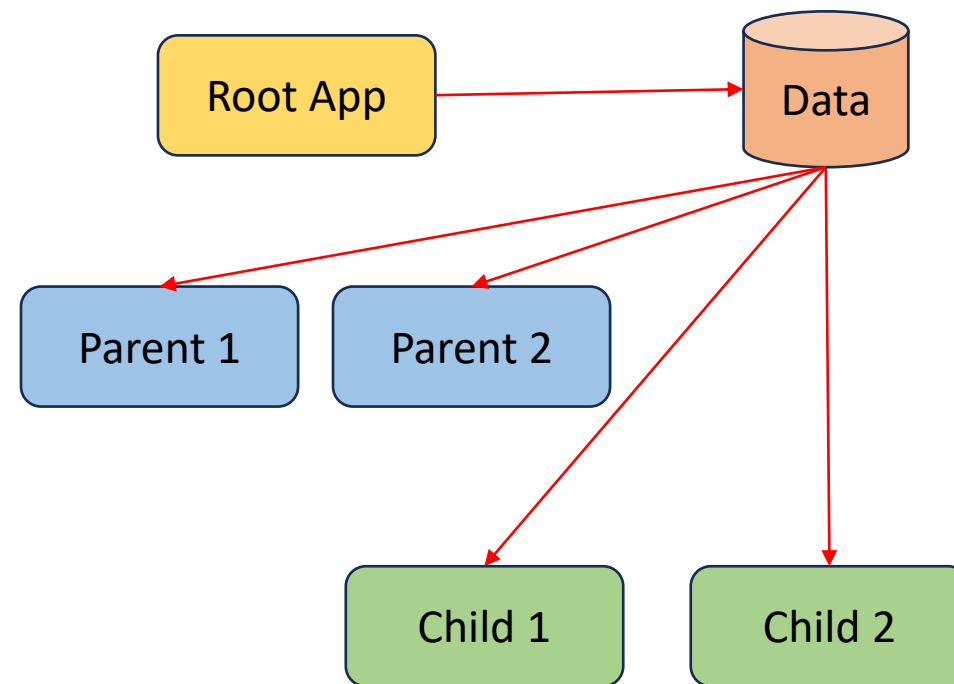

Avoiding Prop Drilling



Q. Why to **Avoid** Prop Drilling? In how many **ways** can avoid Prop Drilling? **V. IMP.**

❖ Why to avoid Prop Drilling:

1. **Maintenance:** Prop drilling can make code harder to maintain as changes in data flow require updates across multiple components.
2. **Complexity:** It increases code complexity and reduces code readability.
3. **Debugging:** Debugging becomes challenging when props need to be traced through numerous components.

5 Ways to avoid Prop Drilling

1. Using Context API

2. Using Redux

3. Using Component Composition


4. Using Callback Functions

5. Using Custom Hooks



Q. What are **Class Components** In React? **V. IMP.**

- ❖ Class components are defined using **JavaScript classes**.
- ❖ They are stateful components by using the lifecycle methods.
- ❖ The render method in a class component is responsible for returning JSX.

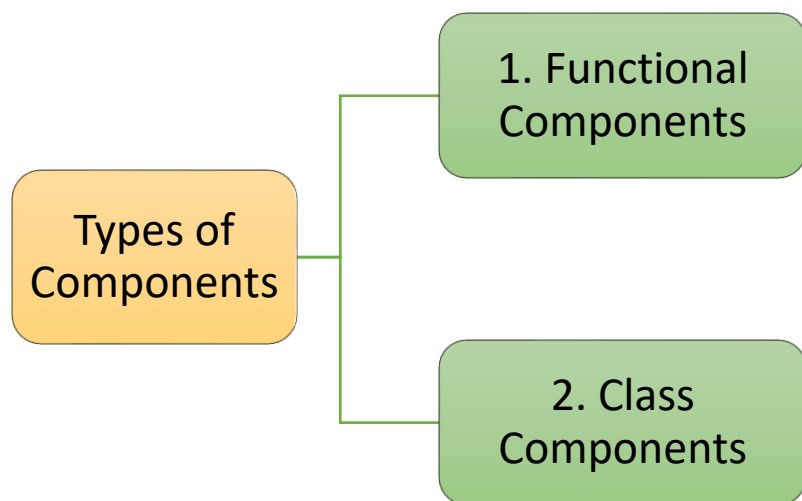

```
components > JS AppClass.js > ...  
import React, { Component } from 'react';  
  
class AppClass extends Component {  
  render() {  
    return <h1>Interview Happy</h1>;  
  }  
}  
  
export default AppClass;
```



Q. How to **pass data between class components** in React?

- ❖ **this.props** can be used in child component to access properties/ data passed from parent component.

```
class ParentComponent extends Component {  
  render() {  
    const dataToSend = "Hello from Parent!";  
  
    return (  
      <div>  
        <ChildComponent message={dataToSend} />  
      </div>  
    );  
  }  
}  
export default ParentComponent;
```

```
class ChildComponent extends Component {  
  render() {  
    return (  
      <div>  
        <p>Message: {this.props.message}</p>  
      </div>  
    );  
  }  
}  
export default ChildComponent;
```

Message: Hello from Parent!



Q. What is the role of **this keyword** in class components?

- ❖ this keyword is used to refer to the **instance of the class**.

```
class ParentComponent extends Component {  
  render() {  
    const dataToSend = "Hello from Parent!";  
  
    return (  
      <div>  
        <ChildComponent message={dataToSend} />  
      </div>  
    );  
  }  
}  
export default ParentComponent;
```

```
class ChildComponent extends Component {  
  render() {  
    return (  
      <div>  
        <p>Message: {this.props.message}</p>  
      </div>  
    );  
  }  
}  
export default ChildComponent;
```

Message: Hello from Parent!

Q. What are the 5 differences btw **Functional components** & **Class components**? **V. IMP.**



Functional Component	Class Component
1. Syntax: Defined as a JS function.	Defined as a JS(ES6) class.
2. State: Originally stateless but can now maintain state using hooks.	Can manage local state with this.state.
3. Lifecycle methods: No	Yes
4. Readability: more readable & concise. 🏆	Verbose(complex).
5. this keyword: No	Yes (Access props using this.props)
6. Do not have render method.	Have render method.

6: Routing



Q1. What is **Routing** and **Router** in React?

V. IMP.

Q2. How to **Implement Routing** in React?

V. IMP.

Q3. What are the roles of **<Routes>** & **<Route>** component in React Routing?

V. IMP.

Q4. What are **Route Parameters** in React Routing?

Q5. What is the role of **Switch** Component in React Routing?

Q6. What is the role of **exact prop** in React Routing?

Q. What is **Routing** and **Router** in React? **V. IMP.**




Routing

Routing allows you to create a single-page web application with **navigation**, without the need for a full-page refresh.

React Router

React Router is a library for handling routing and enables navigation and rendering of different components **based on the URL**.

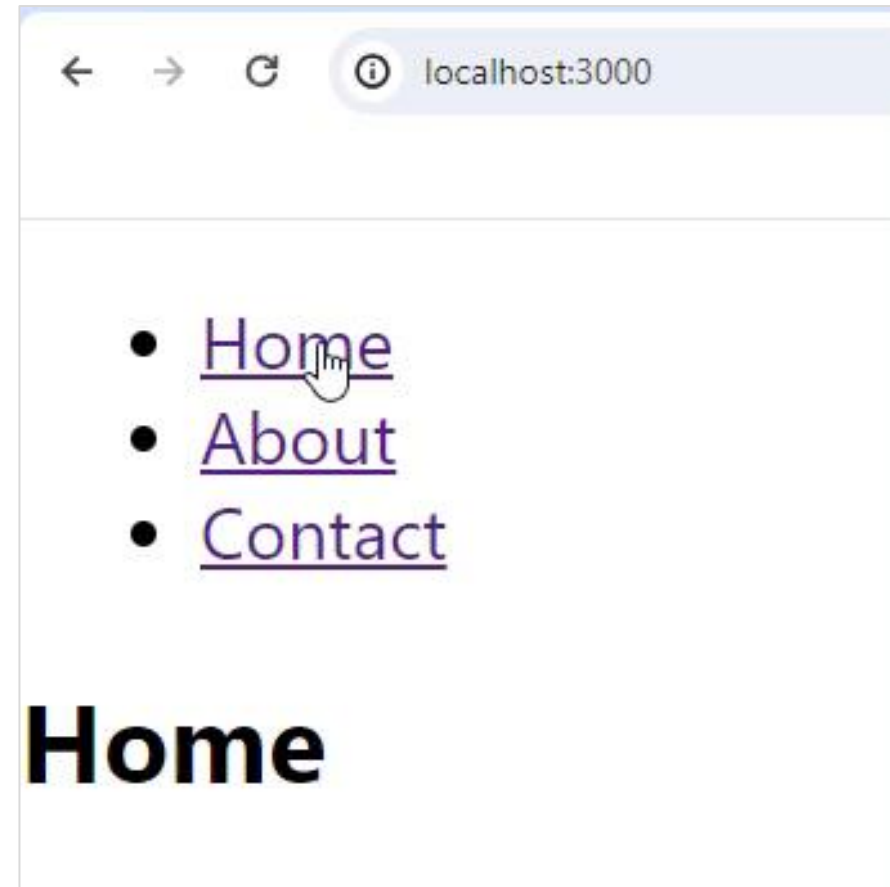

Q. How to Implement Routing in React?



❖ Command to install router:

```
npm install react-router-dom
```

```
import React from "react";
import { Routes, Route, Link } from "react-router-dom";

// Elements or imported components
const Home = () => <h2>Home</h2>;
const About = () => <h2>About</h2>;
const Contact = () => <h2>Contact</h2>;

const AppRoute = () => (
  <div>
    {/* Navigation links */}
    <nav>
      <ul>
        <li><Link to="/">Home</Link></li>
        <li><Link to="/about">About</Link></li>
        <li><Link to="/contact">Contact</Link></li>
      </ul>
    </nav>
  </div>
);
```

```
// index.js
import AppRoute from "../Others/AppRoute";
import { BrowserRouter as Router }
  | | | | | | | from "react-router-dom";

const root = ReactDOM.createRoot(
  | | document.getElementById("root"));
root.render(
  | <Router>
  | | <AppRoute />
  | </Router>
);
```

```
{/* Routes */}
<Routes>
  <Route path="/" element={<Home />} />
  <Route path="/about" element={<About />} />
  <Route path="/contact" element={<Contact />} />
</Routes>
</div>
);
export default AppRoute;
```

[back to chapter index](#)

Q. How to **Implement Routing** in React?



Step 1

- Install React Router

Step 2

- Create Navigation

Step 3

- Create Routes



Q. What are the roles of `<Routes>` & `<Route>` component in React Routing? **V. IMP.**

- ❖ The `<Routes>` component is used as the root container for declaring your **collection of routes**.
- ❖ The `<Route>` component is used to define a route and specify the component that should render when the **route matches**.
 - ❖ For example, in this code if user enter “website.com/about” in url, then matching “About” component will be rendered.

```
import React from "react";
import { Routes, Route, Link } from "react-router-dom";

{/* Routes */}
<Routes>
  <Route path="/" element={<Home />} />
  <Route path="/about" element={<About />} />
  <Route path="/contact" element={<Contact />} />
</Routes>
```

Q. What are **Route Parameters** in React Routing?



- ❖ Route parameters in React Router are a way to pass dynamic values(data) to the component **as part of the URL path**.

```
{/* userId is the route parameter */}  
<Route path="/users/:userId" component={UserProfile} />
```

Q. What is the role of **Switch** Component in React Routing?



- ❖ Switch component ensures that only the **first matching <Route> is rendered** and rest are ignored.
 - ❖ For example, Switch is commonly used to handle 404 or "not found" routes.

```
import { Switch, Route } from 'react-router-dom';

<Switch>
  <Route path="/users" element={<UsersList />} />
  <Route path="/users/:id" element={<UserProfile />} />
</Switch>
```

Q. What is the role of **exact prop** in React Routing?



- ❖ exact prop is used with the `<Route>` component to **match exactly** to the provided path.

```
{/* without exact (default behavior)*/}  
{/* match "about", "/about/team", "/about/contact" etc. */}  
<Route path="/about" component={About} />
```

```
{/* with exact */}  
{/* only match "about"*/}  
<Route path="/about" exact component={About} />
```




7: Hooks -useState/ useEffect

Q1. What are **React Hooks**? What are the **Top** React Hooks?

V. IMP.

Q2. What are **State, Stateless, Stateful** and **State Management** terms?

V. IMP.

Q3. What is the role of **useState()** hook and how it works?

V. IMP.

Q4. What is the role of **useEffect()**. How it works and what is its **use**?

V. IMP.

Q5. What is **Dependency Array** in **useEffect()** hook?

Q6. What is the meaning of the **empty array []** in the **useEffect()**?



Q. What are **React Hooks**? What are the **Top** React Hooks? **V. IMP.**

1. React Hooks are inbuilt functions provided by React that allow functional components to **use state** and **lifecycle features**.
2. Before Hooks, class components lifecycle methods were used to maintain state in React applications.
3. To use React Hook first we first have to import it from React library:

```
// Import Hook from the React library
import React, { useState } from "react";
```

1. useState:

State

2. useEffect:

Side effects

3. useContext:

Context

4. useReducer:

Complex state

5. useCallback:

Memoization

6. useMemo:

Performance

7. useRef:

Refs



8. useEffect:

Synchronous Side effects.

Q. What are **State**, **Stateless**, **Stateful** and **State Management** terms?




- ❖ "state" refers to the current data of the component.
- ❖ Stateful or state management means, when a user performs some actions on the UI, then the React application should be able to **update and re-render that data or state** on the UI.

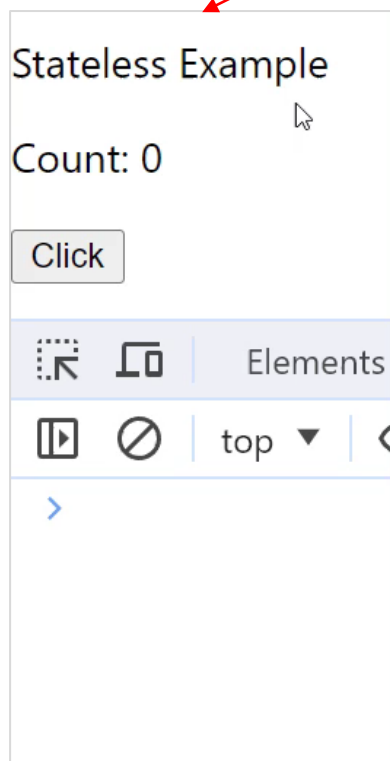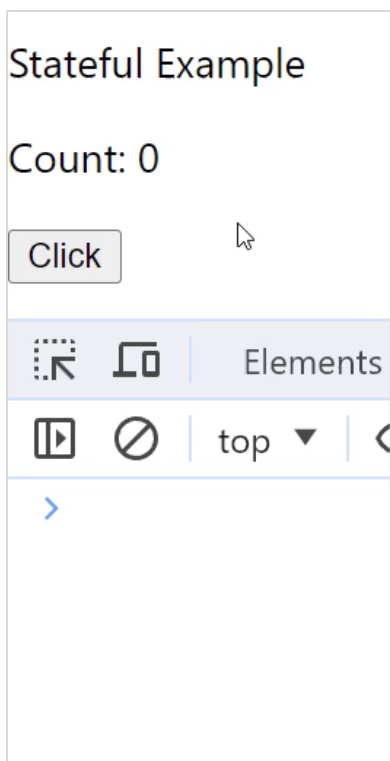

```
books > JS ComponentState.js > ...  
import React from "react";  
  
// Stateless Example  
function ComponentState() {  
  let count = 0; // Initial state  
  
  const increment = () => {  
    count += 1; // State updated  
    console.log(`Count: ${count}`);  
  };  
  
  return (  
    <div>  
      <p>Stateless Example</p>  
      <p>Count: {count}</p> {/* Not updating */}  
      <button onClick={increment}>Click</button>  
    </div>  
  );  
}  
  
export default ComponentState;
```



Q. What is the role of `useState()` hook and how it works? **V. IMP.**

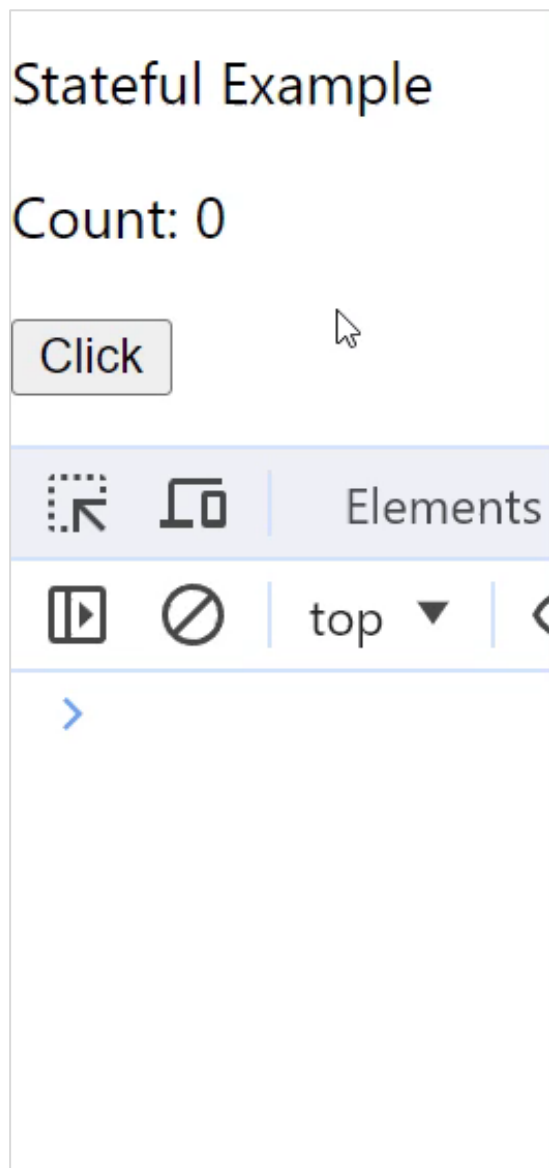

```
import React, { useState } from "react";

function UseState() {
  // array destructuring
  const [count, setCount] = useState(0);

  const increment = () => {
    setCount(count + 1);
    console.log(`Count: ${count + 1}`);
  };

  return (
    <div>
      <p>Stateful Example</p>
      <p>Count: {count}</p> { /* Updating */}
      <button onClick={increment}>Click</button>
    </div>
  );
}

export default UseState;
```

[back to chapter index](#)



Q. What is the role of `useState()` hook and how it works? **V. IMP.**


- ❖ The `useState` hook enables functional components to **manage state**.
- ❖ `useState()` working: `useState()` function accept the initial state value as the parameter and returns an array with two elements:
 1. The first element is the current state value (count in this code).
 2. Second element is the function that is used to update the state (`setCount` in this code).
- ❖ The concept of assign array elements to individual variables is called **array destructuring**.

```
// state is the current state value.  
// setState is a function that used to update the state.  
const [state, setState] = useState(initialValue);
```



Q. What is the role of `useEffect()`. How it works and what is its **use**? **V. IMP.**

- ❖ The `useEffect` Hook in React is used to perform **side effects** in functional components.
- ❖ For example, data fetching from API, subscriptions or any other operation that needs to be performed after the component has been rendered.

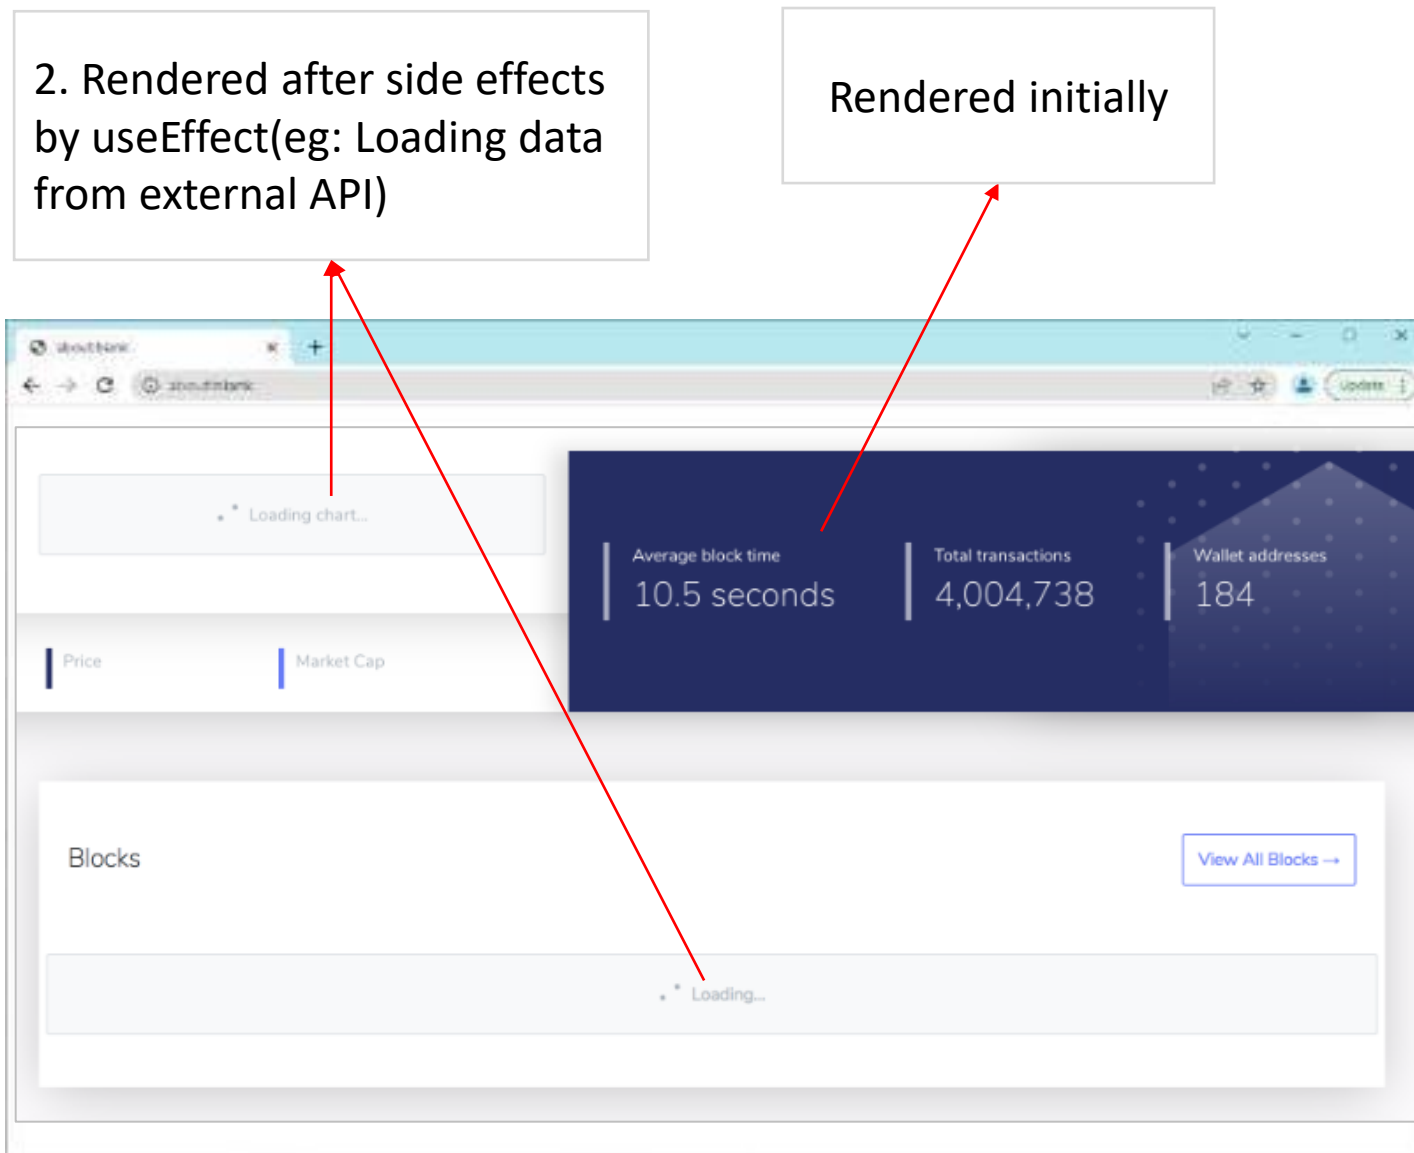




Q. What is the role of `useEffect()`. How it works and what is its **use**? **V. IMP.**

❖ 2 points to remember about `useEffect()`:

1. `useEffect()` is called after the component renders. Example, side effects.
2. `useEffect()` function will accept two parameter: (Effect function, dependency array).

Browser Output

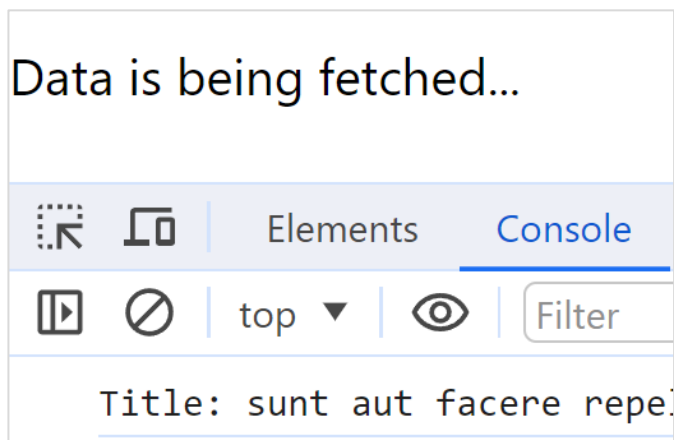

```
import React, { useEffect } from "react";

function UseEffect() {
  useEffect(() => {
    const fetchData = async () => {
      const response = await fetch(
        "https://jsonplaceholder.typicode.com/posts/1"
      );
      const result = await response.json();
      console.log("Title:", result.title);
    };
    fetchData();
  }, []);

  return (
    <div>
      <p>Data is being fetched...</p>
    </div>
  );
}

export default UseEffect;
```



Q. What is **Dependency Array** in useEffect() hook? **V. IMP.**

- ❖ Dependencies arrays(optional) act as triggers for useEffect to rerun; meaning if any of dependencies values change, the code inside useEffect() will be executed again.

```
// Pseudocode
useEffect(() => {
  // Side effect code here

  // Optional cleanup code
  return () => {
    // Cleanup code here
  };
}, [dependencies]);
```

Data Fetching with Dependencies

User ID:

User Details:

```
{
  "id": 1,
  "name": "Leanne Graham",
  "username": "Bret",
  "email": "Sincere@april.biz",
  "address": {
    "street": "Kulas Light",
    "suite": "Apt. 556",
    "city": "Gwenborough",
    "zipcode": "92998-3874",
    "geo": {
      "lat": "-37.3159",
      "lng": "81.1496"
    }
  },
  "phone": "1-770-736-8031 x56442",
  "website": "hildegard.org",
  "company": {
    "name": "Romaguera-Crona",
    "catchPhrase": "Multi-layered client-server neural-net",
    "bs": "harness real-time e-markets"
  }
}
```




Q. What is **Dependency Array** in useEffect() hook?

```
const UseEffectDependencies = () => {  
  const [data, setData] = useState(null);  
  const [userId, setUserId] = useState(1);  
  
  useEffect(() => {  
    const fetchData = async () => {  
      const response = await fetch(  
        `https://jsonplaceholder.typicode.com/users/${userId}`  
      );  
      const result = await response.json();  
      setData(result);  
    };  
  
    fetchData();  
  }, [userId]);  
}
```




```
return (  
  <div>  
    <h2>Data Fetching with Dependencies</h2>  
    <label>User ID: </label>  
    <input  
      type="number"  
      value={userId}  
      onChange={(e) =>  
        setUserId(Number(e.target.value))}  
    />  
    {data && (  
      <div>  
        <h3>User Details:</h3>  
        <pre>{JSON.stringify(data, null, 2)}</pre>  
      </div>  
    )}  
  </div>  
)  
);  
};  
export default UseEffectDependencies;
```

Q. What is the meaning of the **empty array []** in the `useEffect()`?



❖ An empty array `[]` indicates that the effect function should only **run once**.

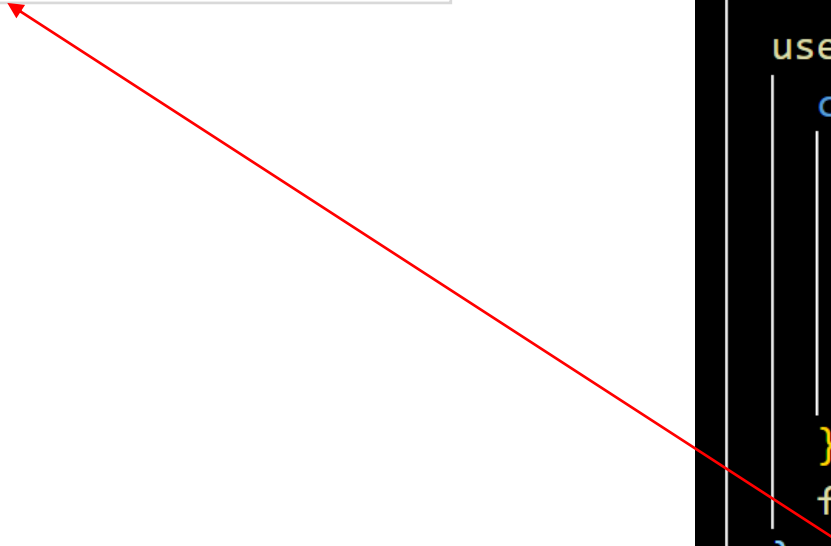

books > JS UseEffect.js > ...

```
function UseEffect() {
  const [data, setData] = useState({});

  useEffect(() => {
    const fetchData = async () => {
      const response = await fetch(
        "https://jsonplaceholder.typicode.com/posts/1"
      );
      const result = await response.json();
      setData(result);
    };
    fetchData();
  }, []);

  return (
    <div>
      <p>Title: {data.title}</p>
    </div>
  );
}
```

[back to chapter index](#)

8: Hooks - useContext/ useReducer



Q1. What is the role of `useContext()` hook?

V. IMP.

Q2. What is `createContext()` method? What are `Provider` & `Consumer` properties?

Q3. When to use `useContext()` hook instead of props in real applications?

Q4. What are the `similarities` between `useState()` and `useReducer()` hook?

Q5. What is `useReducer()` hook? When to use `useState()` and when `useReducer()`?

V. IMP.

Q6. What are the differences between `useState()` and `useReducer()` Hook?


Q7. What are `dispatch` & `reducer function` in useReducer Hook?

Q8. What is the `purpose` of passing initial state as an object in `UseReducer`?




Q. What is the role of `useContext()` hook? **V. IMP.**

- ❖ Prop drilling is the process of **passing down props** through multiple layers of components.

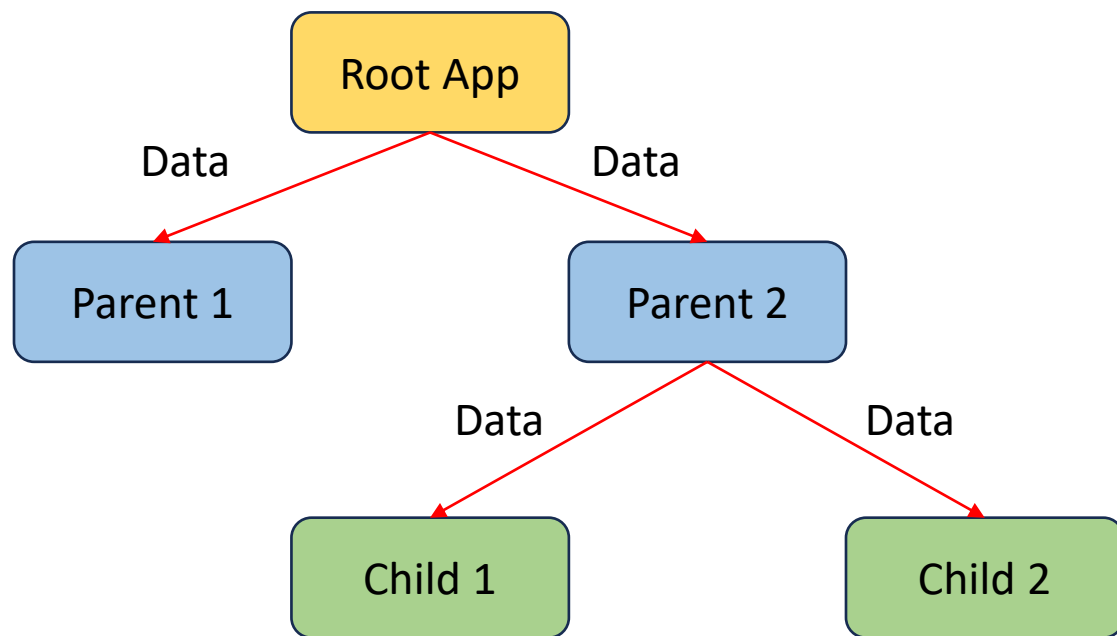

Using Prop Drilling

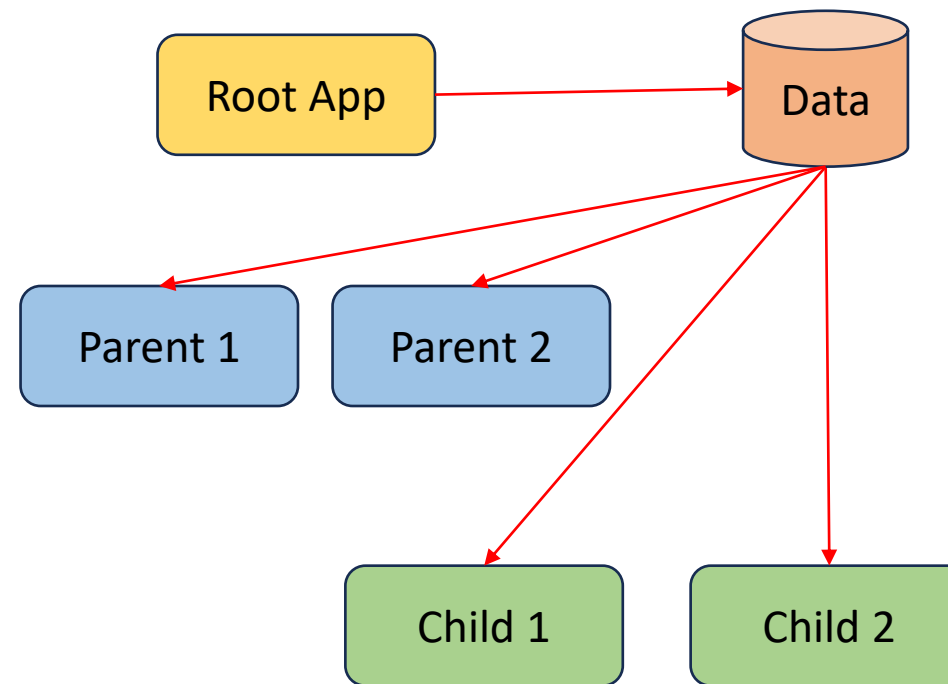

Avoiding Prop Drilling



Q. What is the role of `useContext()` hook? **V. IMP.**

- ❖ `useContext` in React provides a way to pass data from parent to child component without using props.

Hello from Context!

```
books > JS Parent.js > ...  
  
const Parent = () => {  
  const contextValue = "Hello from Context!";  
  
  return (  
    <MyContext.Provider value={contextValue}>  
      /* Your component tree */  
      <Child></Child>  
    </MyContext.Provider>  
  );  
};  
export default Parent;
```

```
books > JS MyContext.js > ...  
  
import { createContext } from "react";  
  
const MyContext = createContext();  
export default MyContext;
```

```
books > JS Child.js > ...  
  
const Child = () => {  
  const contextValue = useContext(MyContext);  
  
  return <p>{contextValue}</p>;  
  // return (  
  //   <MyContext.Consumer>  
  //     {(contextValue) => <div>{contextValue}</div>}  
  //   </MyContext.Consumer>  
  // );  
};  
export default Child;
```



Q. What is `createContext()` method? What are **Provider** & **Consumer** properties?

- ❖ `createContext()` function returns an object with **Provider** and **Consumer** properties.
- ❖ The **Provider** property is responsible for providing the context value to all its child components.
- ❖ `useContext()` method or **Consumer** property can be used to consume the context value in child components.

```
books > JS MyContext.js > ...  
  
import { createContext } from "react";  
  
const MyContext = createContext();  
  
export default MyContext;
```

```
books > JS Parent.js > ...  
  
const Parent = () => {  
  const contextValue = "Hello from Context!";  
  
  return (  
    <MyContext.Provider value={contextValue}>  
      /* Your component tree */  
      <Child></Child>  
    </MyContext.Provider>  
  );  
};  
  
export default Parent;
```


```
books > JS Child.js > ...  
  
const Child = () => {  
  const contextValue = useContext(MyContext);  
  
  return <p>{contextValue}</p>;  
  // return (  
  //   <MyContext.Consumer>  
  //     {(contextValue) => <div>{contextValue}</div>}  
  //   </MyContext.Consumer>  
  // );  
};  
  
export default Child;
```

Q. When to use useContext() hook instead of props in real applications?




- ❖ Use useContext instead of props when you want to **avoid prop drilling** and access context values directly within deeply nested components.

❖ Props are good

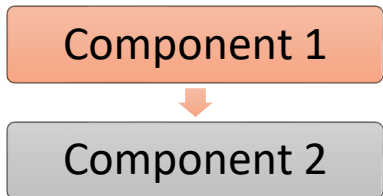

❖ useContext is good

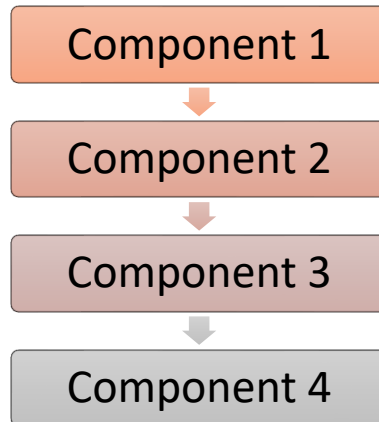

1. Theme Switching (Dark/ Light)

- You can centralize and pass the theme selection of the application from the parent to all the deep child components.

2. Localization (language selection)

- You can centralize and pass the language selection of the application from the parent to all the child components.

3. Centralize Configuration Settings

- Common configuration settings like API endpoints can be centralized and change in the parent component will pass the setting to all its child components

4. User Preferences

- Any other user preferences apart from theme and localization can also be centralized.

5. Notification System

- Components that trigger or display notifications can access the notification state from the context.



Q. What are the **similarities** between **useState()** and **useReducer()** hook?

```
// useState for managing state
import React, { useState } from "react";

const UseStateR = () => {
  const [count, setCount] = useState(0);

  const increment = () => {
    setCount(count + 1);
  };
  const decrement = () => {
    setCount(count - 1);
  };

  return (
    <div>
      <p>Count: {count}</p>
      <button onClick={increment}>Increment</button>
      <button onClick={decrement}>Decrement</button>
    </div>
  );
};

export default UseStateR;
```

```
// useReducer for managing complex state
import React, { useReducer } from "react";

const UseReducer = () => {
  const i = { count: 0 }; // "i" is object
  const [state, dispatch] = useReducer(fnReducer, i);

  const increment = () => {
    dispatch({ type: "INCREMENT" });
  };
  const decrement = () => {
    dispatch({ type: "DECREMENT" });
  };

  return (
    <div>
      <p>Count: {state.count}</p>
      <button onClick={increment}>Increment</button>
      <button onClick={decrement}>Decrement</button>
    </div>
  );
};
```




Q. What are the **similarities** between **useState()** and **useReducer()** hook?

❖ 3 Similarities between useState() and useReducer() hook:

1. Both hooks provide a way to **update state** and trigger a re-render of the component.
2. Both useState and useReducer **return an array with two elements**:
 - a. First element is current state
 - b. Second element is a function that can be used to update the state.

Q. What is `useReducer()` hook? When to use `useState()` and when `useReducer()`? **V. IMP.**



```
// useState for managing state
import React, { useState } from "react";

const UseStateR = () => {
  const [count, setCount] = useState(0);

  const increment = () => {
    setCount(count + 1);
  };
  const decrement = () => {
    setCount(count - 1);
  };

  return (
    <div>
      <p>Count: {count}</p>
      <button onClick={increment}>Increment</button>
      <button onClick={decrement}>Decrement</button>
    </div>
  );
};

export default UseStateR;
```

```
// useReducer for managing complex state
import React, { useReducer } from "react";

const UseReducer = () => {
  const i = { count: 0 }; // "i" is object
  const [state, dispatch] = useReducer(fnReducer, i);

  const increment = () => {
    dispatch({ type: "INCREMENT" });
  };
  const decrement = () => {
    dispatch({ type: "DECREMENT" });
  };

  return (
    <div>
      <p>Count: {state.count}</p>
      <button onClick={increment}>Increment</button>
      <button onClick={decrement}>Decrement</button>
    </div>
  );
};
```

Q. What is **useReducer()** hook? When to use **useState()** and when **useReducer()**? **V. IMP.**



```
// useReducer for managing complex state
import React, { useReducer } from "react";

const UseReducer = () => {
  const i = { count: 0 }; // "i" is object
  const [state, dispatch] = useReducer(fnReducer, i);

  const increment = () => {
    dispatch({ type: "INCREMENT" });
  };
  const decrement = () => {
    dispatch({ type: "DECREMENT" });
  };

  return (
    <div>
      <p>Count: {state.count}</p>
      <button onClick={increment}>Increment</button>
      <button onClick={decrement}>Decrement</button>
    </div>
  );
};
```

```
oks > JS UseReducer.js > ...

// Reducer function
const fnReducer = (state, action) => {
  switch (action.type) {
    case "INCREMENT":
      return { count: state.count + 1 };
    case "DECREMENT":
      return { count: state.count - 1 };
    default:
      return state;
  }
};


export default UseReducer;
```

Q. What is `useReducer()` hook? When to use `useState()` and when `useReducer()`? **V. IMP.**



- ❖ `useReducer()` is an alternative to the `useState()` hook when dealing with **complex state** in your components.

```
// Structure  
const [state, dispatch] = useReducer(reducer, initialState);
```

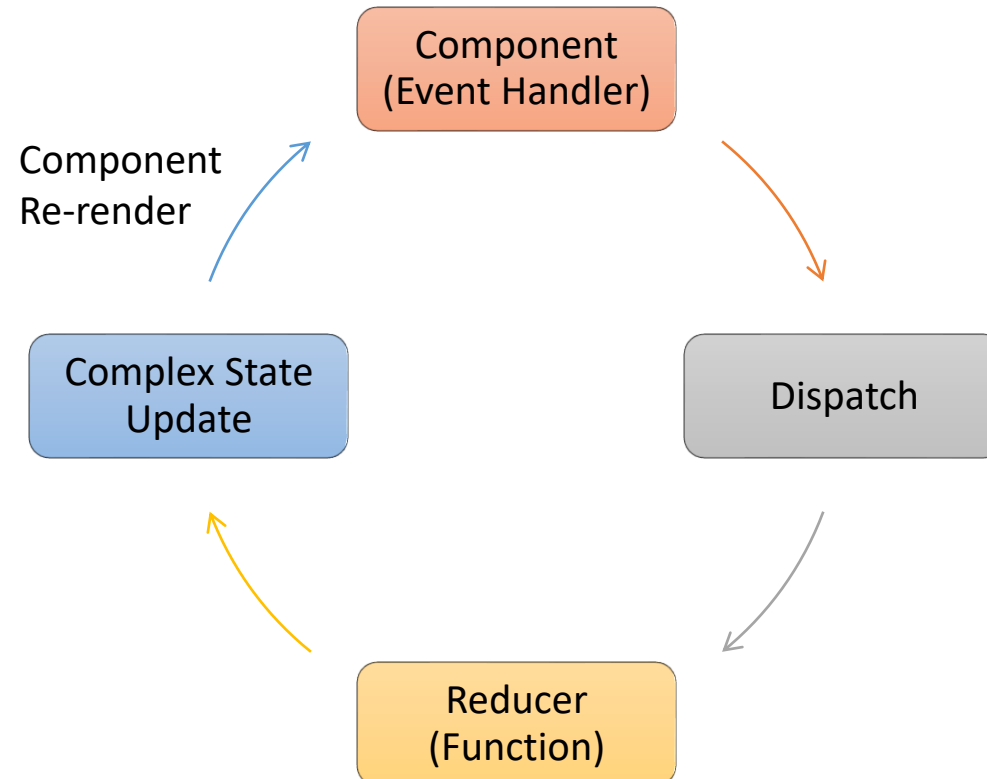



Q. What are the differences between `useState()` and `useReducer()` Hook?

useState	useReducer
1. useState is simpler to use and used for managing simple state values.	useReducer is more appropriate for complex state logic or when the next state depends on the previous one.
2. It is suitable for managing a single piece of state .	It is well-suited for managing multiple pieces of state that needs to be updated together.
3. The useState hook takes an initial state as an argument and returns an array with two elements: the current state and a function to update the state.	The useReducer hook takes a reducer function and an initial state as arguments and returns the current state and a dispatch function.

Q. What are **dispatch** & **reducer function** in useReducer Hook?



- ❖ dispatch function is returned by the useReducer hook, and it is used to dispatch actions(type) to reducer function that trigger state updates.
- ❖ The reducer function is a function responsible for updating the state based on the action received from dispatch function.

```
// Reducer function
const fnReducer = (state, action) => {
  switch (action.type) {
    case "INCREMENT":
      return { count: state.count + 1 };
    case "DECREMENT":
      return { count: state.count - 1 };
    default:
      return state;
  }
};
```

```
// useReducer for managing complex state
import React, { useReducer } from "react";

const UseReducer = () => {
  const i = { count: 0 }; // "i" is object
  const [state, dispatch] = useReducer(fnReducer, i);

  const increment = () => {
    dispatch({ type: "INCREMENT" });
  };
  const decrement = () => {
    dispatch({ type: "DECREMENT" });
  };

  return (
    <div>
      <p>Count: {state.count}</p>
      <button onClick={increment}>Increment</button>
      <button onClick={decrement}>Decrement</button>
    </div>
  );
};
```

Q. What is the purpose of passing initial state as an object in UseReducer?



- ❖ By setting initial state as an object, you can manage complex states with useReducer functions.

```
const initialState = {  
  user: {  
    name: 'John',  
    age: 30,  
  },  
  isLoggedIn: false,  
};  
const [state, dispatch] = useReducer(reducer, initialState);
```

9: Hooks - useCallback/ useMemo/ useRef/ useEffect



Q1. What is the role of `useCallback()` hook in React? **V. IMP.**

Q2. What `parameters` does the `useCallback hook` accept & what does it returns?

Q3. What is the role of `useMemo()` Hook? **V. IMP.**

Q4. What is the role of `useRef()` Hook?

Q5. What is `useLayoutEffect()` Hook? Compare it with `useEffect()` hook.

Q6. When to use `useLayoutEffect()` Hook? **V. IMP.**



Q. What is the role of `useCallback()` hook in React? **V. IMP.**

- ❖ The `useCallback` hook is used to **memorize functions** in functional components.
- ❖ When passing function as a prop from parent component to child component, then passing memorized function avoid unnecessary re-creation of the function on each render.

Count: 0

Increment

```
books > JS UseCallbackChild.js > ...  
  
const UseCallbackChild = ({ onIncrement }) => {  
  return (  
    <div>  
      <button onClick={onIncrement}>  
        Increment</button>  
    </div>  
  );  
};
```

books > JS UseCallbackParent.js > ...

```
const UseCallbackParent = () => {  
  const [count, setCount] = useState(0);  
  
  // Without useCallback  
  // const handleIncrement = () => {  
  //   setCount(count + 1);  
  // };  
  
  // With useCallback  
  const handleIncrement = useCallback(() => {  
    setCount(count + 1);  
  }, [count]);  
  
  return (  
    <div>  
      <p>Count: {count}</p>  
      /* Pass the memoized callback to the ChildComponent */  
      <UseCallbackChild onIncrement={handleIncrement} />  
    </div>  
  );  
};
```

[back to chapter index](#)



Q. What parameters does the useCallback hook accept & what does it returns?

```
const memoizedCallback = useCallback(callback, dependencies);
```

❖ The useCallback hook returns the memoized version of the callback function.

❖ The first parameter is the callback function that you want to memorize.

❖ The second parameter is an array of dependencies. It specifies the values that, when changed, will cause the memoized callback to be re-created.



Q. What is the role of **useMemo()** Hook? **V. IMP.**

- ❖ The useMemo hook is a performance optimization function that **memorizes the result** of a computation.
- ❖ The advantage is it **prevent unnecessary recalculations and rendering**. It is particularly useful when dealing with expensive calculations.
- ❖ useMemo accept two parameters:
 1. The first argument of useMemo() is a function that performs some expensive computation and return some result(processData).
 2. The second argument([data]) is an array of dependencies ([data]). The memorized value will only be recalculated if this dependency will change.
- ❖ useMemo returns a memorized version of the calculated value.

```
oks > JS UseMemo.js > ...
import React, { useMemo } from 'react';

const UseMemo = ({ data }) => {
  const processedData = useMemo(() => {
    // Expensive computation on data
    return processData(data);
  }, [data]);


  return (
    <div>
      {/* Render using the memoized value */}
      {processedData}
    </div>
  );
};

export default UseMemo;
```



Q. What is the role of `useRef()` Hook? **V. IMP.**

- ❖ The `useRef` hook is primarily used for accessing and **interacting with the DOM elements**.
- ❖ The advantage is, the `useRef` hook **persists across renders** and does not trigger re-renders when it changes.

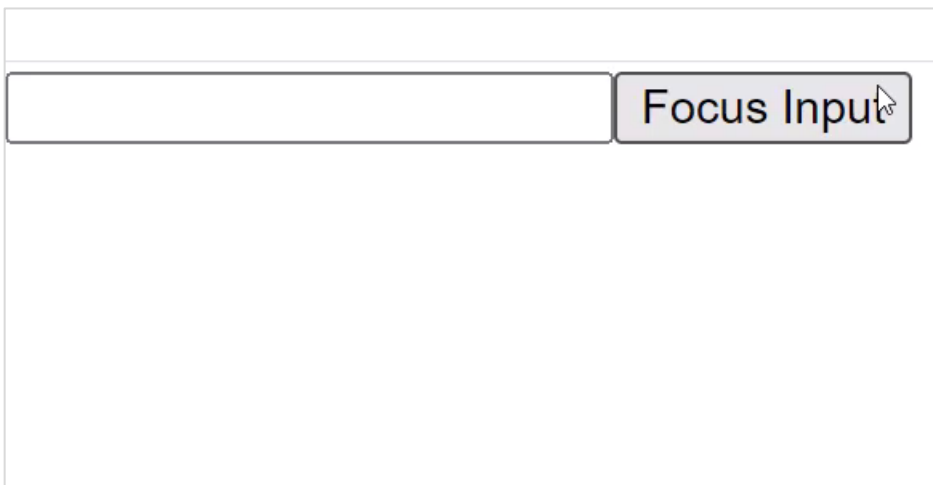

```
import React, { useRef } from "react";

const UseRef = () => {
  // Create a ref to hold a reference to the element
  const inputRef = useRef();

  // Function to focus the input element
  const focusInput = () => {
    inputRef.current.focus();
  };

  return (
    <div>
      <input ref={inputRef} type="text" />

      {/* Button click will focus on input element */}
      <button onClick={focusInput}>Focus Input</button>
    </div>
  );
};


export default UseRef;
```



Q. What is `useLayoutEffect()` Hook? Compare it with `useEffect()` hook.

Rendered after side effects by
`useEffect`(eg: Loading data
from external API)

Rendered initially

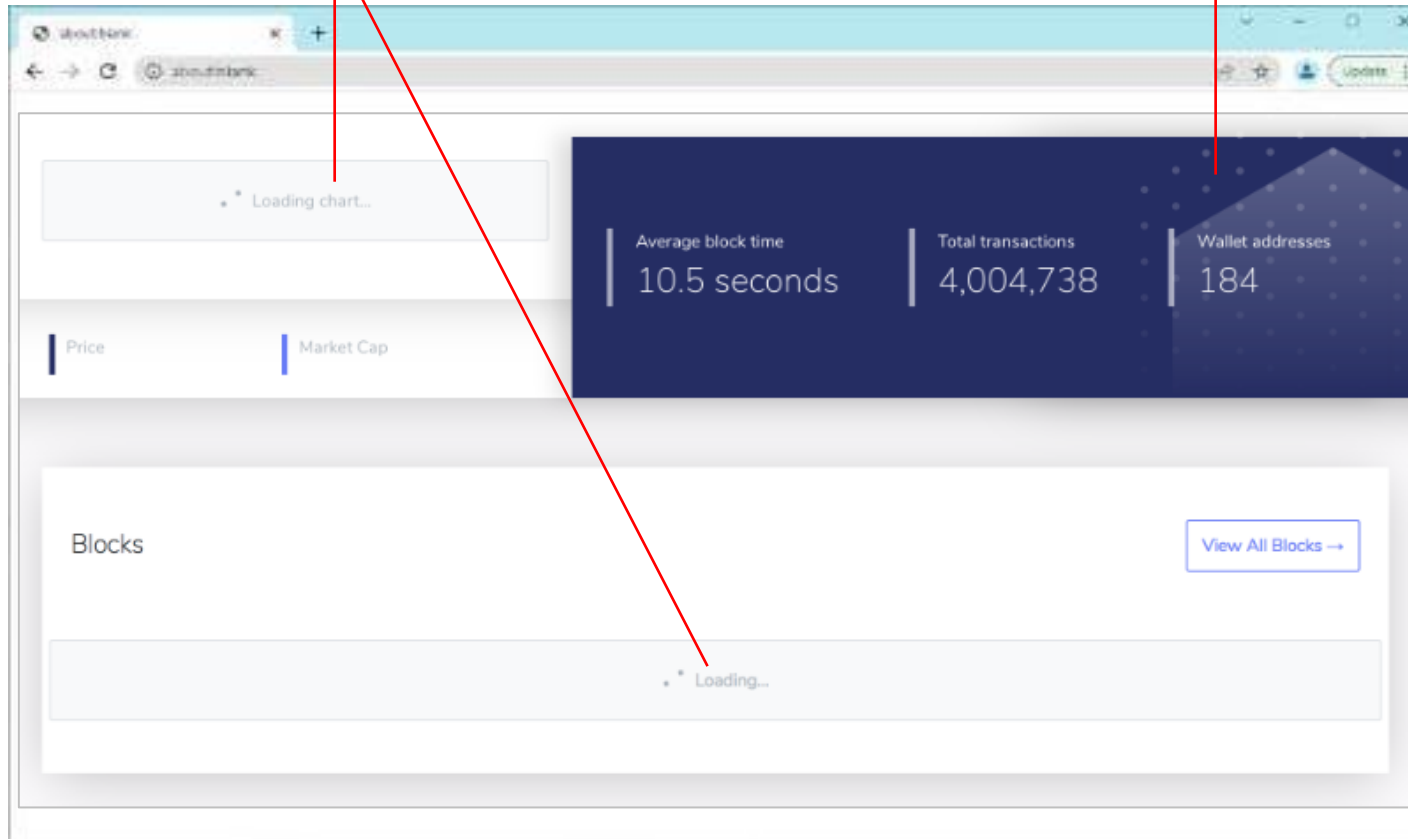



Q. What `useLayoutEffect()` Hook? Compare it with `useEffect()` hook.

books > JS UseEffect.js > ...

```
function UseEffect() {
  const [data, setData] = useState({});

  useEffect(() => {
    const fetchData = async () => {
      const response = await fetch(
        "https://jsonplaceholder.typicode.com/posts/1"
      );
      const result = await response.json();
      setData(result);
    };
    fetchData();
  }, []);

  return (
    <div>
      <p>Title: {data.title}</p>
    </div>
  );
}
```

books > JS UseLayoutEffect.js > ...

```
function UseLayoutEffect() {
  const [data, setData] = useState({});

  useLayoutEffect(() => {
    const fetchData = async () => {
      const response = await fetch(
        "https://jsonplaceholder.typicode.com/posts/1"
      );
      const result = await response.json();
      setData(result);
    };
    fetchData();
  }, []);

  return (
    <div>
      <p>Title: {data.title}</p>
    </div>
  );
}
```

Same Code



Q. What `useLayoutEffect()` Hook? Compare it with `useEffect()` hook.

`useEffect`



`useEffect` runs asynchronously and is scheduled after the UI has been rendered.



This means `useEffect` won't block the browser from updating the UI.

`useLayoutEffect`



`useLayoutEffect` run synchronously with the UI rendering.



This means `useLayoutEffect` can block the browser from updating the UI.




Q. When to use `useLayoutEffect()` Hook? **V. IMP.**

- ❖ For example, below the paragraph element style(bold/ normal) is dependent on the side effect data, then we use `useLayoutEffect`.

Update this element to bold after data fetch

sunt aut facere repellat provident
occaecati excepturi optio reprehenderit

```
return (  
  <div>  
    <p id="myElement">Update this element  
    to bold after data fetch</p>  
  
    {data && <p>{data.title}</p>}  
  </div>  
);  
};  
  
export default UseLayoutEffectUse;
```



```
const UseLayoutEffectUse = () => {  
  const [data, setData] = useState(null);  
  
  useLayoutEffect(() => {  
    const fetchData = async () => {  
      // Fetch API data  
      const response = await fetch(  
        "https://jsonplaceholder.typicode.com/posts/1"  
      );  
      const result = await response.json();  
      setData(result);  
  
      // Update styles based on the fetched data  
      const element = document.getElementById("myElement");  
      if (element && result && result.title) {  
        element.style.fontWeight = "bold";  
      }  
    };  
  
    fetchData();  
  }, []);  
};
```




Q. When to use `useLayoutEffect()` Hook? **V. IMP.**

- ❖ The `useLayoutEffect` hook in React should be used when you need to perform actions that involve manipulating the layout of the DOM based on side effects, such as data fetching.
- ❖ In other words, you want the layout changes to be reflected before the browser paints the updated UI.

10: Hooks - Best Practices/ Short Answer



Q1. What are the **Rules** or **Best Practices** for hooks implementation? **V. IMP.**

Q2. What are **Custom Hooks**?

Q3. Tell 3 scenarios in which you can use useEffect() hook?

Q4. What useState() hook return in React?

Q5. How can you conditionally run effects with useEffect?

Q6. What problem do React Hooks solve?

Q7. What is the advantage of React Hooks over Lifecycle methods?

Q8. What is **Context API**?

V. IMP.

Q9. What are the **uses of all the Hooks** in React?

V. IMP.

Q. What are the **Rules** or **Best Practices** for hooks implementation? **V. IMP.**



❖ Rules or Best Practices for hooks implementation

1. Hooks can only be called at the top level of a component.
2. Hooks can only be called directly inside React components.
3. Keep hooks order consistent.

```
function MyComponentRule1() {  
  // Use Hooks at the Top Level  
  const [count, setCount] = useState(0);  
  // Remaining code of component...  
}  
  
function MyComponent2Rule1() {  
  // Component code...  
  // Hook at middle or bottom  
  const [count, setCount] = useState(0);  
}
```



```
function MyComponentRule2(){  
  // Only call Hooks from React Components  
  const [count, setCount] = useState(0);  
}  
  
function someFunction() {  
  // Not from normal or nested JS functions  
  const [count, setCount] = useState(0);  
}
```



```
function MyComponent1Rule3(){  
  // Keep Hooks order consistent  
  const [count, setCount] = useState(0);  
  const [text, setText] = useState('');  
}  
  
function MyComponent2Rule3(){  
  // Don't change hook order  
  const [text, setText] = useState('');  
  const [count, setCount] = useState(0);  
}
```





Q. What are Custom Hooks?

- ❖ Custom Hooks in React are JavaScript functions developed by developers to encapsulate reusable logic for their applications.

```
oks > JS useCustomHooks.js > ...  
  
// Custom Hook for managing a counter  
const useCustomHook = (initialValue = 0) => {  
  const [count, setCount] = useState(initialValue);  
  
  const increment = () => setCount(count + 1);  
  const decrement = () => setCount(count - 1);  
  
  return { count, increment, decrement };  
};  
export default useCustomHook;
```

```
oks > JS UseCustomHookUse.js > ...  
  
const UseCustomHookUse = () => {  
  const { count, increment, decrement } = useCustomHook();  
  
  return (  
    <div>  
      <p>Count: {count}</p>  
      <button onClick={increment}>Increment</button>  
      <button onClick={decrement}>Decrement</button>  
    </div>  
  );  
};  
export default UseCustomHookUse;
```

Q. What useState() hook return in React?



1. StateVariable is the current state value.

1. stateUpdaterFunction is a function that used to update the state.

```
const [stateVariable, stateUpdaterFunction] = useState(initialState);
```

Q. Tell 3 scenarios in which you can use useEffect() hook?



useEffect() hook can be used for:

1. Fetching data from external API.
2. For managing subscriptions or event listeners.
3. For manual DOM manipulations.
4. For setting up timers or intervals.

Q. How can you conditionally run effects with useEffect?



- ❖ In React, you can conditionally run effects with the useEffect hook by **placing the if-else condition inside the hook itself.**

```
const UseEffectCondition = () => {  
  const [shouldRunEffect, setShouldRunEffect] = useState(true);  
  
  useEffect(() => {  
    // Conditionally run the effect  
    if (shouldRunEffect) {  
      // Your effect code here  
      console.log("Effect ran!");  
    }  
  }, [shouldRunEffect]); // Include any dependencies if needed  
  
  return (  
    <div>  
      <p>Conditionally Run Effect Example</p>  
      <button onClick={() => setShouldRunEffect(!shouldRunEffect)}>  
        Toggle Effect  
      </button>  
    </div>  
  );  
};  
export default UseEffectCondition;
```

Q. What problem do React Hooks solve?



- ❖ React Hooks solve problems related to managing **state**, **lifecycle**, and **side effects** in functional components

Q. What is the advantage of React Hooks over Lifecycle methods?



- ❖ **Simplicity:** Hooks eliminate the need for class components, making the code more readable and reducing boilerplate.

Q. What is **Context API**?



- ❖ Context API is a **broader concept** for the creation of context and its management.
- ❖ It can be achieved by **using useContext Hook**.

Hello from Context!

```
books > JS Parent.js > ...  
  
const Parent = () => {  
  const contextValue = "Hello from Context!";  
  
  return (  
    <MyContext.Provider value={contextValue}>  
      {/* Your component tree */}  
      <Child></Child>  
    </MyContext.Provider>  
  );  
};  
export default Parent;
```

```
books > JS MyContext.js > ...  
  
import { createContext } from "react";  
  
const MyContext = createContext();  
export default MyContext;
```

```
books > JS Child.js > ...  
  
const Child = () => {  
  const contextValue = useContext(MyContext);  
  
  return <p>{contextValue}</p>;  
  // return (  
  //   <MyContext.Consumer>  
  //     {(contextValue) => <div>{contextValue}</div>}  
  //   </MyContext.Consumer>  
  // );  
};  
export default Child;
```



Q. What are the **uses of all the Hooks** in React? **V. IMP.**

1. useState:	State
2. useEffect:	Side effects
3. useContext:	Context
4. useReducer:	Complex state
5. useCallback:	Memorize function
6. useMemo:	Memorize function result
7. useRef:	Refs
8. useLayoutEffect:	Synchronous Side effects.

Q. What are the **uses of all the Hooks** in React? **V. IMP.**



1. **useState:**

Used for adding state to functional components.

2. **useEffect:**

Enables performing side effects in functional components, such as data fetching.

3. **useContext:**

Allows functional components to consume values from a React context.

4. **useReducer:**

Provides an alternative to **useState** when the state logic is more complex.

5. **useCallback:**

Memoizes a callback function to prevent unnecessary re-renders of child components.

6. **useMemo:**

Memoizes the result of a function to optimize performance by avoiding unnecessary recalculations.

7. **useRef:**

Creates a mutable object that persists across renders (used for interacting with DOM elements).

8. **useLayoutEffect:**

Similar to **useEffect** but fires synchronously after all DOM mutations.



11: Components LifeCycle Methods - I

Q1. What are **Component life cycle phases**?

V. IMP.

Q2. What are **Component life cycle methods**?

V. IMP.

Q3. What are **Constructors** in class components? When to use them?


Q4. What is the role of **super keyword** in constructor?

Q5. What is the role of **render()** method in component life cycle?

Q6. How the **State** can be maintained in a class component?

Q7. What is the role of **componentDidMount()** method in component life cycle?


Q. What are **Component life cycle phases**?

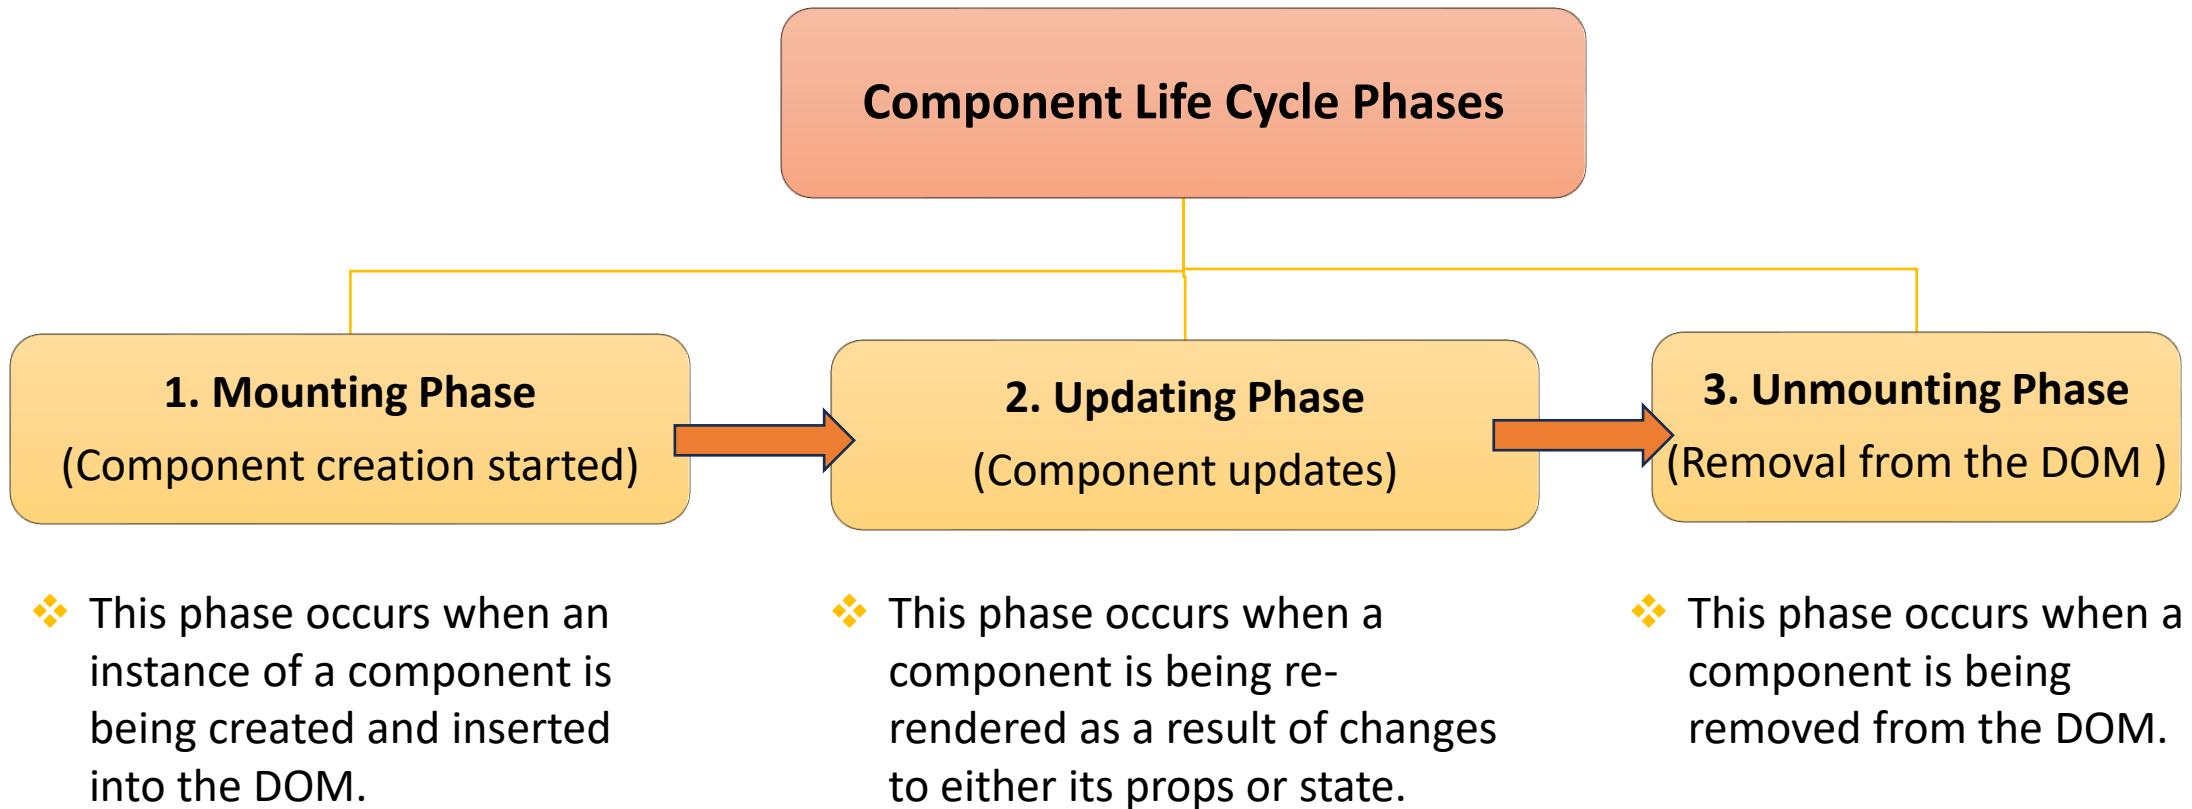



Q. What are **Component life cycle methods**? **V. IMP.**


- ❖ Component lifecycle methods are special methods that get called at various stages of a component's life.

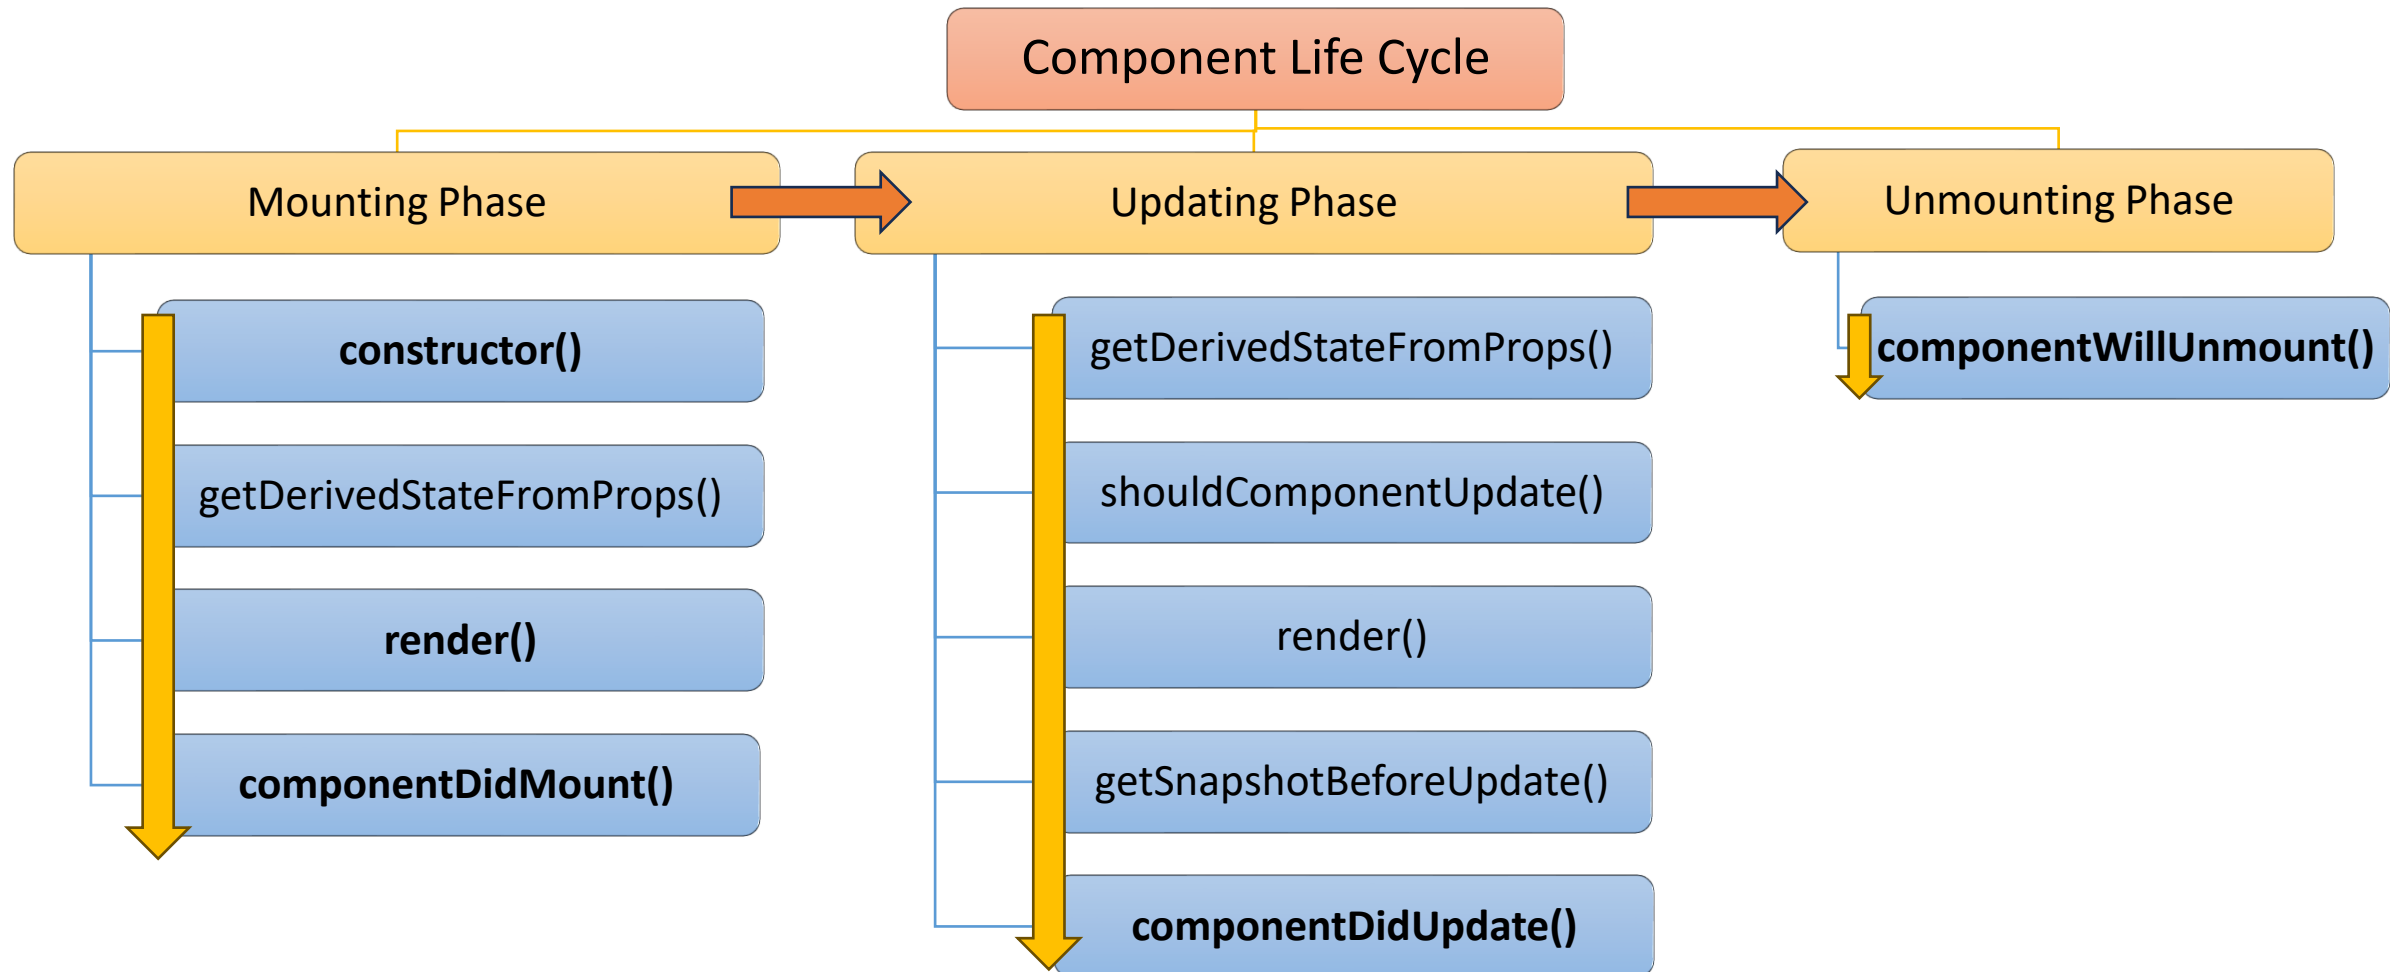



Q. What are **Constructors** in class components? When to use them?

- ❖ constructor is a **special method** that is called when an instance of the class is created.
- ❖ Constructor is **used for initializing the component's state** or performing any setup that is needed before the component is rendered.

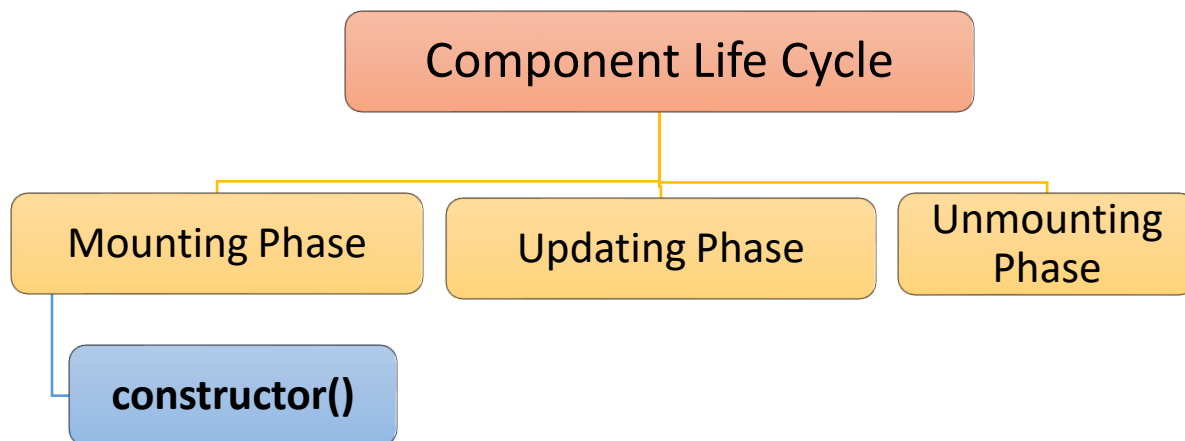

```
class ConstructorExample extends Component {
  constructor(props) {
    super(props);

    // Initialize the state
    this.state = {
      count: 0,
    };
  }

  render() {
    return (
      <h2>Count: {this.state.count}</h2>
    );
  }
}

export default ConstructorExample;
```





Q. What is the role of **super keyword** in constructor?

- ❖ super keyword is used in the constructor of a class component to **call the constructor of the parent class**.
- ❖ This is necessary to ensure that the initialization logic of the parent class is executed.

```
class ConstructorExample extends Component {  
  constructor(props) {  
    super(props);  
  
    // Initialize the state  
    this.state = {  
      count: 0,  
    };  
  }  
  
  render() {  
    return (  
      <h2>Count: {this.state.count}</h2>  
    );  
  }  
}  
  
export default ConstructorExample;
```




Q. What is the role of **render()** method in component life cycle?

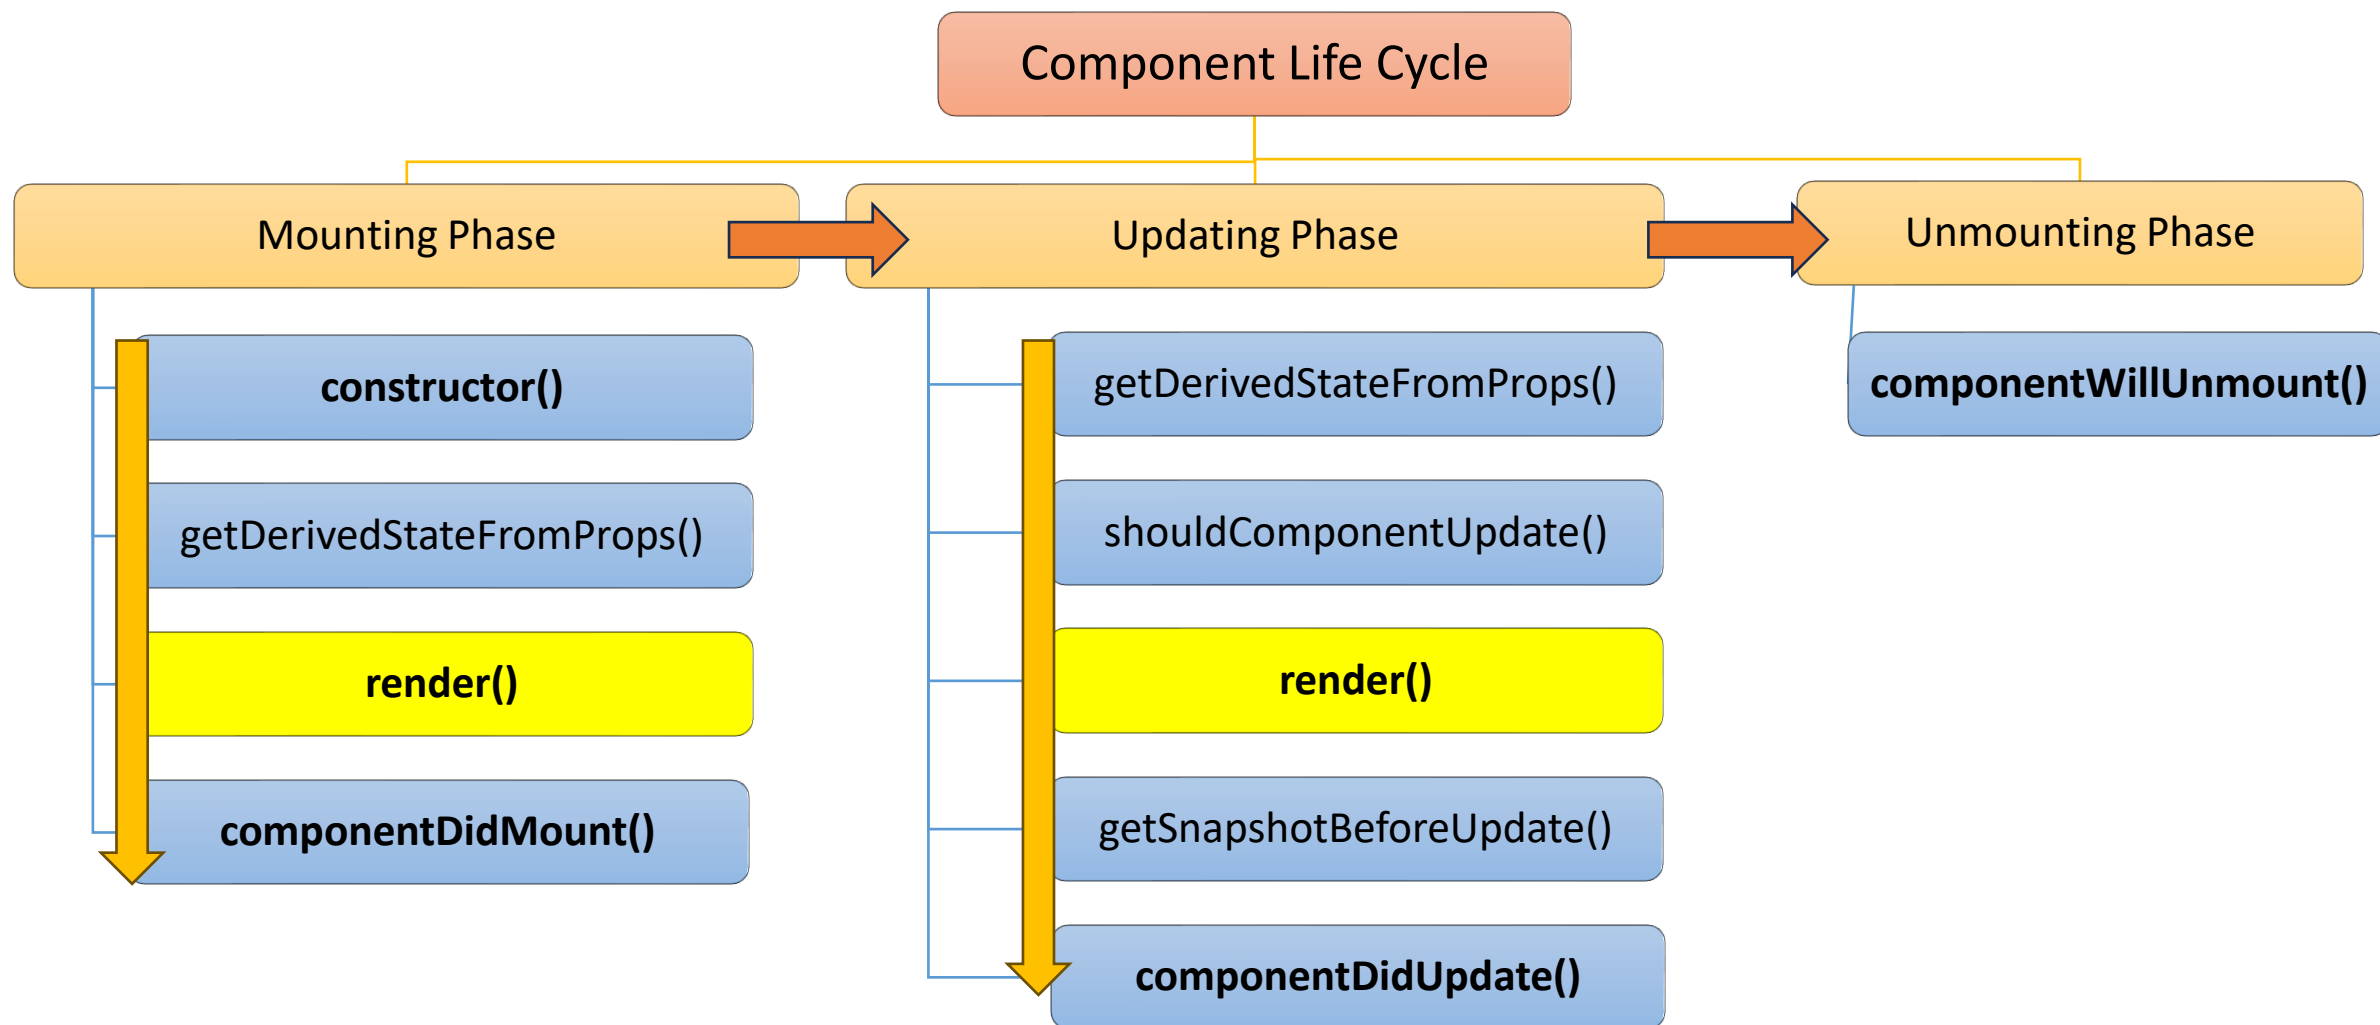



Q. What is the role of **render()** method in component life cycle?

- ❖ **Render()** method **returns the React elements** that will be rendered to the DOM.

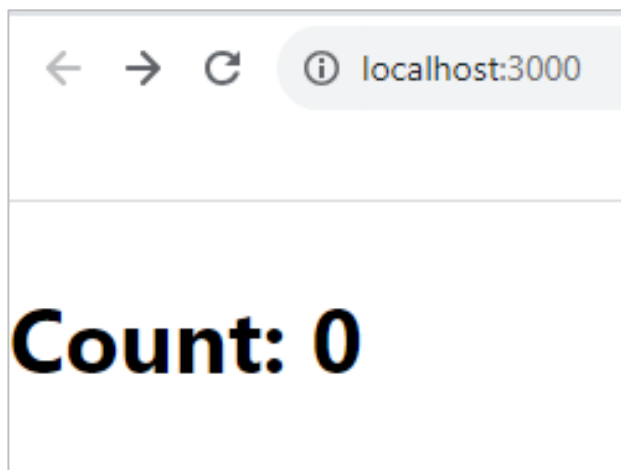

```
class ConstructorExample extends Component {  
  constructor(props) {  
    super(props);  
  
    // Initialize the state  
    this.state = {  
      count: 0,  
    };  
  }  
  
  render() {  
    return (  
      <h2>Count: {this.state.count}</h2>  
    );  
  }  
}  
  
export default ConstructorExample;
```



Q. How the **State** can be maintained in a class component? **V. IMP.**

❖ Two step process to maintain state:

1. **this.setState()** method is used to update the state.
2. **this.state** property is used to render the update state in DOM.



```
class StateComponent extends Component {
  constructor(props) {
    super(props);
    this.state = {
      count: 0, // Initializing the state
    };
  }


  render() {
    return (
      <div>
        <h2>Counter: {this.state.count}</h2>
        <button onClick={this.handleInc}>Inc</button>
      </div>
    );
  }

  handleInc = () => {
    this.setState((prevState) => ({
      count: prevState.count + 1,
    }));
  };
}

export default StateComponent;
```



Q. What is the role of **componentDidMount()** method in component life cycle?

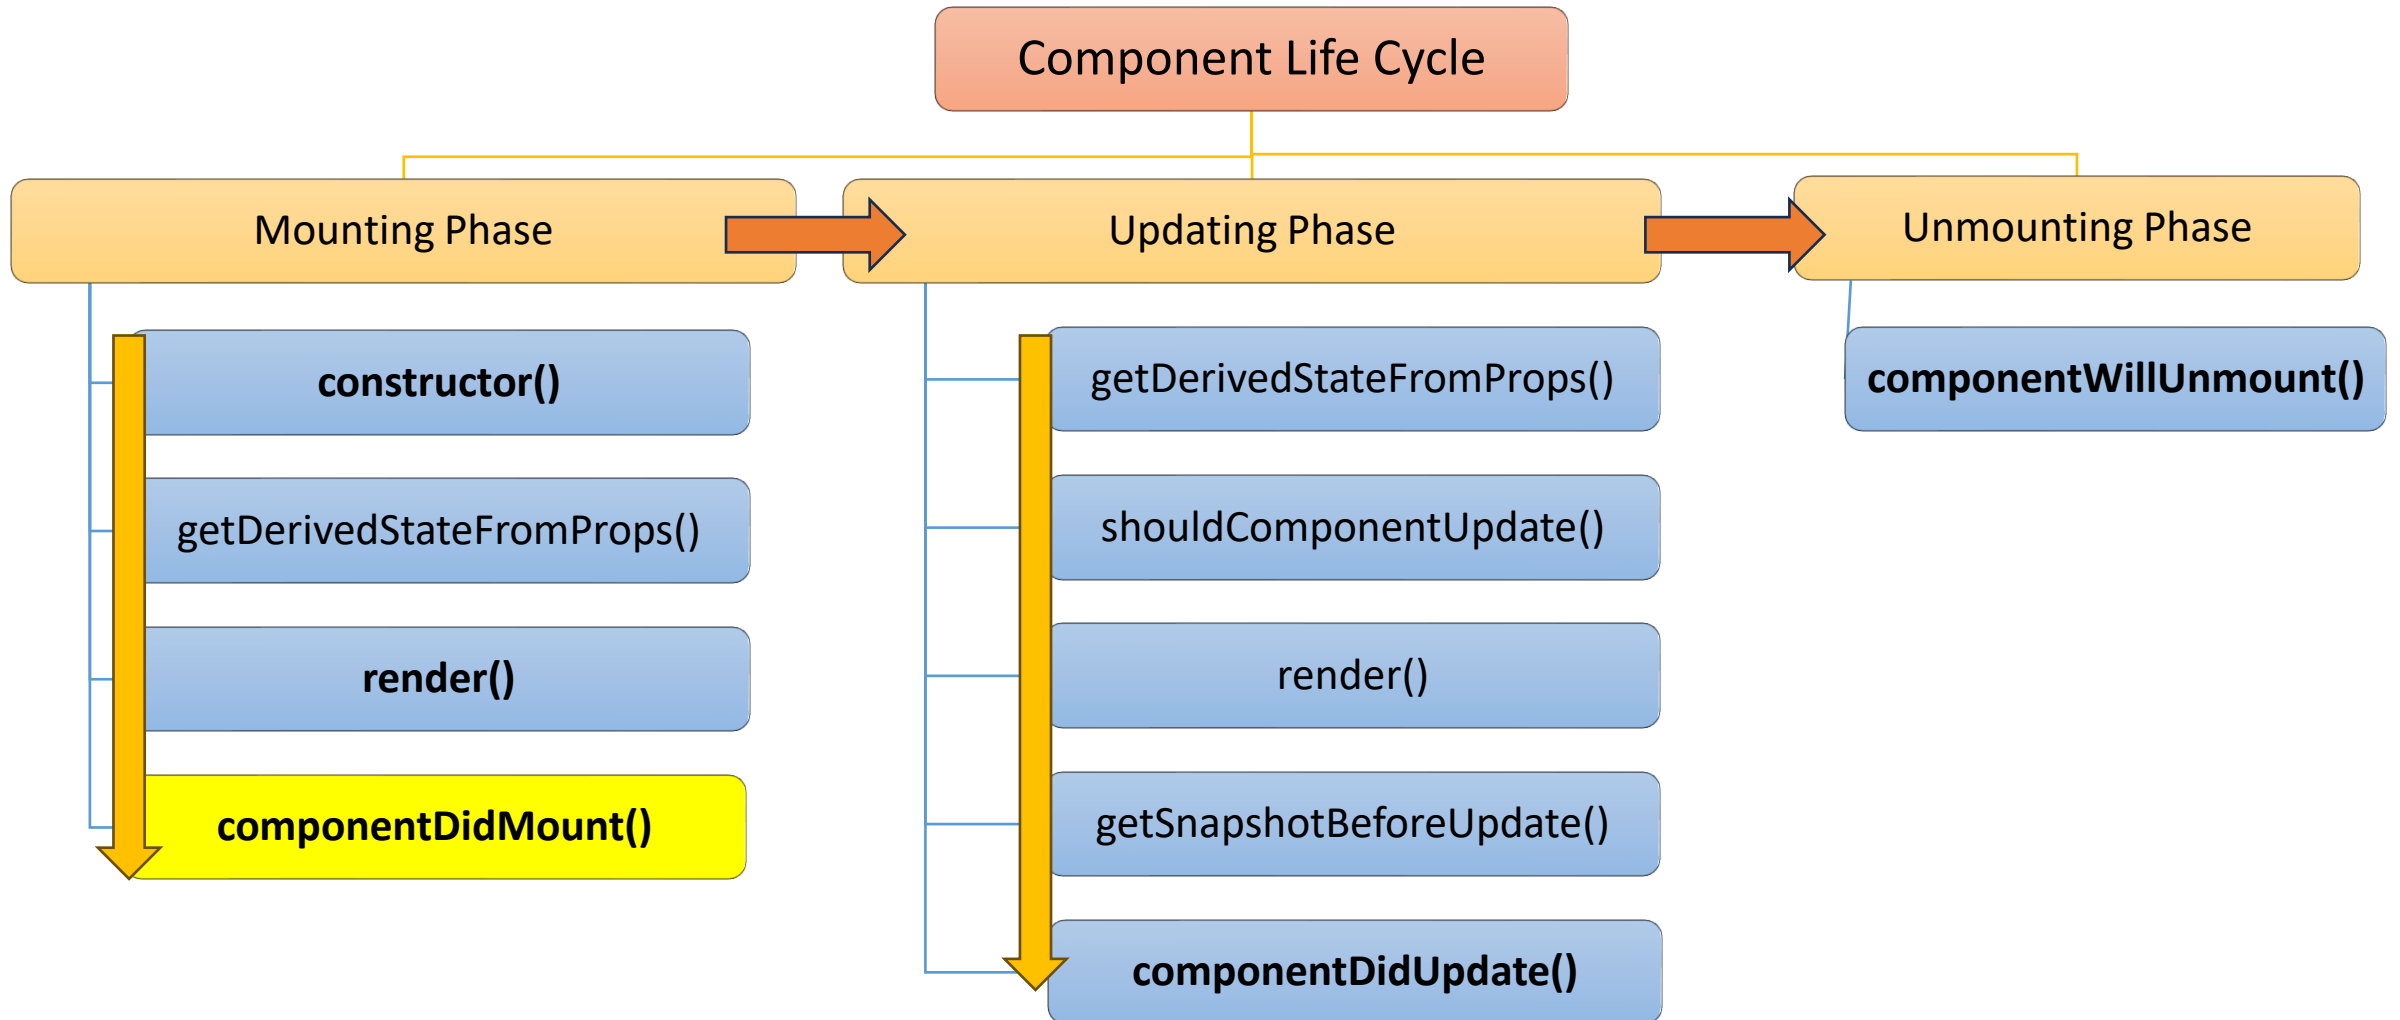




Q. What is the role of `componentDidMount()` method in component life cycle?

1. Rendered after constructor initialization.

2. Rendered after `componentDidMount()` to run **Side effects**(ex: loading data from external API) and then call `render()` method of updating phase again.

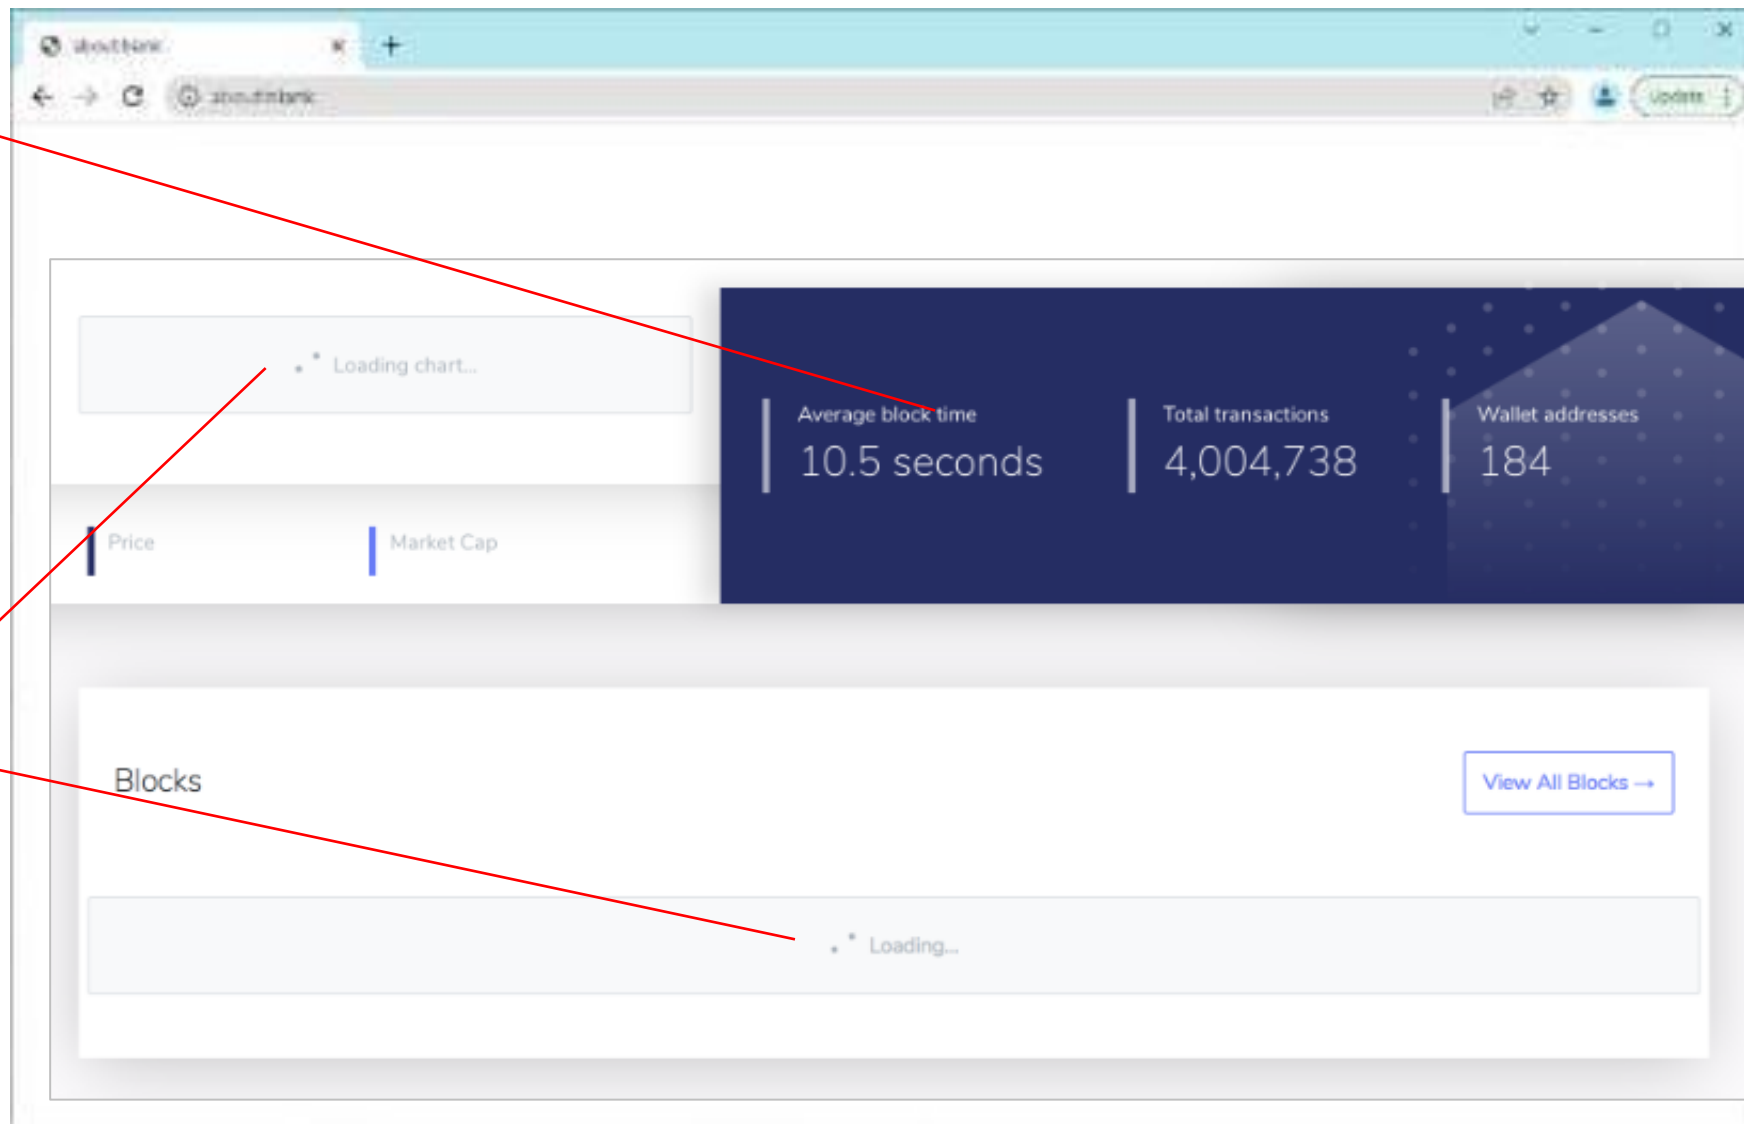



Q. What is the role of `componentDidMount()` method in component life cycle?

- ❖ `componentDidMount()` lifecycle method in React is the part of mounting phase and is **called after a component has been rendered** to the DOM.
- ❖ Mostly used for **side effects**. For example, external data fetching or setting up subscriptions.

```
// 4. Render the component's UI using
// the fetched data
render() {
  return (
    <div>
      <p>Data: {this.state.data}</p>
    </div>
  );
}
export default CompDidMount;
```

```
// Fetch data from API example using
// componentDidMount life cycle method
class CompDidMount extends Component {
  constructor(props) {
    // 1. Component initialization
    this.state = {
      data: null
    };
  }
```

```
// 2. componentDidMount is called after
// the component is added to the DOM
componentDidMount() {
  // 3. Fetch data from an API and
  // update state with fetch data
  fetchData().then((data) => {
    this.setState({
      data: data
    });
  });
}
```



12: Components LifeCycle Methods - II



Q1. What is the role of `componentDidUpdate()` method in component life cycle?

Q2. What is the role of `componentWillUnmount()` method in component life cycle?

Q3. How do you initialize state in a class component?

Q4. In which lifecycle phase component will be re-rendered?


Q5. What will happen if you don't define a constructor in your React component?

Q6. Why we need class components when we already have functional components?

Q7. What are the **5 main methods** of component lifecycle?



Q. What is the role of **componentDidUpdate()** method in component life cycle?

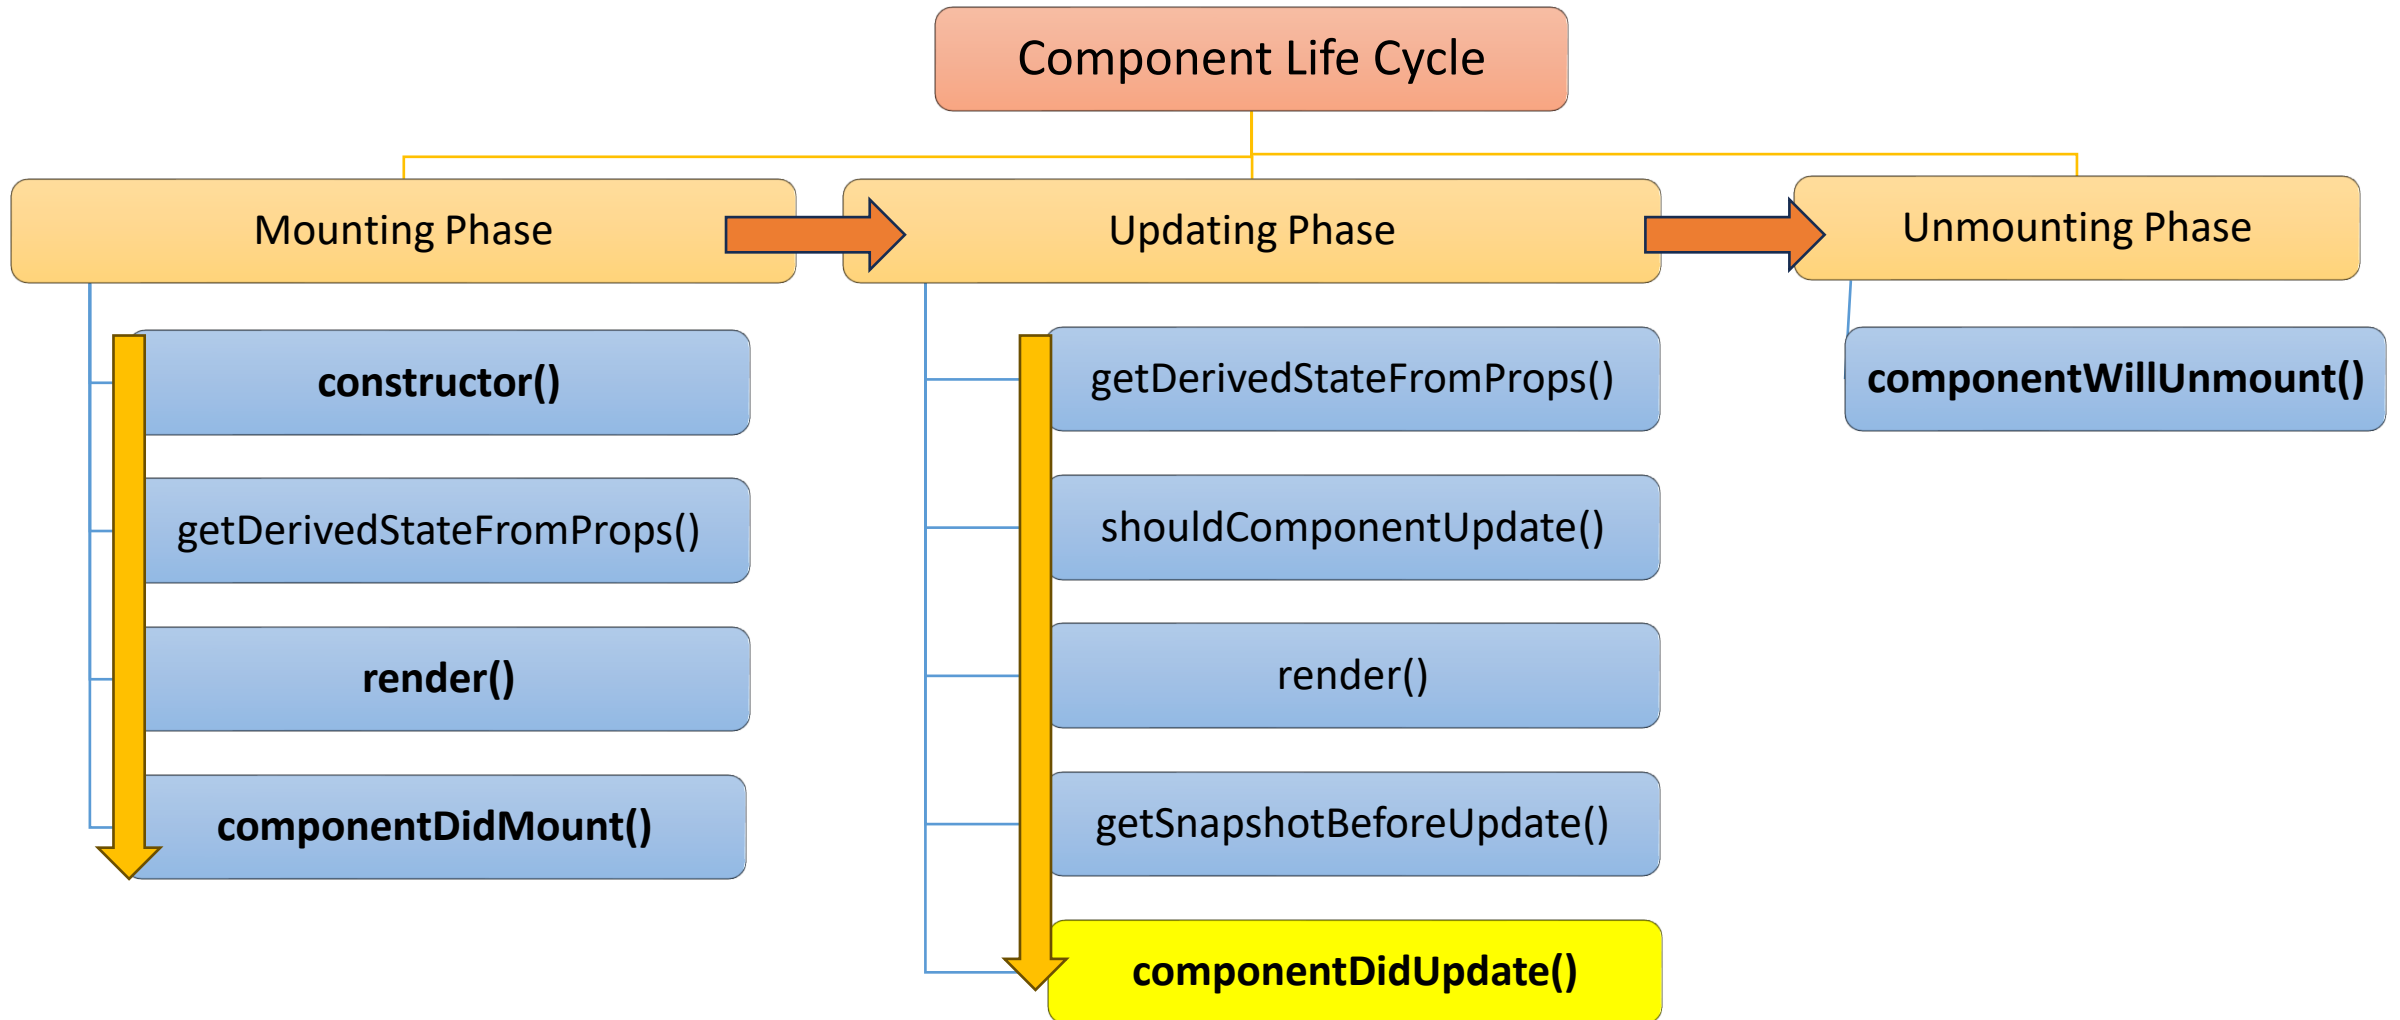




Q. What is the role of **componentDidUpdate()** method in component life cycle?

1. Rendered after constructor initialization.

2. Rendered after `componentDidMount()` Side effects.

3. For **any property or state change**, `componentDidUpdate()` method will refetch the data and re-rendered in the DOM.

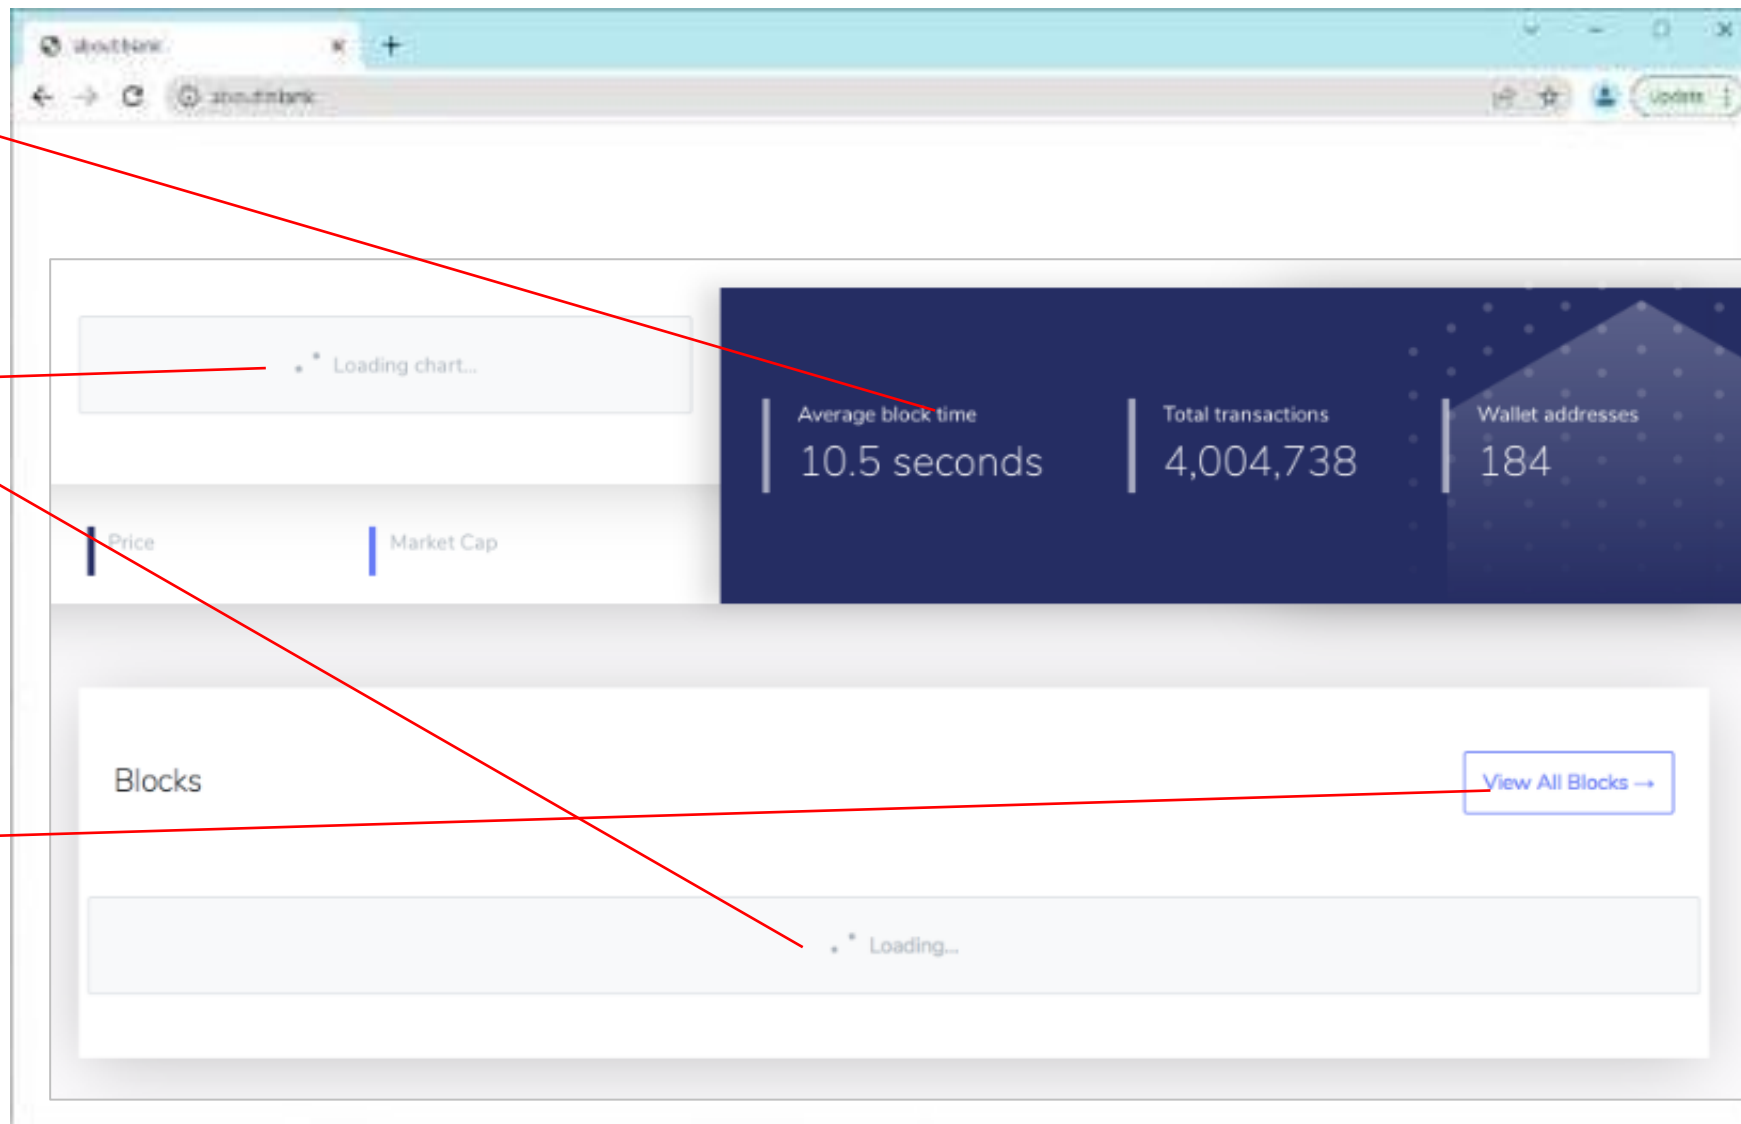




Q. What is the role of **componentDidUpdate()** method in component life cycle?

- ❖ `componentDidUpdate()` lifecycle method is the part of updating phase and is called **after a component has been updated** (property of state change).
- ❖ For example, after data is initially fetched by the `componentDidMount` method, if the user changes some property in the component (e.g., triggering a re-render with updated props or state), then the `componentDidUpdate` method can be used to re-fetch data again.

```
class CompDidUpdate extends Component {  
  constructor(props) {  
    |   this.state = { data: null,};  
  }  
  componentDidMount() {  
    |   fetchData().then((data) => {  
    |     |   this.setState({ data: data });  
    |   });  
  }  
  
  componentDidUpdate(prevProps) {  
    |   // Fetch new data if userId property changes  
    |   if (this.props.userId !== prevProps.userId) {  
    |     |   fetchData().then((data) => {  
    |     |     |   this.setState({ data: data });  
    |     |   });  
    |   }  
  }  
  
  render() {  
    |   return <div>Data: {this.state.data}</div>;  
  }  
}  
export default CompDidUpdate;
```



Q. What is the role of **componentWillUnmount()** method in component life cycle?

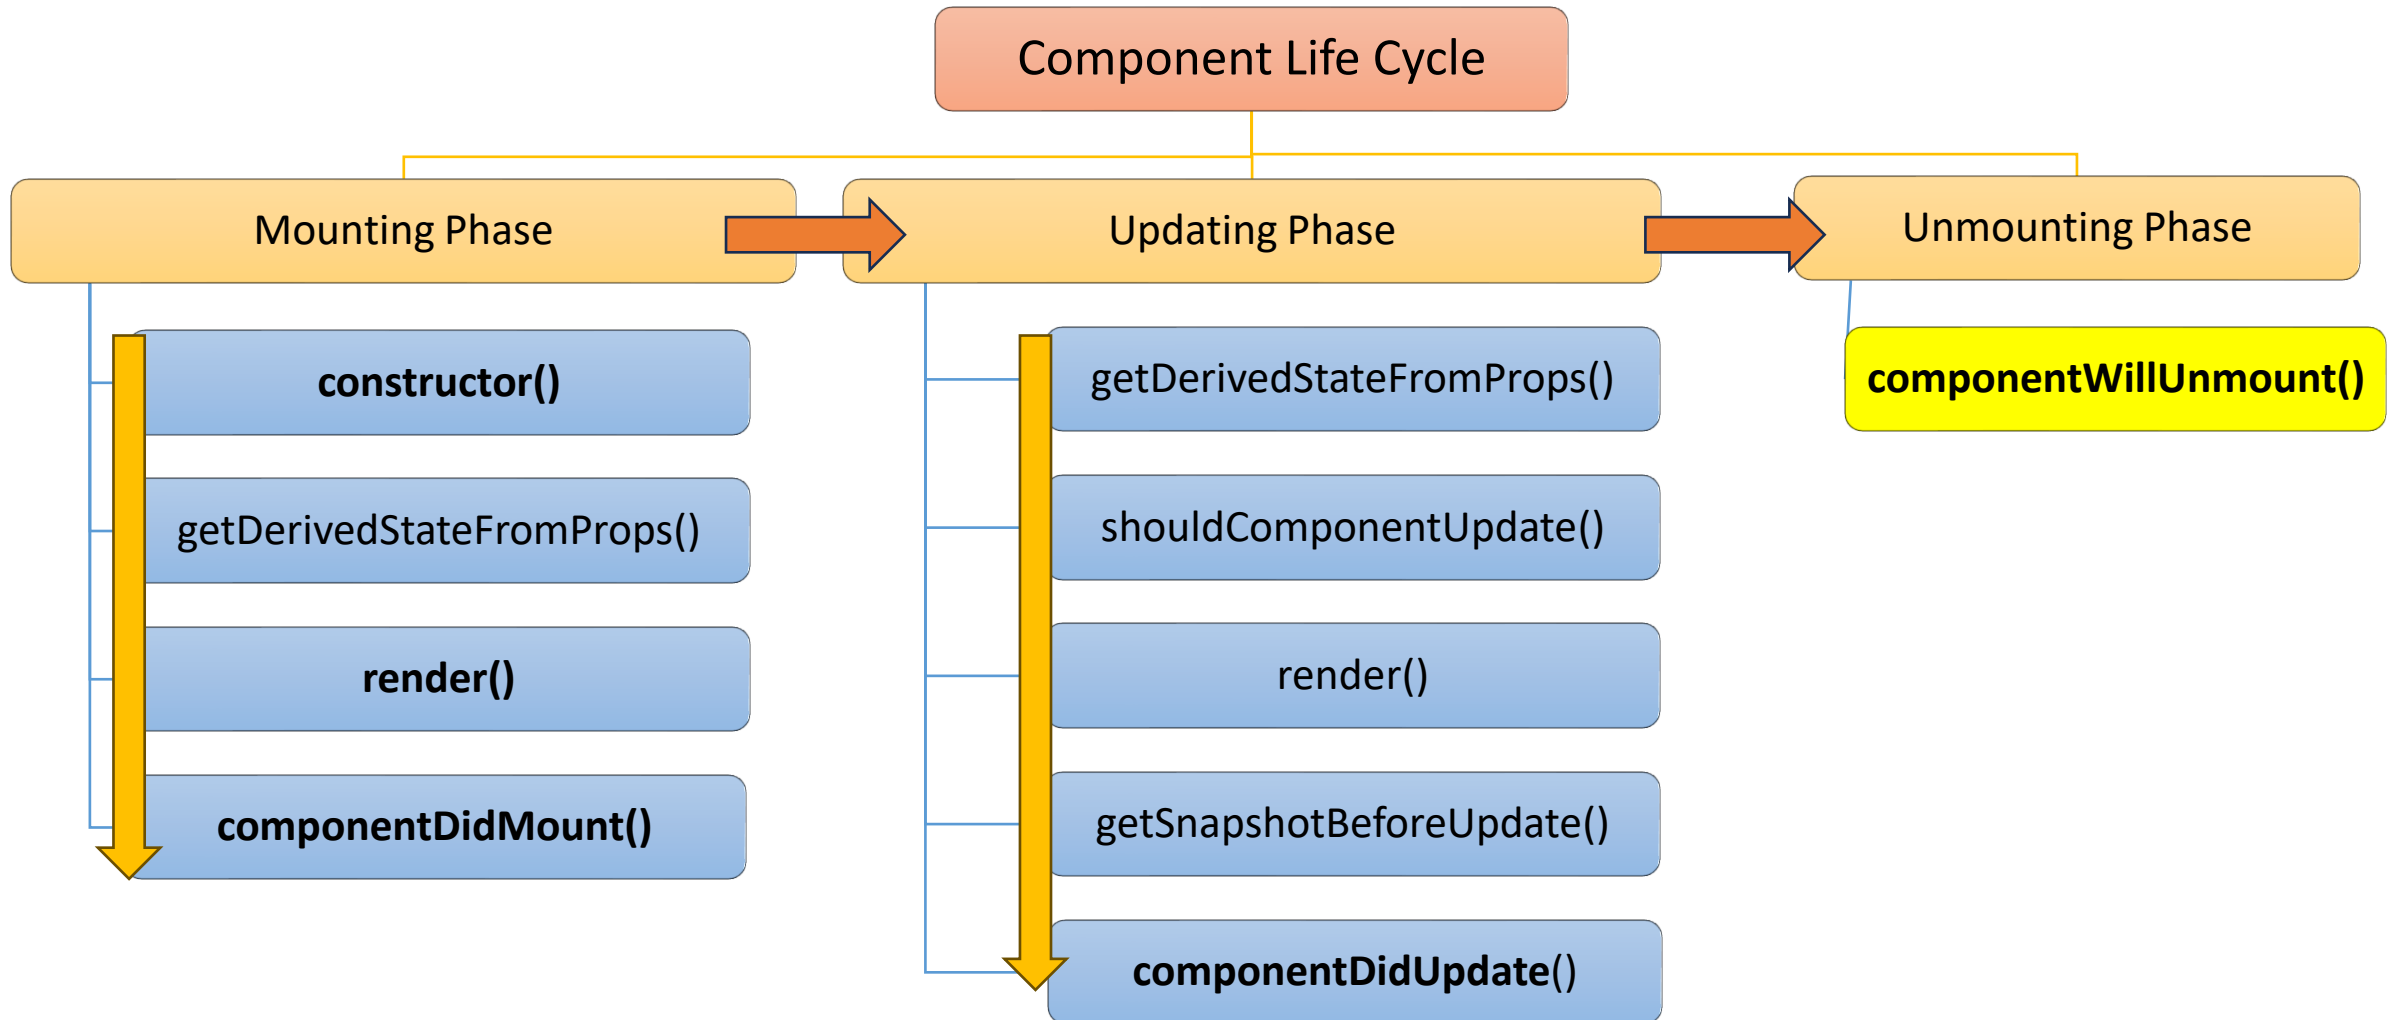




Q. What is the role of **componentWillUnmount()** method in component life cycle?

1. Rendered after **constructor()** initialization.

2. Rendered after **componentDidMount()**.

3. Re-rendered after, **componentDidUpdate()** on any state or property change.

3. Before unmounting of component, **componentWillUnmount()** will do the cleanup task.

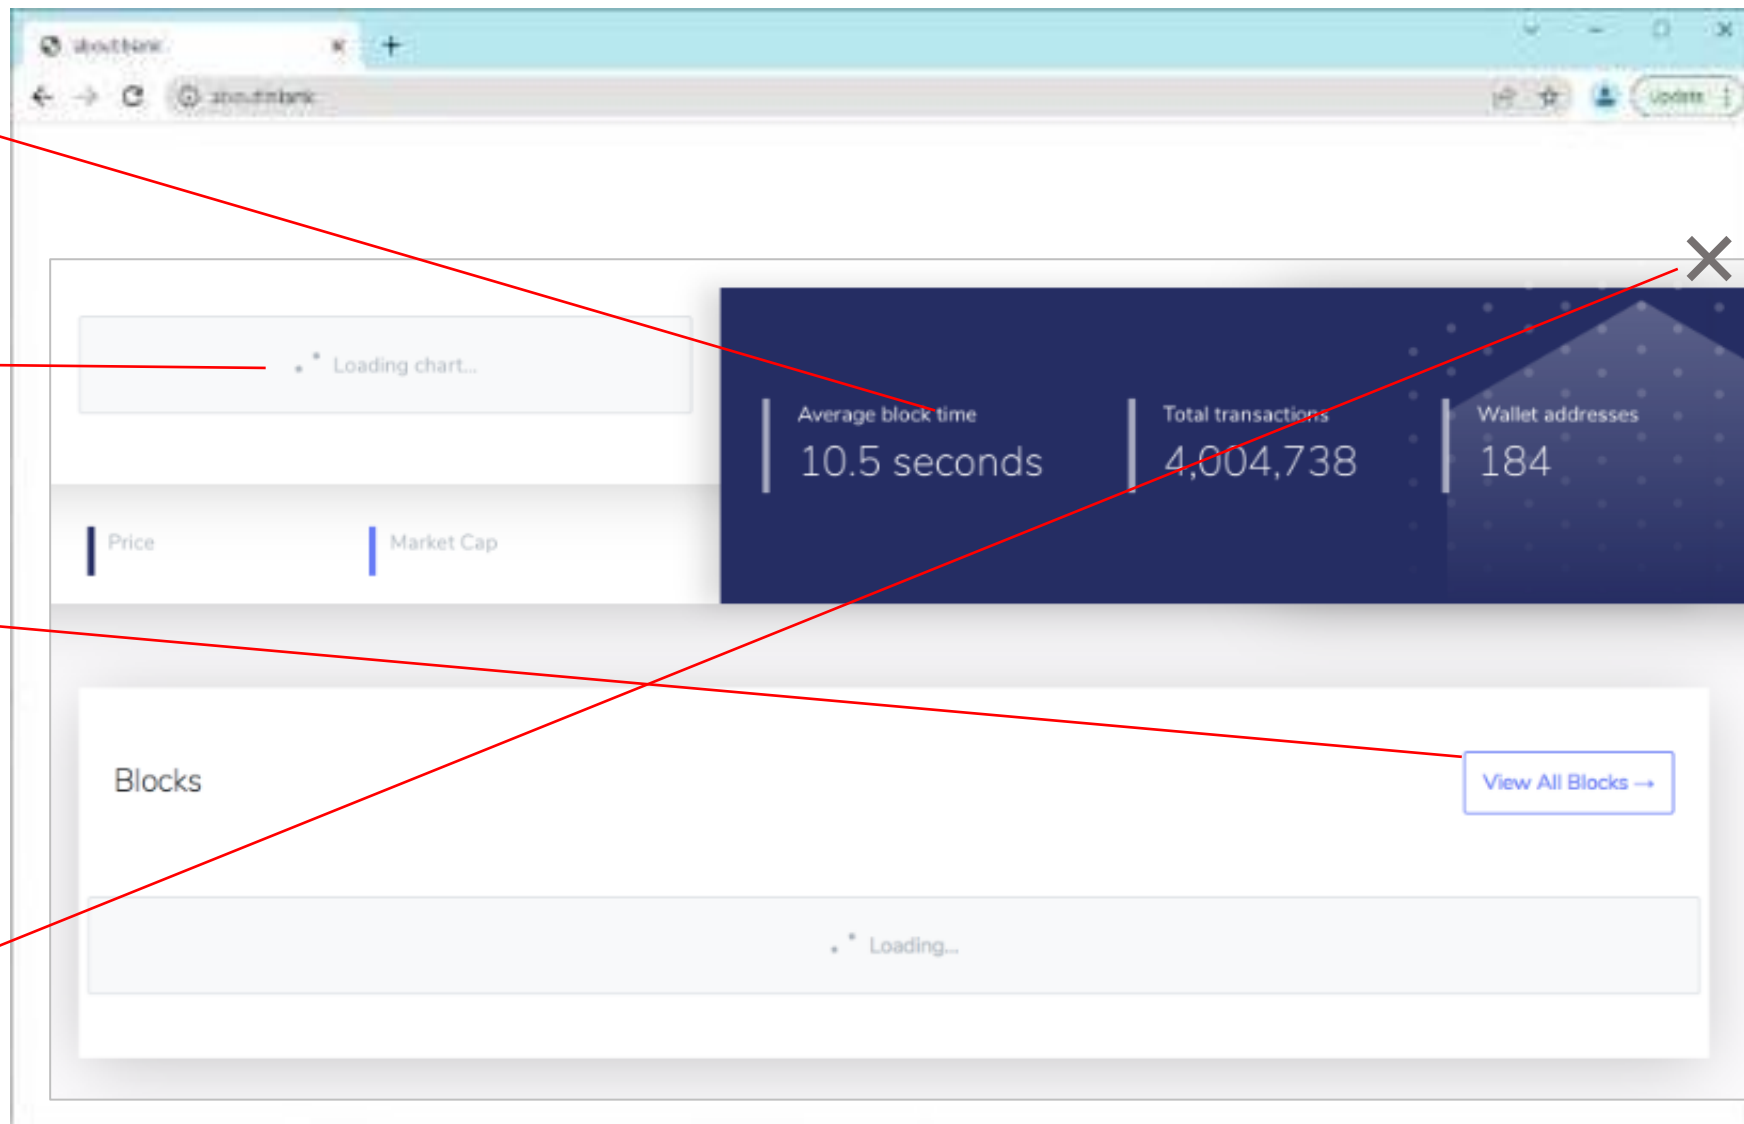



Q. What is the role of **componentWillUnmount()** method in component life cycle?

- ❖ `componentWillUnmount()` lifecycle method is called just **before a component is unmounted** and removed from the DOM.
- ❖ It is used for **cleanup tasks**, freeing up resources or canceling any ongoing processes. For example, remove event listener or unsubscribe from any external service.

```
// pseudocode: componentWillMount
class MyComponent extends Component {
  constructor(props) {
    // Intialize component...
  }

  componentDidMount() {
    // Add event listener
    document.addEventListener("click", this.handleClick);
  }

  componentWillUnmount() {
    // 1. Clean up operations
    document.removeEventListener("click", this.handleClick);

    // 2. Unsubscribe or close connections
    externalService.unsubscribe(this.subscription);
  }
}
```

Q. How do you initialize state in a class component?




- ❖ In a React class component, state is initialized in the **constructor**.

```
class ConstructorExample extends Component {  
  constructor(props) {  
    super(props);  
  
    // Initialize the state  
    this.state = {  
      count: 0,  
    };  
  }  
  
  render() {  
    return (  
      <h2>Count: {this.state.count}</h2>  
    );  
  }  
}  
  
export default ConstructorExample;
```

Q. In which lifecycle phase component will be re-rendered?



- ❖ In the **updating phase** component will be re-rendered if any props or state is changed.

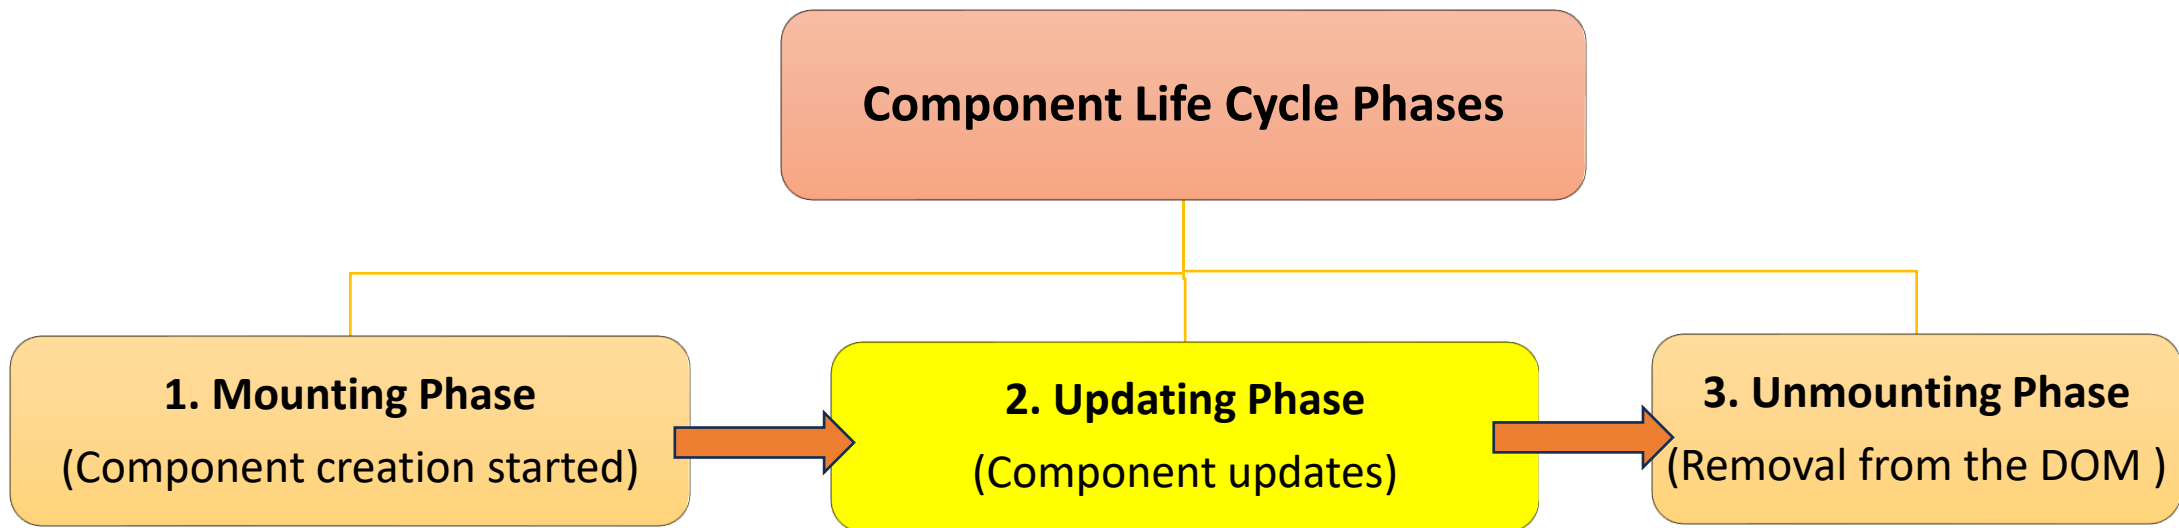

Q. What will happen if you don't define a constructor in your React component?



- ❖ If you don't define a constructor in your React component, React will **automatically create a default constructor for you**. This default constructor will call the constructor of the base class (Component) using `super(props)`.

```
class ConstructorExample extends Component {  
  render() {  
    return (  
      <h2>Interview Happy</h2>  
    );  
  }  
}  
  
export default ConstructorExample;
```

Q. Why we need class components when we already have functional components?



- ❖ Previously, class components were used for managing state in React applications since functional components were stateless. However, with the introduction of hooks, functional components can also handle the state.

- ❖ When we need class components now?
 1. To manage **existing projects(legacy code)**, especially those built before the introduction of hooks.
 2. To support some **third-party libraries** that might still be written as class components.
 3. To support component lifecycle methods of the existing legacy code.

Q. What are the **5 main methods** of component lifecycle?



Component Life Cycle Main Methods

1. constructor()

2. render()

3. componentDidMount()

4. componentDidUpdate()

5. componentWillUnmount()

```
// pseudocode: summary
class CompleteClassComponent extends Component {
  constructor(props) {
    // 1. Initialize the component
  }

  render() {
    // 2. Render the component
  }

  componentDidMount() {
    // 3. Component is mounted to the DOM
  }

  componentDidUpdate(prevProps, prevState) {
    // 4. Component is updated in the DOM
  }

  componentWillUnmount() {
    // 5. Component is about to be removed from t
  }
}
```

[back to chapter index](#)

Q. What are the 5 main methods of component lifecycle?



1. `constructor()`

Initializes the component's state and automatically called when the component is being created.

2. `render()`

Returns UI elements based on the current state and props;

3. `componentDidMount()`

Invoked after the component has been added to the DOM; used for data fetching and subscribing to external data sources.

4. `componentDidUpdate()`

Invoked after a component's state or props have been updated and it has been re-rendered; used for handling side effects after updates.

5. `componentWillUnmount()`

Called just before a component is unmounted and removed from the DOM; used for cleanup tasks and releasing resources.

13: Controlled & Uncontrolled Components



Q1. What are **Controlled Components** in React?

V. IMP.

Q2. What are the **Differences** btw **Controlled** & **Uncontrolled** Components?

V. IMP.

Q3. What are characteristics of controlled components?

Q4. What are the **advantages** of using controlled components in React forms?

Q5. How to handle forms in React?

Q6. How can you handle multiple input fields in a controlled form?

Q7. How do you handle form validation in a controlled component?

Q8. In what scenarios might using uncontrolled components be advantageous?



Q. What are **Controlled Components** in React? **V. IMP.**

- ❖ A controlled component is a component whose form elements (like input fields or checkboxes) are **controlled by the state** of the application.

You typed:

```
const Controlled = () => {
  // State to store the input value
  const [inputValue, setInputValue] = useState("");

  // Event handler for input changes
  const handleInputChange = (e) => {
    // Update the state with the new input value
    setInputValue(e.target.value);
  };

  return (
    <div>
      {/* Input controlled by the state */}
      <input type="text" value={inputValue}
        onChange={handleInputChange} placeholder="Type..." />

      {/* Display the current state value */}
      <p>You typed: {inputValue}</p>
    </div>
  );
};

export default Controlled;
```

Q. What are the Differences btw Controlled & Uncontrolled Components? **V. IMP.**



```
const Controlled = () => {
  // State to store the input value
  const [inputValue, setInputValue] = useState("");

  // Event handler for input changes
  const handleInputChange = (e) => {
    // Update the state with the new input value
    setInputValue(e.target.value);
  };

  return (
    <div>
      {/* Input controlled by the state*/}
      <input type="text" value={inputValue}
        onChange={handleInputChange} placeholder="Type something..." />

      {/* Display the current state value */}
      <p>You typed: {inputValue}</p>
    </div>
  );
};

export default Controlled;
```

```
const Uncontrolled = () => {
  // Create a ref to access the input value
  const inputRef = useRef(null);

  const handleClick = () => {
    // Access the input value directly using ref
    const value = inputRef.current.value;
    alert(`You typed: ${value}`);
  };

  return (
    <div>
      {/* Uncontrolled input with ref */}
      <input type="text" ref={inputRef}
        placeholder="Type something..." />

      <button onClick={handleClick}>Click</button>
    </div>
  );
};

export default Uncontrolled;
```

Q. What are the **Differences** btw **Controlled** & **Uncontrolled** Components? **V. IMP.**



Controlled Components	Uncontrolled Components
1. Values are controlled by React state .	Values are not controlled by React state.
2. Event handlers update React state .	No explicit state update; values can be accessed directly from the DOM .
3. Don't depend on <code>useRef()</code> .	Commonly uses <code>useRef()</code> to access form element values.
4. Re-renders on state changes.	Less re-rendering since values are not directly tied to React state.
5. A recommended and standard practice for form handling in React. 	Useful in certain scenarios but less commonly considered a best practice.



Q. What are characteristics of controlled components?

❖ Characteristics of controlled components:

1. **State Control:** The value of the form element is stored in the component's state.
2. **Event Handling:** Changes to the form element trigger an event (e.g., onChange for input fields).
3. **State Update:** The event handler updates the component's state with the new value of the form element.
4. **Re-rendering:** The component re-renders with the updated state, and the form element reflects the new value.

```
const Controlled = () => {  
  // State to store the input value  
  const [inputValue, setInputValue] = useState("");  
  
  // Event handler for input changes  
  const handleInputChange = (e) => {  
    // Update the state with the new input value  
    setInputValue(e.target.value);  
  };  
  
  return (  
    <div>  
      {/* Input controlled by the state*/}  
      <input type="text" value={inputValue}  
        onChange={handleInputChange} placeholder="Type..." />  
  
      {/* Display the current state value */}  
      <p>You typed: {inputValue}</p>  
    </div>  
  );  
};  
export default Controlled;
```

[back to chapter index](#)



Q. What are the **advantages** of using controlled components in React forms?

- ❖ Top 3 benefits of using controlled components in React forms:
 1. In controlled components, form elements have their values managed by React state, ensuring a **single source of truth**.
 2. This approach facilitates predictable and synchronized updates, making it easier to implement features such as form validation, and dynamic rendering, and seamless integration with React's lifecycle methods.
 3. Controlled components offer better control and maintainability compared to uncontrolled components, making them the best practice for handling forms in React applications.

Q. How to handle forms in React?



- ❖ The preferred and recommended approach for handling forms in React is **by using controlled components**.

Q. How can you handle multiple input fields in a controlled form?



- ❖ Maintain **separate state variables** for each input field and update them individually using the **onChange event**.

Q. How do you handle form validation in a controlled component?



- ❖ By using conditional rendering based on the state and validate input values before updating the state.

Q. In what scenarios might using uncontrolled components be advantageous?



- ❖ Uncontrolled components can be beneficial when integrating with non-React libraries, or when dealing with forms where controlled components are not possible.

14: Code Splitting



Q1. What is **Code Splitting** in React?

V. IMP.

Q2. How to **Implement Code Splitting** in React?

V. IMP.

Q3. What is the role of **Lazy** and **Suspense** methods in React?

V. IMP.

Q4. What are the **Pros** and **Cons** of **Code Splitting**?

Q5. What is the role of the **import() function** in code splitting?

Q6. What is the purpose of the **fallback prop** in Suspense?



Q7. Can you dynamically load CSS files using code splitting in React?

Q8. How do you inspect and analyze the generated chunks in a React application?



Q. What is **Code Splitting** in React? **V. IMP.**

- ❖ Code splitting is a technique to split the JavaScript bundle into **smaller chunks**, which are **loaded on-demand**.

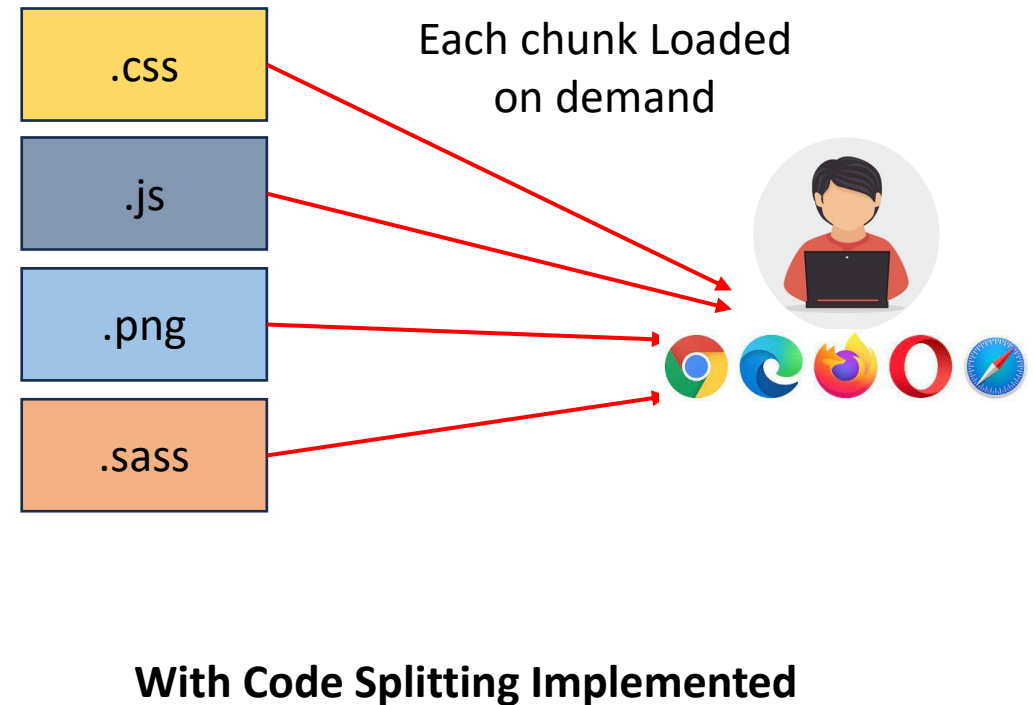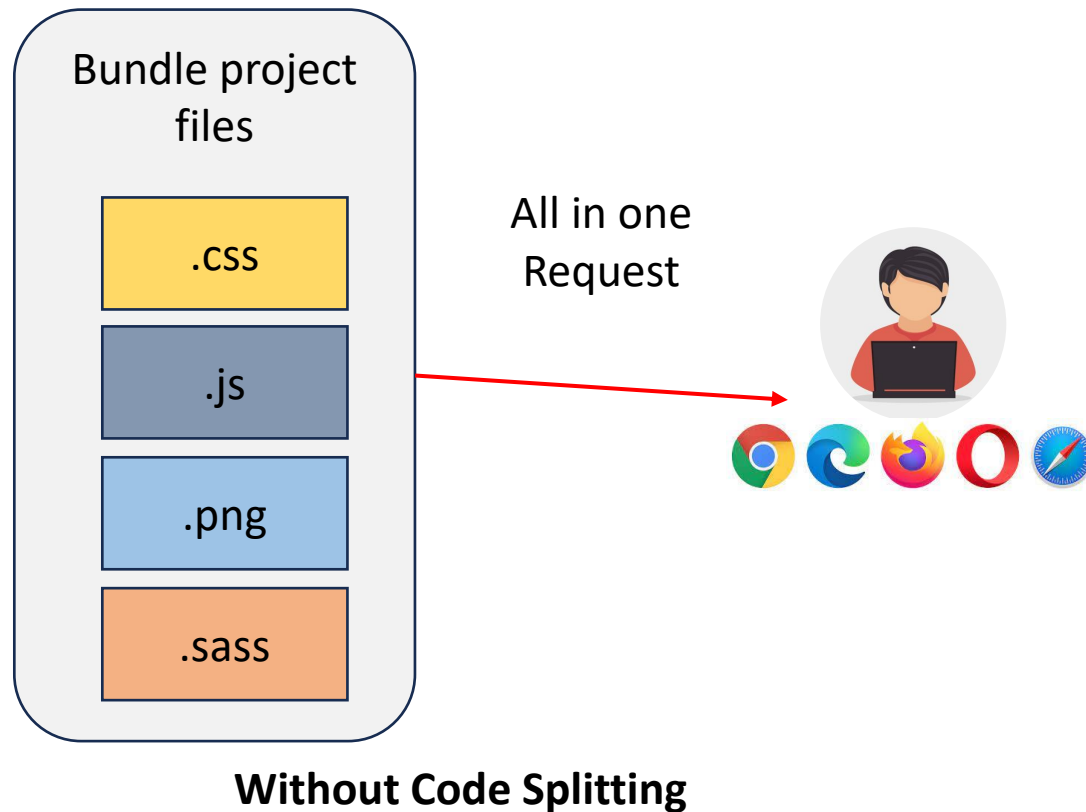

Q. How to **Implement Code Splitting** in React? **V. IMP.**



❖ 3 steps for Code splitting in React:

1. Use **React.lazy()** to lazily import components.
2. Wrap components with **Suspense** to handle loading.
3. Configure your build tool (e.g., **Webpack**) for dynamic imports.



Q. How to **Implement Code Splitting** in React? **V. IMP.**

```
// CodeSplit.js: Component
const CodeSplit = () => {
  | return <div>My component!</div>;
};

export default CodeSplit;
```

```
// App.js
import React, { lazy, Suspense } from "react";

const CodeSplit = lazy(() => import("../Others/CodeSplit"));

function App() {
  | return (
  |   <div>
  |     <Suspense fallback={<div>Loading...</div>}>
  |       <CodeSplit />
  |     </Suspense>
  |   </div>
  | );
}

export default App;
```

localhost

bundle.js

src_Others_CodeSplit_js.chunk.js

favicon.ico

WS

```
// webpack installation command
// npm install webpack webpack-cli --save-dev

// webpack.config.js: under root
const path = require('path');

module.exports = {
  | // other webpack configuration...
  | output: {
  |   filename: '[name].bundle.js',
  |   path: path.resolve(__dirname, 'dist'),
  | },
};
```



Q. What is the role of **Lazy** and **Suspense** methods in React? **V. IMP.**

- ❖ React.lazy is a function that allows you to **load a component lazily**.
- ❖ It enables code splitting by allowing you to import a component asynchronously/dynamically, meaning component is loaded only when needed only.

- ❖ The Suspense component is used to display a fallback UI while the lazily loaded component is being fetched.

```
// App.js
import React, { lazy, Suspense } from "react";

const CodeSplit = lazy(() => import("./Others/CodeSplit"));

function App() {
  return (
    <div>
      <Suspense fallback={<div>Loading...</div>}>
        <CodeSplit />
      </Suspense>
    </div>
  );
}

export default App;
```

Q. What are the **Pros** and **Cons** of **Code Splitting**?



5 Pros of Code Splitting:

- | | |
|--------------------------------------|--|
| 1. Faster Initial Load Time: | Code splitting reduces the initial load time of your application by only loading the necessary code for the current view or feature. Good for performance. |
| 2. Optimized Bandwidth Usage: | By loading only, the code needed for a specific page, it reduces the amount of data transferred over the network. Good for slow network. |
| 3. Improved Caching: | Smaller, more focused code chunks are more likely to be cached by the browser. |
| 4. Parallel Loading: | Multiple smaller chunks can be loaded simultaneously, leading to faster overall loading times. |
| 5. Easier Maintenance: | Code splitting can make your codebase more modular, independent and easier to maintain. |

Q. What are the **Pros** and **Cons** of **Code Splitting**?



5 Cons of Code Splitting:

1. Complexity:

Implementing code splitting introduces additional complexity to your application. This complexity can make the development process slow.

2. Tooling Dependencies:

Proper code splitting often requires specific build tools and configurations, such as Webpack and Babel. Managing these tools is challenging.

3. Potential for Runtime Errors:

Dynamically loading code at runtime can introduce the possibility of runtime errors. Careful testing is necessary to catch such issues.

4. Increased Number of Requests:

Code splitting may increase the number of HTTP requests needed to fetch all the necessary chunks. This can impact performance.

5. Learning Curve:

Developers who are new to code splitting may need time to understand the concepts and best practices. This can be a challenging.

Q. What is the role of the **import()** function in code splitting?



- ❖ The `import()` function returns a promise that allow **dynamic loading of modules**.

```
// App.js
import React, { lazy, Suspense } from "react";

const CodeSplit = lazy(() => import("./Others/CodeSplit"));

function App() {
  return (
    <div>
      <Suspense fallback={<div>Loading...</div>}>
        <CodeSplit />
      </Suspense>
    </div>
  );
}

export default App;
```

Q. What is the purpose of the **fallback prop** in Suspense?



- ❖ The fallback prop provides a **loading indicator** or UI while the dynamically imported component is being loaded.

```
// App.js
import React, { lazy, Suspense } from "react";

const CodeSplit = lazy(() => import("../Others/CodeSplit"));

function App() {
  return (
    <div>
      <Suspense fallback={<div>Loading...</div>}>
        <CodeSplit />
      </Suspense>
    </div>
  );
}

export default App;
```

Q. Can you dynamically load CSS files using code splitting in React?



- ❖ **Yes**, using `dynamic import()` for CSS files allows you to load styles on-demand along with the corresponding components.

Q. How do you inspect and analyze the generated chunks in a React application?



- ❖ Use tools like **Webpack Bundle Analyzer** to analyze the size and composition of chunks.

15: React - Others



Q1. What is a [Higher-Order Component](#) in React?

V. IMP.

Q2. What are the [5 ways to Style](#) React components? Explain Inline Styles?

Q3. What are the differences between [React](#) & [React Native](#)?

Q4. What is [GraphQL](#)?

Q5. What are the [Top 3 ways](#) to achieve state management? When to use what in React?

Q6. How can you [Implement Authentication](#) in a React application?

V. IMP.

Q7. What is the use of [React Profiler](#)?

Q8. What is the difference between [fetch](#) & [axios](#) for api calls in React?

Q9. What are the popular [Testing Libraries](#) for React?

Q10. How can you [Optimize Performance](#) in a React application?

V. IMP.

Q11. Explain [Reactive Programming](#) with example?


Q12. In how many ways can we implement [Reactive Programming](#) in React?

Q13. How to [pass data](#) from child component to parent Component in React?



Q. What is a **Higher-Order Component** in React? **V. IMP.**

- ❖ A Higher-Order Component is a component which takes **another component as an argument** and adds extra features to another component.
- ❖ HOC can be used for providing **logging functionality** to all the components in a reusable way.

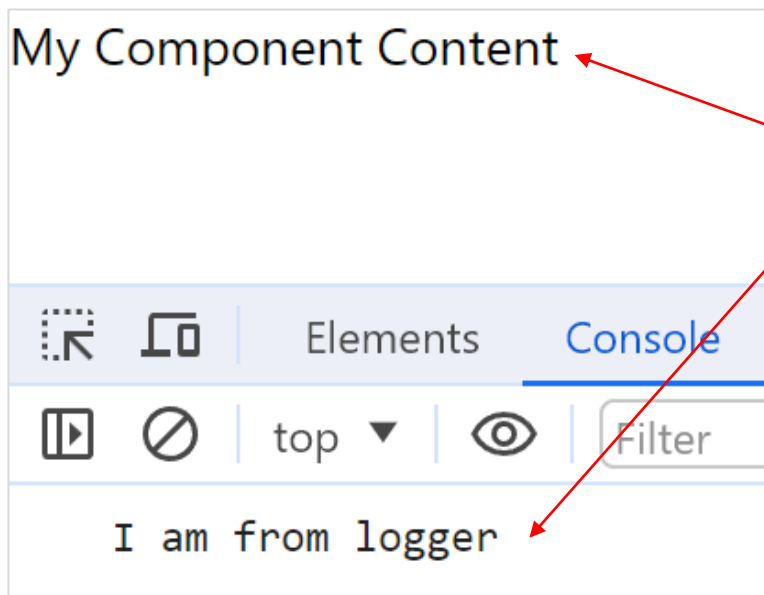

```
// HocLogger.js: High Order Component
const HocLogger = (HocUse) => {

  return function WithLogger(props) {
    console.log("I am from logger");
    return <HocUse />;
  };
};

export default HocLogger;
```

```
// HocUse.js: Normal Component will HOC
const HocUse = () => {
  return <div>My Component Content</div>;
};

export default Hoc(HocUse);
```

```
// index.js
root.render(<HocUse></HocUse>);
```



Q. What are the 5 ways to Style React components? Explain Inline Styles?

5 ways to Style React components

1. Inline Styles

2. CSS Stylesheets

3. CSS-Modules

4. Global Stylesheets

5. CSS Frameworks

```
import React from "react";

const AppInlineStyle = () => {
  return (
    <div>
      <h1 style={inlineStyles.title}>Inline</h1>
    </div>
  );
};

const inlineStyles = {
  title: {
    color: "blue",
    fontSize: "24px",
  },
};

export default AppInlineStyle;
```

Inline

Q. What are the differences between **React** & **React Native**?



 React	 React Native
1. React is a library	React Native is a framework.
2. React is used for building web interfaces.	React Native is used for building mobile applications.
3. Run on Web browsers.	Run on iOS and Android platforms.
4. HTML and CSS are used for UI.	Native UI components (e.g., View, Text) are used for UI.
5. Deployed as web applications.	Deployed through app stores(e.g., App Store, Google Play).



Q. What is GraphQL?

- ❖ GraphQL is a **query language for APIs** (Application Programming Interfaces) and a runtime for executing those queries with your existing data.
- ❖ GraphQL and React are often used together. React components can use GraphQL queries to fetch the data required for rendering.



```
<!--GraphQL query example -->
query {
  user(id: 1) {
    id
    name
    email
    posts {
      title
      content
    }
  }
}
```

Q. What are the **Top 3 ways** to achieve state management? When to use what in React?



1. useState Hook:

- **When to use:** Simple component-level state.
- **Reason:** Ideal for applications having small components and isolated state because it is Lightweight and built into React only.

2. Context API:

- **When to use:** Prop drilling avoidance for sharing global data.
- **Reason:** Simplifies data passing through the component tree, reducing the need for manual prop drilling.

3. Redux:

- **When to use:** Large-scale applications with complex state.
- **Reason:** Centralized store and actions provide a predictable state management pattern, aiding in debugging and scalability.

Q. How can you **Implement Authentication** in a React application? **V. IMP.**



Front-end/ Client-side



4. Store JWT token
at local storage

8. Display data on
browser

1. POST: {username, password}

3. Return Response {JWT token}

5. Request Data {JWT token: Header}

7. Send Data



Middleware/ Server-side/ Backend



2. Authenticate &
create **JWT Token**

6. Validate token
signature



Q. What is the use of **React Profiler**?

- ❖ React Profiler is a set of tools in React that allows developers to profile(analyze) the **performance** of a React application.

```
// Wrap the section of code you want to profile
// with the React.Profiler component.
<React.Profiler id="example" onRender={callback}>
|   {/* Your code to profile */}
</React.Profiler>;

// Define a callback function (onRender) that
// will be called whenever the component tree
// within the Profiler is committed.
function callback(id, phase, actualDuration, baseDuration,
|   startTime, commitTime
|   ) {
|   // Process profiling data
|   // Start time, End Time, Execution Time
|   }
```



Q. What is the difference between **fetch** & **axios** for api calls in React?


```
fetch("https://api.example.com/data")
  .then((response) => response.json())
  .then((data) => console.log(data))
  .catch((error) => console.error("Error:", error));
```

1. fetch is a **built-in JavaScript function**, so it doesn't require any additional libraries.
2. fetch **returns Promises**, making it easy to work with asynchronous code using `async/await` syntax.
3. If you want to keep **http requests simple**, fetch is a good choice.

```
// installation command: npm install axios
import axios from "axios";
axios
  .get("https://api.example.com/data")
  .then((response) => console.log(response.data))
  .catch((error) => console.error("Error:", error));
```

1. Axios is a **third-party library**, that simplifies the process of making HTTP requests.
2. Axios allows you to **use interceptors**, which can be good for tasks like request/response logging, authentication, and error handling.
3. If you want to intercept http request/response, or improve error handling then Axios has more features to do it.

Q. What are the popular **Testing Libraries** for React?

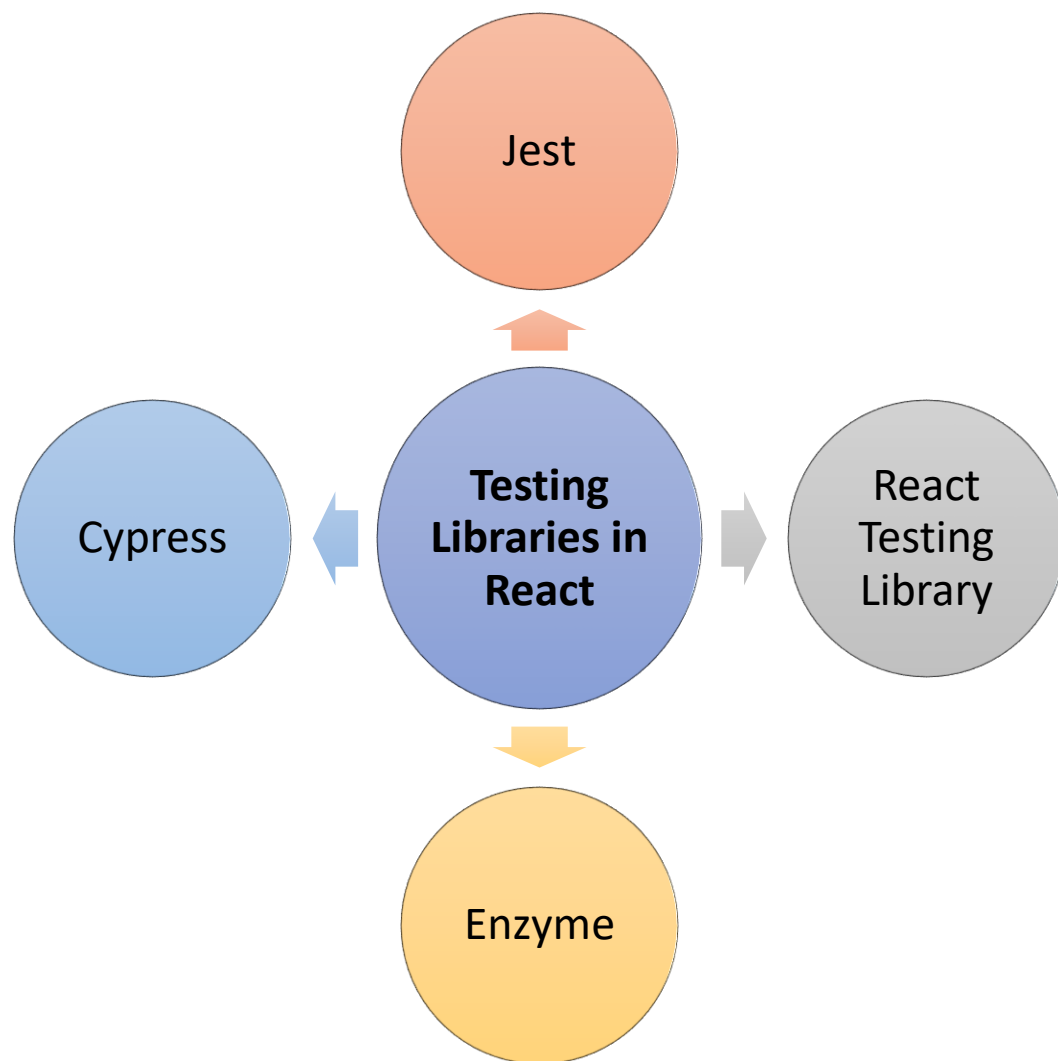



Q. How can you **Optimize Performance** in a React application?

1. Memoization with `useMemo` and `useCallback`:

2. Optimizing Renders with `React.Fragment`:

3. Lazy Loading with `React.lazy`:

4. Code Splitting:

5. Optimizing Images and Assets



Q. How can you **Optimize Performance** in a React application?

1. Memoization with `useMemo` and `useCallback`:

Use this hooks to memoize values and, reducing unnecessary recalculations.

2. Optimizing Renders with `React.Fragment`:

Use it to avoid unnecessary wrapper elements that could cause additional DOM nodes.

3. Lazy Loading with `React.lazy`:

Use it to load components lazily, reducing the initial bundle size and improving initial loading performance.

4. Code Splitting:

Employ code splitting to divide your application into smaller chunks that are loaded on demand, improving initial load times.


5. Optimizing Images and Assets:

Compress and optimize images, use responsive images, and leverage lazy loading for images to reduce network and rendering overhead.



Q. Explain **Reactive Programming** with example?

- ❖ Reactive programming is a programming paradigm that focuses on **reacting to changes and events** in a declarative and asynchronous manner.
- ❖ Declarative means a programming style where you write the code for what you want to achieve, rather than specifying step-by-step how to achieve it. For example, JSX in React has declarative syntax.
- ❖ Asynchronously means an action that does not block other actions.

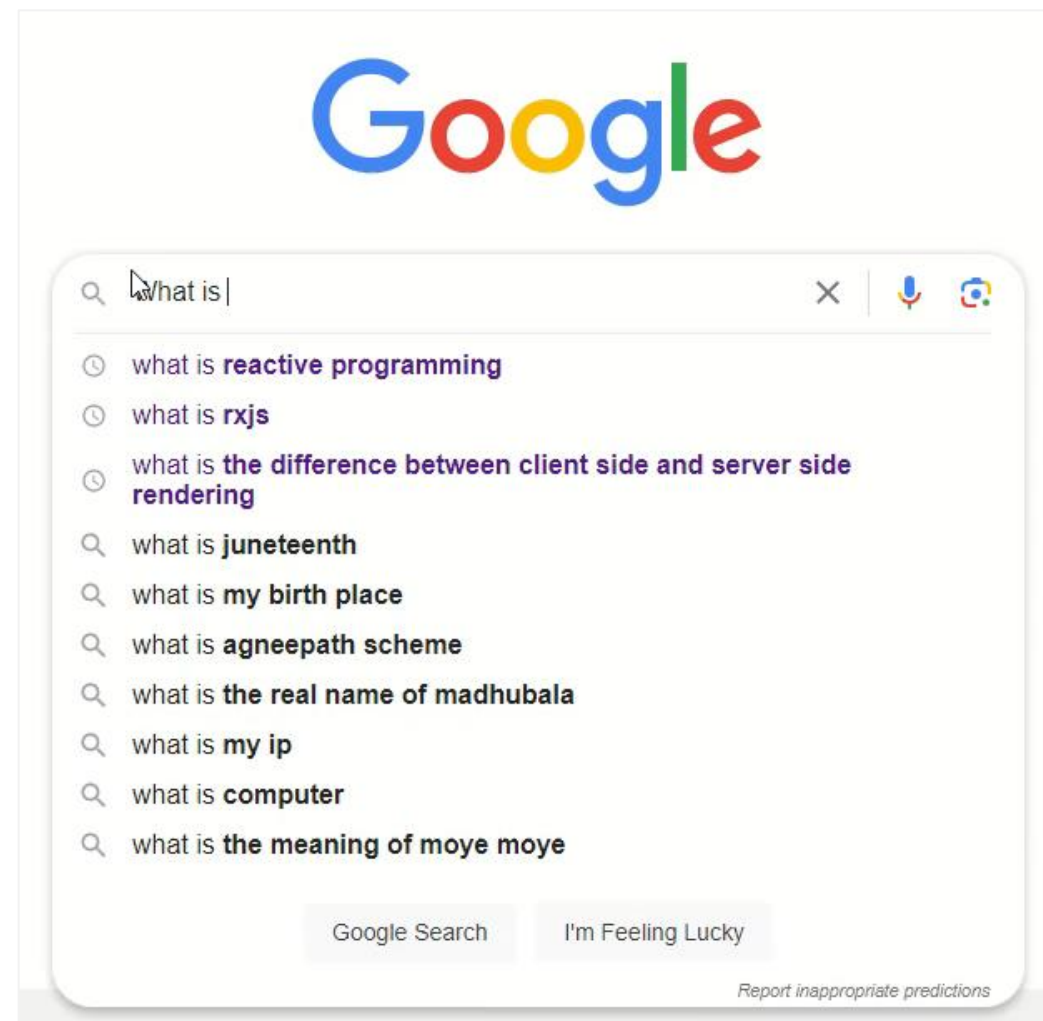

Live Search Suggestion



Q. In how many ways can we implement **Reactive Programming** in React?

1. State and Props	Reacting to changes in local component state and passing data reactively through props.
2. React Hooks:	Leveraging useState and useEffect hooks for managing state and side effects in functional components.
3. Event Handling:	Reacting to user interactions through event handling and updating state accordingly.
4. Context API:	Sharing and managing global state reactively across components using the Context API.
5. Redux:	Using state management libraries like Redux for managing complex application state reactively.
6. Component Lifecycle Methods:	Using class components and lifecycle methods for handling side effects and updates.
7. Async/Await:	Utilizing async/await syntax for handling asynchronous operations reactively.
8. RxJS and Observables:	Leveraging RxJS for handling asynchronous operations and data streams in a reactive manner.

Q. How to **pass data** from child component to parent Component in React?



- ❖ Parent provides a **callback function** to child and then child component can then invoke this callback to pass data back to the parent.

```
const ParentComponent = () => {  
  // Callback to receive data from the child  
  const callback = (data) => {  
    console.log("Data from Child:", data);  
  };  
  
  return (  
    <div>  
      {/* Pass the callback to the child */}  
      <ChildComponent fromChild={callback} />  
    </div>  
  );  
};  
export default ParentComponent;
```

```
const ChildComponent = ({ fromChild }) => {  
  // No local state in the child component  
  const dataToParent = () => {  
    // Directly pass the input value to the parent  
    fromChild(document.getElementById  
      | ("inputField").value);  
  };  
  
  return (  
    <div>  
      <input type="text" id="inputField" />  
      <button onClick={dataToParent}>Send</button>  
    </div>  
  );  
};  
export default ChildComponent;
```


16: Redux - Component/ Action/ Store/ Reducer



Q1. What is the role of **Redux** in React?

V. IMP.

Q2. When to use **Hooks** and when to use **Redux** in React applications?

Q3. What is the **Flow of data** in React while using Redux?

V. IMP.

Q4. How to **install** Redux for React application?

Q5. What are **Action Creators** in React Redux?

V. IMP.

Q6. Difference between **Action Creators**, **Action Object** & **Action Type**?

Q7. Explain **React Component Structure** while using Redux?

Q8. What is the role of **Store** in React Redux?

V. IMP.


Q9. What is the role of **Reducer** in Redux?

V. IMP.




Q. What is the role of **Redux** in React? **V. IMP.**

- ❖ Redux is an open-source JavaScript library used for **state management**.
- ❖ Redux provides a **centralized store** that holds the entire state of an application and allows components to access and update the state in a predictable manner.

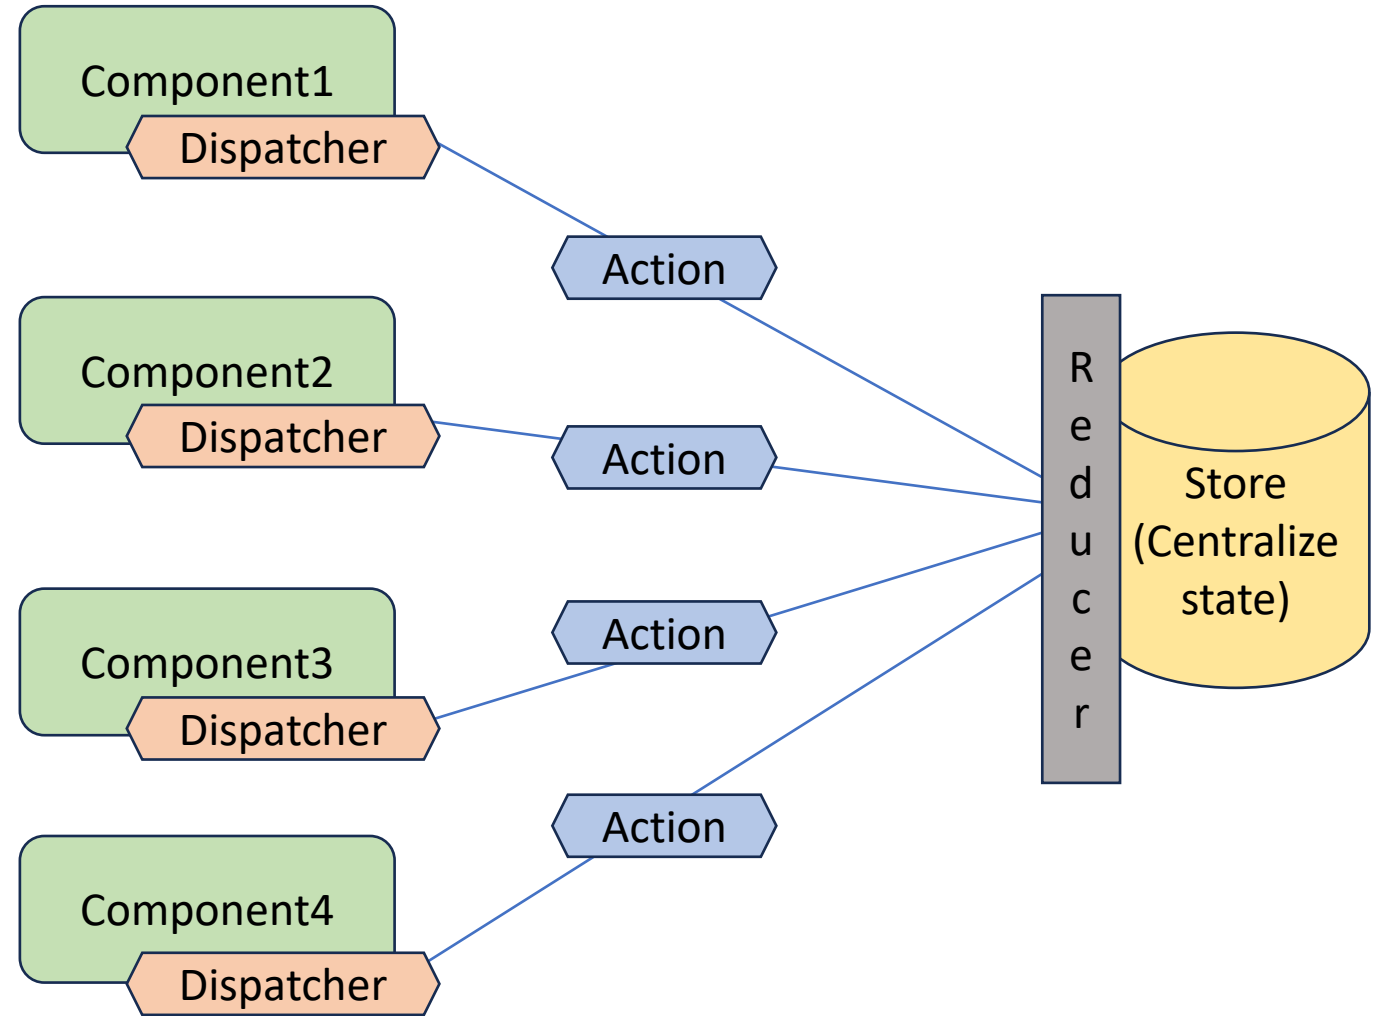




Q. When to use **Hooks** and when to use **Redux** in React applications? **V. IMP.**

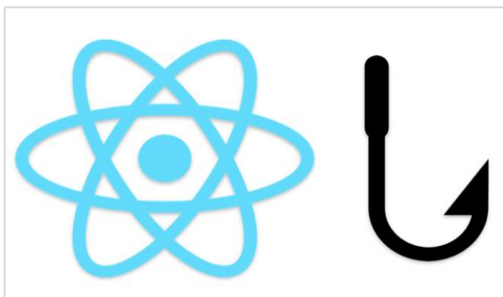


❖ Use React with Hooks when:

1. Your application is small or medium (5-50 Components)
2. Your application has simple state management.
3. State is specific to components.

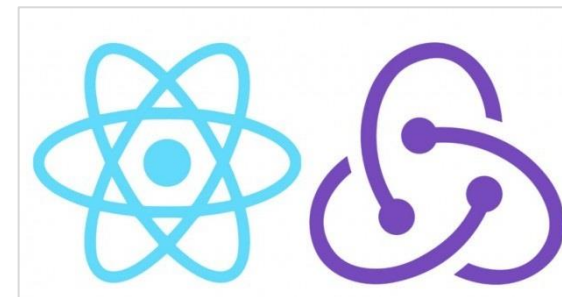

❖ Use React with Redux when:


1. Your application is big or complex (>50 Components)
2. Your application has complex global state management.
3. Share state among multiple components.

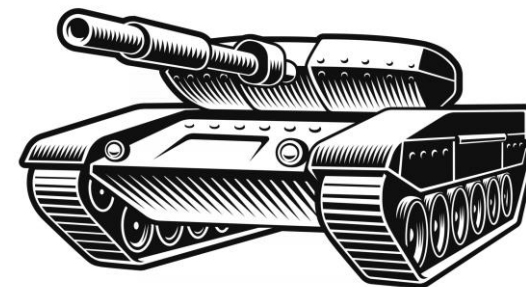

Q. What is the **Flow of data** in React while using Redux? **V. IMP.**



❖ Flow of Data in React-Redux application

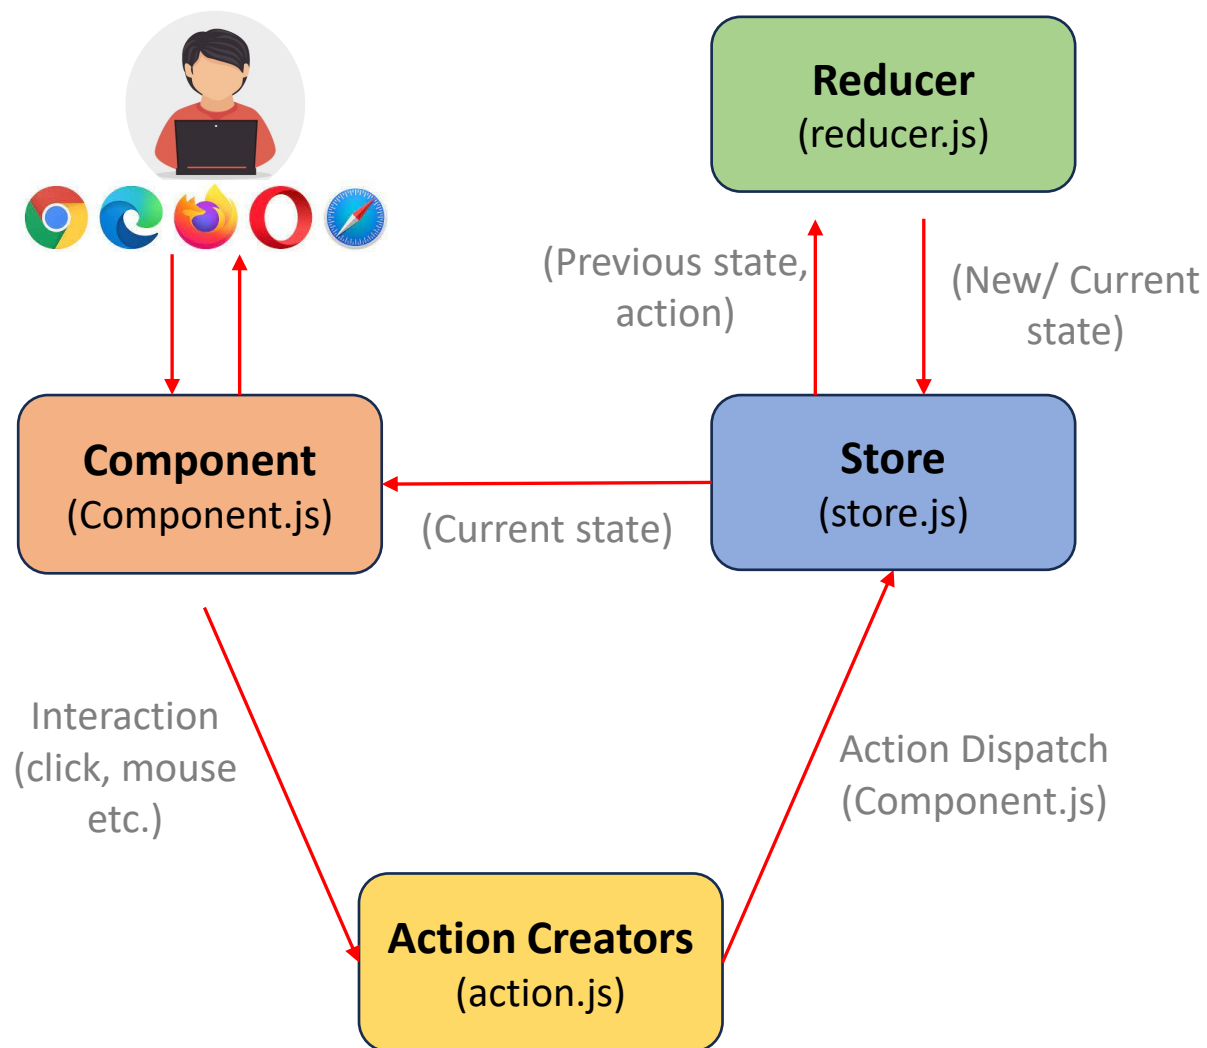



Q. How to **install** Redux for React application?


- ❖ Install the necessary packages using npm (run this command):

```
npm install redux react-redux
```



Q. What are **Action Creators** in React Redux? **V. IMP.**

- ❖ Action creators are functions that **create** and **return action objects**.

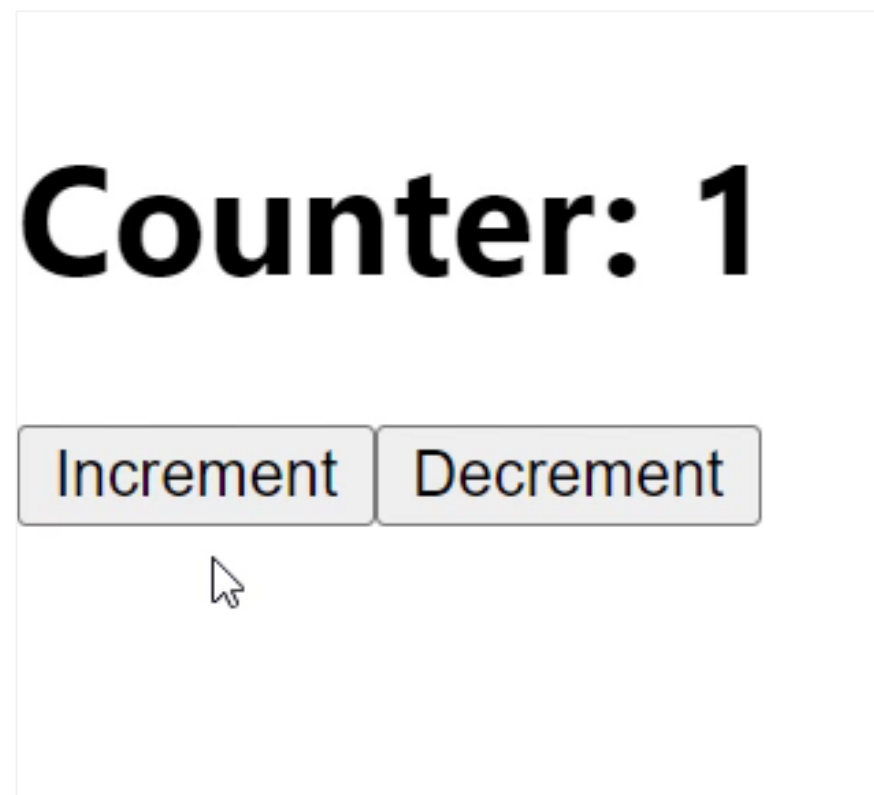

```
// actions.js

// Action creator function
export const increment = () => ({
  type: 'INCREMENT' // Action type
});

// Action creator function
export const decrement = () => ({
  type: 'DECREMENT' // Action type
});
```

Q. Difference between Action Creators, Action Object & Action Type? V. IMP.



❖ Action creator functions are functions that create and return action objects.

❖ Action object are plain JavaScript objects returned by action creator functions.

❖ An action type is a string constant that defines the type of action.

```
// Action creator
const increment = (amount) => {
  return {
    type: "INCREMENT",
    payload: {
      amount: amount,
    },
  };
};
```


```
// Action object
const incrementAction = increment(2);
incrementAction = {
  type: "INCREMENT",
  payload: { amount: 2 },
};
```

```
// Action type
var actionType = incrementAction.type;
```




Q. Explain **React Component Structure** while using Redux?

❖ Example video of expected state management:

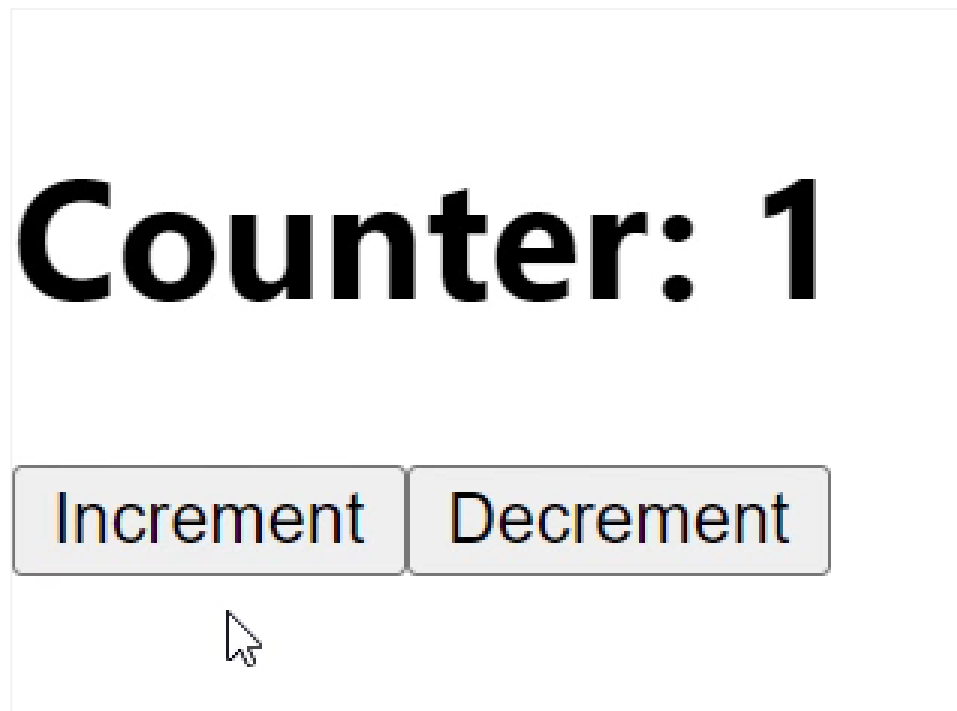

❖ Flow of Data in React-Redux application

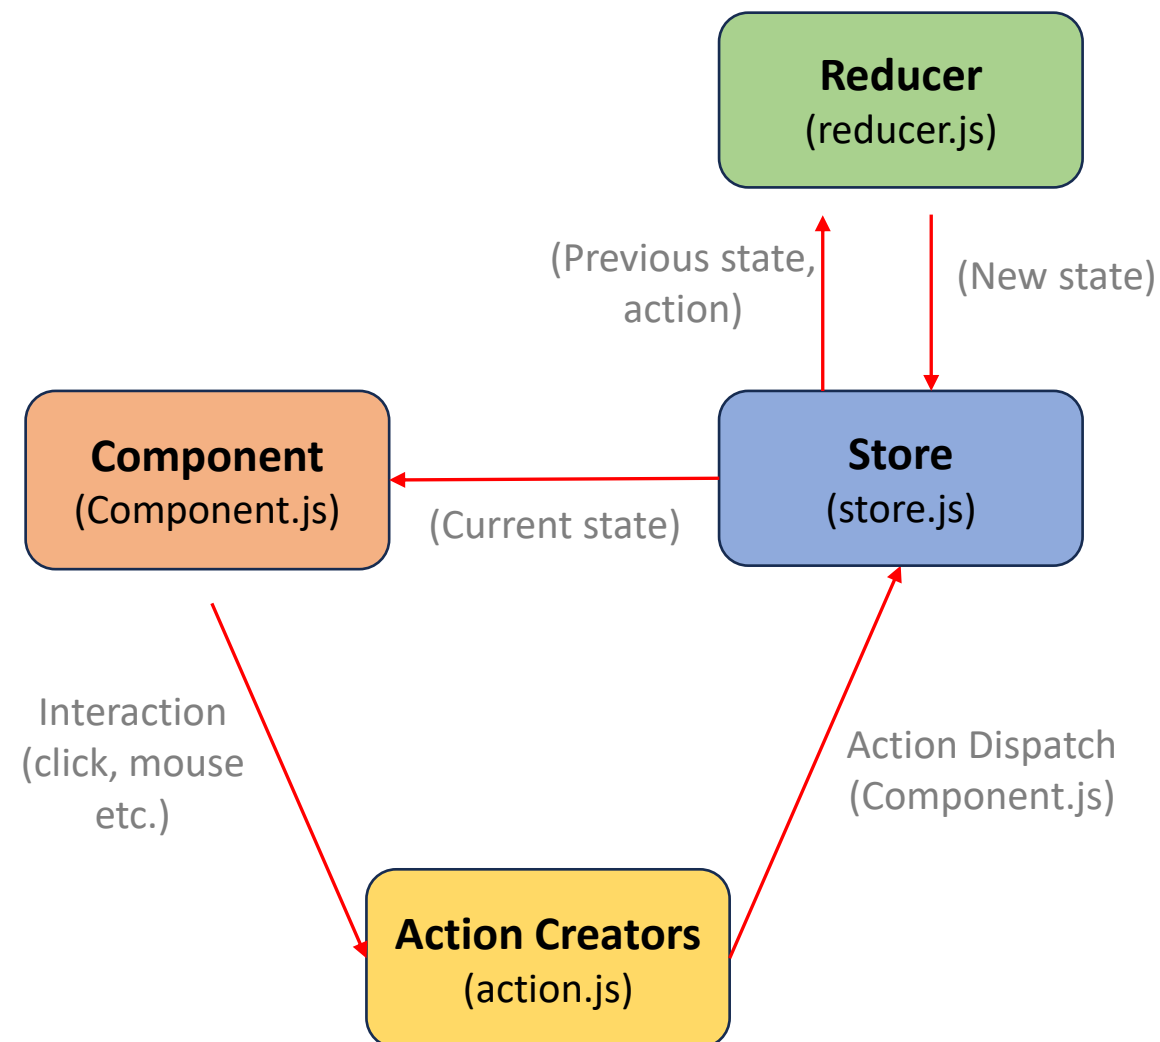



Q. Explain **React Component Structure** while using Redux?

```
// CounterComponent.js

// 1. Import Statements
import React from "react";
import { connect } from "react-redux";
import { increment, decrement } from "../actions";

// 2. Functional Component
const CounterComponent = ({ count, increment, decrement }) => {
  return (
    <div>
      <h1>Counter: {count}</h1>
      <button onClick={increment}>Increment</button>
      <button onClick={decrement}>Decrement</button>
    </div>
  );
};
```

```
// 3. Map Redux actions to component props
const mapDispatchToProps = {
  increment,
  decrement,
};

// 4. Map Redux state to component props
const mapStateToProps = (state) => {
  return {
    count: state.counter.count, //From store
  };
};

// 5. Connect the component to Redux store
export default connect(mapStateToProps,
  mapDispatchToProps)(CounterComponent);
```



Q. Explain **React Component Structure** while using Redux?

❖ 5 Steps to implement Redux integration in component:

1. Import dependencies like connect function and action creators.
2. Define Functional Component to render & display elements.
3. Define function to dispatch action to reducer via store.
4. Define function to get state from Redux store back to component.
5. Connect both the above functions and the component to Redux store by connect() function.



Q. What is the role of **Store** in React Redux? **V. IMP.**


- ❖ Redux store enables the application to **update state using the defined reducer**.
- ❖ Redux Store is a **centralized place** for holding the state of all the components in the application.

```
// store.js
import { configureStore } from '@reduxjs/toolkit';
import counterReducer from './reducer';

const store = configureStore({
  reducer: {
    counter: counterReducer,
  },
});

export default store;
```


❖ Flow of Data in React-Redux application

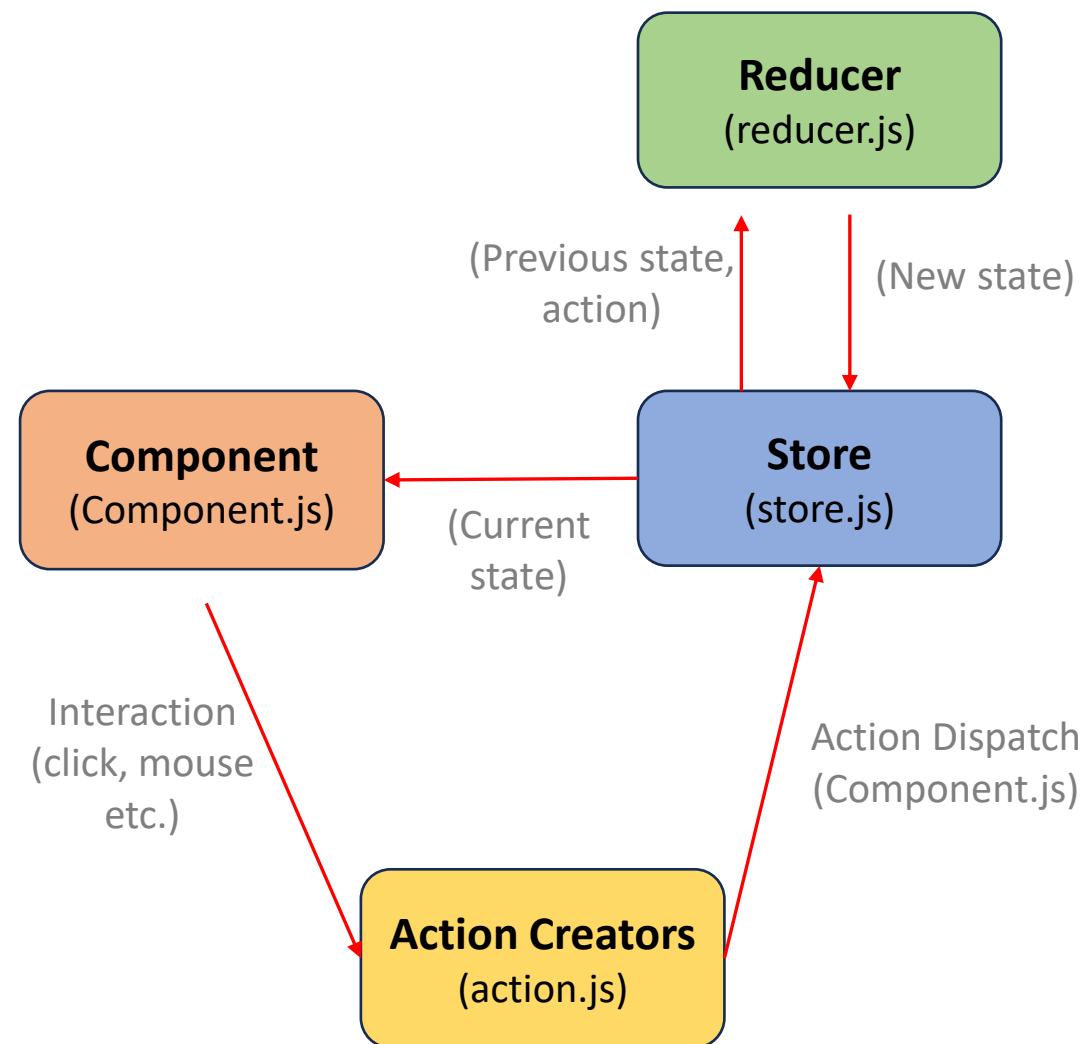



Q. What is the role of **Reducer** in Redux? **V. IMP.**

- ❖ A reducer is a function that takes the **previous state** and **an action** as arguments and returns the new state of the application.

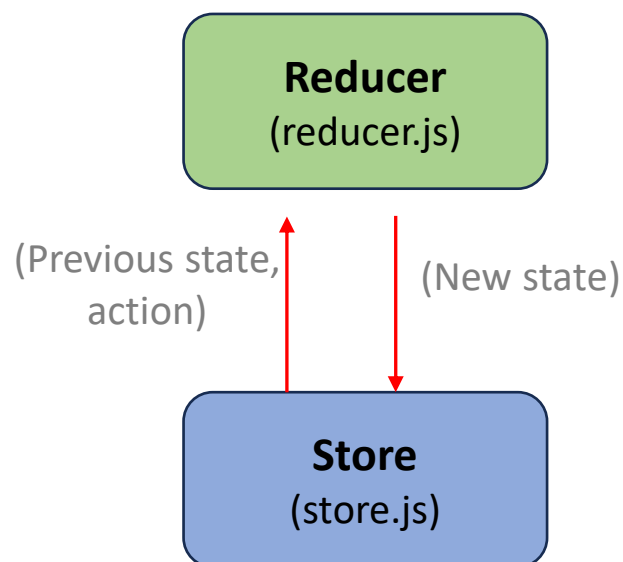

```
// reducer.js
const counterReducer = (state = { count: 0 }, action) => {
  switch (action.type) {
    case "INCREMENT":
      return { count: state.count + 1 };
    case "DECREMENT":
      return { count: state.count - 1 };
    default:
      return state;
  }
};
export default counterReducer;
```

17: Redux - Core Principles/ Pros-Cons/ Local & Redux State



Q1. Explain the **Core Principles** of Redux? **V. IMP.**

Q2. List **5 benefits** of using Redux in React? **V. IMP.**

Q3. What are the differences between **local component state** & **Redux state**?

Q4. What are the challenges or **disadvantages** while using Redux?



Q. Explain the **Core Principles** of Redux? **V. IMP.**

1. Single Source of Truth (Store)


2. State is Read-Only (Unidirectional)

3. Changes using Pure Functions (Reducers)

4. Actions Trigger State Changes (Actions)

5. Predictable State Changes (Actions)

❖ Flow of Data in React-Redux application

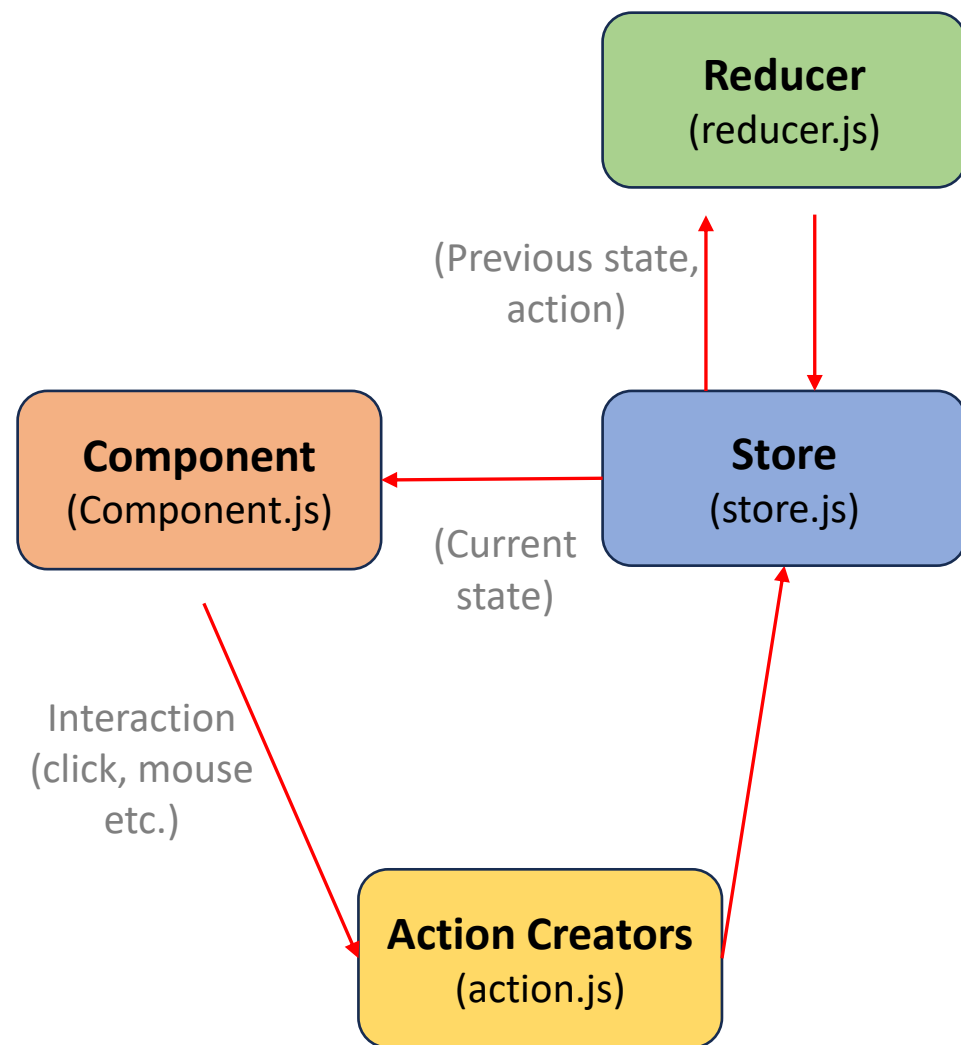

[back to chapter index](#)

Q. Explain the **Core Principles** of Redux? **V. IMP.**



1. Single Source of Truth:

The entire application state is stored in one place, simplifying data management and ensuring a consistent view of the application.

2. State is Read-Only:

State cannot be directly modified. To make changes to the state, you need to dispatch an action. This ensures that the state transitions are explicit and traceable.

3. Changes using Pure Functions (Reducers):

This ensures predictability and consistency because pure functions return the same result if the same arguments are passed.

4. Actions Trigger State Changes:

Plain JavaScript objects (actions) describe state changes, guiding the store to invoke reducers and update the application state accordingly.

5. Predictable State Changes with Actions:

State changes are determined by actions, fostering a predictable flow of data and simplifying debugging in response to specific actions.

Q. List 5 benefits of using Redux in React? **V. IMP.**



1. Predictability & Centralization:

The application state is stored in a single, predictable and centralized source (the store).

2. Maintainability:

For larger applications, Redux is a structured and scalable approach for managing state.

3. Debuggability:

Redux has powerful developer tools that make it easier to trace and debug state changes.

4. Interoperability:

Redux can be used with various JavaScript frameworks and libraries.

5. Community & Ecosystem:

Redux has a large and active community, resulting in a rich ecosystem of tools and extensions.



Q. What are the differences between **local component state** & **Redux state**?

Local Component State	Redux State
1. Scope: Limited to the component where defined.	Global and accessible across components. 🏆
2. Management: Managed internally by the component.	Managed externally by the Redux store.
3. Performance: Generally, more performant for small-scale applications.	More performant for large applications.
4. Complexity: Simpler to set up and manage. 🏆	Comparatively complex to manage.
5. Testing: Simpler to test with component-specific state. 🏆	Requires more comprehensive testing due to global nature and interactions between components.



Q. What are the challenges or **disadvantages** while using Redux?

1. Boilerplate Code

2. Learning Curve

3. Verbosity and Complexity

4. Overhead for Small Projects

5. Global State for Local Components

6. Integration with Non-React Libraries



Q. What are the challenges or **disadvantages** while using Redux?

1. Boilerplate Code:

Implementing Redux requires writing extensive boilerplate code in action, reducer, store, increasing code volume and complexity.

2. Learning Curve:

Understanding Redux concepts can be challenging, posing a learning curve for developers, especially those new to React state management.

3. Verbosity and Complexity:

As projects grow, Redux code may become verbose and complex, demanding careful management of actions and reducers.

4. Overhead for Small Projects:

In small projects, Redux may introduce unnecessary complexity, potentially outweighing its benefits in development efficiency.

5. Global State for Local Components:

Overusing Redux for local state introduces unnecessary complexity, as not all state requires a global scope.

6. Integration with Non-React Libraries:

Integrating Redux with non-React libraries or frameworks may demand additional effort and customization, potentially adding complexity to the project.

18: Redux - Short Answer



Q1. What is **Provider Component**? How components getting the state from Redux store? **V. IMP.**

Q2. What is the role of **Connect** function in React-Redux? **V. IMP.**

Q3. What are the **4 Important Files** in React-Redux project?

Q4. How to structure the project and maintain **state in multiple components**?

Q5. Explain the concept of **immutability** in the context of Redux?

Q6. Which are the typical properties of an Action object in React-Redux project?

Q7. Difference btw **mapDispatchToProps** & **mapStateToProps** in the connect?

Q8. What is the meaning of **Unidirectional Data Flow** in Redux?

Q9. How does Redux handle communication between components?

Q10. What is **Payload property** in Redux?

Q. What is **Provider Component**? How components getting the state from Redux store?



- ❖ Provider component of react-redux will **make the Redux store available** to all connected components.

```
// index.js
import { Provider } from "react-redux";
import store from "../Redux/store";

const root = ReactDOM.createRoot(
  document.getElementById("root"));
root.render(
  <Provider store={store}>
    <CounterComponent />
  </Provider>
);
```

```
// CounterComponent.js
// Map Redux state to component props
const mapStateToProps = (state) => {
  return {
    count: state.counter.count,
  };
};
```



Q. What is the role of **Connect** function in React-Redux?

- ❖ The connect function is used to **make the connection** between a React component and the Redux store.

```
import React from "react";
import { connect } from "react-redux";

// 3. Map Redux actions to component props
const mapDispatchToProps = {
  increment,
  decrement,
};

// 4. Map Redux state to component props
const mapStateToProps = (state) => {
  return {
    count: state.counter.count, //From store
  };
};

// 5. Connect the component to Redux store
export default connect(mapStateToProps,
  mapDispatchToProps)(CounterComponent);
```

Q. What are the **4 Important Files** in React-Redux project?



❖ Important File for Redux Implementation:


1. **actions.js**: Defines action creators.
2. **reducer.js**: Update the state based on the action and previous state received from the store.
3. **store.js**: Stores the updated state received from reducer and export it to the components.
4. **CounterComponent.js**: React component connected to Redux, uses state and actions to render UI and handle user interactions.

```
src/  
|-- actions.js  
|-- reducer.js  
|-- store.js  
|-- CounterComponent.js  
|-- App.js  
|-- index.js
```

Q. How to structure the project and maintain **state in multiple components**?




❖ Single component project structure

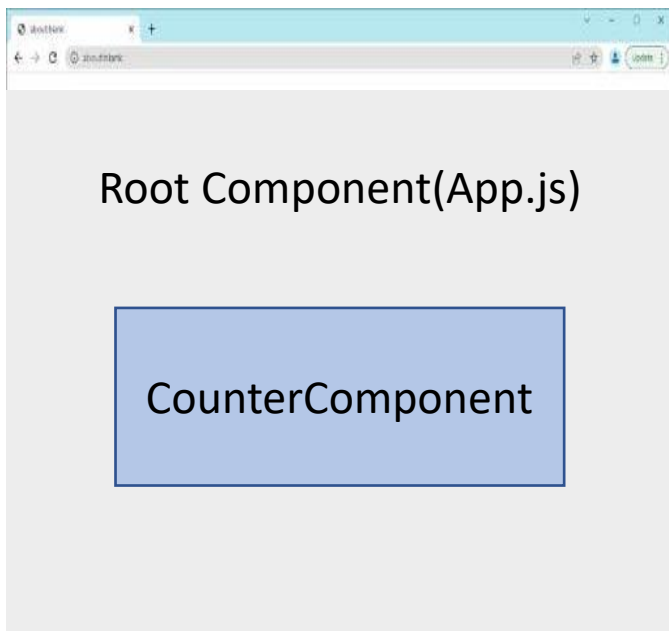

```
src/  
|-- actions.js  
|-- reducer.js  
|-- store.js  
|-- CounterComponent.js  
|-- App.js  
|-- index.js
```

❖ Multiple component project structure

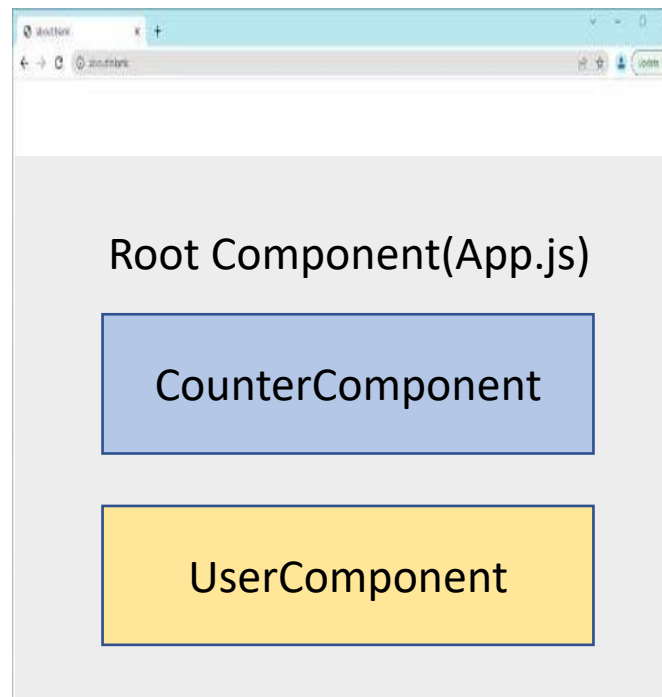

```
src/  
|-- actions/  
|   |-- counterActions.js  
|   |-- userActions.js  
|  
|-- reducers/  
|   |-- counterReducer.js  
|   |-- userReducer.js  
|  
|-- store/  
|   |-- configureStore.js  
|  
|-- components/  
|   |-- CounterComponent.js  
|   |-- UserComponent.js  
|  
|-- App.js  
|-- index.js
```


Q. Explain the concept of **immutability** in the context of Redux?



- ❖ In Redux, immutability is the principle that once an object (such as the state which is readonly) is created, it **cannot be changed** or modified directly.
- ❖ To make changes to the state, you need to dispatch an action.

Q. Which are the typical properties of an Action object in React-Redux project?



❖ 2 Typical properties in most of the React-Redux project:

1. **Type:** Type describes the type of action being performed.
2. **Payload:** Carries data from mostly from external API's.

```
// Action creator
const increment = (amount) => {
  return {
    type: "INCREMENT",
    payload: {
      amount: amount,
    },
  };
};
```

```
// Action object
const incrementAction = increment(2);
// incrementAction = {
//   type: "INCREMENT",
//   payload: { amount: 2 }
// }
```

Q. Difference btw `mapDispatchToProps` & `mapStateToProps` in the connect?



- ❖ `mapDispatchToProps()` function dispatches action to the store to **update the state** using a reducer.
- ❖ `mapStateToProps()` function **gets the state** for the component from Redux store.

```
// 3. Map Redux actions to component props
const mapDispatchToProps = {
  increment,
  decrement,
};

// 4. Map Redux state to component props
const mapStateToProps = (state) => {
  return {
    count: state.counter.count, //From store
  };
};


// 5. Connect the component to Redux store
export default connect(mapStateToProps,
  mapDispatchToProps)(CounterComponent);
```

Q. What is the meaning of **Unidirectional Data Flow** in Redux?



- ❖ In a unidirectional data flow architecture, data follows a single, clear path.
- ❖ Redux enforces this pattern to provide a predictable state management mechanism.


❖ **Flow of Data in React-Redux application**

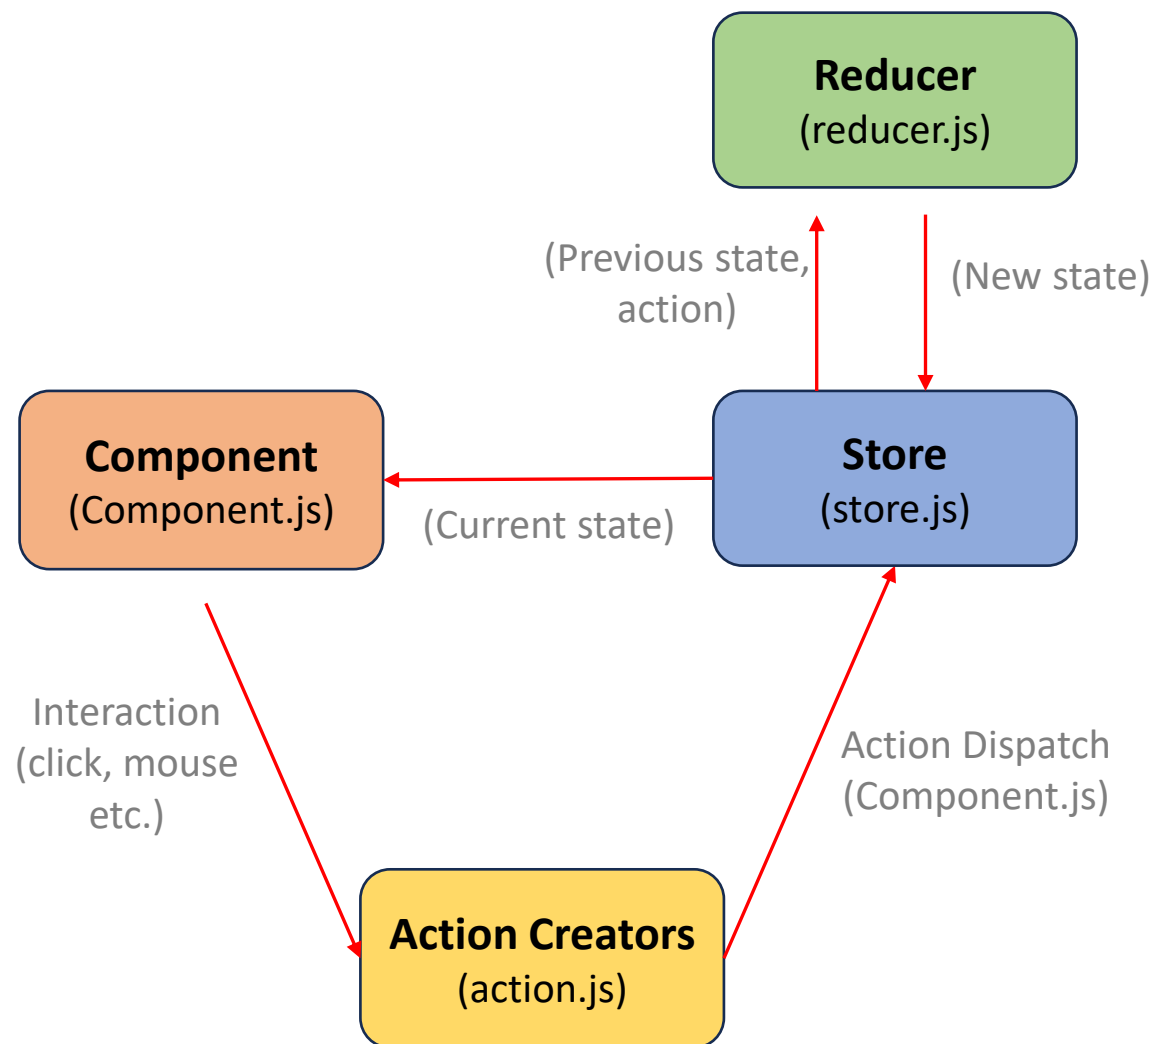

Q. How does Redux handle communication between components?



- ❖ Redux handles communication between components through a **centralized state management system(store)**.

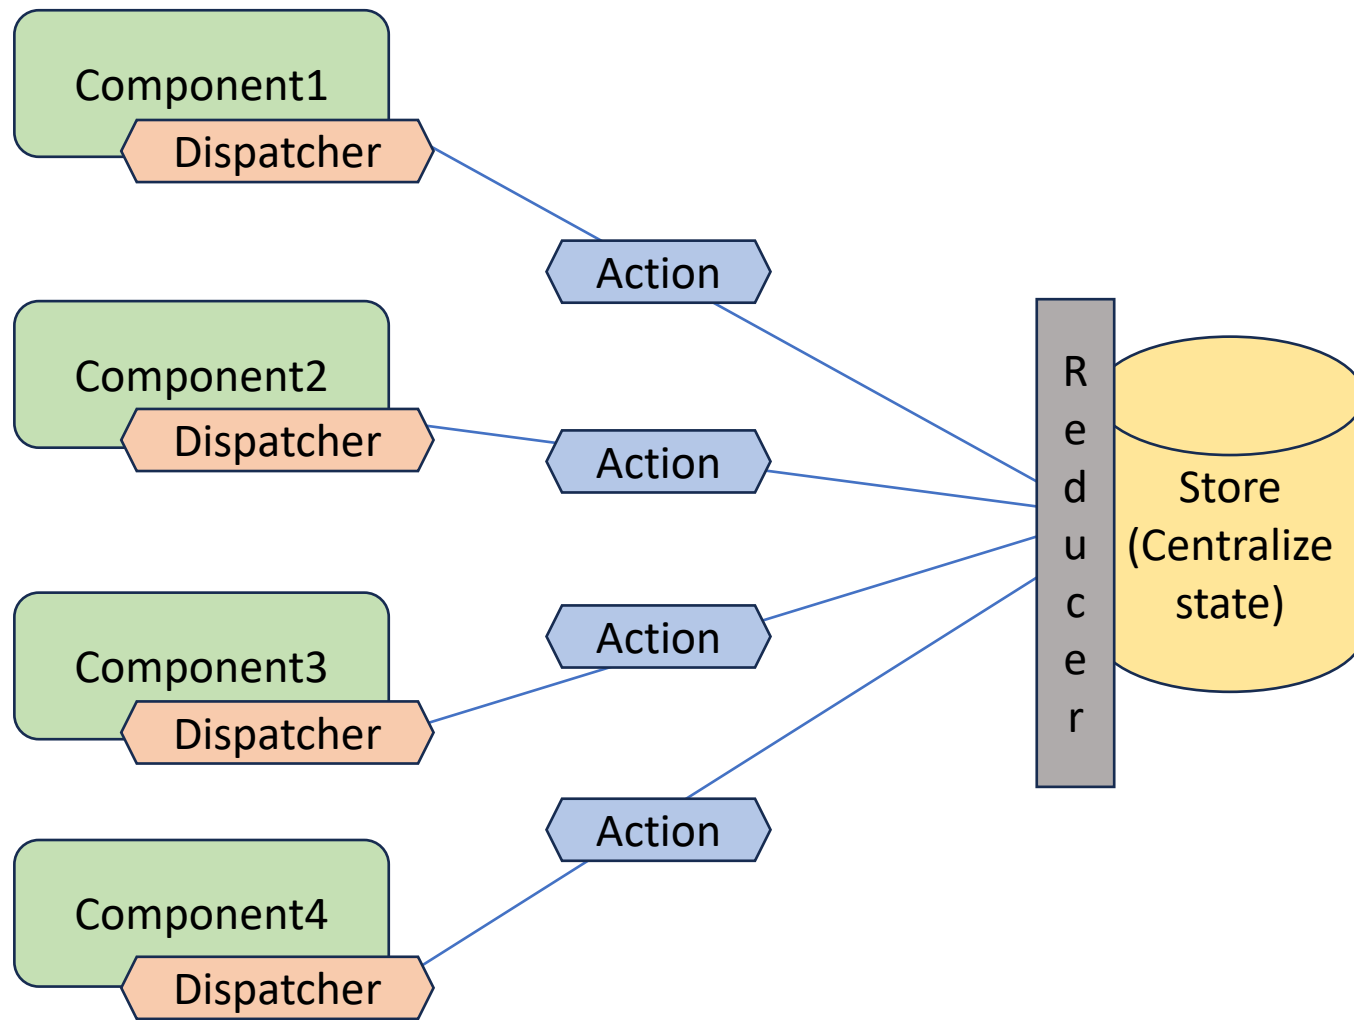

Q. What is **Payload property** in Redux?



- ❖ Along with the action type, payload property in Redux actions **holds the data** being sent to the reducer.
- ❖ Payload contains information necessary for the reducer to update the state based on the action.

```
// Action creator
const increment = (amount) => {
  return {
    type: "INCREMENT",
    payload: {
      amount: amount,
    },
  };
};
```

19: Redux - Thunk/ Middleware/ Error Handling/ Flux



Q1. What is the difference between [Regular Action creator](#) & [Thunk action creator](#)?

Q2. Explain the concept of [Middleware](#) in React-Redux?

Q3. How can you handle [Asynchronous Operations](#) & side-effect in React-Redux?

Q4. How does [Error Handling](#) work in Redux?

Q5. What is the difference between [Flux](#) & [Redux](#)?

Q. What is the difference between Regular Action creator & Thunk action creator?



- ❖ A regular action creator **returns a plain JavaScript object** with a type property, describing the type of action to be performed.

```
// Regular action creator
export const increment = () => ({
  type: "INCREMENT",
});
```

- ❖ 3 main points about Thunks:
- 1. A Thunk action creator is a function that **returns another function**.
- 2. This returned function dispatched to the Redux store.
- 3. Thunks are used to handle complex asynchronous operations, such as data fetching or API calls, based on which the action will be decided.

```
// Thunk action creator
export const fetchData = () => (dispatch) => {
  // Asynchronous logic, e.g., API call using fetch
  fetch("https://api.example.com/data")
    .then((response) => response.json())
    .then((data) => dispatch({ type: "SUCCESS", payload: data }))
    .catch((error) =>
      dispatch({ type: "FAILURE", payload: error.message })
    );
};
```





Q. Explain the concept of **Middleware** in React-Redux?

- ❖ Middleware provides a mechanism to **add extra functionality** to the Redux store.
- ❖ Middleware can intercept actions, modify them, or execute additional logic in actions before they reach the reducers.

```
// Configure the Redux store
// with middleware
const store = configureStore({
  reducer: rootReducer,
  middleware: [thunk],
});
```

- ❖ Flow of Data in React-Redux application with Middleware

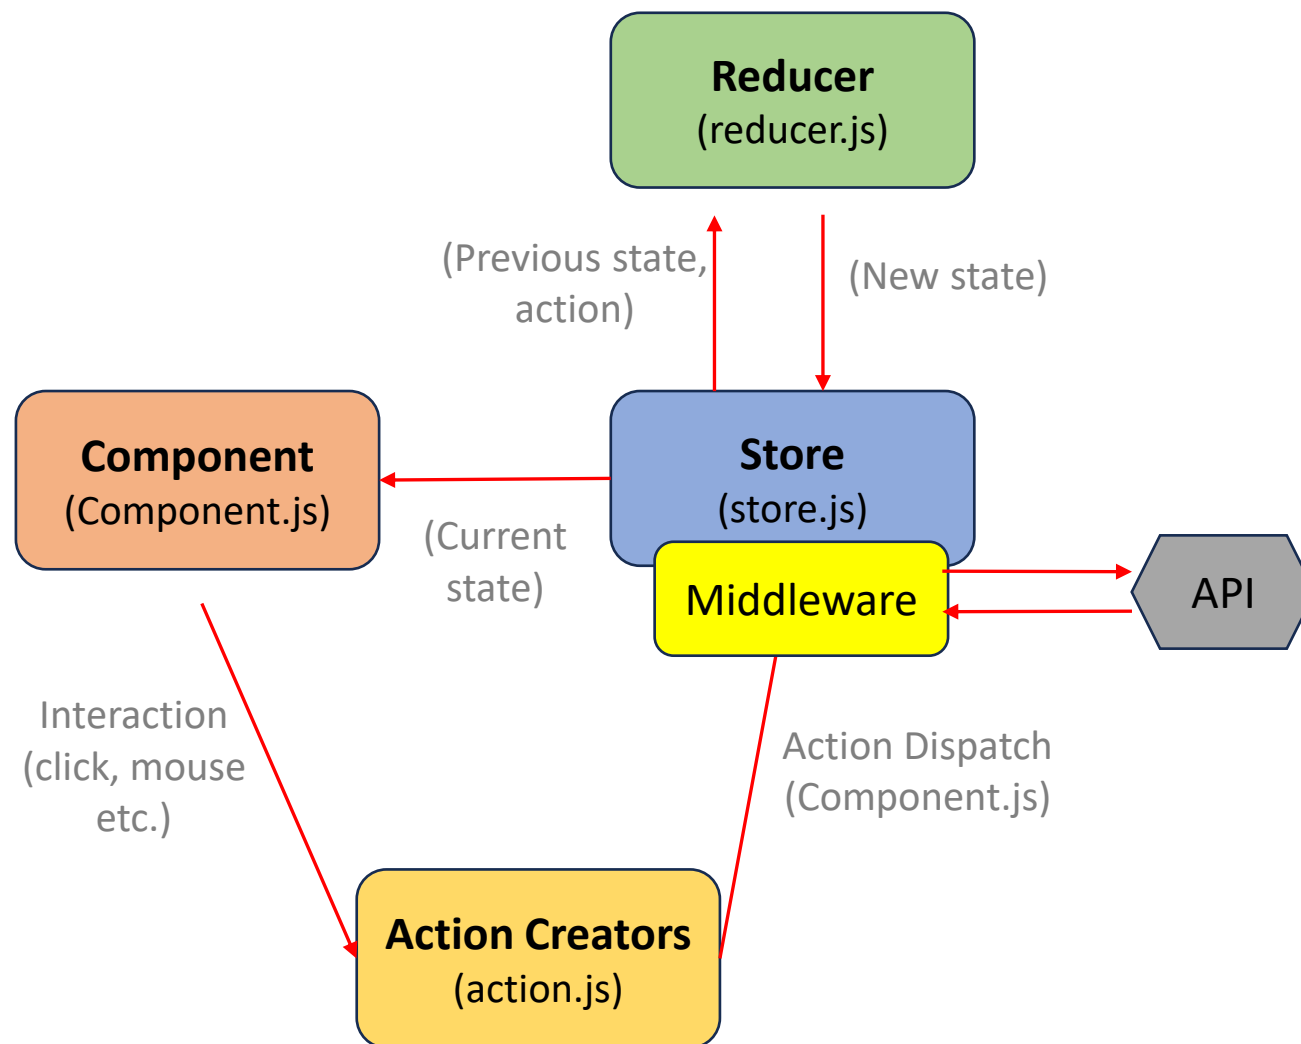

Q. How can you handle **Asynchronous Operations** & side-effect in React-Redux?



- ❖ Use middleware and Redux Thunk action creators **to handle asynchronous operations**.

```
// Configure the Redux store
// with middleware
const store = configureStore({
  reducer: rootReducer,
  middleware: [thunk],
});
```

```
// Thunk action creator
export const fetchData = () => (dispatch) => {
  // Asynchronous logic, e.g., API call using fetch
  fetch("https://api.example.com/data")
    .then((response) => response.json())
    .then((data) => dispatch({ type: "SUCCESS", payload: data }))
    .catch((error) =>
      dispatch({ type: "FAILURE", payload: error.message })
    );
};

// Usage in a component
dispatch(fetchData());
```

Q. How does **Error Handling** work in Redux?



- ❖ Error handling in Redux can be done by using **try-catch blocks** in action creator, middleware and reducers.

```
export const fetchData = () => async (dispatch) => {  
  try {  
    const data = await api.fetchData();  
    dispatch({ type: "FETCH_SUCCESS", payload: data });  
  } catch (error) {  
    dispatch({ type: "FETCH_ERROR", payload: error.message });  
  }  
};
```



Q. What is the difference between Flux & Redux?

- ❖ Flux is an **architecture pattern**. It provides a set of design principles for organizing code to manage state in a unidirectional data flow.
- ❖ Redux is a library that implements the Flux architecture.

20: JS for React - Basics



Q. What is **JavaScript**? What is the role of JavaScript engine?

Q. What are **client side** and **server side**?

Q. What are **variables**? What is the difference between **var**, **let**, and **const**?

Q. What are some important **string operations** in JS?

Q. What are **selectors** in JS?

Q. What is the difference between **getElementById**, **getElementsByClassName** and **getElementsByTagName**?

Q. What is the difference between **querySelector()** and **querySelectorAll()**?

Q. What are **data types** in JS?

Q. What are the **types of conditions statements** in JS?

Q. What is a **loop**? What are the types of loops in JS?


Q. What is **Scope** in JavaScript?

Q. What is **Hoisting** in JavaScript?

Q. What is **JavaScript**? What is the **role** of JavaScript engine? **V. IMP.**



- ❖ JavaScript is a programming language that is used for converting static web pages to **interactive and dynamic** web pages.
- ❖ A JavaScript engine is a program present in web browsers that executes JavaScript code.

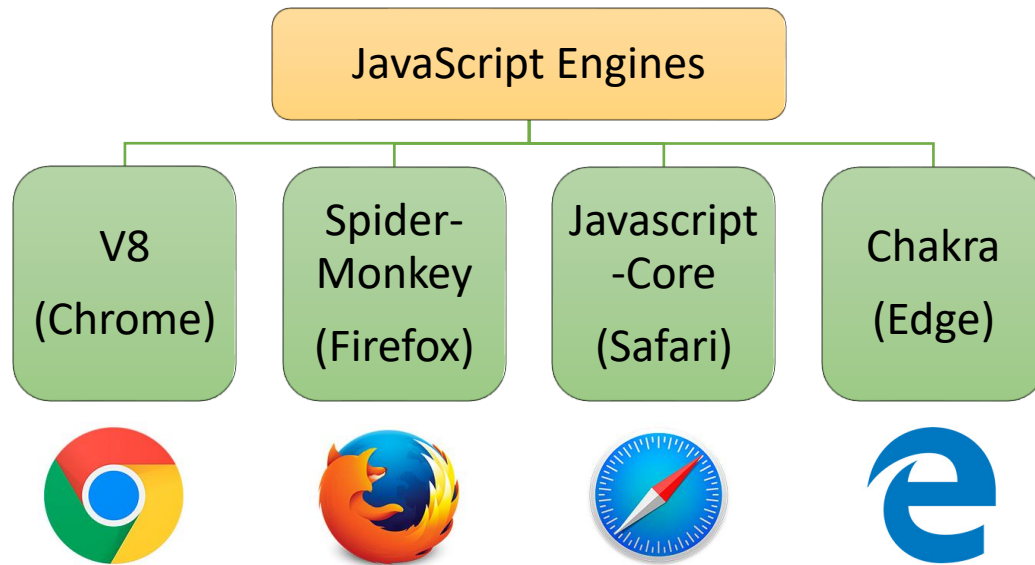

Q. What is **JavaScript**? What is the **role** of JavaScript engine? **V. IMP.**



<> index.html > ...

```
1  <!DOCTYPE html>
2  <html lang="en">
3    <head>
4      <title>Document</title>
5    </head>
6    <body>
7      <h1>Interview Happy</h1>
8      <button id="myButton">Click</button>
9
10     <script src="index.js"></script>
11   </body>
12 </html>
```

JS index.js > ...


```
1  // Get a reference to the button element
2  var button = document.getElementById("myButton");
3
4  // Add a click event listener to the button
5  button.addEventListener("click", function () {
6    alert("Button was clicked!");
7  });
```

Q. What are **Client side** and **Server side**? v.IMP.



❖ A client is a device, application, or software component that **requests** and consumes services or resources from a server.

❖ A server is a device, computer, or software application that **provides** services, resources, or functions to clients.

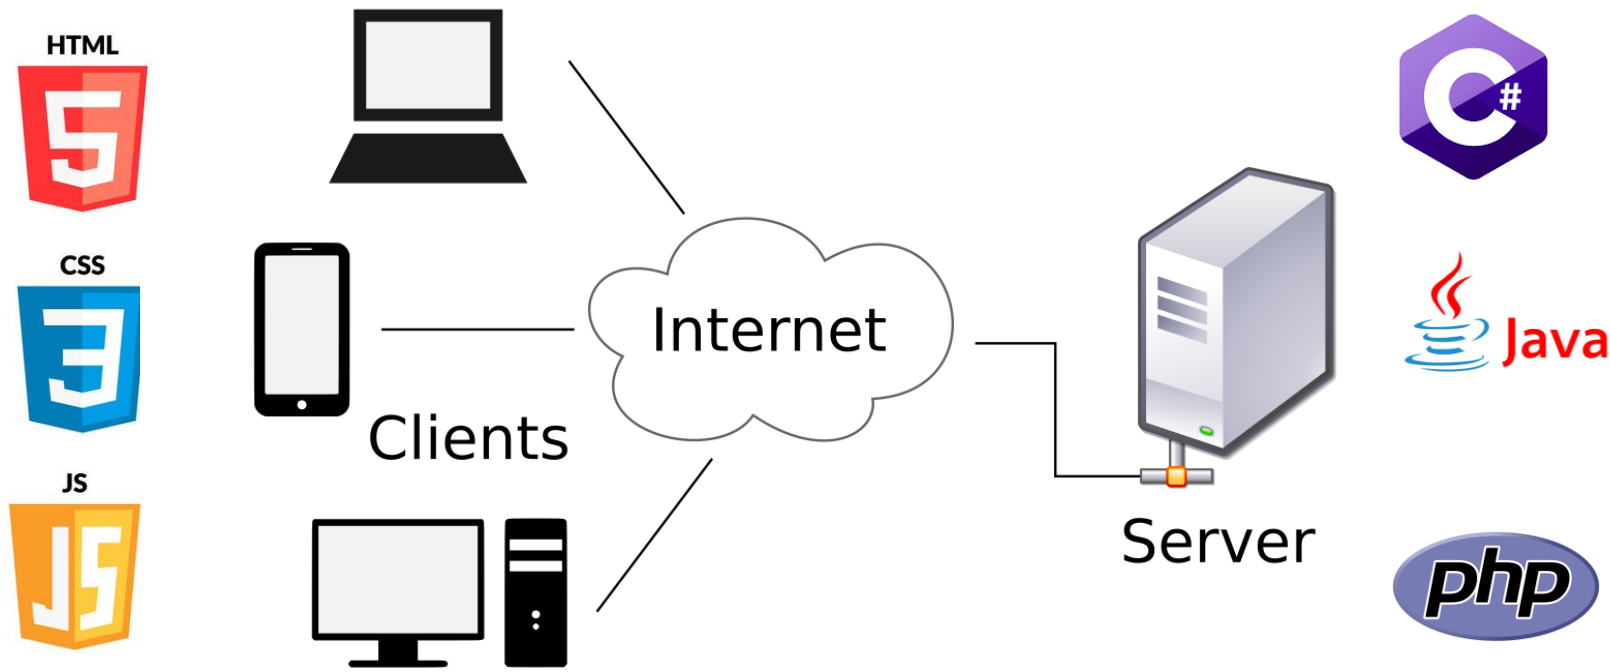


Q. What are **variables**? What is the difference between **var**, **let**, and **const**? **V. IMP.**



❖ Variables are used to **store** data.

```
var count = 10;
```

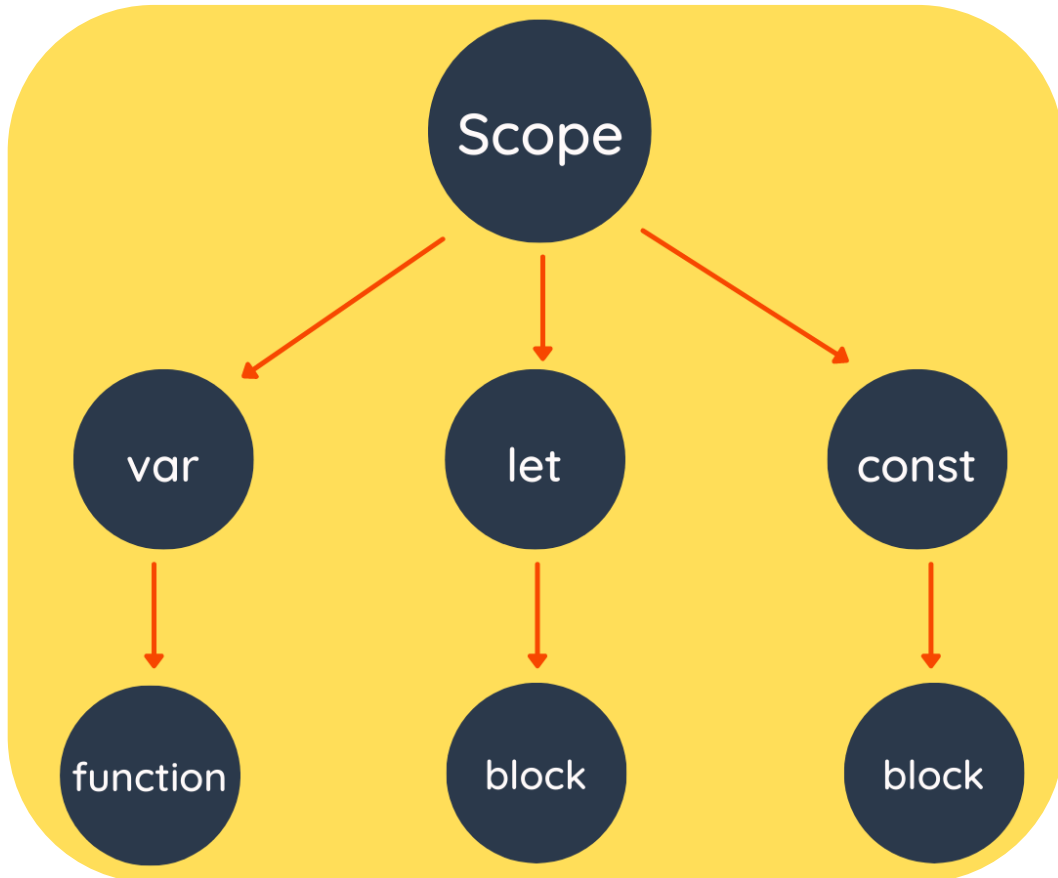

Q. What are **variables**? What is the difference between **var**, **let**, and **const**? **V. IMP.**



- ❖ **var** creates a **function-scoped** variable.

```
//using var
function example() {

  if (true) {

    var count = 10;
    console.log(count);
    //output: 10
  }

  console.log(count);
  //Output: 10
}
```

- ❖ **let** creates a **block-scoped** variable

```
//using let
function example() {

  if (true) {

    let count = 10;
    console.log(count);
    //Output: 10
  }

  console.log(count);
  //Output: Uncaught
  //Reference Error:
  //count is not defined
}
```

- ❖ **const** can be assigned only once, and its value **cannot be changed** afterwards.

```
// Using constant
const z = 10;
z = 20;

// This will result
//in an error
console.log(z);
```

Q. What are some important **string operations** in JS?



JavaScript String Methods

JS

substr()	indexOf()	trim()
substring()	includes()	charAt()
replace()	slice()	valueOf()
search()	concat()	split()
toLocaleLowerCase()	lastIndexOf()	toString()
toLocaleUpperCase()	charCodeAt()	match()

Q. What are some important **string operations** in JS?



```
//Add multiple string
let str1 = "Hello";
let str2 = "World";
let result = str1 + " " + str2;
console.log(result);
// Output: Hello World
```

```
// Using concat() method
let result2 = str1.concat(" ", str2);
console.log(result2);
// Output: Hello World
```

```
//Extract a portion of a string
let subString = result.substring(6, 11);
console.log(subString);
// Output: World
```

```
//Retrieve the length of a string
console.log(result.length);
// Output: 11
```

```
//Convert a string to uppercase or lowercase
console.log(result.toUpperCase());
// Output: HELLO WORLD
console.log(result.toLowerCase());
// Output: hello world
```

```
//Split a string into an array of substrings
//based on a delimiter
let arr = result.split(" ");
console.log(arr);
// Output: ["Hello", "World"]
```


```
//Replace occurrences of a substring within a string
console.log(result.replace("World", "JavaScript"));
// Output: Hello JavaScript
```

```
//Remove leading and trailing whitespace
let str = "  Hello World  ";
let trimmedStr = str.trim();
console.log(trimmedStr);
// Output: Hello World
```

Q. What are **selectors** in JS? **V. IMP.**



- ❖ Selectors in JS help to **get specific elements from DOM** based on IDs, class names, tag names.

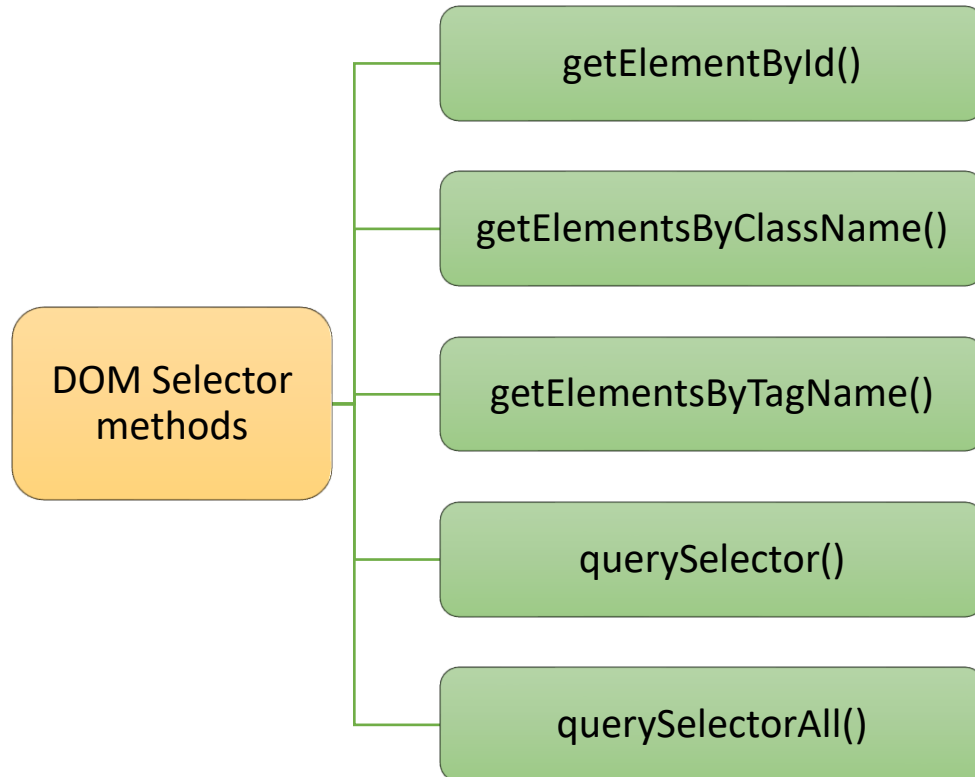

```
<div id="myDiv">Test</div>
```

```
//getElementById - select a single element  
const elementById = document.getElementById("myDiv");  
console.log(elementById.innerHTML);
```



Q. What is the difference between `getElementById`, `getElementsByClassName` and `getElementsByTagName`? **V. IMP.**

```
<!DOCTYPE html>
<html>
  <head>
    <title>DOM Methods</title>
  </head>
  <body>
    <div id="myDiv" class="myClass">1</div>
    <div class="myClass">2</div>
    <p class="myClass">3</p>

    <script src="index.js"></script>
  </body>
</html>
```

```
//getElementById - select a single element
const elementById = document.getElementById("myDiv");
console.log(elementById.innerHTML);
// Output: 1
```

```
//getElementsByClassName - select multiple elements that
//share the same class name
const elements = document.getElementsByClassName("myClass");

for (let i = 0; i < elements.length; i++) {
  console.log(elements[i].textContent);
}
// Output: 1 2 3
```

```
//getElementsByTagName - select multiple elements based
//on their tag name
const elementsTag = document.getElementsByTagName("div");

for (let i = 0; i < elementsTag.length; i++) {
  console.log(elementsTag[i].textContent);
}
// Output: 1 2
```

Q. What is the difference between `querySelector()` and `querySelectorAll()`?



```
<html>
  <head>
    <title></title>
  </head>
  <body>
    <div class="myClass">Element 1</div>
    <div class="myClass">Element 2</div>
    <div class="myClass">Element 3</div>
    <script src="index.js"></script>
  </body>
</html>
```

```
// Using querySelector() - returns the first element
var element = document.querySelector('.myClass');
console.log(element.textContent);
// Output: Element 1
```

```
// Using querySelectorAll() - returns all the elements
var elements = document.querySelectorAll('.myClass');
elements.forEach(function(element) {
  console.log(element.textContent);
});
// Output: Element 1, Element 2, Element 3
```




Q. What are **data types** in JS?


❖ A data type determines the **type of variable**.

```
//Number  
let age = 25;
```

```
//String  
let message = 'Hello!';  
  
//Boolean  
let isTrue = true;  
  
//Undefined  
let x;  
console.log(x);  
// Output: undefined  
  
//Null  
let y = null;  
console.log(y);  
// Output: null
```

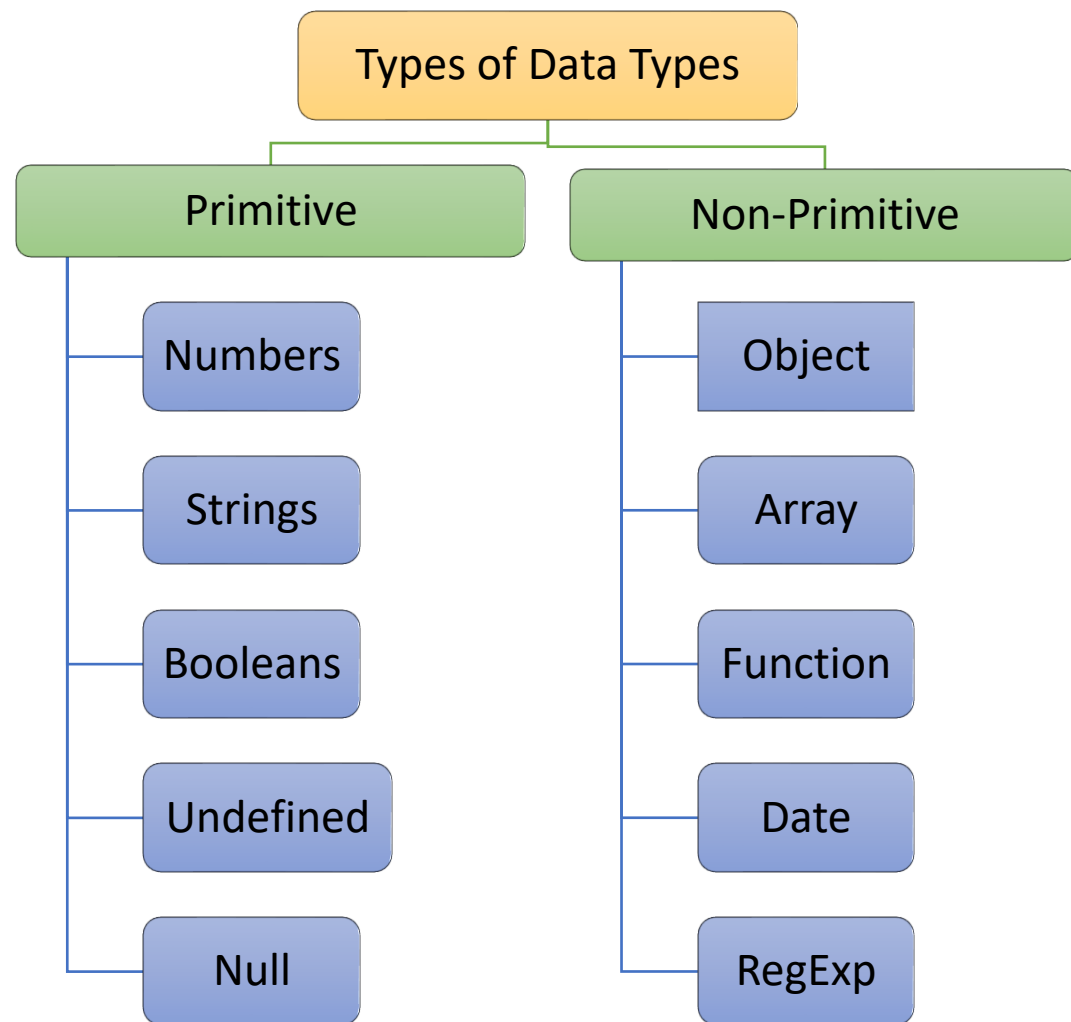

Q. What are the types of **conditions statements** in JS? **V. IMP.**

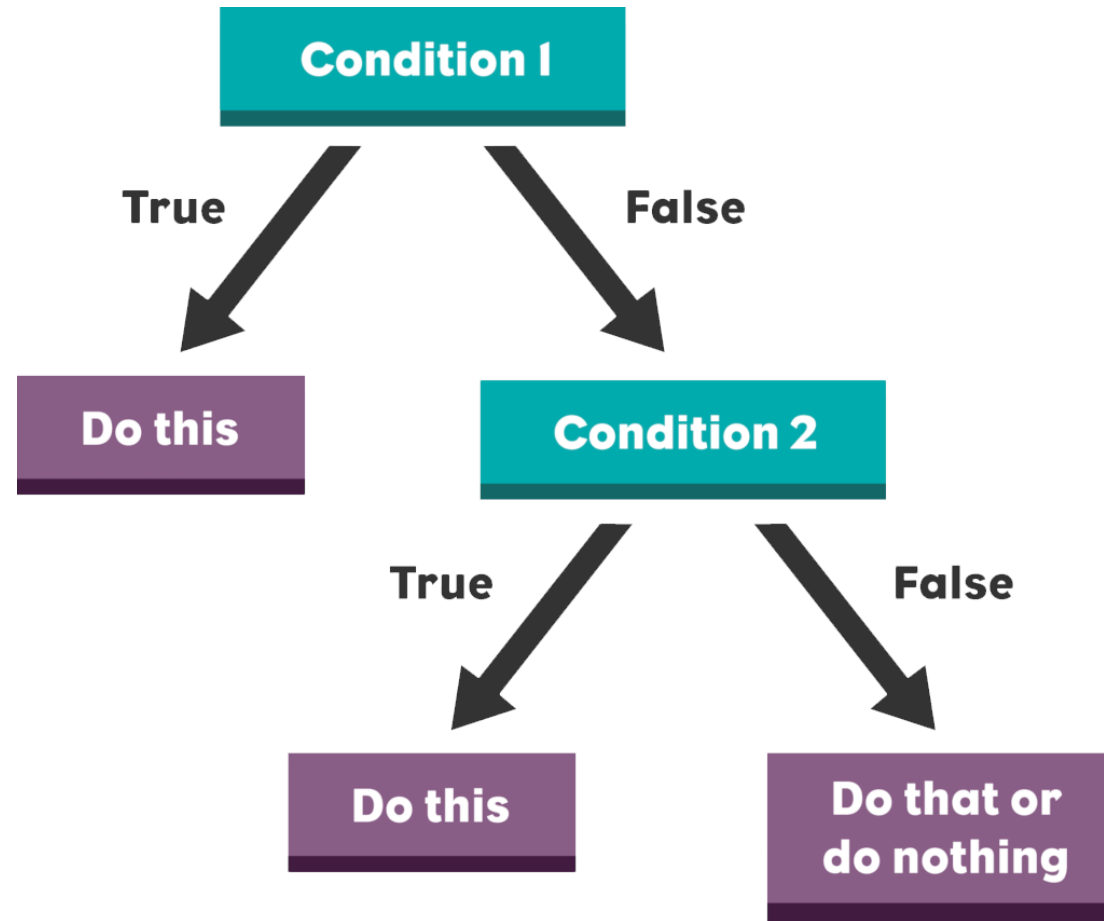

Q. What are the types of **conditions statements** in JS? **V. IMP.**



Types of condition statements

1. If/ else statements

```
let x = 5;  
if (x > 10) {  
  console.log("1");  
} else if (x < 5) {  
  console.log("2");  
} else {  
  console.log("3");  
}  
// Output: '3'
```

2. Ternary operator

```
let y = 20;  
let z = y > 10 ? "1" : "0"  
console.log(z);  
// Output: '1'
```



3. Switch statement

```
let a = 5;  
switch (a) {  
  case 1:  
    console.log("1");  
    break;  
  case 5:  
    console.log("2");  
    break;  
  default:  
    console.log("3");  
}  
// Output: '2'
```



Q. What is a **loop**? What are the **types** of loops in JS? **V. IMP.**

- ❖ A loop is a programming way to run a piece of **code repeatedly** until a certain condition is met.

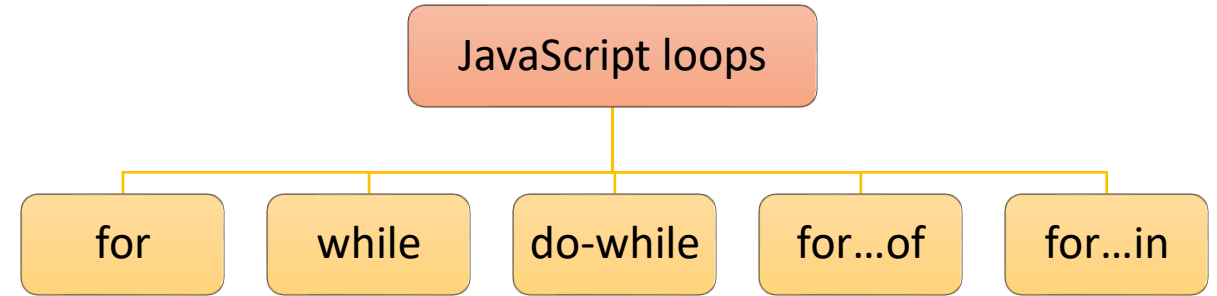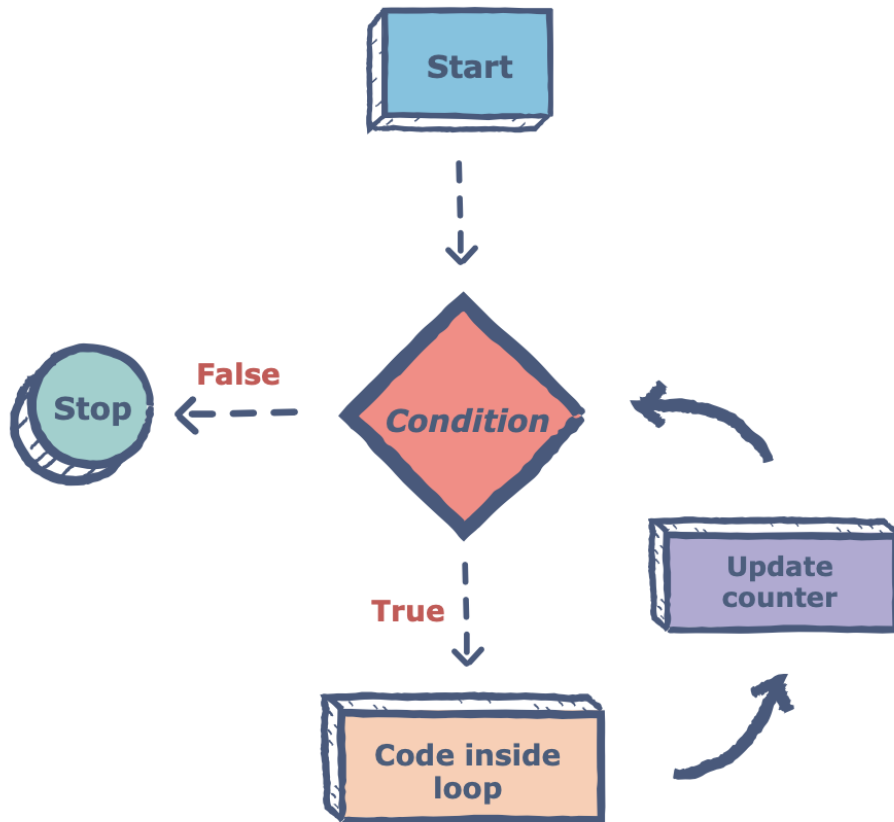

1. Initialization

2. Condition

3. Increment

```
//for-loop
for (let i = 0; i < 5; i++) {
    console.log(i);
}
//Output: 0 1 2 3 4
```

Red arrows point from the labels '1. Initialization', '2. Condition', and '3. Increment' to the corresponding parts of the for-loop code: 'let i = 0', 'i < 5', and 'i++' respectively.

Q. What is **Scope** in JavaScript? **V. IMP.**



- ❖ Scope determines where variables are **defined** and where they can be **accessed**.

Global

Function

Block

```
//Global - accessible anywhere
let globalVariable = "global";


greet();

function greet() {
  //Function - accessible inside function only
  let functionVariable = "function";
  if (true) {
    //Block - accessible inside block only
    let blockVariables = "block";
    console.log(blockVariables); //Output: block
    console.log(functionVariable); //Output: function
    console.log(globalVariable); //Output: global
  }
  console.log(functionVariable); //Output: function
  console.log(globalVariable); //Output: global
}
console.log(globalVariable); //Output: global
```

Q. What is **Hoisting** in JavaScript? **V. IMP.**



- ❖ Hoisting is a JavaScript behavior where functions and variable **declarations are moved to the top** of their respective scopes during the compilation phase.

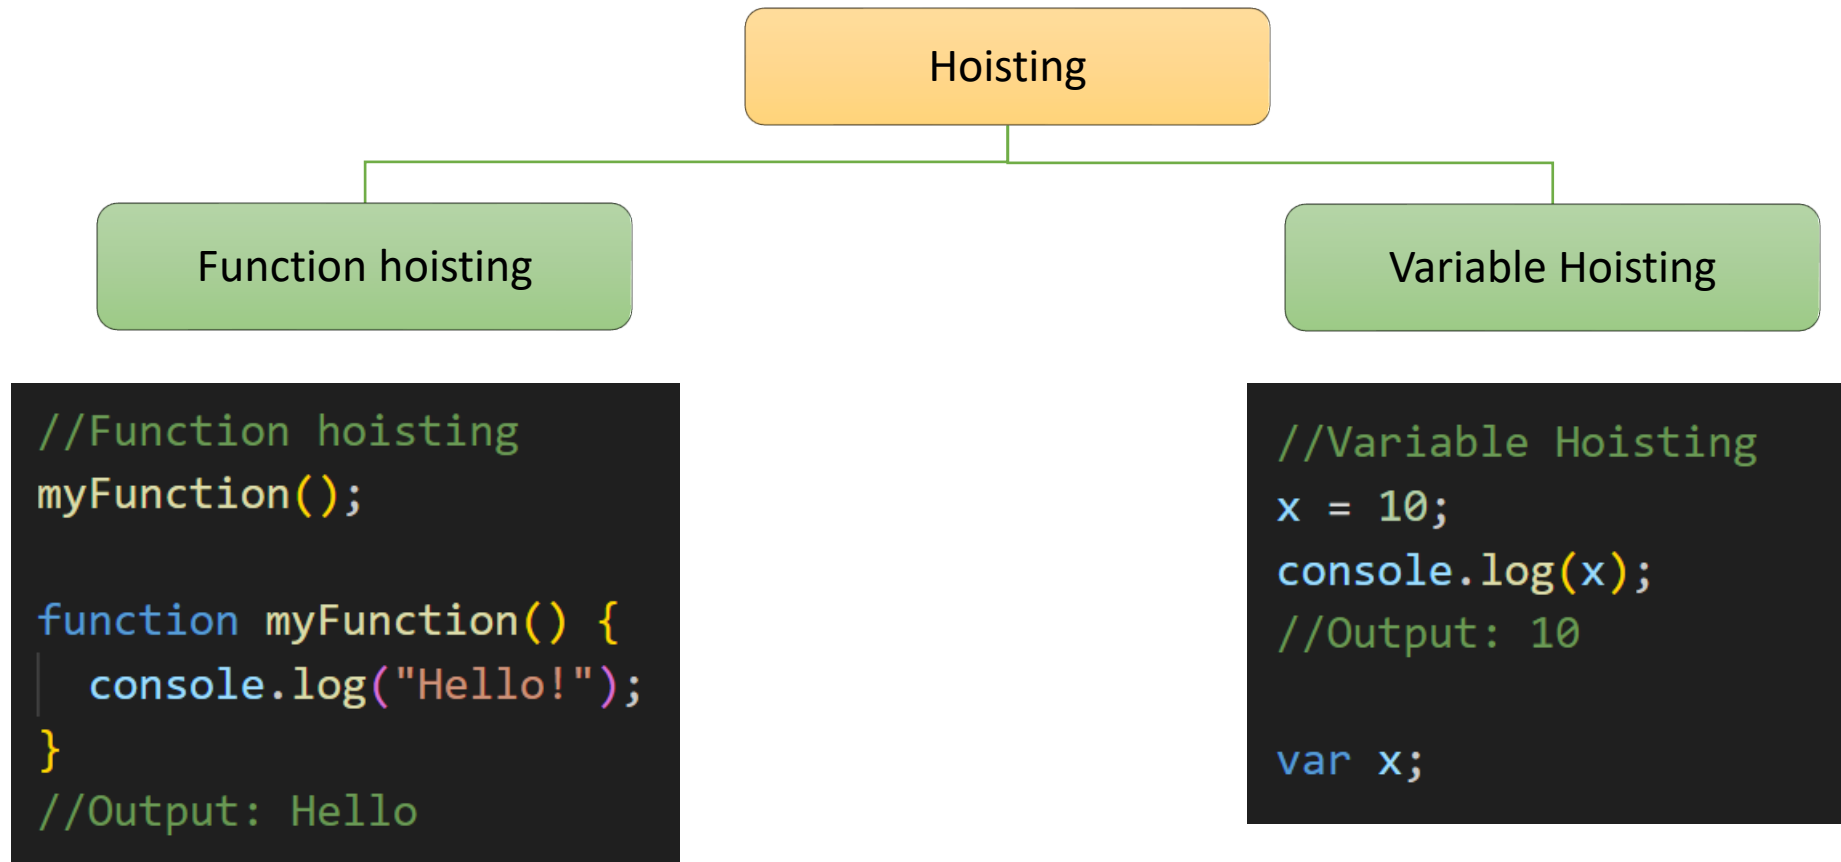

20: JS for React - Arrays & Functions



Q. What are **Arrays** in JS? How to get, add & remove elements from arrays?

Q. What is the **indexOf()** method of an Array?

Q. What is the difference between **find()** and **filter()** methods of an Array?

Q. What is the **slice()** method of an Array?

Q. What is the difference between **push()** and **concat()** methods of an Array?

Q. What is the difference between **pop()** and **shift()** methods of an Array?

Q. What is the difference **map()** and **forEach()** array methods of an Array?

Q. What is **Array Destructuring** in JS?

Q. What are **Functions** in JS? What are the types of function?

Q. What is the difference between **named & anonymous functions**?

Q. What is **function expression** in JS?

Q. What are **Arrow Functions** in JS? What is it use?

Q. What are **Callback Functions**? What is it use?

Q. What is **Higher-order function** In JS?


Q. What are **Pure and Impure functions** in JS?

Q. What are **Arrays** in JS? How to **get**, **add** & **remove** elements from arrays? **V. IMP.**




- ❖ An array is a data type that allows you to **store multiple values** in a single variable.


```
//Array  
let fruits = ["apple", "banana", "orange"];
```

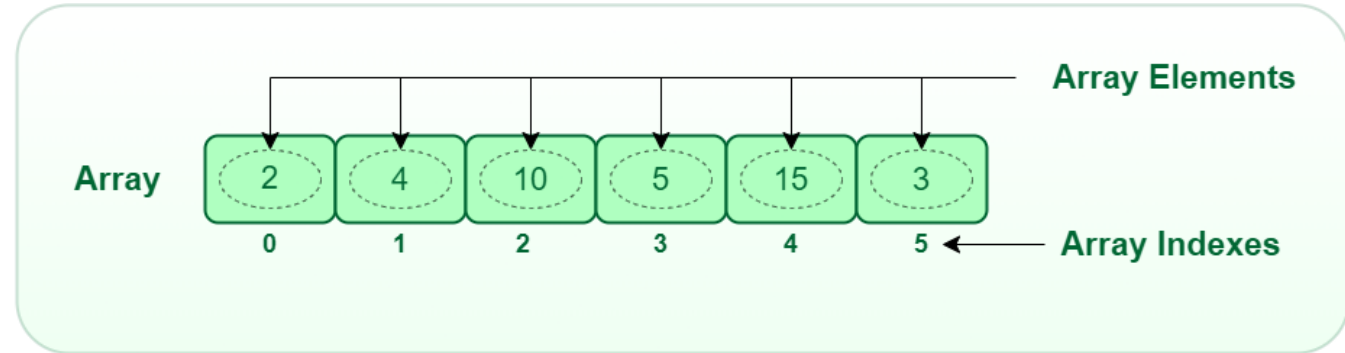


UNSTRUCTURED DATA

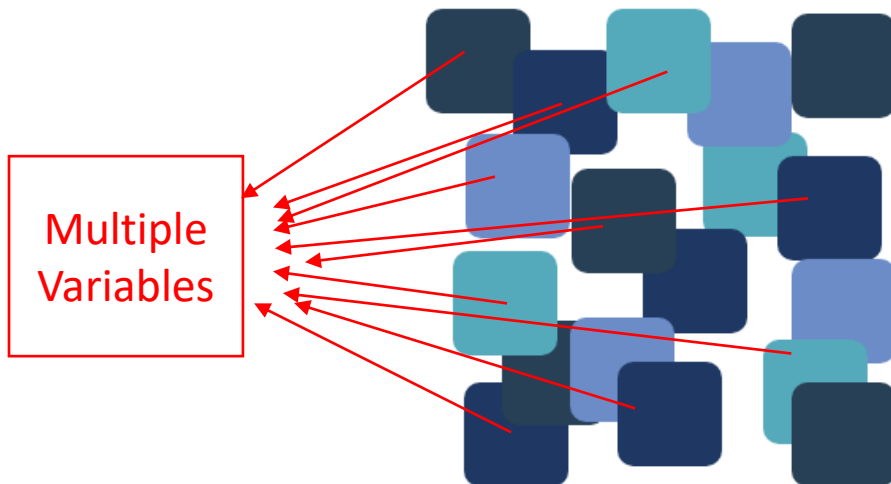

STRUCTURED DATA

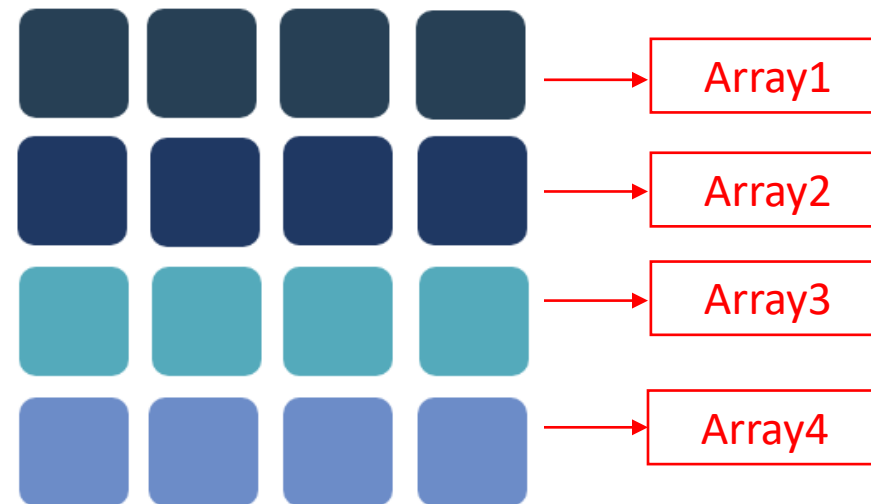


Q. What are **Arrays** in JS? How to **get**, **add** & **remove** elements from arrays? **V. IMP.**

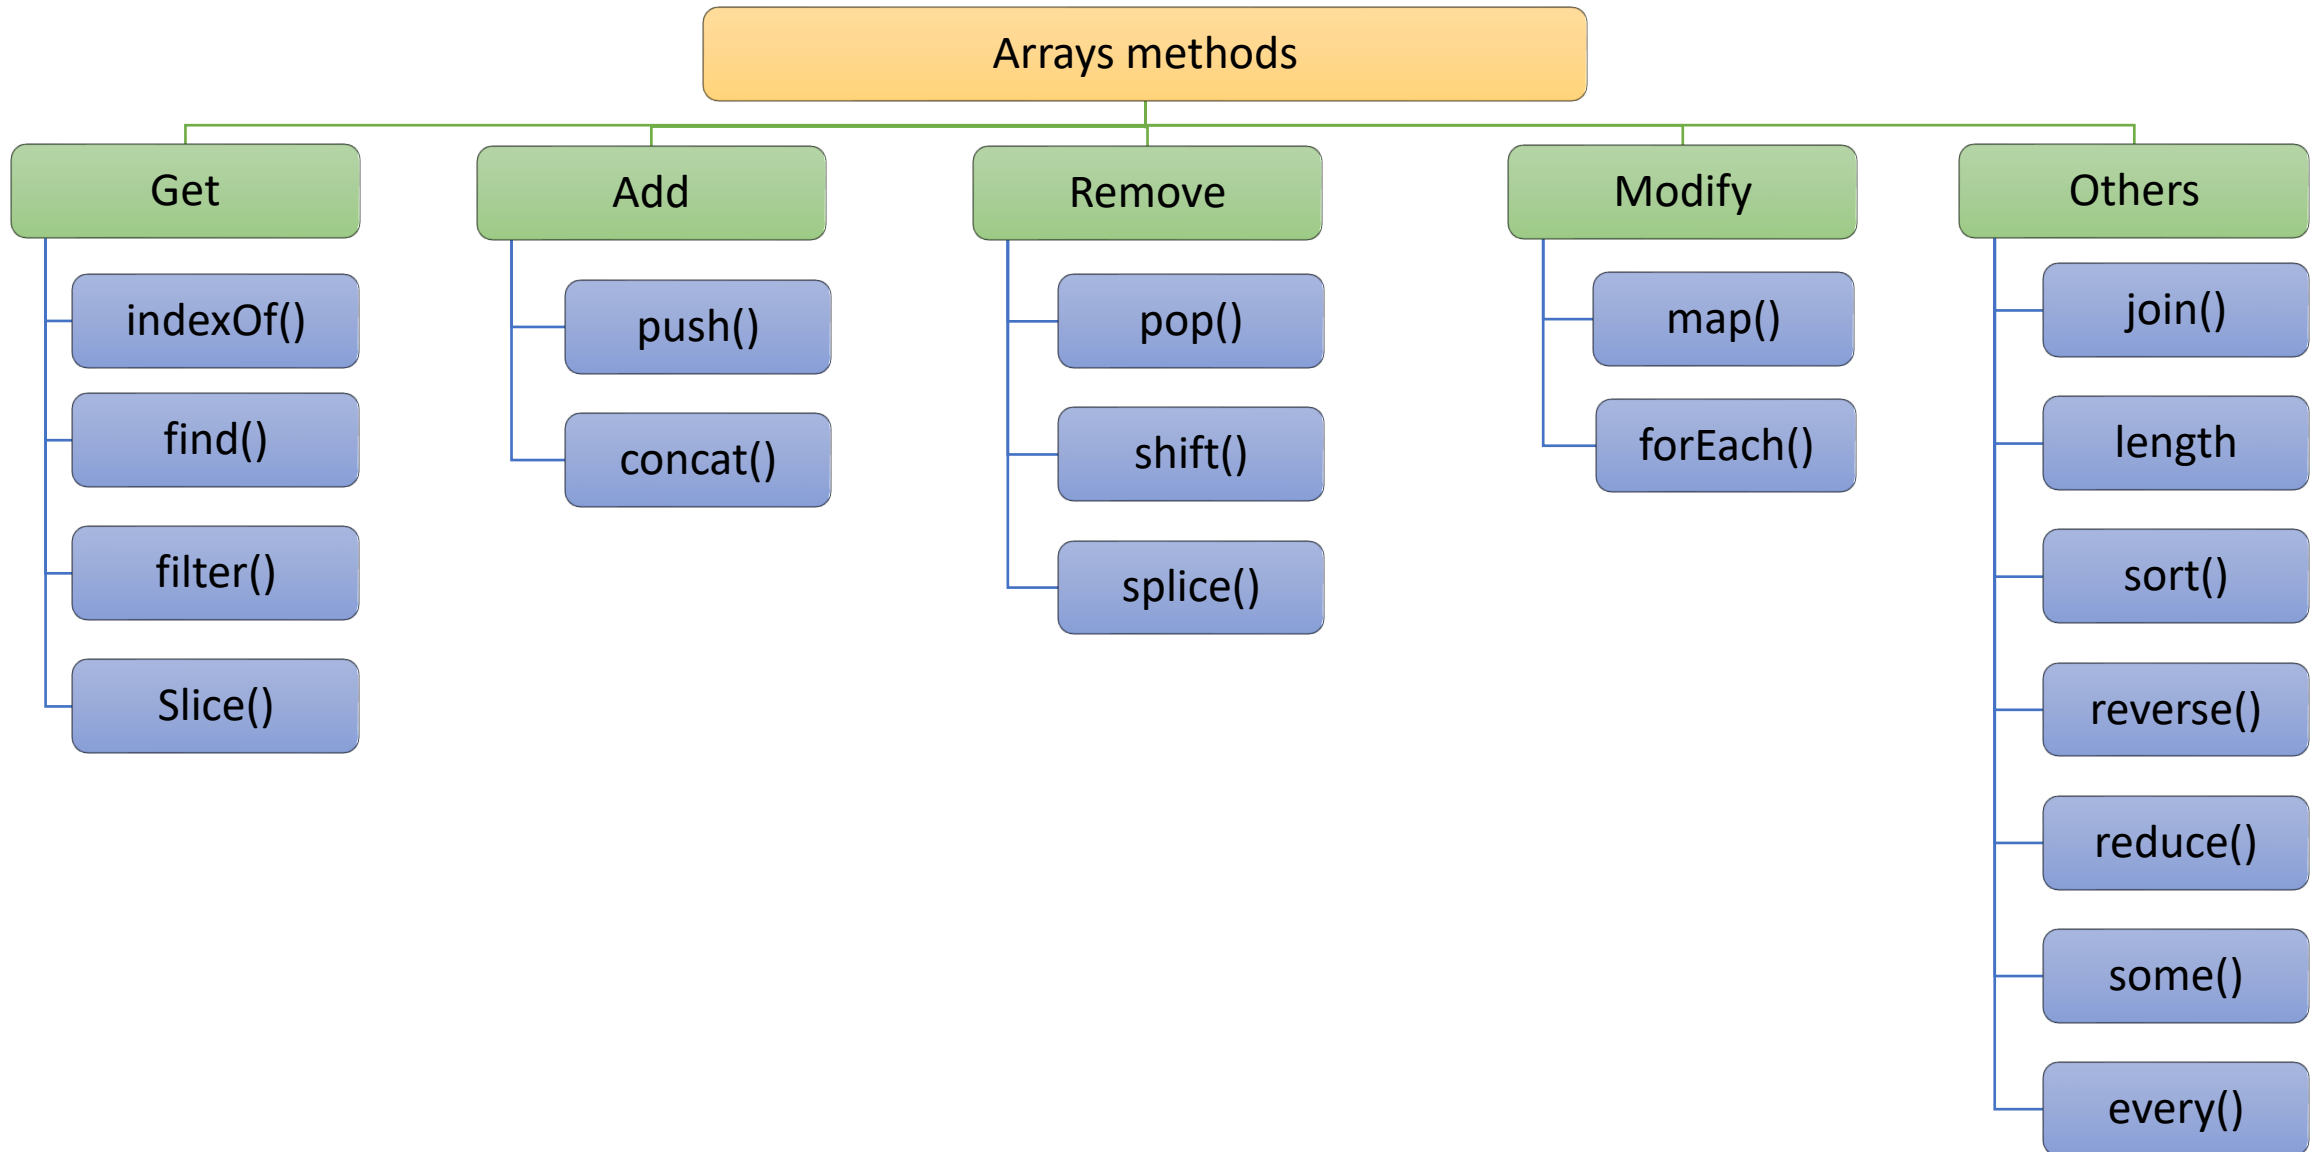

Q. What are **Arrays** in JS? How to **get**, **add** & **remove** elements from arrays? **V. IMP.**



❖ Pictorial representation of important method of arrays

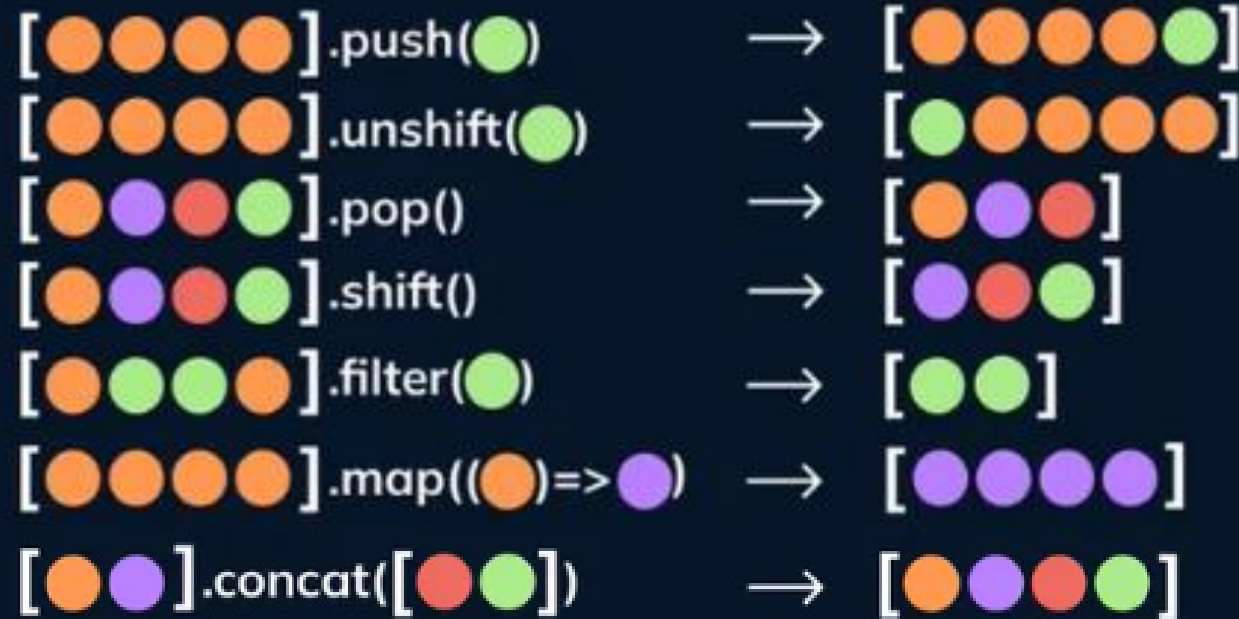



Q. What is the `indexOf()` method of an Array?

- ❖ `indexOf()` method **gets the index** of a specified element in the array.

```
// Example array
const array = [1, 2, 3, 4, 5];

let a = array.indexOf(3);
console.log(a);
// Output: 2
```



Q. What is the difference between **find()** and **filter()** methods of an Array? **V. IMP.**

Array methods for **getting** elements

find()

filter()

slice()

```
// Example array
const array = [1, 2, 3, 4, 5];
let c = array.find((num) =>
  num % 2 === 0);
console.log(c);
// Output: 2
```


```
// Example array
const array = [1, 2, 3, 4, 5];
let d = array.filter((num) =>
  num % 2 === 0);
console.log(d);
// Output: [2, 4]
```

❖ find() method get the **first element** that satisfies a condition.

❖ filter() method **get an array of elements** that satisfies a condition.



Q. What is the **slice()** method of an Array? **V. IMP.**

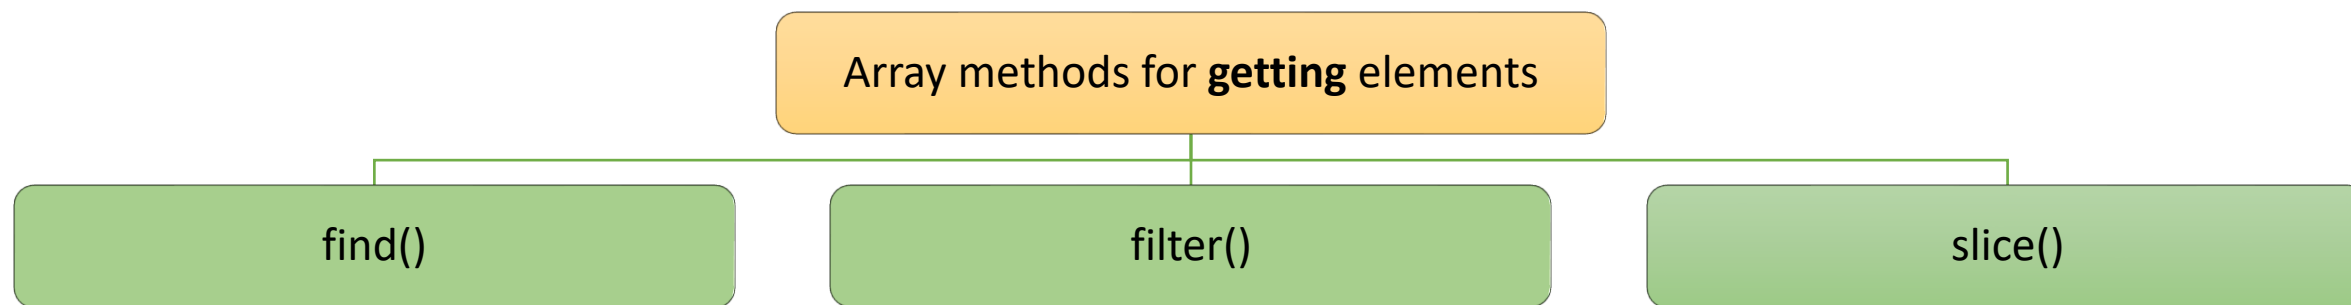


```
const array = ["a", "b", "c", "d", "e"];

let e = array.slice(1, 4);
console.log(e);

// Output: ['b', 'c', 'd']
```

- ❖ Slice() method get a **subset of the array** from start index to end index(end not included).

Q. What is the difference between `push()` and `concat()` methods of an Array?

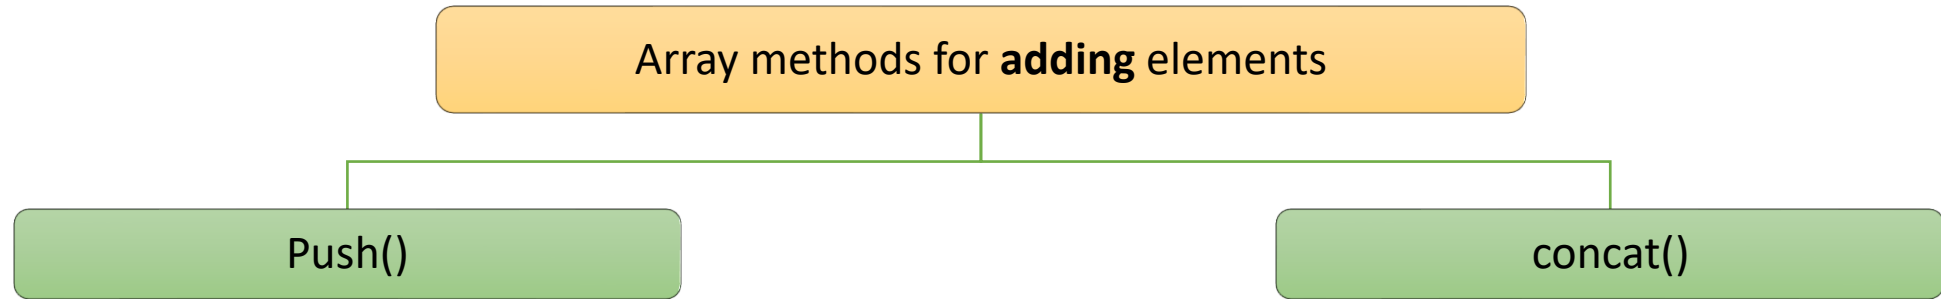

```
let array1 = [1, 2];  
// Using push()  
array1.push(3, 4);  
console.log(array1);  
// Output: [1, 2, 3, 4]
```

- ❖ `Push()` will **modify the original array** itself.

```
let array2 = [5, 6];  
// Using concat()  
let array3 = array2.concat(7, 8);  
console.log(array3);  
// Output: [5, 6, 7, 8]  
  
console.log(array2);  
//original array is not modified  
// Output: [5, 6]
```

- ❖ `Concat()` method will **create the new array** and not modify the original array.

Q. What is the difference between **pop()** and **shift()** methods of an Array?



Array methods for **removing** elements

pop()

```
// Using pop()
let arr1 = [1, 2, 3, 4];
let popped = arr1.pop();
console.log(popped);
// Output: 4
console.log(arr1);
// Output: [1, 2, 3]
```

- ❖ pop() will remove the **last element** of the array

shift()

```
// Using shift()
let arr2 = [1, 2, 3, 4];
let shifted = arr2.shift();
console.log(shifted);
// Output: 1
console.log(arr2);
// Output: [2, 3, 4]
```

- ❖ Shift() will remove the **first element** of the array

Q. What is the difference `map()` and `forEach()` array methods of an Array?



Array methods for modification and iteration

`map()`

```
// Using map()
let arr1 = [1, 2, 3];
let mapArray = arr1.map((e) => e * 2);
console.log(mapArray);
//map return a new array
// Output: [2, 4, 6]
```

`forEach()`

```
// Using forEach()
let arr2 = [1, 2, 3];
arr2.forEach((e) => {
  console.log(e * 2);
});
//Does not return anything
// Output: 2 4 6

console.log(arr2);
// Output: [1, 2, 3]
```


- ❖ The `map()` method is used when you want to modify each element of an array and create a **new array** with the modified values.

- ❖ The `forEach()` method is used when you want to perform some operation on each element of an array **without creating a new array**.

Q. What is **Array Destructuring** in JS? **V. IMP.**



- ❖ Array destructuring allows you to extract elements from an array and assign them to **individual variables** in a single statement.
- ❖ Array destructuring is introduced in **ECMAScript 6 (ES6)**.

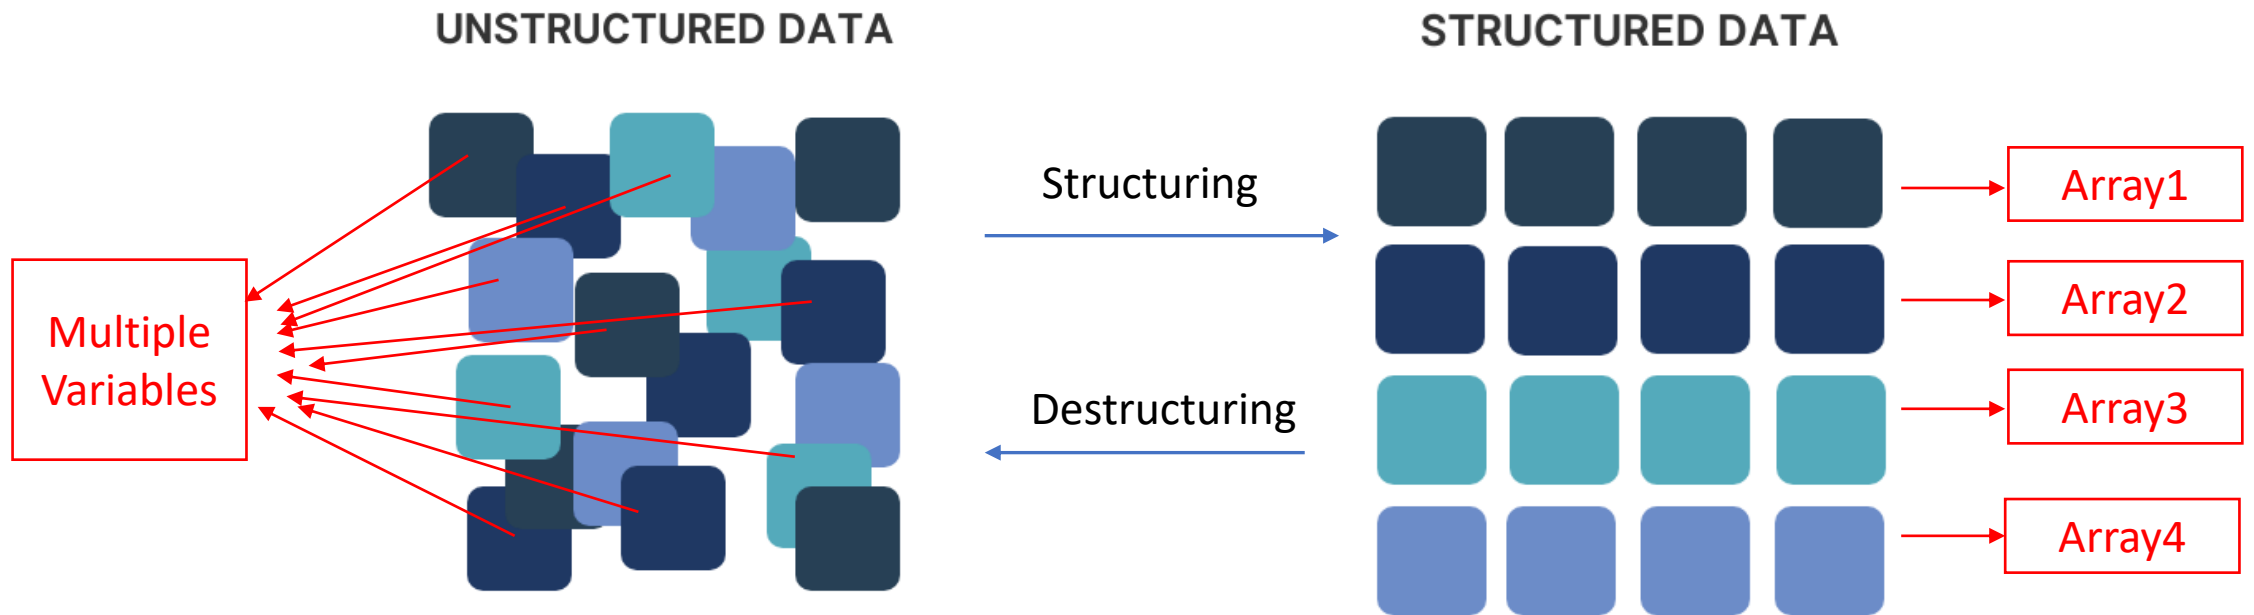

Q. What is **Array Destructuring** in JS? **V. IMP.**



```
// Example array  
const fruits = ['apple', 'banana', 'orange'];
```


```
// Array destructuring  
const [firstFruit, secondFruit, thirdFruit] = fruits;
```

```
// Output  
console.log(firstFruit); // Output: "apple"  
console.log(secondFruit); // Output: "banana"  
console.log(thirdFruit); // Output: "orange"
```




Q. What are **Functions** in JS? What are the **types** of function? **V. IMP.**

- ❖ A function is a **reusable block of code** that performs a specific task.

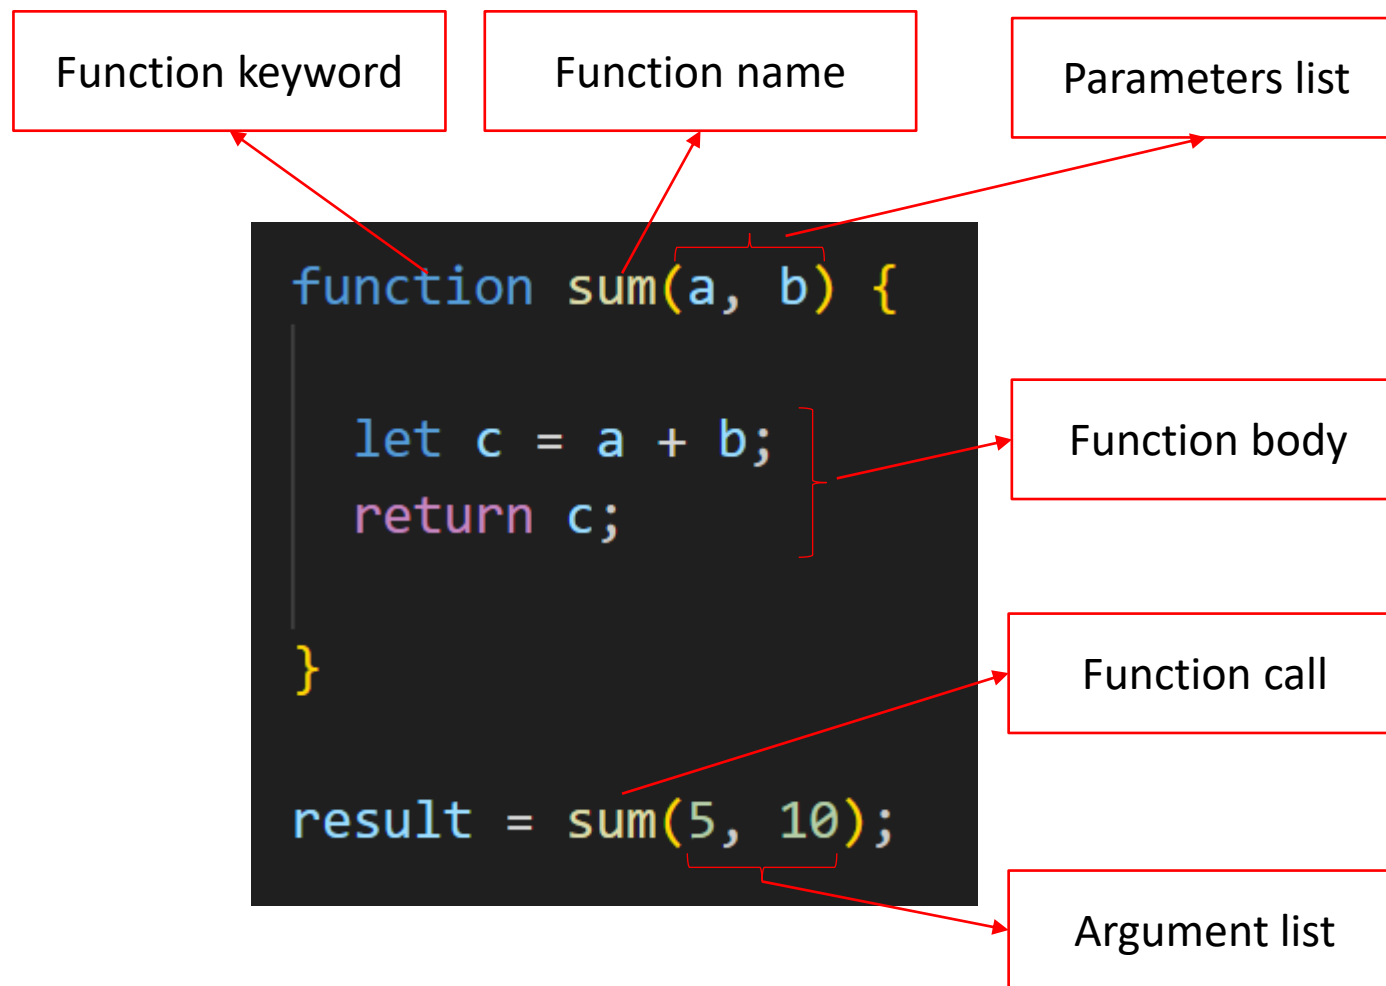

Q. What are **Functions** in JS? What are the **types** of function? **V. IMP.**

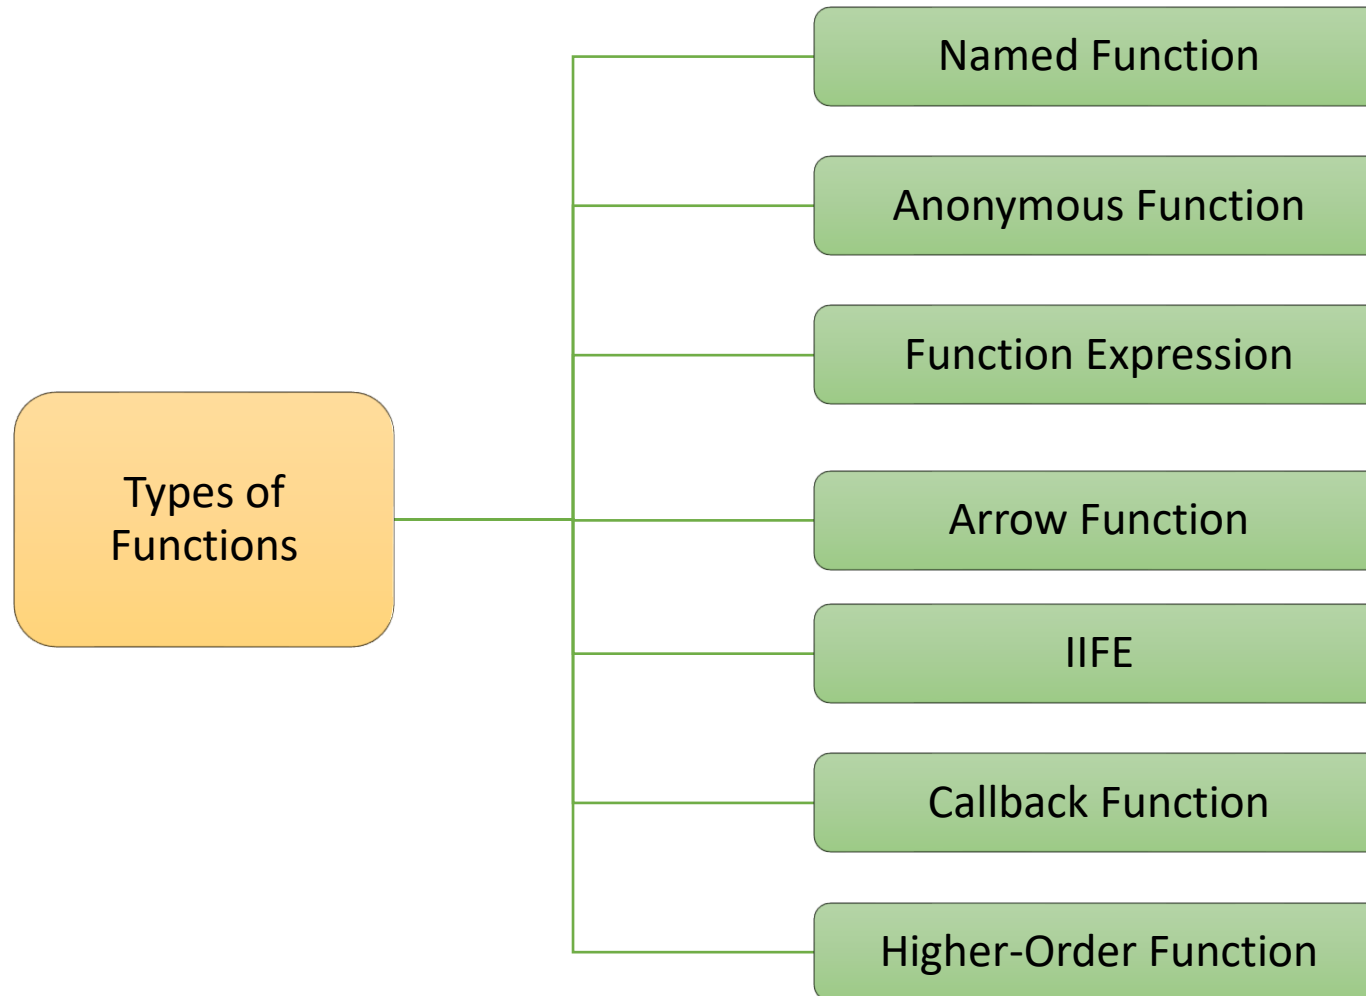

Q. What is the difference between **named** and **anonymous** functions? When to **use** what in applications?



- ❖ Named functions have a **name identifier**

```
//Named Function
//Function Declaration

function sum(a, b) {
  return a + b;
};

console.log(sum(5, 3));
//Output: 8
```

- ❖ Use named functions for **big and complex** logics.
- ❖ Use when you want to **reuse** one function at multiple places.

- ❖ Anonymous functions **do not have a name identifier** and cannot be referenced directly by name.

```
// Anonymous function

console.log(function(a, b) {
  return a * b;
}(4, 5));

// Output: 20
```

- ❖ Use anonymous functions for **small logics**.
- ❖ Use when want to use a function in a **single place**.



Q. What is **function expression** in JS?

- ❖ A function expression is a way to define a function by **assigning it to a variable**.

```
//Anonymous Function Expression
```

```
const add = function(a, b) {  
  | return a + b;  
};
```

```
console.log(add(5, 3));  
//Output: 8
```

```
//Named Function Expression
```


```
const add = function sum(a, b) {  
  | return a + b;  
};
```

```
console.log(add(5, 3));  
//Output: 8
```



Q. What are **Arrow Functions** in JS? What is it use? **V. IMP.**

- ❖ Arrow functions, also known as fat arrow functions, is a **simpler and shorter** way for defining functions in JavaScript.

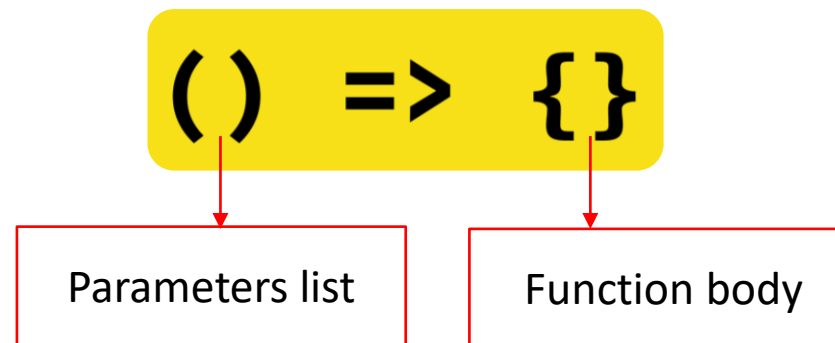

//Traditional approach

```
function add(x, y)
{
  return x + y;
}
```

```
console.log(add(5, 3));
//output : 8
```

//Arrow function

```
const add = (x, y) => x + y;

console.log(add(5, 3));
//output : 8
```

Q. What are **Callback Functions**? What is it use? **V.IMP.**



- ❖ A callback function is a function that is **passed as an argument** to another function.

```
function add(x, y) {  
  return x + y;  
}  
  
let a = 3, b = 5;  
let result = add(a, b)  
  
console.log(result);  
//Output: 8
```

Higher-order function

Callback function

```
function display(x, y, operation) {  
  var result = operation(x, y);  
  console.log(result);  
}  
  
display(10, 5, add);  
display(10, 5, multiply);  
display(10, 5, subtract);  
display(10, 5, divide);
```



Q. What is **Higher-order function** In JS?

- ❖ A Higher order function:
 1. Take one or more functions as **arguments**(callback function) OR
 2. **Return** a function as a result

```
//Take one or more functions
//as arguments
function hof(func) {
  func();
}

hof(sayHello);

function sayHello() {
  console.log("Hello!");
}

// Output: "Hello!"
```

Callback function

High-order function

```
//Return a function as a result
function createAdder(number) {
  return function (value) {
    return value + number;
  };
}

const addFive = createAdder(5);

console.log(addFive(2));

// Output: 7
```


Q. What are **Pure** and **Impure** functions in JS?



1. A pure function is a function that always produces the **same output for the same input**.
2. Pure functions cannot modify the **state**.
3. Pure functions cannot have **side effects**.

```
// Pure function
function add(a, b) {
  return a + b;
}

console.log(add(3, 5));
// Output: 8

console.log(add(3, 5));
// Same Output: 8
```

1. An impure function, can produce **different outputs for the same input**.
2. Impure functions can modify the state.
3. Impure functions can have side effects.

```
// Impure function
let total = 0;

function addToTotal(value) {
  total += value;
  return total;
}

console.log(addToTotal(5));
// Output: 5

console.log(addToTotal(5));
// Not same output: 10
```

20: JS for React - Objects & Events



Q. What are **Objects** in JS?

Q. What is the difference between an **array** and an **object**?

Q. How do you add or modify or delete properties of an object?

Q. What are **Events**? How are events triggered?

Q. What are the **types of events** in JS?


Q. What is **Event Object** in JS?

Q. What is **Event Delegation** in JS?

Q. What is **Event Bubbling** In JS?

Q. What is **Event Capturing** in JS?


Q. What are **Objects** in JS? **V. IMP.**

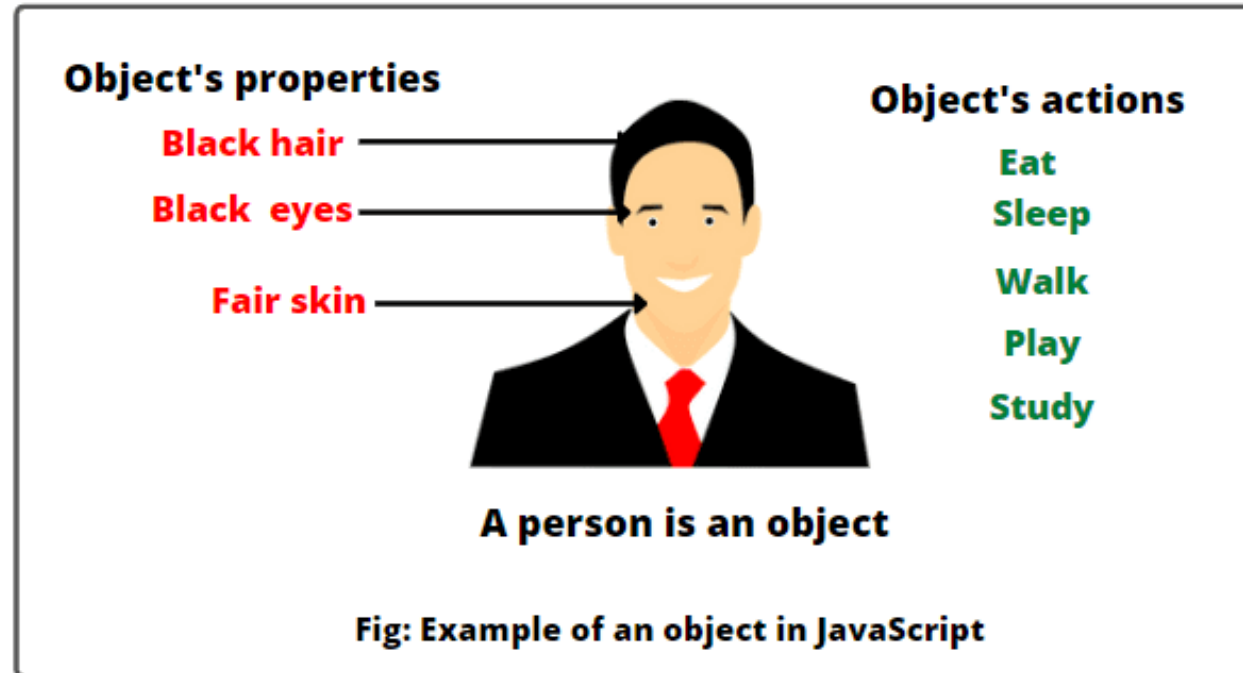

Q. What are **Objects** in JS? **V. IMP.**



- ❖ An object is a data type that allows you to store **key-value** pairs.

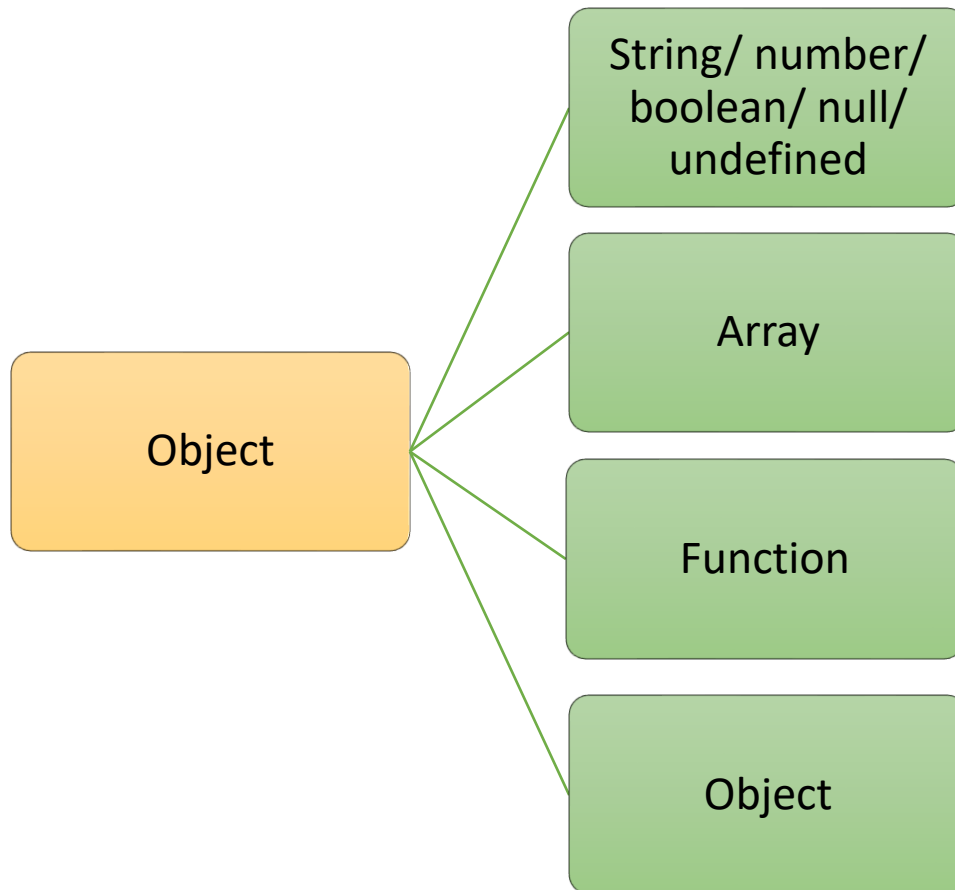

```
//Object Example
let person = {
  name: "Happy",
  hobbies: ["Teaching", "Football", "Coding"],
  greet: function () {
    console.log("Name: " + this.name);
  },
};

console.log(person.name);
// Output: "Happy"

console.log(person.hobbies[1]);
// Output: "Football"

person.greet();
// Output: "Name: Happy"
```



Q. What is the difference between an **array** and an **object**?

Arrays	Objects
1. Arrays are collection of values.	Objects are collections of key-value pairs.
2. Arrays are denoted by square brackets [].	Objects are denoted by curly braces {}.
3. Elements in array are ordered.	Properties in objects are unordered.

```
// Array  
var fruits = ["apple", "banana", "orange"];
```

```
// Object  
var person = {  
  name: "Amit",  
  age: 25,  
  city: "Delhi"  
};
```

Q. How do you **add** or **modify** or **delete** properties of an object?




```
//Blank object  
var person = {};
```

```
// Adding Properties  
person.name = "Happy";  
person.age = 35;  
person.country = "India"
```

```
// Modifying Properties  
person.age = 30;
```

```
// Deleting Properties  
delete person.age;
```

Q. What are **Events**? How are events **triggered**? **V. IMP.**

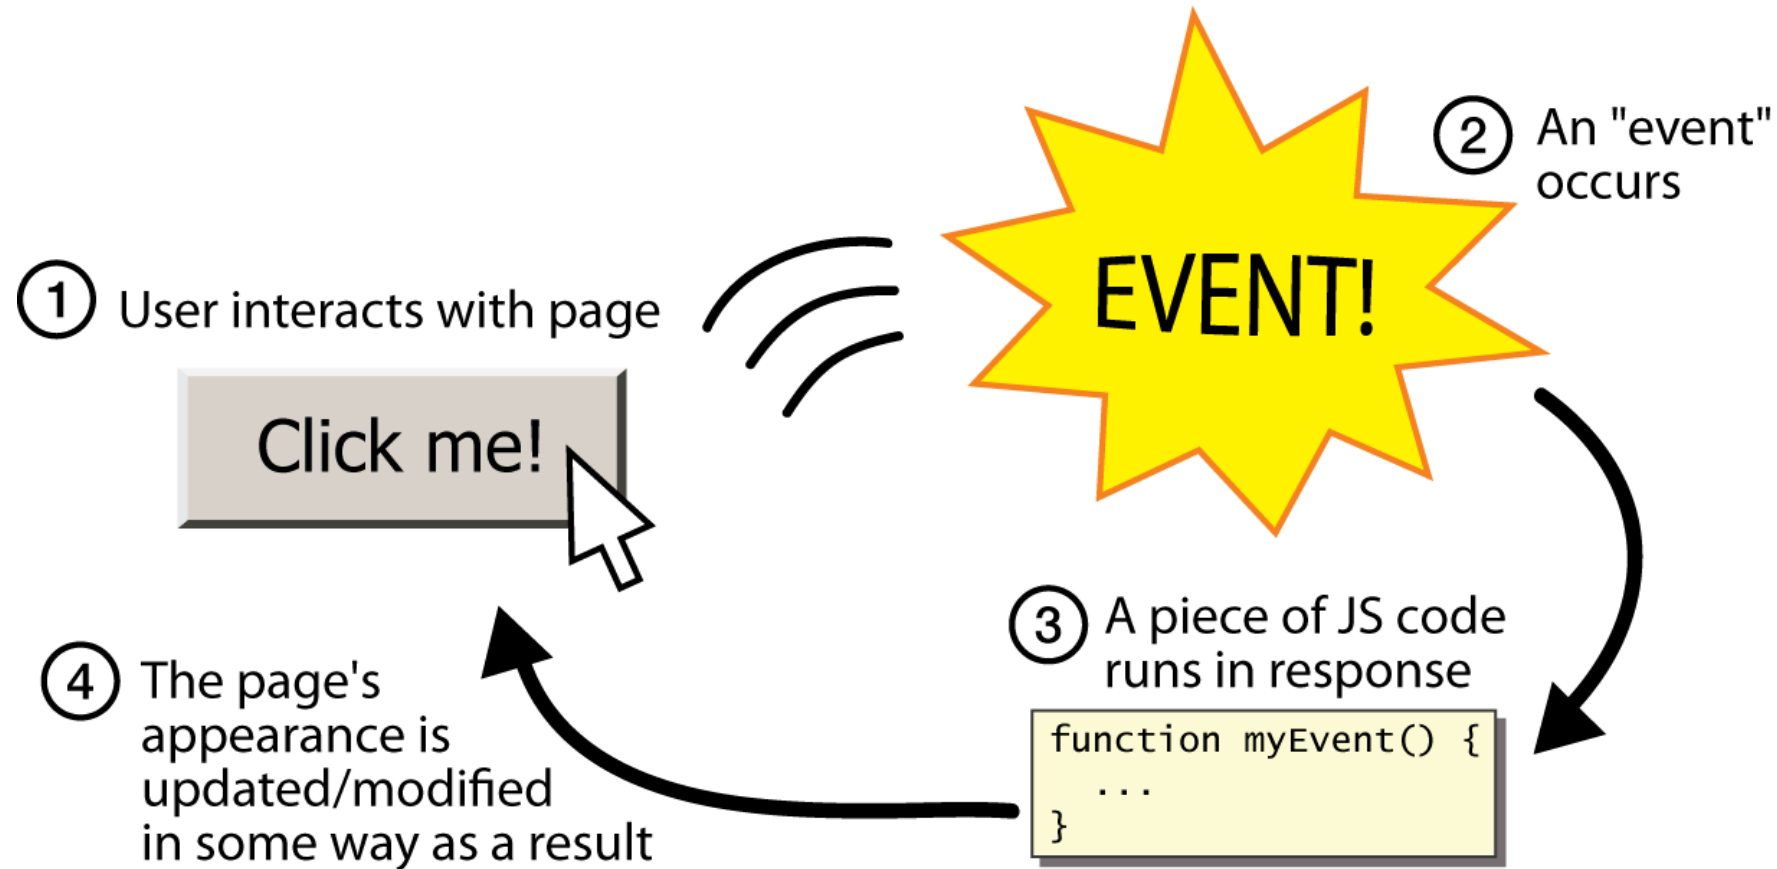

Q. What are **Events**? How are events **triggered**? **V. IMP.**



- ❖ Events are **actions** that happen in the browser, such as a button click, mouse movement, or keyboard input.

```
<button id="myButton">Click Me</button>
```

```
// Get the reference of button in a variable
var button = document.getElementById("myButton");

// Attach an event handler to the button
button.addEventListener("click", handleClick);

// Event handler function
function handleClick() {
    alert("button clicked");
}
```

Event

Event handler/
Callback function

Q. What are the types of **events** in JS? **V. IMP.**



```
<button id="myButton">Click Me</button>
```

```
// Get the reference of button in a variable
var button = document.getElementById("myButton");

// Attach an event handler to the button
button.addEventListener("click", handleClick);

// Event handler function
function handleClick() {
  alert("button clicked");
}
```

Event

Click Event: `addEventListener('click', handler)`

Mouseover Event: `addEventListener('mouseover', handler)`

Keydown Event: `addEventListener('keydown', handler)`

Keyup Event: `addEventListener('keyup', handler)`

Submit Event: `addEventListener('submit', handler)`

Focus Event: `addEventListener('focus', handler)`

Blur Event: `addEventListener('blur', handler)`

Change Event: `addEventListener('change', handler)`

Load Event: `addEventListener('load', handler)`

Resize Event: `addEventListener('resize', handler)`



Q. What is **Event Object** in JS?


- ❖ Whenever any event is triggered, the browser automatically creates an event object and **passes it as an argument** to the event handler function.
- ❖ The event object contains various properties and methods that provide **information about the event**, such as the type of event, the element that triggered the event etc.

```
<button id="myButton">Click Me</button>
```

```
// Get the button element
var button = document.getElementById("myButton");

// Attach event listener to the button element
button.addEventListener("click", handleClick);

// Event handler function
function handleClick(event) {
    // Accessing properties of the event object
    console.log("Event type:", event.type);
    console.log("Target element:", event.target);
}
```

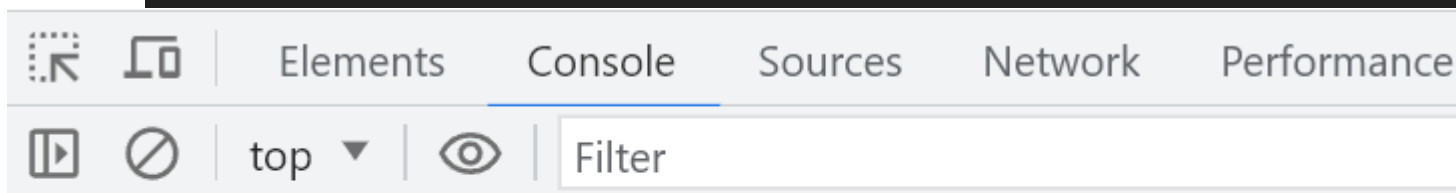


Event type: click


Target element: <button id="myButton">Click Me</button>

[back to chapter index](#)

Q. What is **Event Delegation** in JS? **V. IMP.**

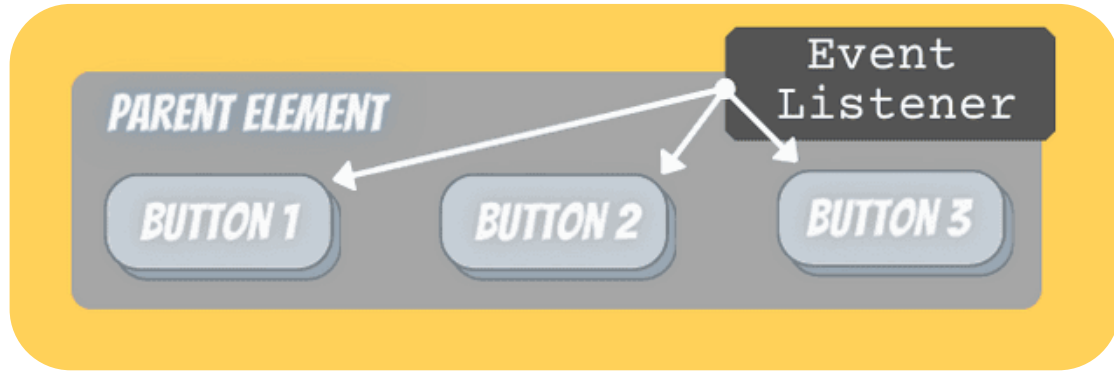

- Item 1
- Item 2
- Item 3

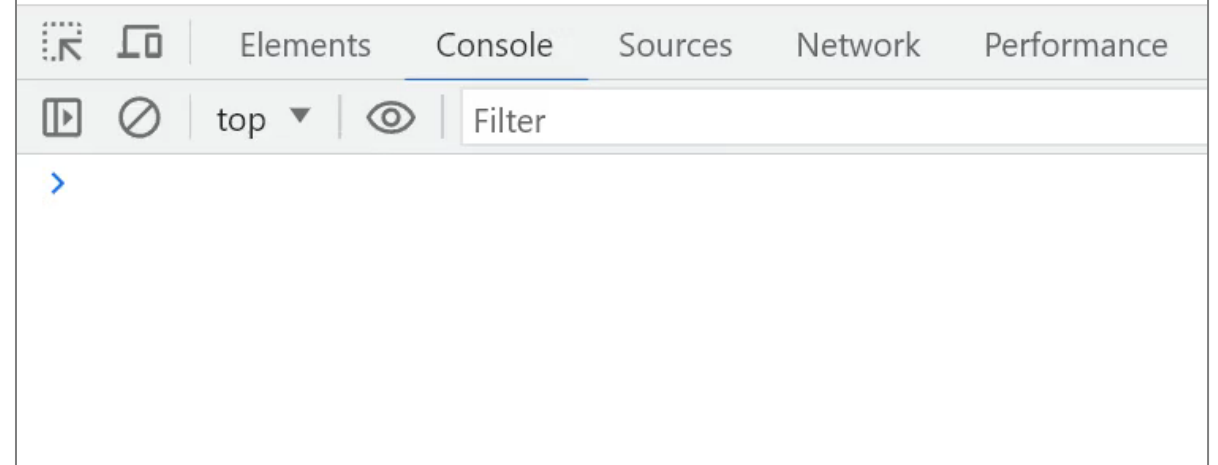


Q. What is **Event Delegation** in JS? **V. IMP.**



- ❖ Event delegation in JavaScript is a technique where you attach a **single event handler to a parent element** to handle events on its **child elements**.

- Item 1
- Item 2
- Item 3




```
<ul id="myList">
  <li>Item 1</li>
  <li>Item 2</li>
  <li>Item 3</li>
</ul>
```

```
var parentList = document.getElementById("myList");


// Attach event handler to parent element
parentList.addEventListener("click", handleItemClick);

// Event handler function
function handleItemClick(event) {
  var target = event.target;
  console.log("Clicked:", target.textContent);
}
```

Q. What is Event Bubbling In JS? V. IMP.

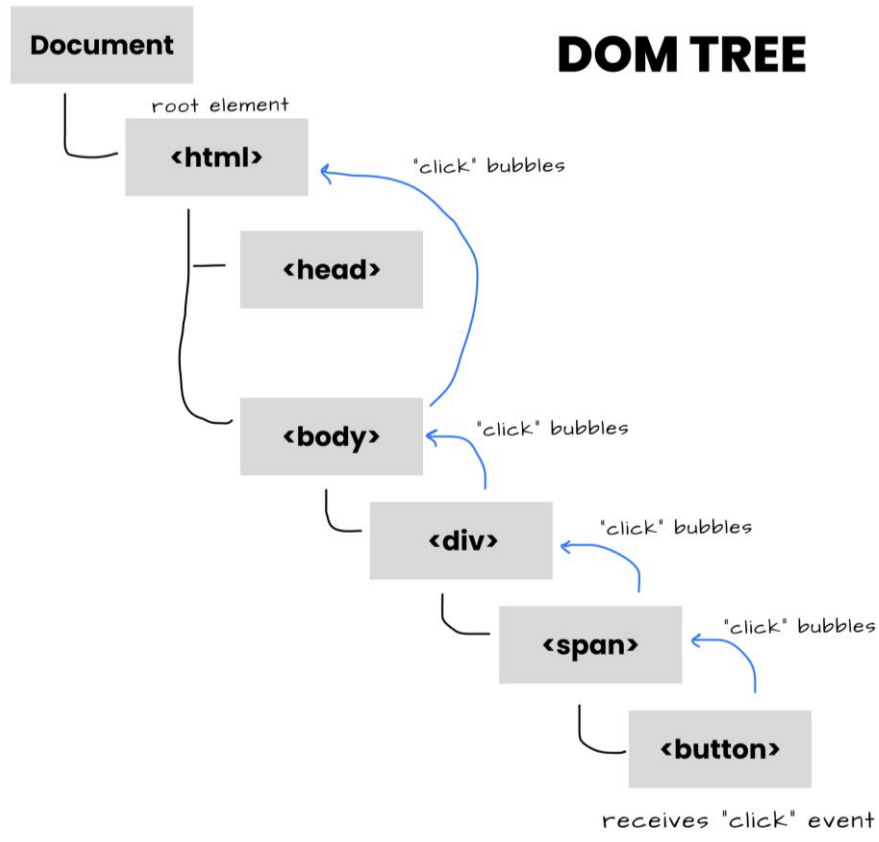

```
<div id="outer">
  <div id="inner">
    <button id="myButton">Click Me</button>
  </div>
</div>
```

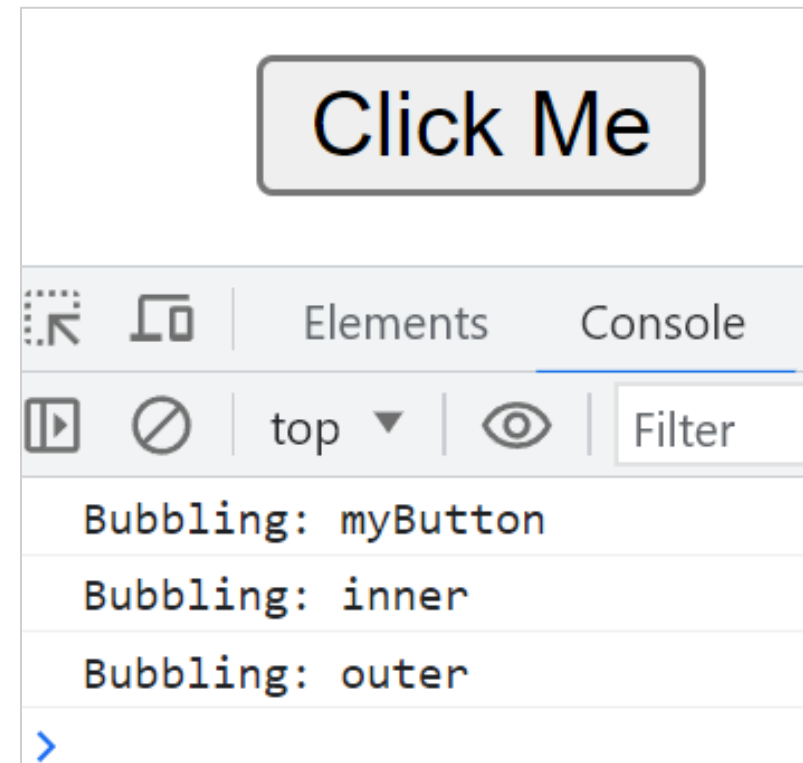


Q. What is **Event Bubbling** In JS?

V. IMP.



- ❖ Event bubbling is the process in JavaScript where an event triggered on a child element **propagates up the DOM tree**, triggering event handlers on its parent elements.

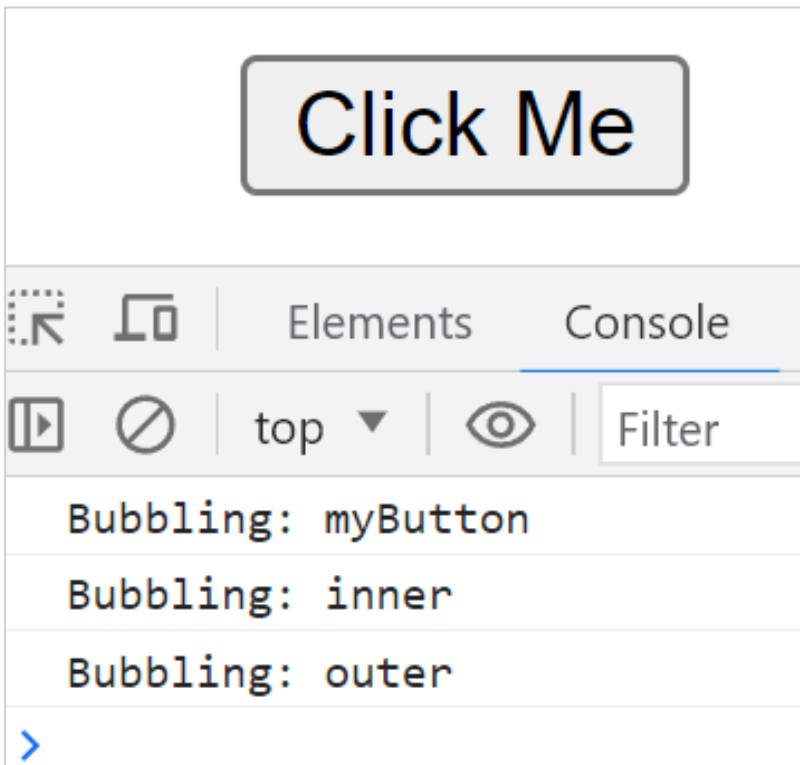

```
<div id="outer">
  <div id="inner">
    <button id="myButton">Click Me</button>
  </div>
</div>
```


```
// Get the reference of elements
var outer = document.getElementById("outer");
var inner = document.getElementById("inner");
var button = document.getElementById("myButton");

// Attach event handlers with elements
outer.addEventListener("click", handleBubbling);
inner.addEventListener("click", handleBubbling);
button.addEventListener("click", handleBubbling);

function handleBubbling(event) {
  console.log("Bubbling: " + this.id);
}
```



Q. What is Event Capturing in JS?

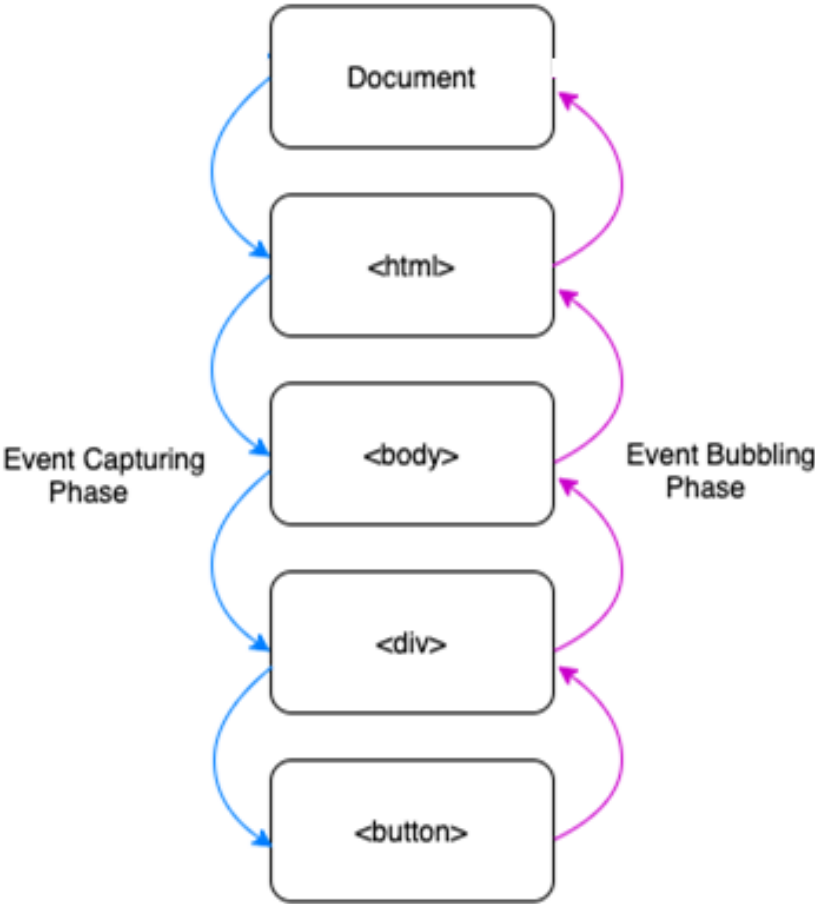

```
<div id="outer">
  <div id="inner">
    <button id="myButton">Click Me</button>
  </div>
</div>
```

Click Me

Elements

Console

top

Filter

Capturing: outer

Capturing: inner


Capturing: myButton

>



Q. What is **Event Capturing** in JS?

- ❖ Event capturing is the process in JavaScript where an event is handled starting from the highest-level ancestor (the root of the DOM tree) and **moving down to the target element**.

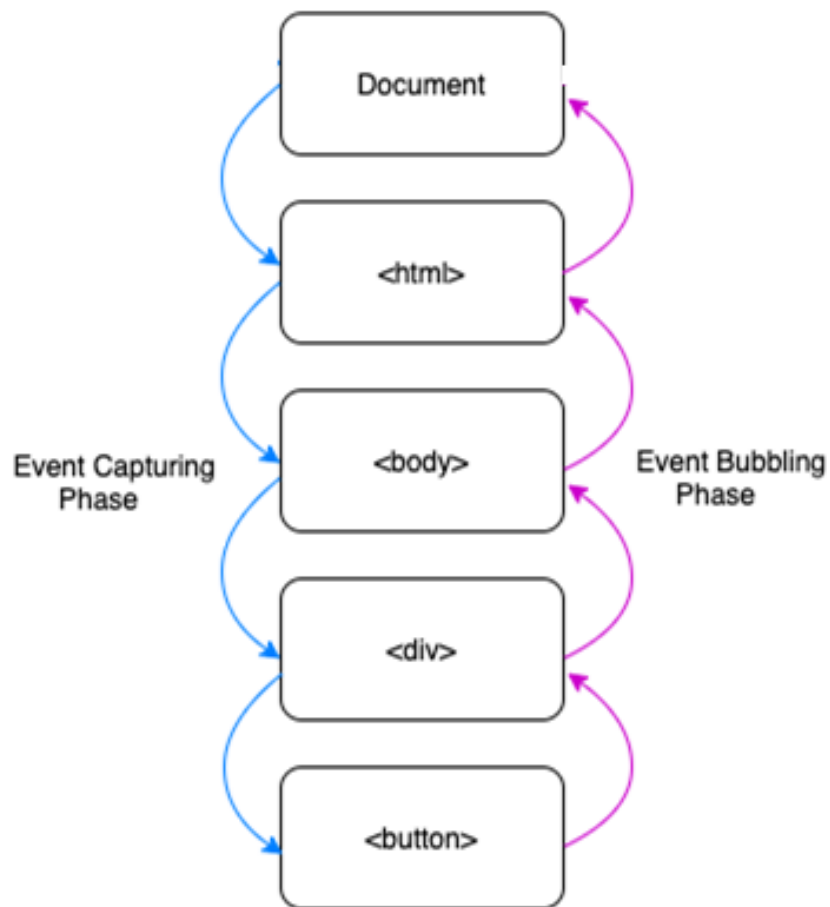

```
<div id="outer">
  <div id="inner">
    <button id="myButton">Click Me</button>
  </div>
</div>
```

```
// Get the reference of elements
var outer = document.getElementById("outer");
var inner = document.getElementById("inner");
var button = document.getElementById("myButton");
```

```
// Attach event handlers with elements
outer.addEventListener('click', handleCapture, true);
inner.addEventListener('click', handleCapture, true);
button.addEventListener('click', handleCapture, true);
```

```
function handleCapture(event) {
  console.log("Capturing: " + this.id);
}
```


20: JS for React - Error Handling



Q. What is **Error Handling** in JS?

Q. What is the role of **finally block** in JS?

Q. What is the purpose of the **throw statement** in JS?

Q. What is **Error propagation** in JS?


Q. What are the best practices for error handling?

Q. What are the different **types of errors** In JS?

Q. What is **Error Handling** in JS? **V. IMP.**



- ❖ Error handling is the process of **managing errors**.

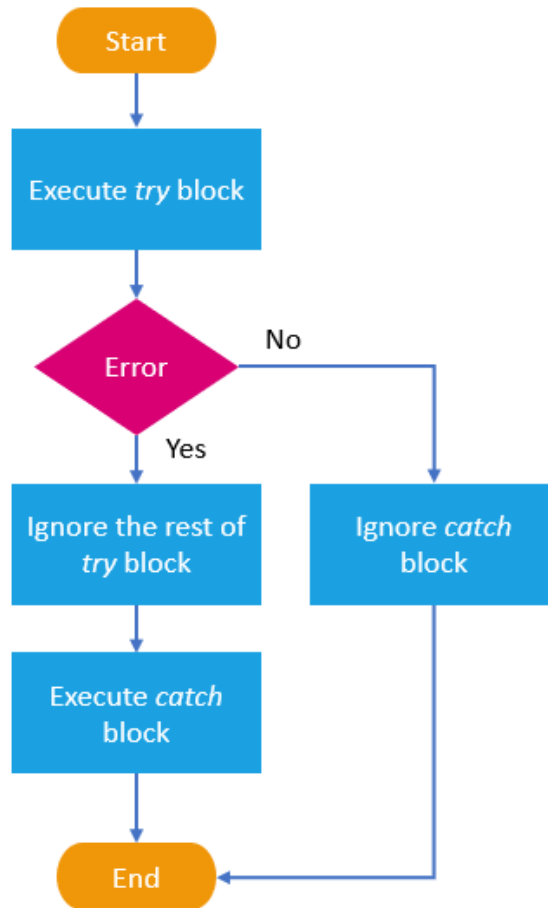

```
//try block contains the code that might throw an error
try {
    const result = someUndefinedVariable + 10;
    console.log(result);
}
//catch block is where the error is handled
catch (error) {
    console.log('An error occurred:', error.message);
}


//Output
//An error occurred: someUndefinedVariable is not defined
```




Q. What is the role of **finally** block in JS?

- ❖ Finally, block is used to **execute some code irrespective of error.**

Without Exception

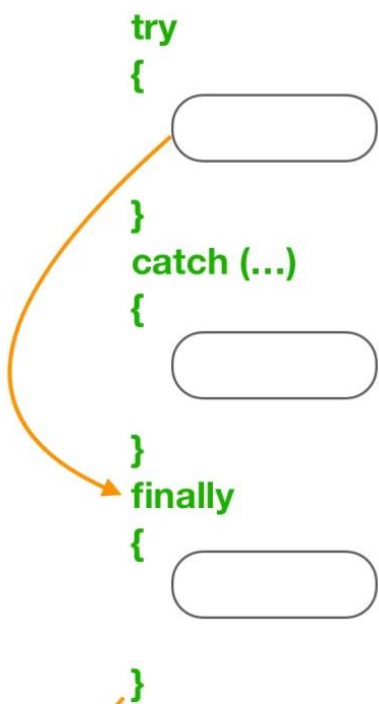

With Exception

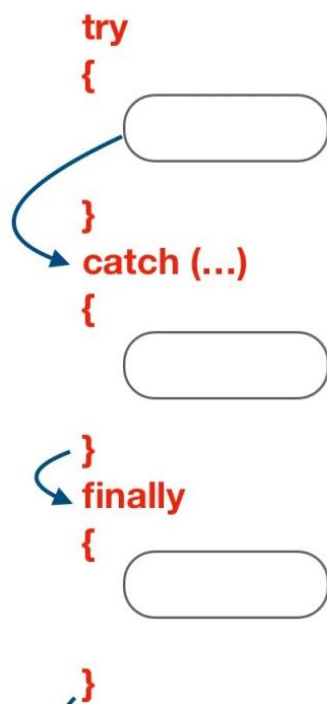

```
//try block contains the code that might throw an error
try {

  const result = someUndefinedVariable + 10;
  console.log(result);


}
//catch block is where the error is handled
catch (error) {
  console.log('An error occurred:', error.message);
}
//finally block to execute code regardless of whether
//an error occurred or not
finally{
  console.log("finally executed");
}

//Output
//An error occurred: someUndefinedVariable is not defined
//finally executed
```



Q. What is the purpose of the **throw** statement in JS?

- ❖ The throw statement stops the execution of the current function and **passes the error to the catch block of calling function**.

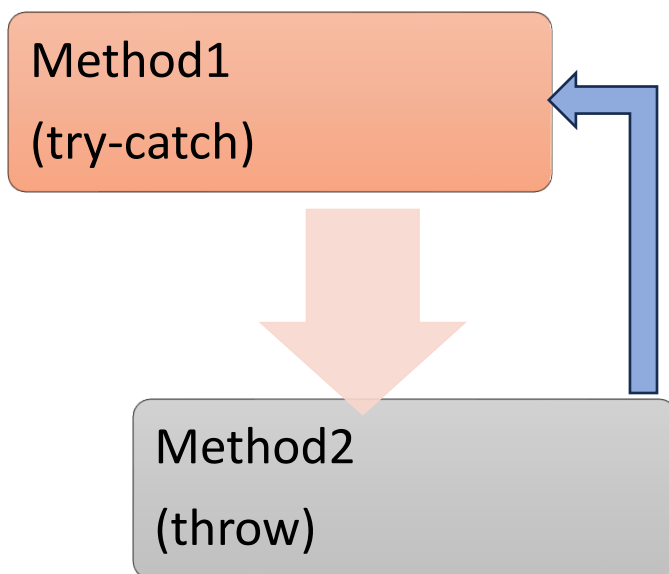


```
function UserData() {
  try {
    validateUserAge(25);
    validateUserAge("invalid"); // This will throw
    validateUserAge(15); // This will not execute
  } catch (error) {
    console.error("Error:", error.message);
  }
}

function validateUserAge(age) {
  if (typeof age !== "number") {
    throw new Error("Age must be a number");
  }
  console.log("User age is valid");
}
```



Q. What is **Error propagation** in JS?

- ❖ Error propagation refers to the process of passing or propagating an error from **one part of the code to another** by using the **throw statement** with try catch.

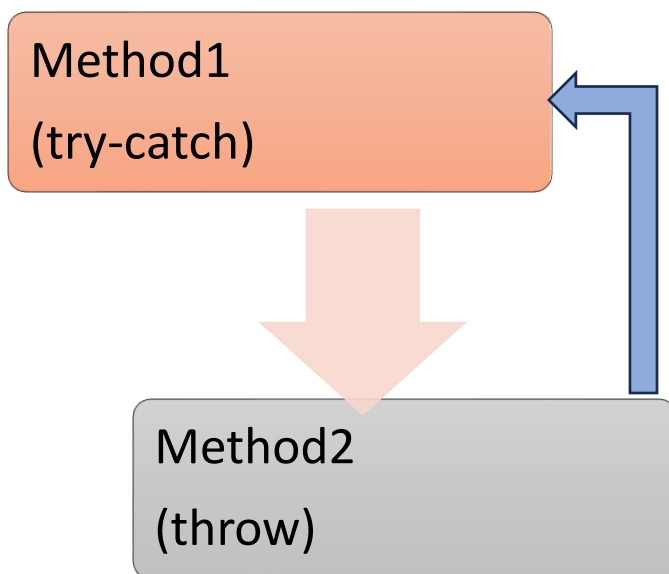

```
function UserData() {
  try {
    validateUserAge(25);
    validateUserAge("invalid"); // This will throw
    validateUserAge(15); // This will not execute
  } catch (error) {
    console.error("Error:", error.message);
  }
}

function validateUserAge(age) {
  if (typeof age !== "number") {
    throw new Error("Age must be a number");
  }
  console.log("User age is valid");
}
```

Q. What are the best practices for **error handling**?




```
// 1. Use Try Catch and Handle Errors Appropriately
try {
    // Code that may throw an error
} catch (error) {
    // Error handling and recovery actions
}
```

```
// 2. Use Descriptive Error Messages
throw new Error("Cannot divide by zero");
```

```
// 3. Avoid Swallowing Errors
try {
    // Code that may throw an error
} catch (error) {
    // Do not leave the catch blank
}
```

```
// 4. Log Errors
try {
    // Code that may throw an error
} catch (error) {
    console.error("An error occurred:", error);
    // Log the error with a logging library
}
```

Q. What are the different **types of errors** In JS?

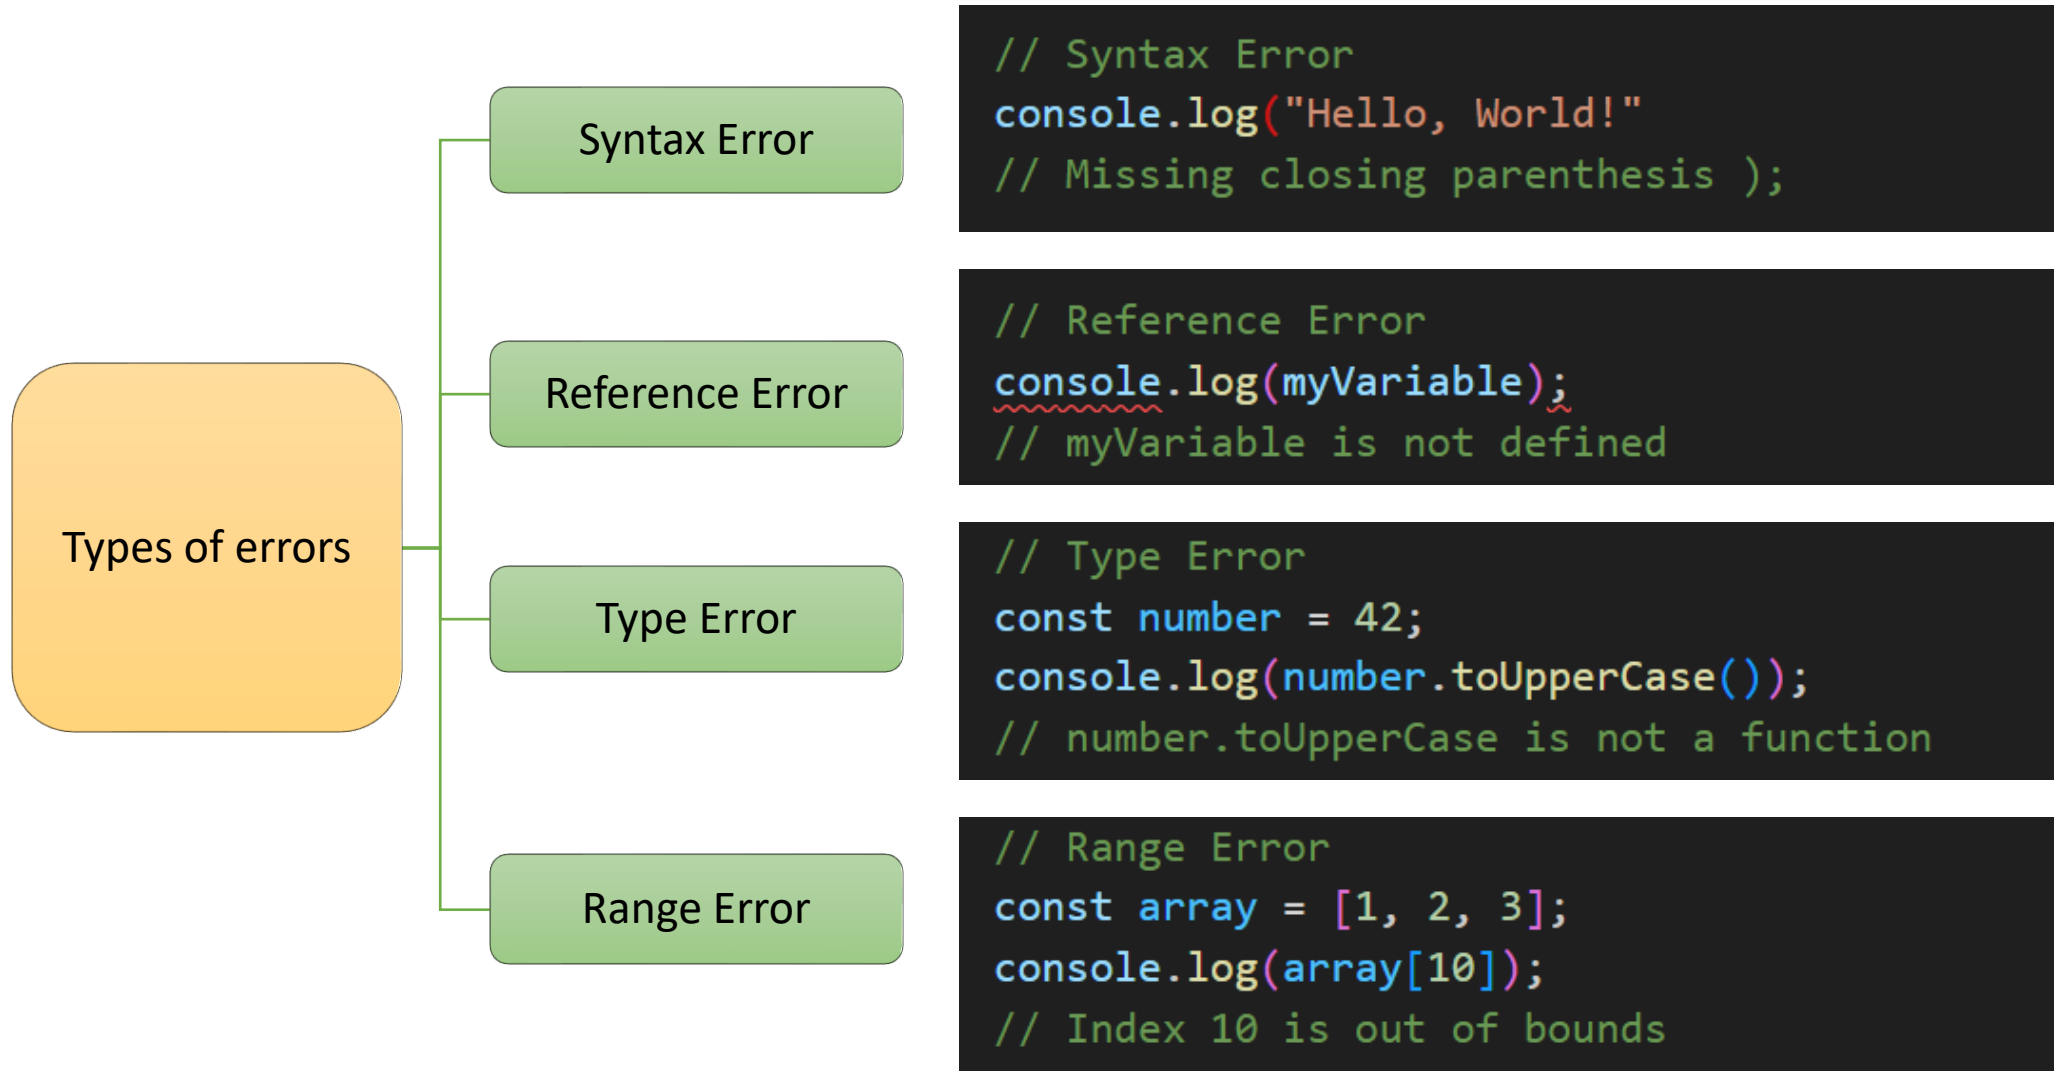

20: JS for React - Asynchronous programming



Q. What is [asynchronous programming](#) in JS? What is its use?

Q. What is the difference between [synchronous](#) and [asynchronous programming](#)?

Q. What are the techniques for achieving asynchronous operations in JS?

Q. What is [setTimeout\(\)](#)? How is it used to handle asynchronous operations?

Q. What is [setInterval\(\)](#)? How is it used to handle asynchronous operations?

Q. What are [Promises](#) in JavaScript?


Q. How to implement Promises in JavaScript?

Q. What is the purpose of [async/ await](#)? Compare it with Promises?

Q. What is **asynchronous programming** in JS? What is its **use**? **V. IMP.**




SYNCHRONOUS

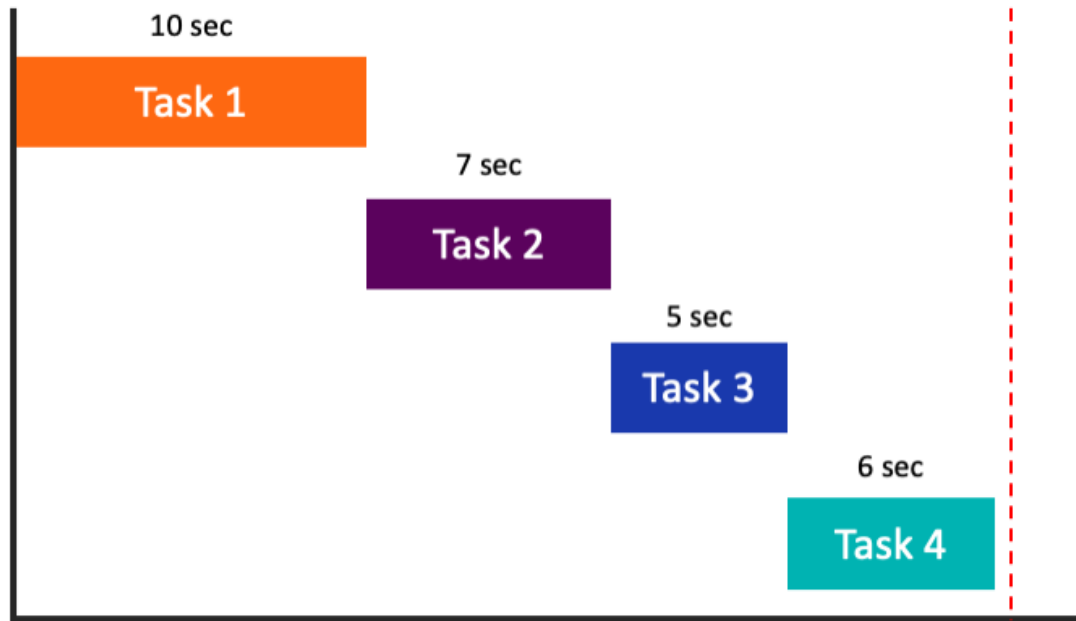

Time taken (28 sec)

ASYNCHRONOUS

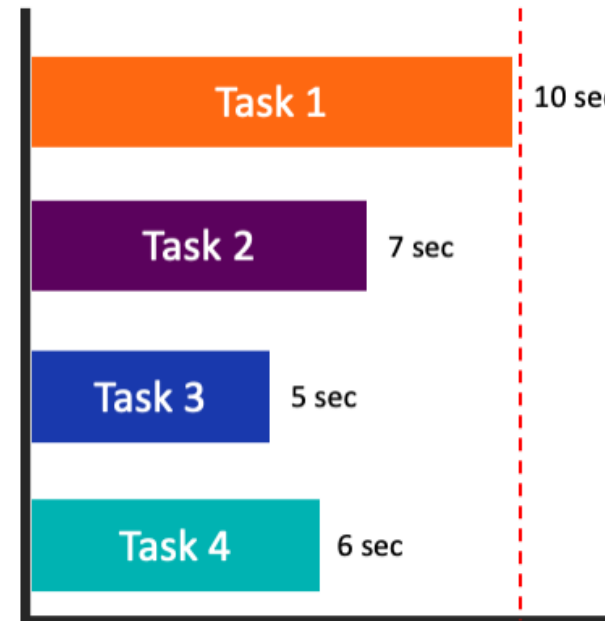


Time taken (10 sec)



Q. What is **asynchronous programming** in JS? What is its **use**? **V. IMP.**

- ❖ Asynchronous programming allows multiple tasks or operations to be initiated and **executed concurrently**.
- ❖ Asynchronous operations **do not block** the execution of the code.

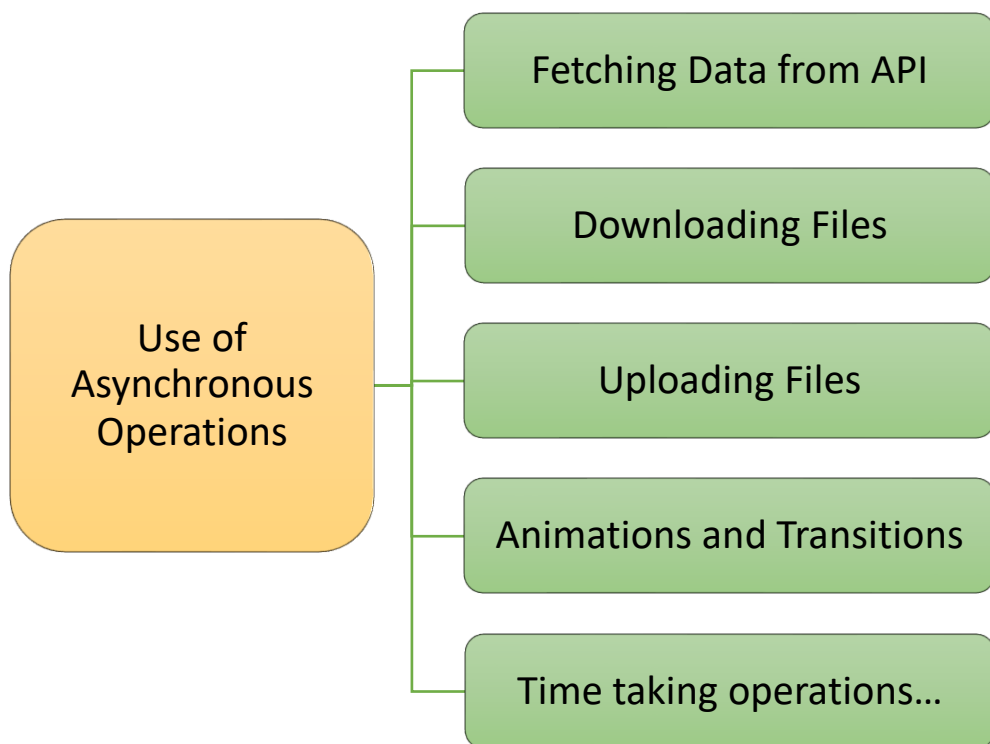

```
// Synchronous Programming
// Not efficient
console.log("Start");
Function1();
Function2();
console.log("End");


// Time taking function
function Function1() {
    // Loading Data from an API
    // Uploading Files
    // Animations
}
function Function2() {
    console.log(100 + 50);
}
```

Q. What is the difference between **synchronous** and **asynchronous** programming?



Synchronous programming	Asynchronous programming
1. In synchronous programming, tasks are executed one after another in a sequential manner .	In synchronous programming, tasks can start, run, and complete in parallel
2. Each task must complete before the program moves on to the next task.	Tasks can be executed independently of each other. 
3. Execution of code is blocked until a task is finished.	Asynchronous operations are typically non-blocking. 
4. Synchronous operations can lead to blocking and unresponsiveness.	It enables better concurrency and responsiveness. 
5. It is the default mode of execution.	It can be achieved through techniques like callbacks, Promises, async/await 

Q. What are the techniques for **achieving asynchronous operations** in JS?

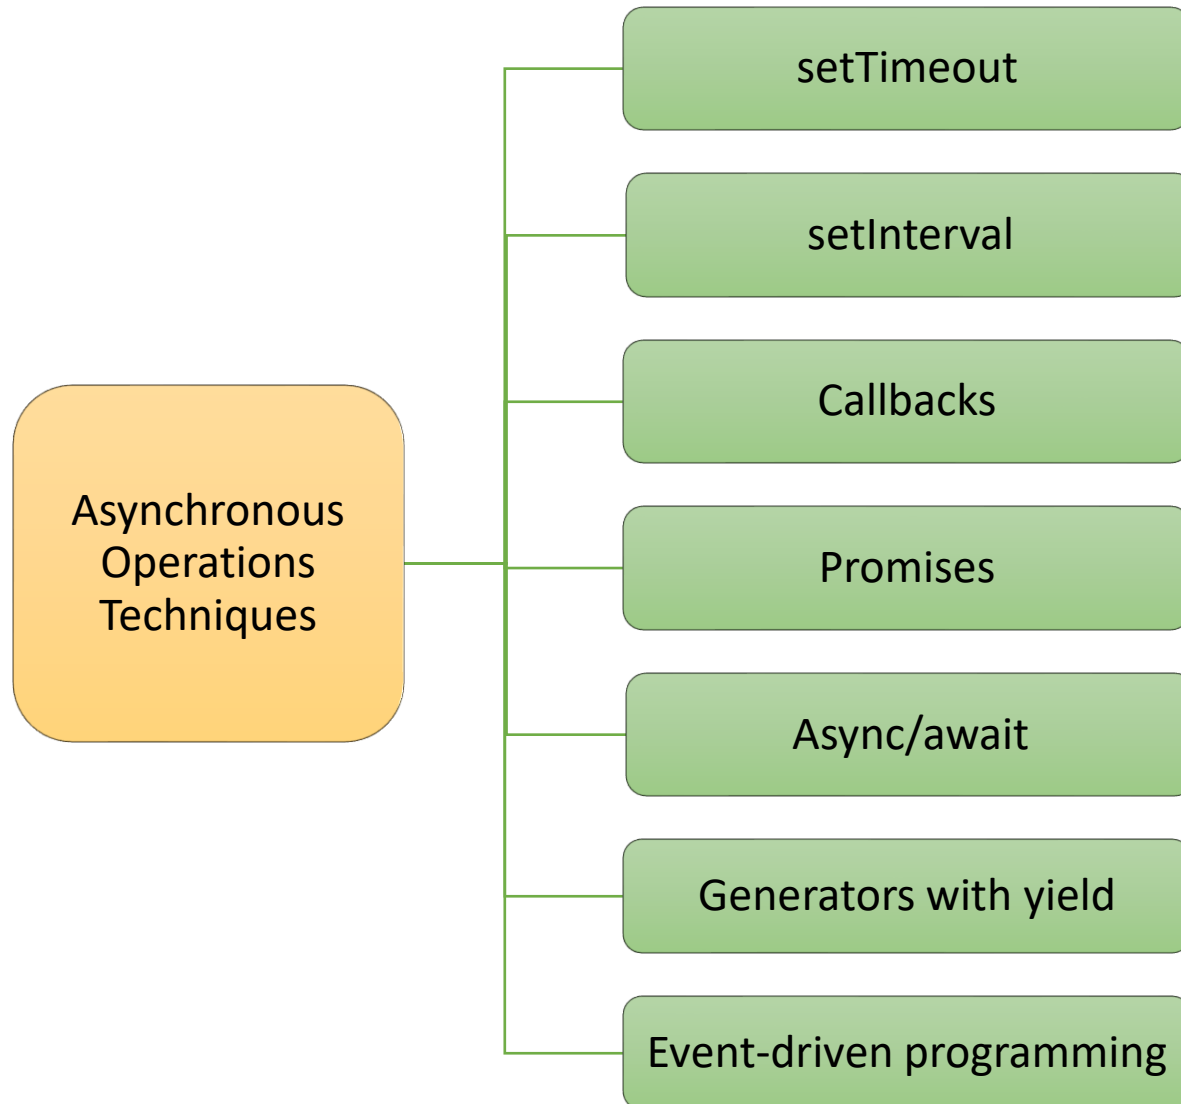

Q. What is `setTimeout()`? How is it used to handle asynchronous operations? **V. IMP.**



- ❖ `setTimeout()` is a built-in JavaScript function that allows you to schedule the execution of a function **after a specified delay** **asynchronously**.



```
console.log("start");  
  
// anonymous function as callback  
setTimeout(function () {  
  console.log("I am not stopping anything");  
}, 3000); // Start after a delay of 3 second  
  
console.log("not blocked");
```


```
// Output:  
// start  
// not blocked  
// I am not stopping anything
```




Q. What is `setInterval()`? How is it used to handle asynchronous operations?

- ❖ `setInterval()` is a built-in JavaScript function that allows you to **repeatedly execute a function at a specified interval asynchronously**.

`setTimeout`

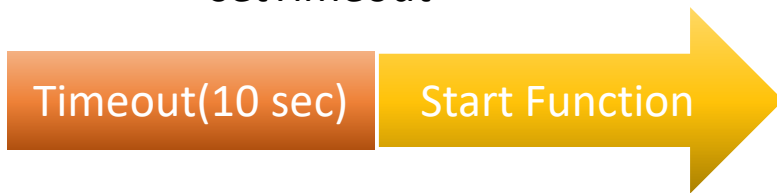

`setInterval`

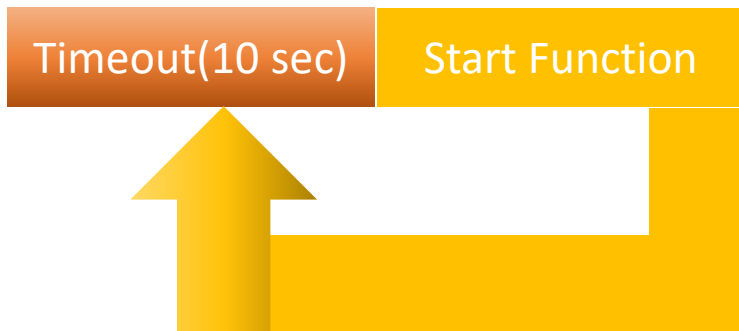

```
console.log("start");

setInterval(function () {
  console.log("I am not stopping anything");
}, 3000); // Repeat after every 3 second

console.log("not blocked");
```


```
// Output:
// start
// not blocked
// I am not stopping anything
// I am not stopping anything
// .....
```



Q. What are **Promises** in JavaScript? **V. IMP.**


❖ Important points about promises:

1. Promises in JavaScript are a way to handle **asynchronous operations**.
2. A Promise can be in one of three states: **pending**, **resolved**, or **rejected**.
3. A promise represents a value that **may not be available yet** but will be available at some point in the **future**.

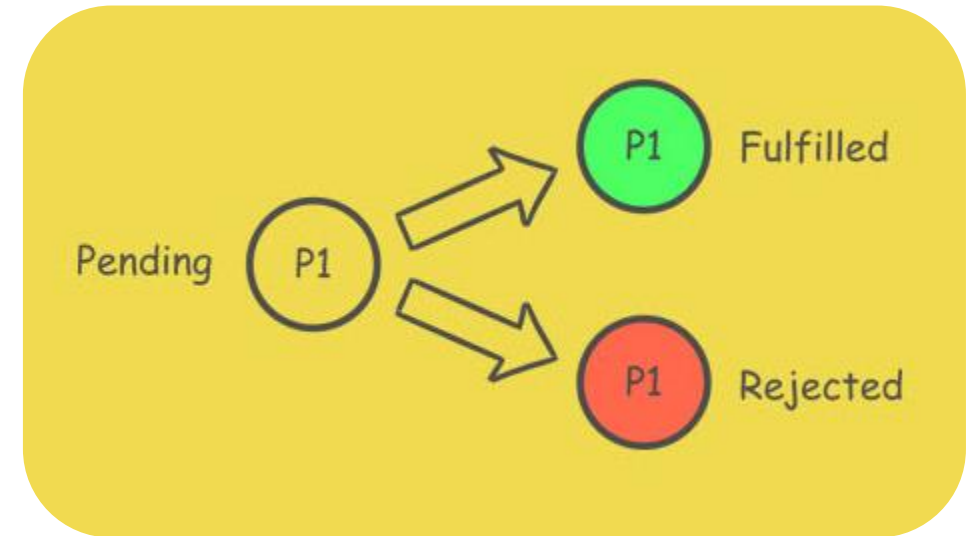

```
const promise = new Promise((resolve, reject) => {  
  // Perform asynchronous operation for eg: setTimeout()  
  // Call `resolve` function when the operation succeeds  
  // Call `reject` function when the operation encounters an error  
});
```

Q. How to implement **Promises** in JavaScript? **V. IMP.**

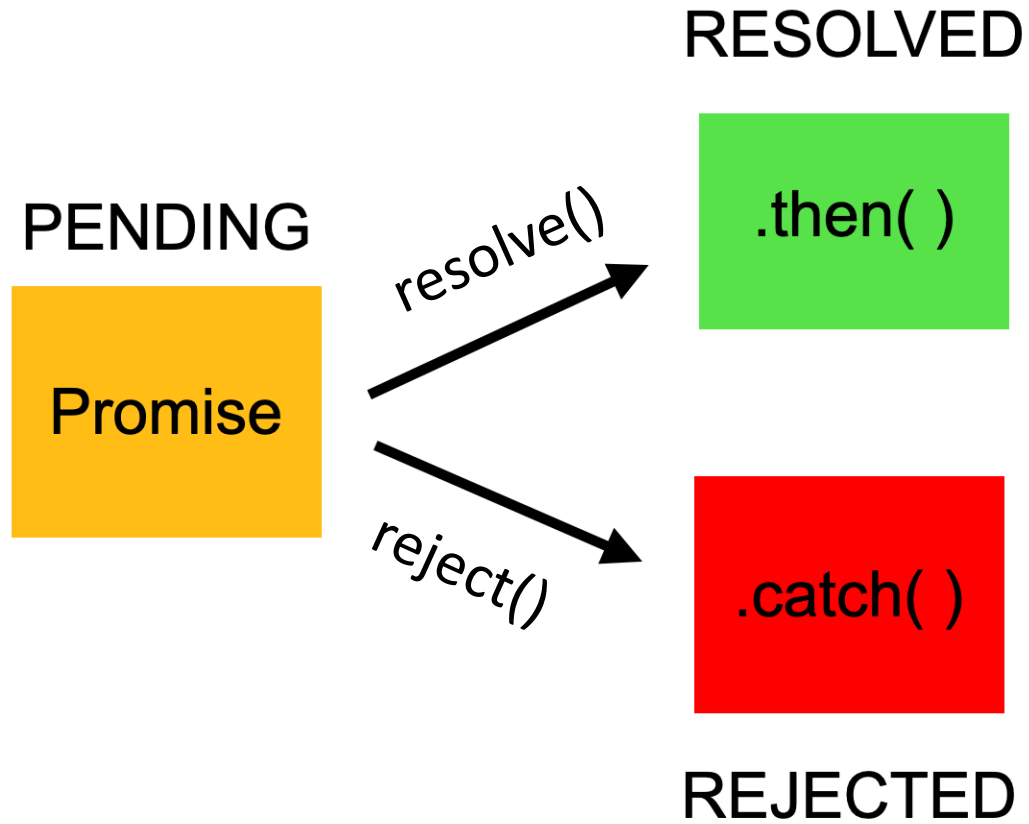

Q. How to implement Promises in JavaScript? V. IMP.



```
// Create a new promise using the Promise constructor
const myPromise = new Promise((resolve, reject) => {
  // Set a timeout of 1 second
  setTimeout(() => {
    // Generate a random number between 0 and 9
    const randomNum = Math.floor(Math.random() * 10);

    // Resolve the promise
    if (randomNum < 5) {
      resolve(`Success! Random number: ${randomNum}`);
    }


    // Reject the promise
    else {
      reject(`Error! Random number: ${randomNum}`);
    }
  }, 1000);
});
```

```
// Use the .then() method to
//handle the resolved promise
myPromise
  .then((result) => {
    console.log(result);
  })

  // Use the .catch() method to
  //handle the rejected promise
  .catch((error) => {
    console.error(error);
  });

//Output: Error! Random number: 9
//Output: Success! Random number: 4
```

Q. What is the purpose of **async/await**? Compare it with **Promises**? **V. IMP.**

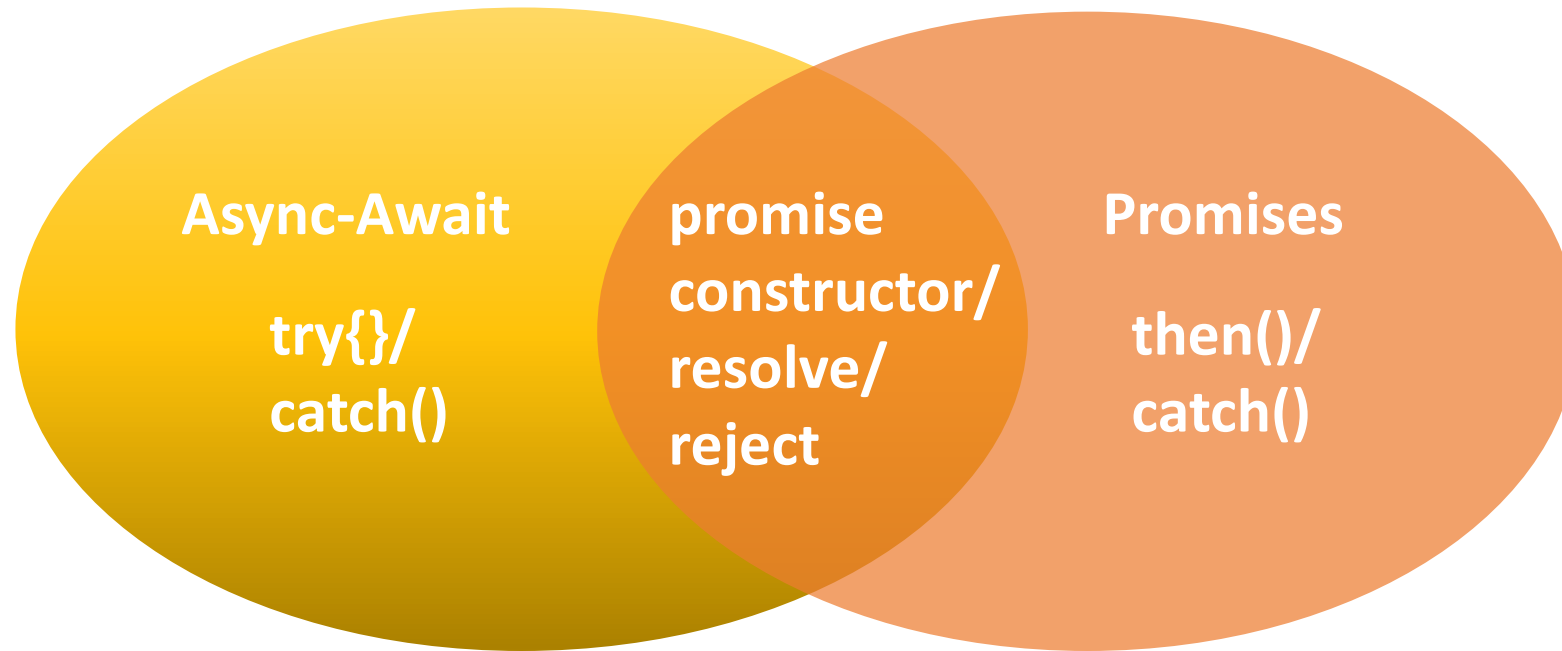

Q. What is the purpose of **async/await**? Compare it with **Promises**? **V. IMP.**



❖ Similarities and differences between promises and async-await:

1. Promises and async/await can achieve the same goal of handling **asynchronous operations**.
2. async/await provides a more concise and **readable syntax** that resembles synchronous code whereas Promises use a chaining syntax with **then()** and **catch()** which is not that readable.
3. async/await still **relies** on Promises for handling the asynchronous nature of the code.

```
function fetchData() {  
  return new Promise((resolve, reject) => {  
    // asynchronous operation  
    setTimeout(() => {  
      resolve("Data has been fetched");  
    }, 1000);  
  });  
}
```

```
// Promises  
fetchData()  
  .then((result) => {  
    console.log(result);  
  })  
  .catch((error) => {  
    console.error(error);  
  });
```

```
// async-await  
async function doSomethingAsync() {  
  try {  
    const result = await fetchData();  
    console.log(result);  
  } catch (error) {  
    console.error(error);  
  }  
}  
doSomethingAsync();
```



All the best for your interviews

Never ever give up