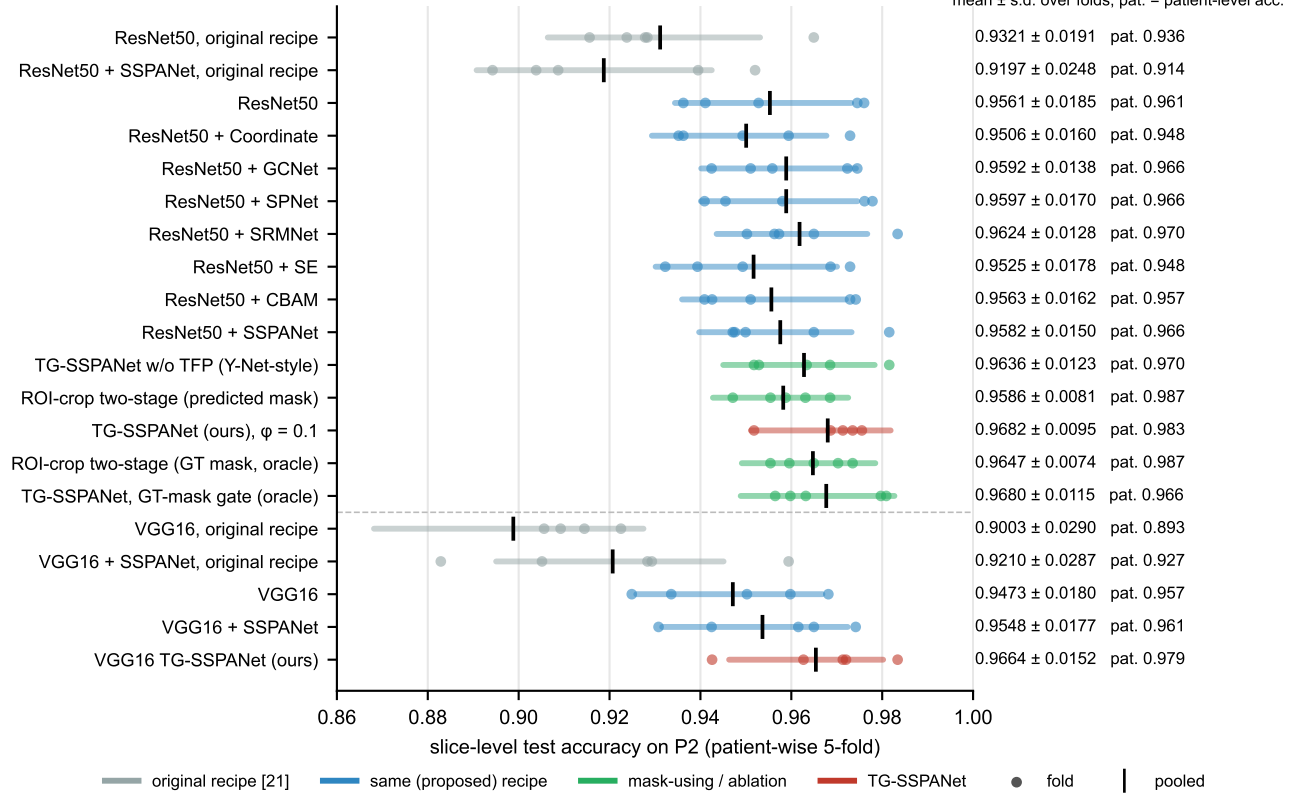
mean ± s.d. over folds; pat. = patient-level acc.
ResNet50, original recipe
ResNet50 + SSPANet, original recipe
ResNet50
ResNet50 + Coordinate
ResNet50 + GCNet
ResNet50 + SPNet
ResNet50 + SRMNet
ResNet50 + SE
ResNet50 + CBAM
ResNet50 + SSPANet
TG-SSPANet w/o TFP (Y-Net-style)
ROI-crop two-stage (predicted mask)
TG-SSPANet (ours), φ = 0.1
ROI-crop two-stage (GT mask, oracle)
TG-SSPANet, GT-mask gate (oracle)
VGG16, original recipe
VGG16 + SSPANet, original recipe
VGG16
VGG16 + SSPANet
VGG16 TG-SSPANet (ours)
0.9321 ± 0.0191 pat. 0.936
0.9197 ± 0.0248 pat. 0.914
0.9561 ± 0.0185 pat. 0.961
0.9506 ± 0.0160 pat. 0.948
0.9592 ± 0.0138 pat. 0.966
0.9597 ± 0.0170 pat. 0.966
0.9624 ± 0.0128 pat. 0.970
0.9525 ± 0.0178 pat. 0.948
0.9563 ± 0.0162 pat. 0.957
0.9582 ± 0.0150 pat. 0.966
0.9636 ± 0.0123 pat. 0.970
0.9586 ± 0.0081 pat. 0.987
0.9682 ± 0.0095 pat. 0.983
0.9647 ± 0.0074 pat. 0.987
0.9680 ± 0.0115 pat. 0.966
0.9003 ± 0.0290 pat. 0.893
0.9210 ± 0.0287 pat. 0.927
0.9473 ± 0.0180 pat. 0.957
0.9548 ± 0.0177 pat. 0.961
0.9664 ± 0.0152 pat. 0.979
0.86
0.88
0.90
0.92
0.94
0.96
0.98
1.00
slice-level test accuracy on P2 (patient-wise 5-fold)
original recipe [21]
same (proposed) recipe
mask-using / ablation
TG-SSPANet
fold
pooled