


# DeepBI windows exe 本地安装版本说明

1. 软件下载， 点击[这里](#)去下载

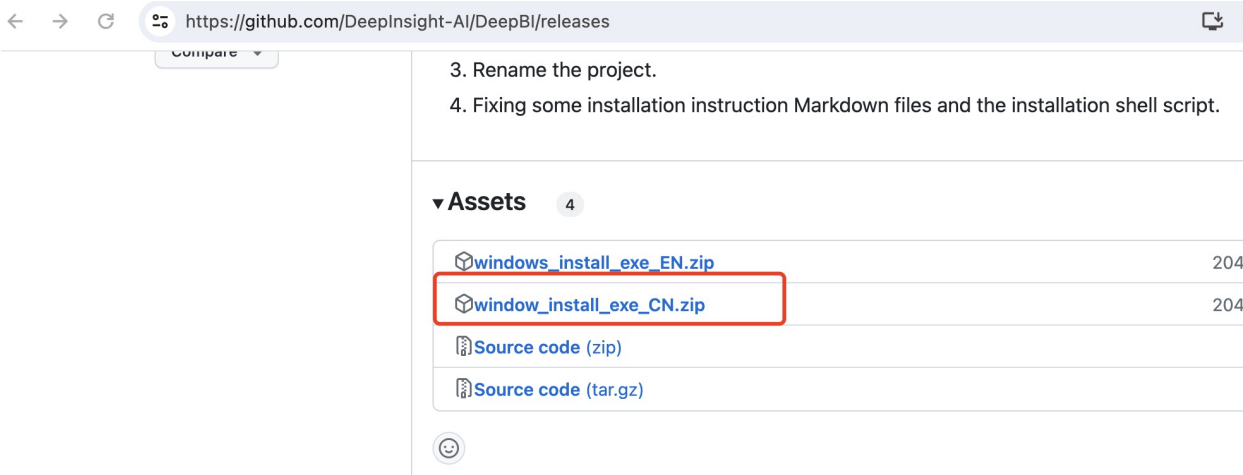


2. 解压安装

名称	修改日期	类型	大小
windows install_exe_CN.zip	2024/1/5 17:11	360压缩 ZIP 文件	208,413 KB
DeepBI_CN1.1.0.exe	2024/1/4 21:15	应用程序	208,806 KB
安装前必读.txt	2024/1/4 11:41	TXT 文件	1 KB

2. 下载文件，解压到当前文件夹


3. 解压后，双击 DeepBI\_CN.版本号.exe 安装

3. 选中桌面快捷方式

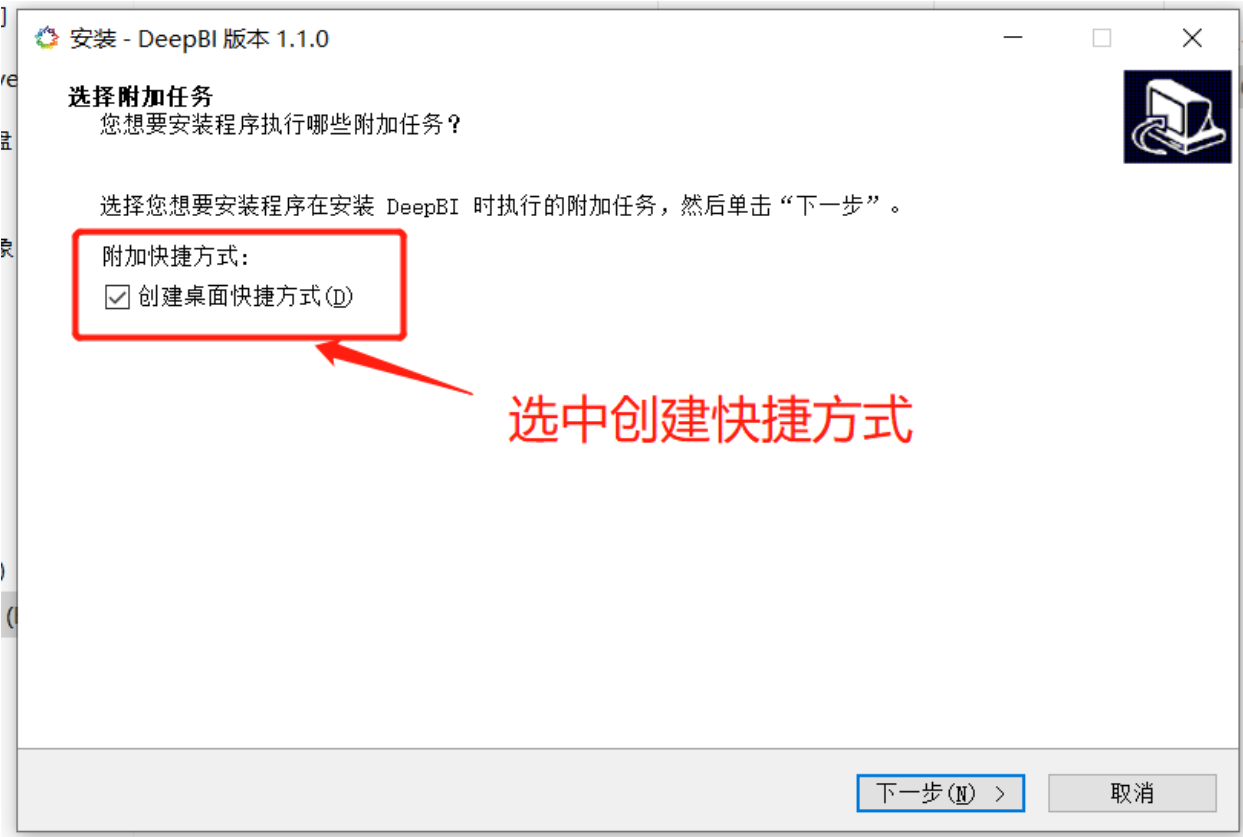



选中创建快捷方式

4. 点击，安装，开始解压文件

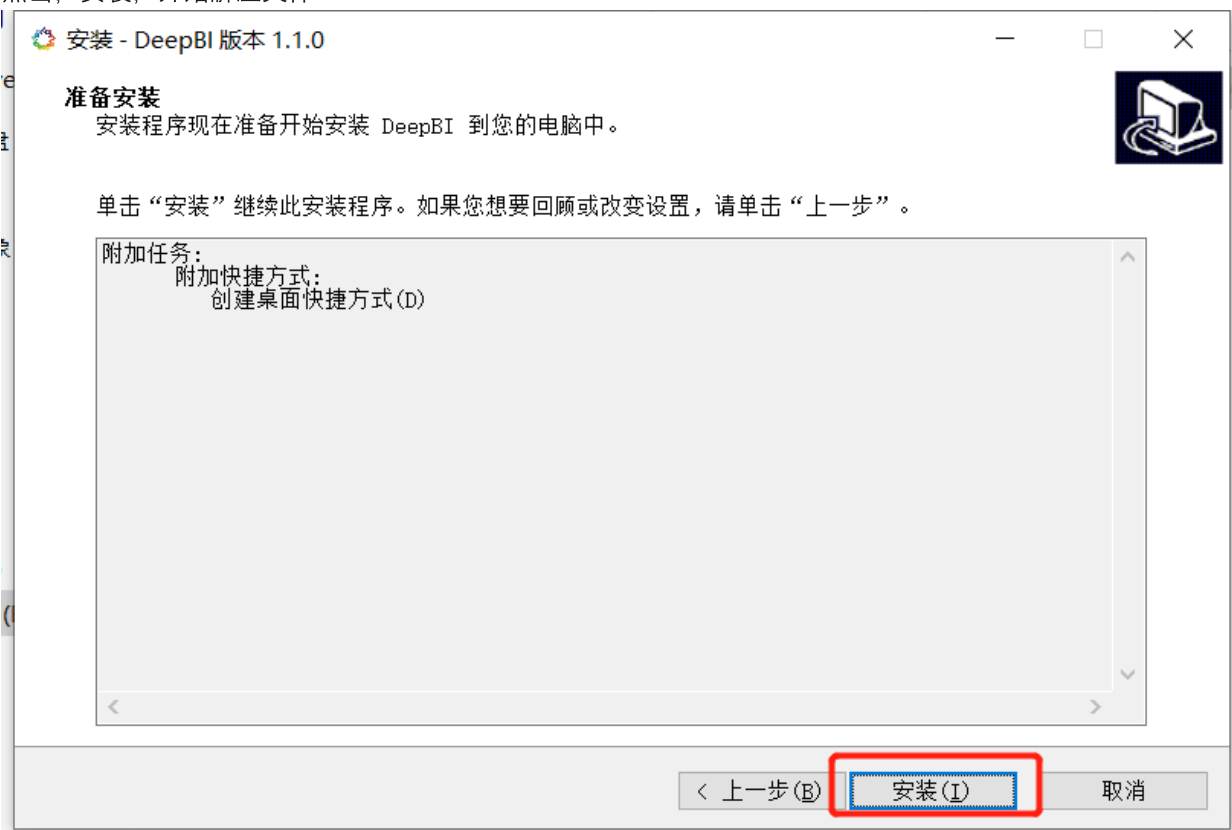


5. 解压完毕，显示软件信息说明

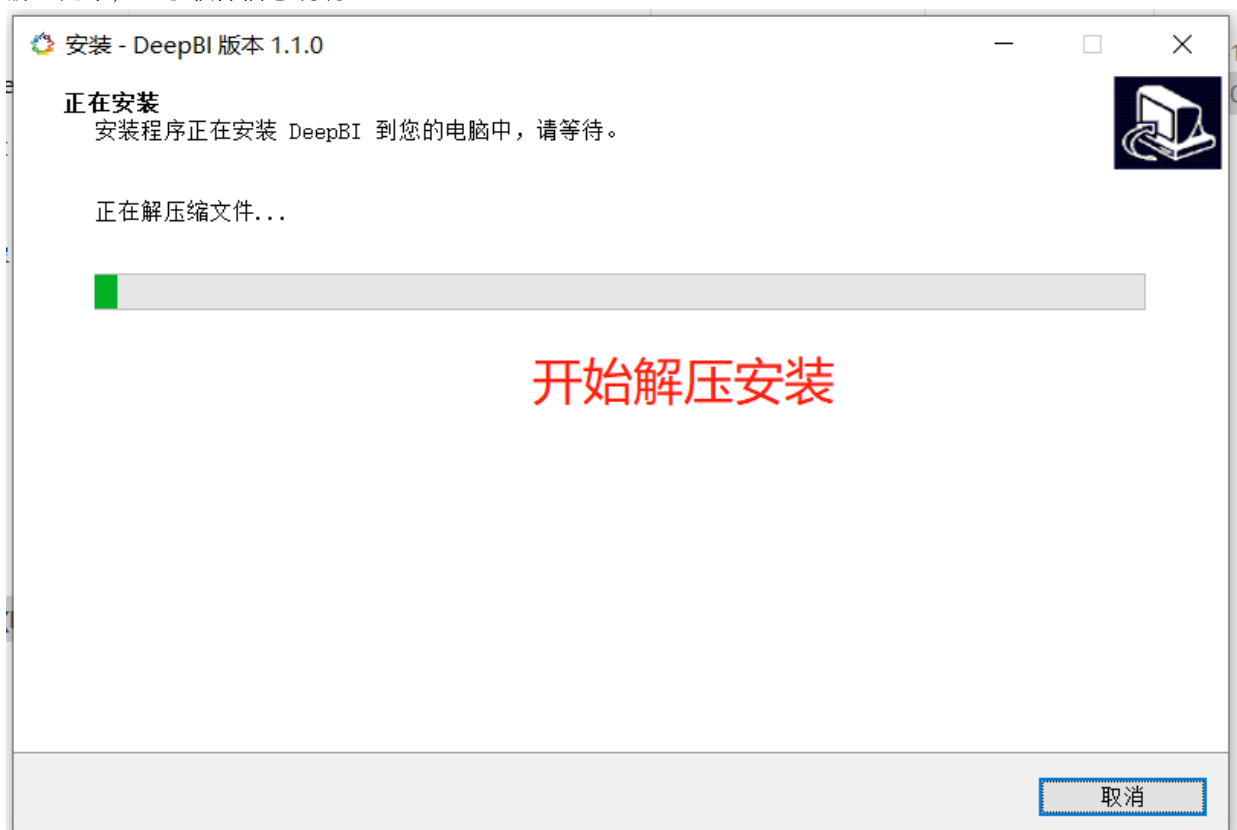

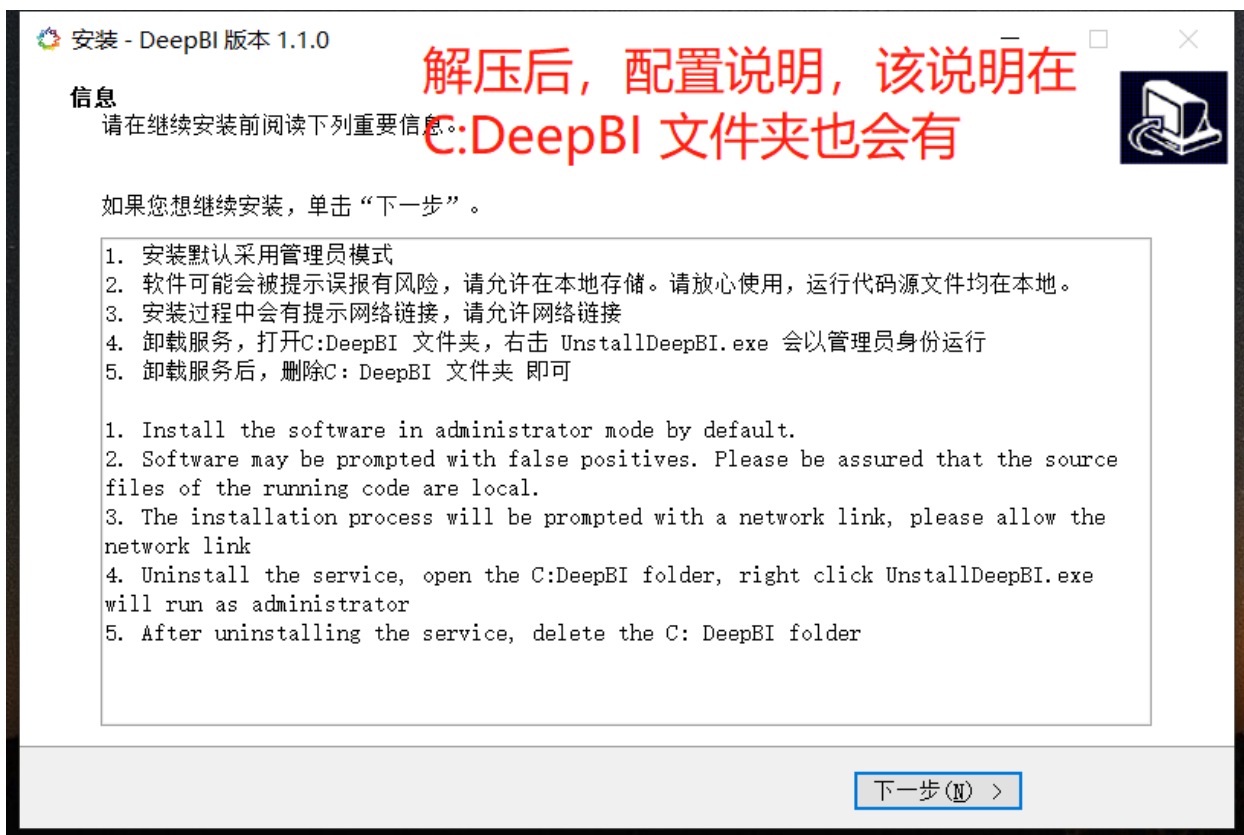

6. 确认后，选中 运行DeepBI，点击完成

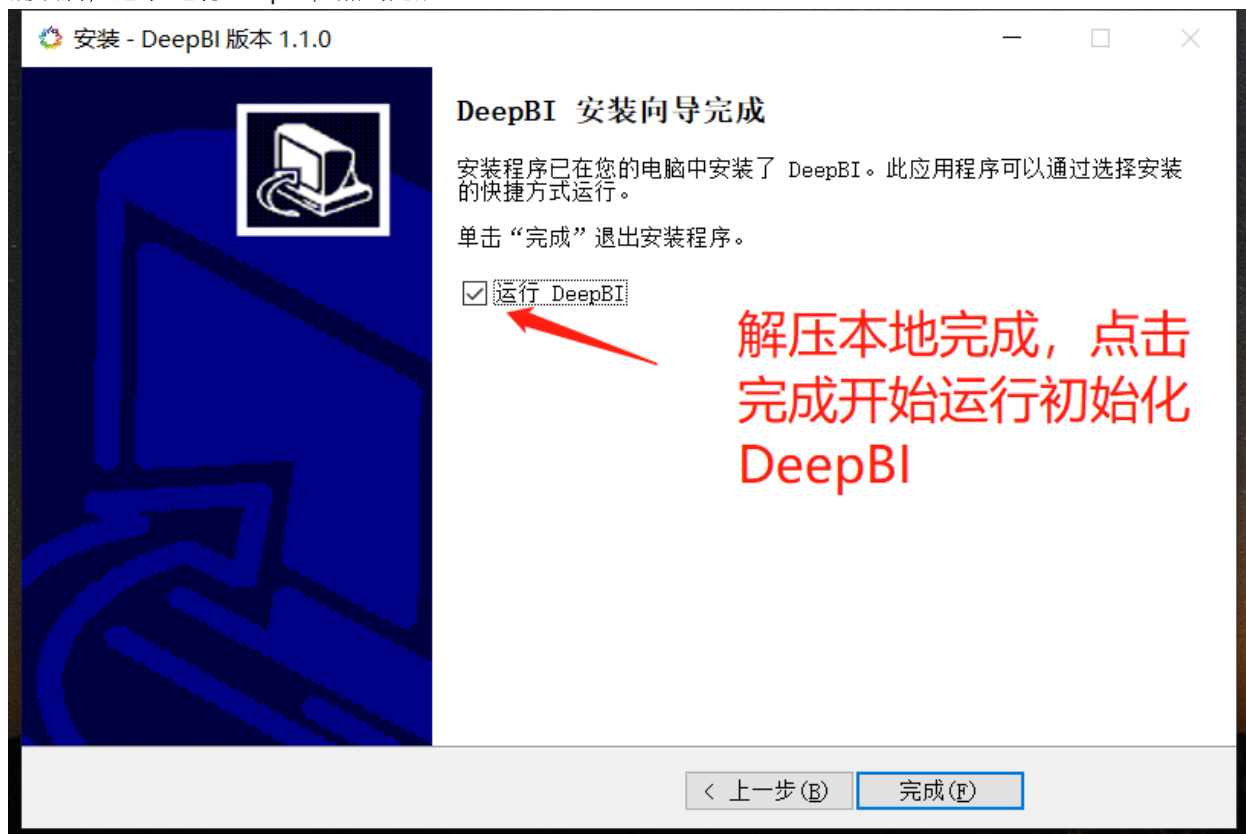

## 7. 等待数据初始化

```
Administrator: DeepBI_server
install 2013 tool, please wait...
install 2015 tool, please wait...
```

初始化数据，可能时间比较长，根据电脑性能，预计3-5分钟

## 8. 初始化完毕，自动打开网页

```
Administrator: DeepBI_server
Current Path: C:\DeepBI
Redis Path: C:\DeepBI\redis
start redis
done
done
start DeepBI
start DeepBI server
```



```
Redis 3.0.504 (00000000/0) 64 bit
Running in standalone mode
Port: 6379
PID: 35456

http://redis.io
```

```
[35456] 05 Jan 17:34:20.927 # Server started, Redis version 3.0.504
[35456] 05 Jan 17:34:20.945 * DB loaded from disk: 0.014 seconds
[35456] 05 Jan 17:34:20.947 * The server is now ready to accept connections on port 6379
wait server....
```

初始化完毕，等待自动打开网页

## 9. 安装成功页面显示，以及成功启动提示

初始化设置

看到这个页面表示本地已经安装成功，设置初始账号即可

初始化设置

欢迎使用  
开始使用前，要进行一个快速初始化

系统管理员：

用户名

电子邮箱

密码

单位名称：  
单位名称

单位名称会出现在电子邮件里和界面上

设置

## 10. 关闭服务

再看启动窗口，如果要关闭服务，点击右上角的 X 即可

初始化设置

Administrator: DeepBI\_server

```
start redis
done
done
start DeepBI
start DeepBI server

Redis 3.0.504 (00000000/0) 64 bit


Running in standalone mode
Port: 6379
PID: 35456

http://redis.io

[35456] 05 Jan 17:34:20.927 # Server started, Redis version 3.0.504
[35456] 05 Jan 17:34:20.945 * DB loaded from disk: 0.014 seconds
[35456] 05 Jan 17:34:20.947 * The server is now ready to accept connections on port 6379
wait server....
done
To stop the server close in current window.
```

服务已经启动


## 11. 重新启动服务

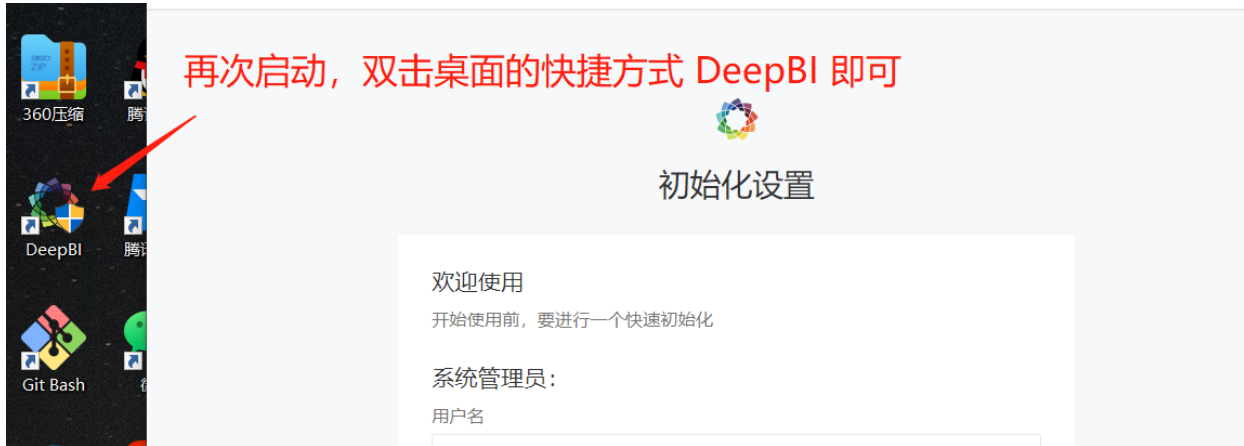

- 以上就是 DeepBI 安装过程, 使用说明, 请点击 [DeepBI 在线使用说明](#)

## Exe安装遇到问题解决方案

1. 安装过程提示没有权限 见下图: :

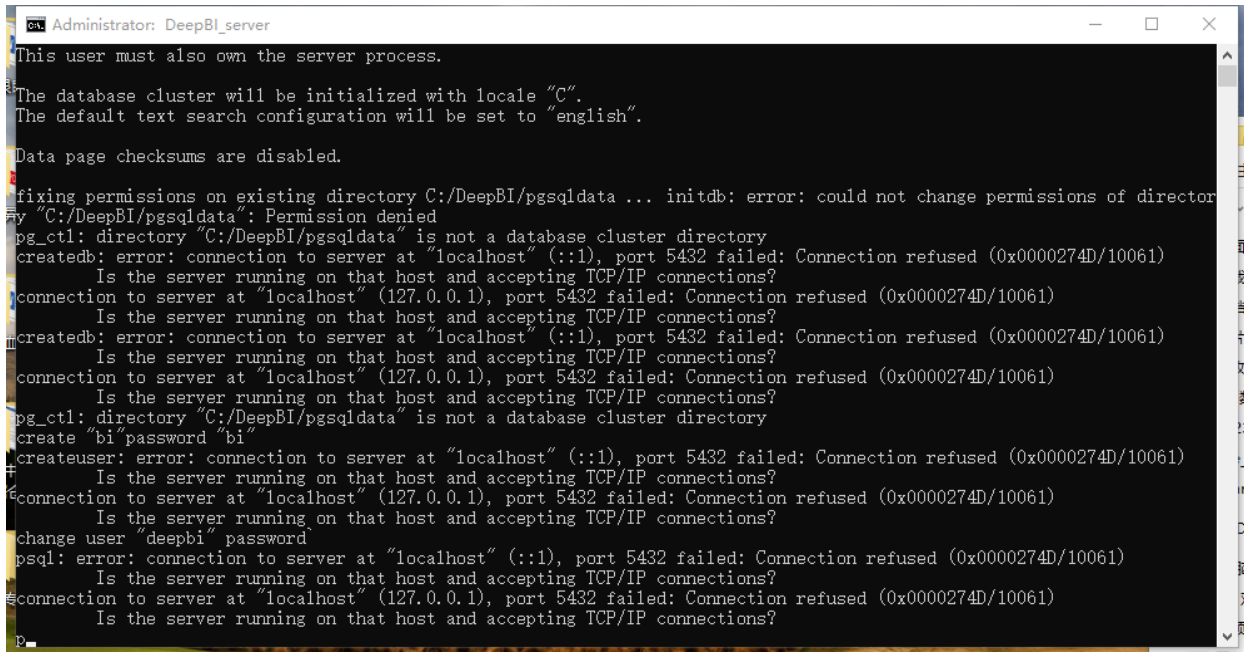


- Appear:

The files belonging to this database system will be owned by user "00767127".  
This user must also own the server process. The database cluster will be initialized with locale "Chinese (Simplified)\_China.936".  
initdb: could not find suitable text search configuration for locale "Chinese (Simplified)\_China.936"  
The default text search configuration will be set to "simple".  
Data page checksums are disabled. fixing permissions on existing directory C:/DeepBI/pgsqldata ...  
initdb: error: could not change permissions of directory "C:/DeepBI/pgsqldata": Permission denied  
pg\_ctl: directory "C:/DeepBI/pgsqldata" is not a database cluster directory  
createdb: error: connection to server at "localhost" (:::1), port 5432 failed: Connection refused (0x0000274D/10061)  
Is the server running on that host and accepting TCP/IP connections?

- solution:

- (1) (1) 停止服务, 打开命令行, 以管理员身份打开, 点击window 窗口, 直接输入cmd 如下图:

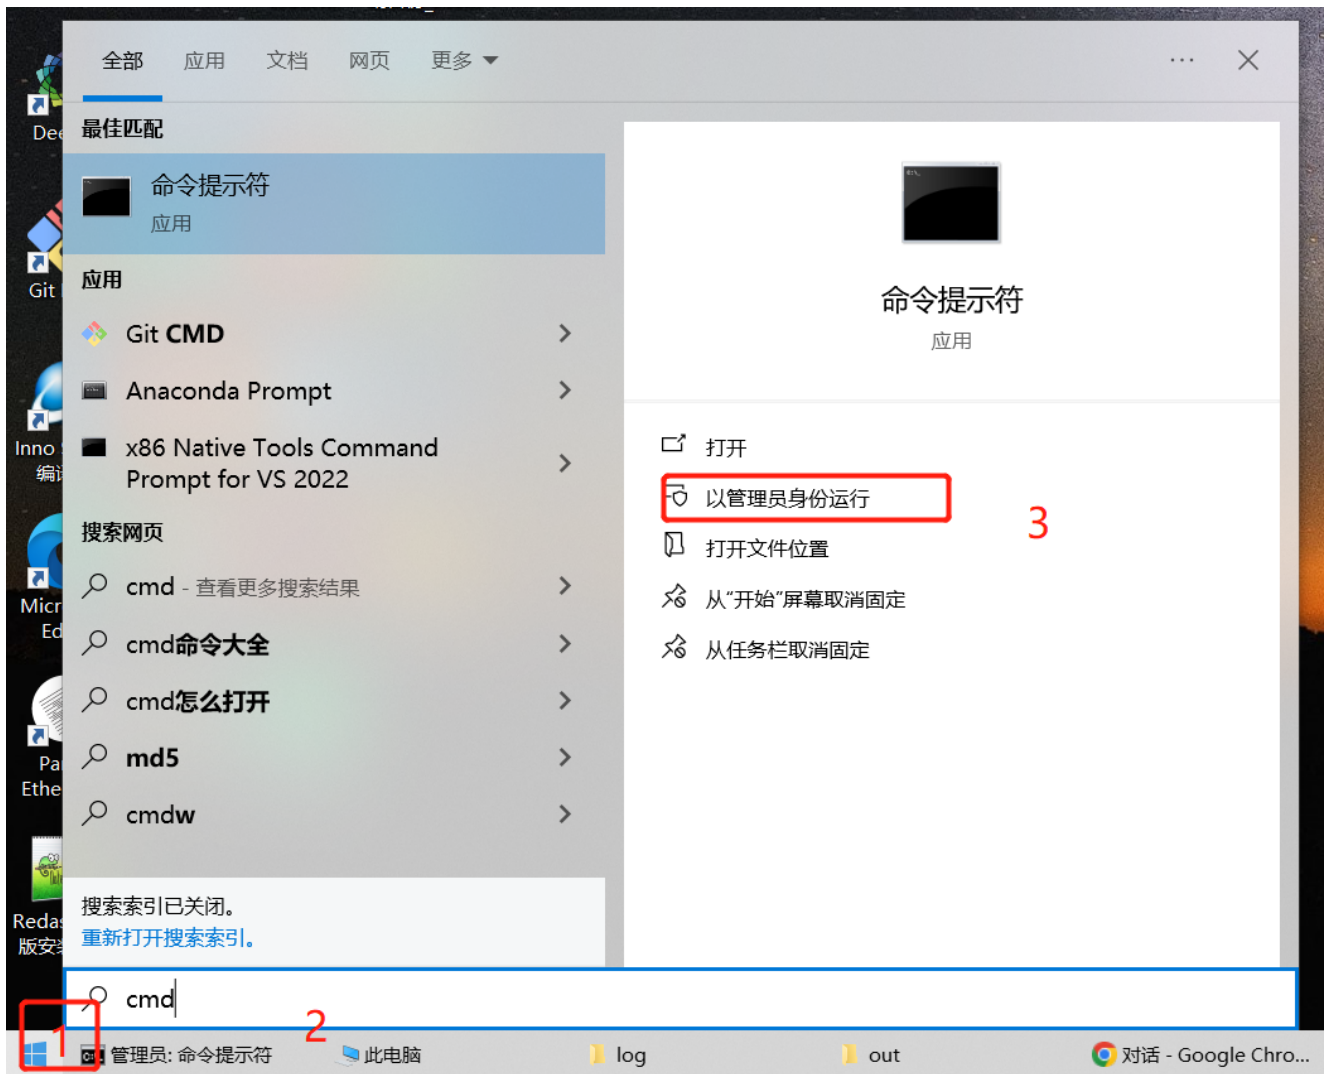

(2) 上面命令命令一般再C:\WINDOWS\system32,转到C:\DeepBI 文件夹下, 运行 stop.bat

运行: cd ../../DeepBI 运行: stop.bat ,等待运行完毕

**管理员: 命令提示符**

```
Microsoft Windows [版本 10.0.19045.3803]
(c) Microsoft Corporation。保留所有权利。

C:\WINDOWS\system32>cd ..

C:\Windows>cd ..


C:\>cd DeepBI

C:\DeepBI>_
```

(3) 删除历史无权限文件

打开 C:\DeepBI 然后删除 .init文件 和 pgsqldata 文件夹


(4) 给文件夹权限

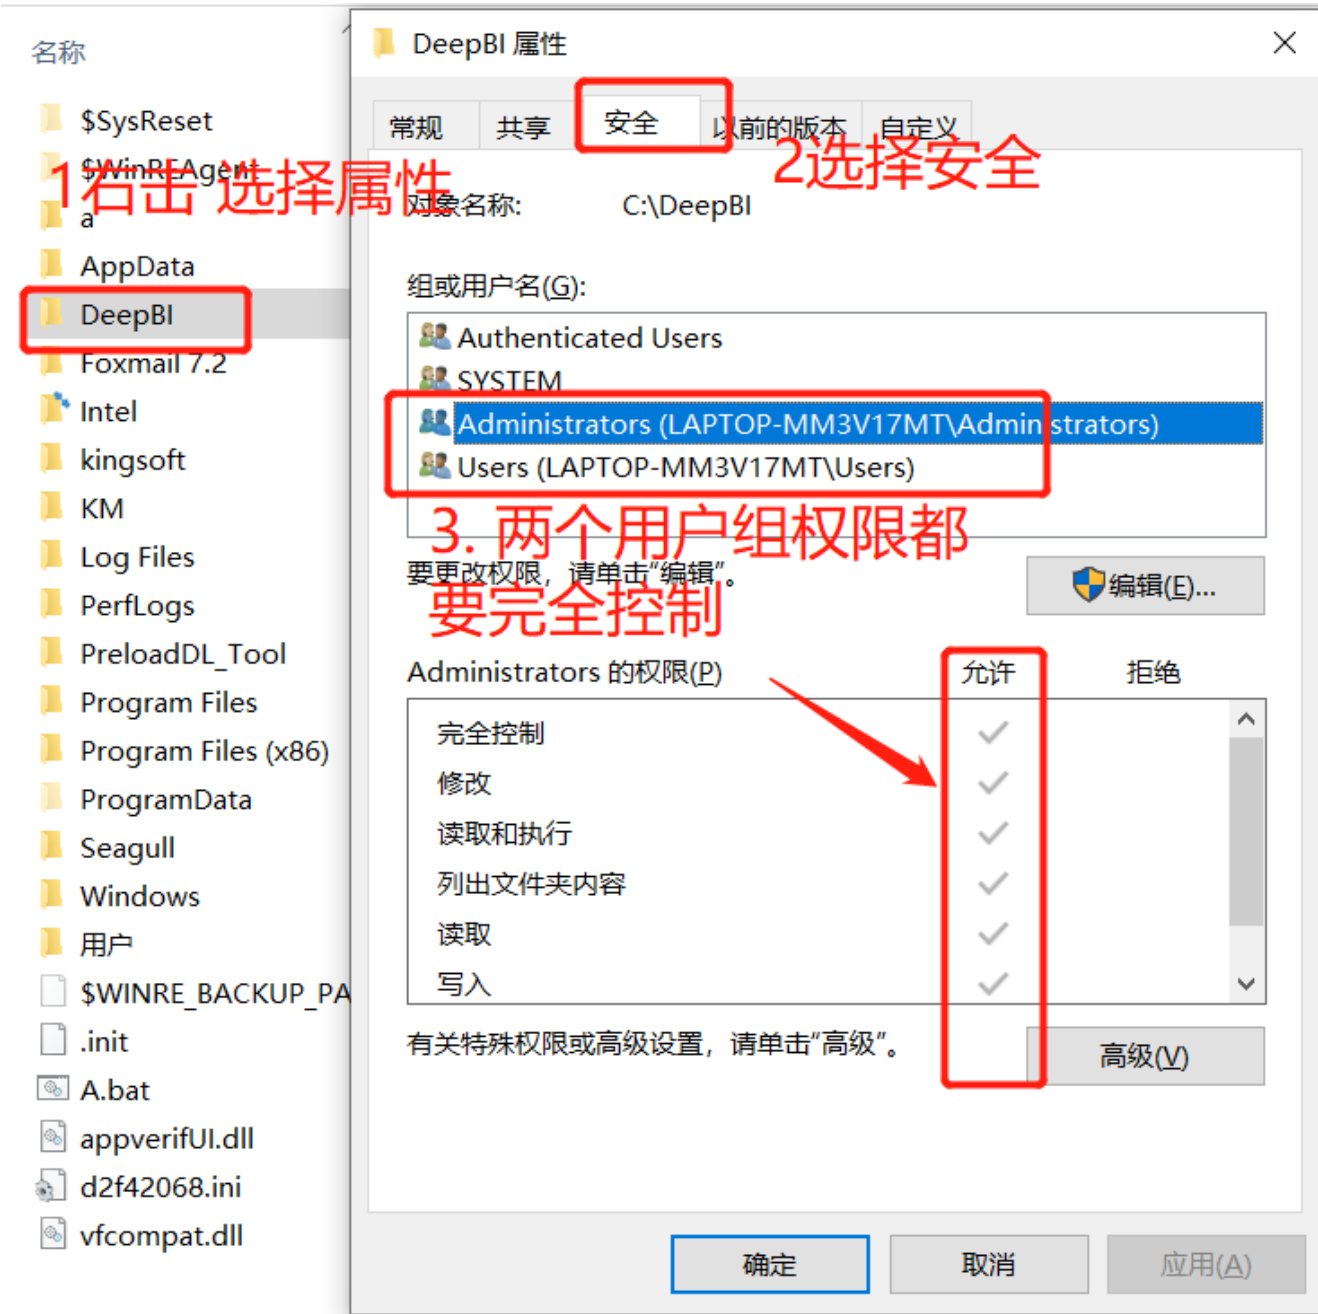


(5) 重新打开管理员命令行，到DeepBI下 命令行运行start.bat 等待启动即可

2. 安装完毕设置网页账号登录后一直处于加载中。



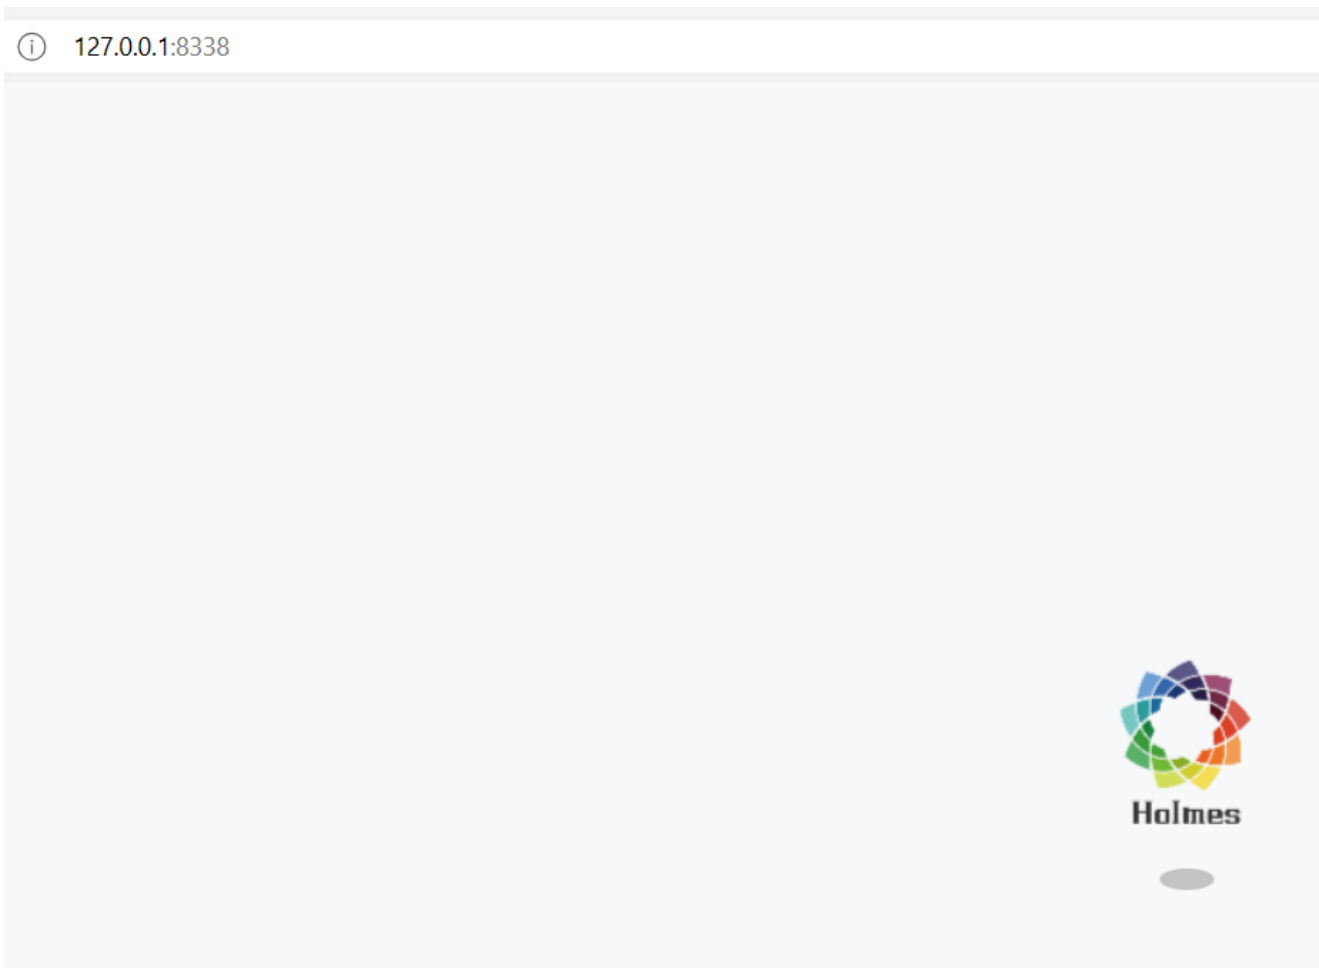


右击页面，选择检查，选择

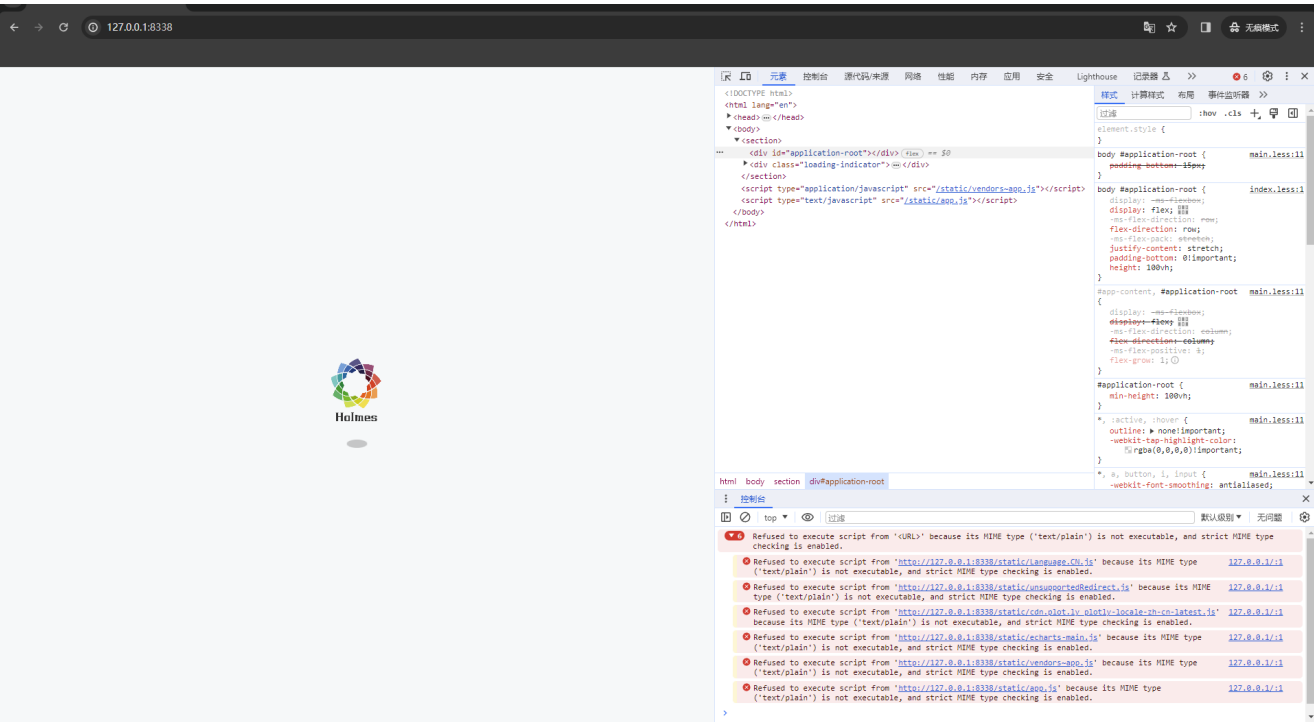

如果出现js无法加载

解决方法：

1.WIN+R 打开运行框，输入“regedit”进入注册表。

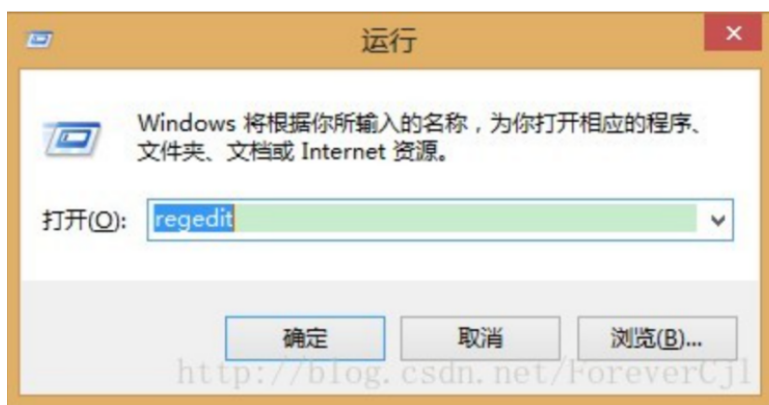

2.在“计算机/HKEY\_CLASSES\_ROOT/.js”目录下找到Content Type键，将其值改为“text/javascript”。！  
在安装vs2012之前，这两个键是不存在的，当卸载vs2012之后也是一样。