

Singleton Pattern

Contents

| | | |
|---|------------------|---|
| 1 | Intent | 1 |
| 2 | Problem | 1 |
| 3 | Solution | 2 |
| 4 | Structure | 3 |
| 5 | Pseudocode | 3 |
| 6 | Applicability | 4 |
| 7 | How to Implement | 4 |
| 8 | Example | 5 |
| 9 | Exercises | 6 |

1 Intent

Singleton is a creational design pattern that lets you ensure that a class has only one instance, while providing a global access point to this instance.

2 Problem

The Singleton pattern solves two problems at the same time, violating the Single Responsibility Principle:

1. **Ensure that a class has just a single instance.** Why would anyone want to control how many instances a class has? The most common reason for this is to control access to some shared resource—for example, a database or a file.

Here's how it works: imagine that you created an object, but after a while decided to create a new one. Instead of receiving a fresh object, you'll get the one you already created.

Note that this behavior is impossible to implement with a regular constructor since a constructor call **must** always return a new object by design.

2. **Provide a global access point to that instance.** Remember those global variables that you (all right, me) used to store some essential objects? While they're very handy, they're also very unsafe since any code can potentially overwrite the contents of those variables and crash the app.

Just like a global variable, the Singleton pattern lets you access some object from anywhere in the program. However, it also protects that instance from being overwritten by other code.

There's another side to this problem: you don't want the code that solves problem #1 to be scattered all over your program. It's much better to have it within one class, especially if the rest of your code already depends on it.

Nowadays, the Singleton pattern has become so popular that people may call something a singleton even if it solves just one of the listed problems.


3 Solution

All implementations of the Singleton have these two steps in common:

- Make the default constructor private, to prevent other objects from using the new operator with the Singleton class.
- Create a static creation method that acts as a constructor. Under the hood, this method calls the private constructor to create an object and saves it in a static field. All following calls to this method return the cached object.

If your code has access to the Singleton class, then it's able to call the Singleton's static method. So whenever that method is called, the same object is always returned.

4 Structure

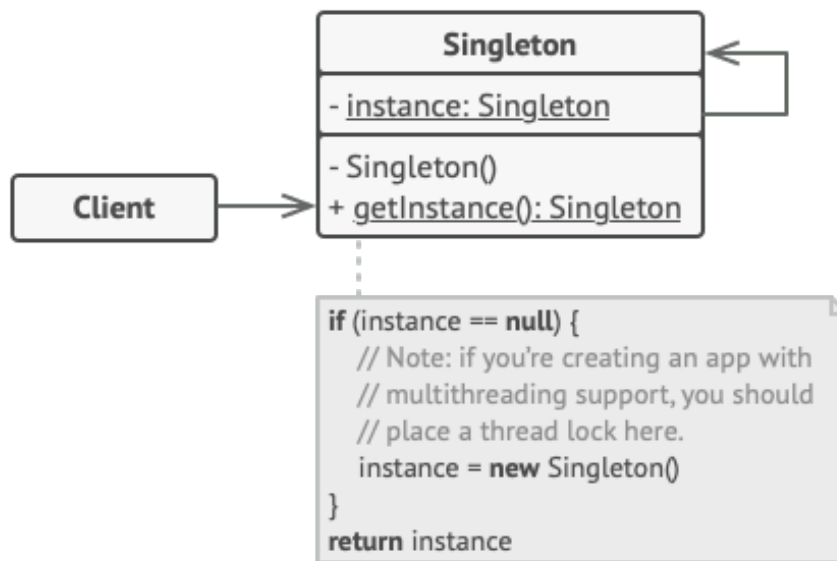

Structure of Singleton

1. The Singleton class declares the static method `getInstance` that returns the same instance of its own class.

The Singleton's constructor should be hidden from the client code. Calling the `getInstance` method should be the only way of getting the Singleton object.

5 Pseudocode

In this example, the database connection class acts as a Singleton. This class doesn't have a public constructor, so the only way to get its object is to call the `getInstance` method. This method caches the first created object and returns it in all subsequent calls.



```

1 // The Database class defines the 'getInstance' method that lets clients
  // access the same instance of a database connection throughout the program.
3 class Database is
  // The field for storing the singleton instance should be declared static.
5   private static field instance: Database

7   // The singleton's constructor should always be private to
  // prevent direct construction calls with the 'new' operator.
9   private constructor Database() is
  // Some initialization code, such as the actual connection to a database server.
11  // ...
  
```



```
13 // The static method that controls access to the singleton instance.
   public static method getInstance() is
15     if (Database.instance == null) then
         acquireThreadLock() and then
17         // Ensure that the instance hasn't yet been initialized by another
         // thread while this one has been waiting for the lock's release.
19         if (Database.instance == null) then
             Database.instance = new Database()
21     return Database.instance

23 // Finally, any singleton should define some business logic which can be executed on its instance.
   public method query(sql) is
25     // For instance, all database queries of an app go through this method.
     // Therefore, you can place throttling or caching logic here.
27     // ...

29 class Application is
     method main() is
31         Database foo = Database.getInstance()
         foo.query("SELECT ...")
33         // ...
         Database bar = Database.getInstance()
35         bar.query("SELECT ...")
         // The variable 'bar' will contain the same object as the variable 'foo'.
```

6 Applicability

1. Use the Singleton pattern when a class in your program should have just a single instance available to all clients; for example, a single database object shared by different parts of the program.
 - The Singleton pattern disables all other means of creating objects of a class except for the special creation method. This method either creates a new object or returns an existing one if it has already been created.
2. Use the Singleton pattern when you need stricter control over global variables.
 - Unlike global variables, the Singleton pattern guarantees that there's just one instance of a class. Nothing, except for the Singleton class itself, can replace the cached instance.

Note that you can always adjust this limitation and allow creating any number of Singleton instances. The only piece of code that needs changing is the body of the `getInstance` method.

7 How to Implement

1. Add a private static field to the class for storing the singleton instance.

2. Declare a public static creation method for getting the singleton instance.
3. Implement “lazy initialization” inside the static method. It should create a new object on its first call and put it into the static field. The method should always return that instance on all subsequent calls.
4. Make the constructor of the class private. The static method of the class will still be able to call the constructor, but not the other objects.
5. Go over the client code and replace all direct calls to the singleton’s constructor with calls to its static creation method.

8 Example

It’s pretty easy to implement a sloppy Singleton. You just need to hide the constructor and implement a static creation method.



```
package com.patterns.singleton;  
  
2 public final class Singleton {  
4     private static Singleton instance;  
     public String value;  
  
6     private Singleton(String value) {  
8         this.value = value;  
     }  
  
10    public static Singleton getInstance(String value) {  
12        if (instance == null) {  
            instance = new Singleton(value);  
14        }  
        return instance;  
16    }  
}
```



```
1 package com.patterns.singleton;  
  
3 public class DemoSingleThread {  
     public static void main(String[] args) {  
5         System.out.println("If you see the same value, then singleton was reused (yay!)"  
            + "\n"  
7         + "If you see different values, then 2 singletons were created (booo!!)"  
            + "\n\n"  
9         + "RESULT: " + "\n");  
  
11        Singleton singleton = Singleton.getInstance("FOO");  
    }  
}
```



```
13 Singleton anotherSingleton = Singleton.getInstance("BAR");  
    System.out.println(singleton.value);  
    System.out.println(anotherSingleton.value);  
15 }  
}
```

9 Exercises

1. Write and demo programs from the pseudocode.
2. Take an example and write code to demo program.