

Lost in Distribution: SAEs Under Domain Shift

Anonymous Author(s)

Affiliation

Address

email

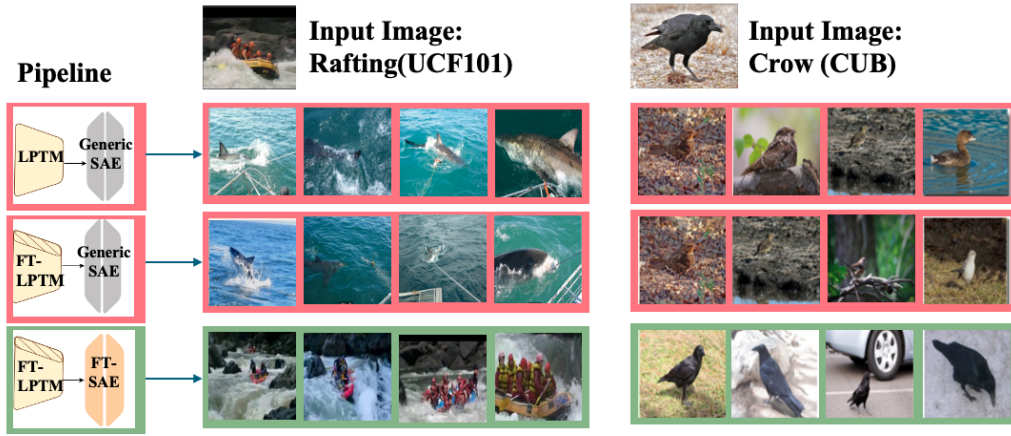


Figure 1: Top-activating images for the per-class top-activating neuron for three configurations. FT-SAE trained on fine-tuned activations (bottom row) captures the semantics better than the Generic SAE (G-SAE) for CLIP activations (top row) and fine-tuned activations (middle row).

Abstract

Large pre-trained vision models are routinely adapted to new domains/applications using lightweight adapters. Existing mechanistic interpretability analyses reuse a *generic* Sparse Autoencoder (SAE) pretrained using a large dataset $\mathcal{D}$ to explain adapted variants. In this paper, we analyze the changes induced by the adapters on mechanistic interpretability. We show that the interpretability of the generic SAE degrades as the target domain moves away from $\mathcal{D}$, using multiple encoders (CLIP, SigLIP, DINO, ALIGN), adapters (LoRA, MaPLe, TAP, VPT), and SAEs (Gated, Top-K, JumpReLU, Matryoshka) using several metrics. The generic SAE features lose both reconstruction fidelity and concept selectivity as the distribution distance of the target shifts from ImageNet-like benchmarks to far ones like PathMNIST, ChestMNIST, and EuroSAT. We also show that *finetuned* SAEs built on the adapted activations using the target dataset recover and surpass the interpretability profile, yielding sparser and more monosemantic features. We introduce a new *Domain-Aware Monosemanticity Score* (DAMS) to measure concept coherence relative to the target distribution, providing a method to determine when reuse of generic SAEs is justified and when finetuned SAEs are necessary. Going beyond correlational evidence, we intervene directly on SAE latents and find that generic-SAE latents have no detectable causal effect on the adapted model’s predictions, while finetuned-SAE latents do, with the gap in how far a dictionary’s latents are *necessary* to correct classification tracking domain distance almost perfectly. We further show that embedding-space distance is the wrong quantity to predict degradation from

— a text-space measure of how far a target vocabulary falls outside ImageNet’s is a substantially better predictor — and combine the two into a rule that calls retrain-versus-reuse correctly in seven of eight domains out-of-sample, using only quantities measurable before any SAE is trained. Our study finds that adapter families differ mechanistically: prompt-based methods primarily steer existing features, while weight-space adaptation reshapes the feature dictionary itself. We conclude that trustworthy mechanistic interpretation of adapted models requires domain-matched SAEs as the target domain moves farther.

1 Introduction

Large pre-trained models (LPTMs) such as CLIP [Radford et al., 2021], SigLIP [Zhai et al., 2023], DINO [Caron et al., 2021], and ALIGN [Jia et al., 2021] have become foundational across different tasks [Bommasani et al., 2021], particularly for several vision tasks. Their general-purpose representations often fall short on specialized domains such as satellite imagery or medical images, necessitating domain adaptation. A rich line of work addresses this through parameter-efficient fine-tuning: LoRA [Hu et al., 2022] introduces low-rank updates, prompt-based methods such as CoOp and CoCoOp [Zhou et al., 2022b,a], and MaPLe [Khattak et al., 2023a] learn task-specific context tokens. Adapter-based [Gao et al., 2024] and visual prompt tuning [Jia et al., 2022] approaches modify intermediate or input-level representations while keeping the backbone frozen. Despite their effectiveness, how adapters reshape internal representations and affect prior interpretability analyses remain largely unexplored.

Understanding what the LPTMs represent internally is no longer optional [Räuker et al., 2023, Kim et al., 2018] as they are used widely. Sparse autoencoders (SAEs) decompose polysemantic activations into sparse, monosemantic features and have emerged as a principled tool for resolving superposition [Cunningham et al., 2024, Rajamanoharan et al., 2024a] with extensions to vision transformers [Gandelsman et al., 2024, Gao et al., 2025]. A growing body of work trains a generic SAE on base models using a large, representative dataset and reuses them as fixed analysis tools [Rao et al., 2024, Stevens et al., 2025, Pach et al., 2025]. Lim et al. [Lim et al., 2024] apply a base-model SAE to MaPLe-adapted CLIP and find that prompt-based adaptation largely remaps existing concepts. Their analysis, however, is restricted to prompt tuning on near-domain benchmarks. This assumption breaks down under stronger adaptation methods and larger domain shifts.

Neuron-level analysis can reveal if pretrained SAE features are preserved, repurposed, or replaced during adaptation. Can the SAE features interpret a model after adapting it? How do we understand the impact of the adapter on the activation space? How much can we trust a fine-tuned model’s behavior [Durrani et al., 2020, Csiszárík et al., 2021]? If adaptation merely remaps existing features, reliability rests on the quality of remapping. If it induces new representations, we need tools to verify their faithfulness to the target distribution. Recent language-model results provide a useful warning sign: frozen SAE features can underperform linear probes on OOD probing [Smith et al., 2025]; SAEs can fail to outperform simple baselines under data scarcity, class imbalance, or covariate shift [Kantamneni et al., 2025]; and under compositional OOD shift, the failure can localise to the dictionary rather than the inference procedure [Pacela et al., 2026]. These results suggest that SAE dictionaries may encode training-distribution co-occurrence structure as fixed directions. If so, shifting the activation distribution should make those directions a worse basis for interpretation. We study this failure mode for vision models under lightweight fine tuning, where practitioners often want to reuse interpretability tools after adapting a foundation model to a specialised domain. We also answer the following question: If the generic SAE degrades after adaptation, how can we restore its interpretability, reconstruction fidelity and causal faithfulness after adaptation?

We study the impact of adaptation on interpretability on different LPTMs, adapters, and SAEs in this paper. We show that generic SAEs fall short in various interpretability metrics as the distribution of the target domain moves away. We demonstrate that training a specific *finetuned* SAE on the adapted model using the target dataset more than compensates for this loss. To ensure our findings generalize, we design our experimental setup along three axes. First, we study four vision encoders spanning distinct pretraining objectives: CLIP [Radford et al., 2021], SigLIP 2 [Tschannen et al., 2025], ALIGN [Jia et al., 2021], and DINOv2 [Oquab et al., 2024]. This selection disentangles the role of language grounding from visual feature quality. Second, we consider adaptation families spanning a spectrum of modification aggressiveness: weight-space LoRA [Hu et al., 2022], and the prompt-based

77 methods MaPLe [Khattak et al., 2023a], TAP [Ding et al., 2025], and visual prompt tuning [Jia
78 et al., 2022]. Third, we test on 16 datasets whose distributions vary systematically from ImageNet
79 used for pretraining, including fine-grained recognition (StanfordCars, FGVC Aircraft, Flowers102,
80 OxfordPets), scene and action understanding (SUN397, UCF101), specialized domains (EuroSAT,
81 PathMNIST, ChestMNIST, DTD), and ImageNet variants (ImageNet, ImageNetV2, ImageNet-Sketch,
82 ImageNet-A). This tiered design tests whether SAE degradation is a smooth function of domain
83 distance or exhibits sharp phase transitions. We focus on Gated SAEs [Rajamanoharan et al., 2024a]
84 in their patch-based variant, enabling both global and local concept analysis, but show the conclusion
85 also holds for the Matryoshka, Top- k [Gao et al., 2025], and JumpReLU [Rajamanoharan et al.,
86 2024b] variants of SAEs.

87 2 Related Work

88 **Adapting Vision–Language Models Under Domain Shift:** Large pre-trained vision and vision–
89 language models exhibit strong transfer across downstream tasks, but this transfer does not imply
90 robustness under distribution shift. CLIP, SigLIP, ALIGN, and DINOv2 can degrade substantially on
91 fine-grained recognition, medical imaging, satellite imagery, textures, and corruption benchmarks
92 [Radford et al., 2021, Zhai et al., 2023, Jia et al., 2021, Oquab et al., 2024, Hendrycks and Dietterich,
93 2019], motivating a large adaptation literature. Prompt-learning methods (CoOp, CoCoOp, MaPLe,
94 PromptSRC, TAP) learn task-specific context tokens while keeping backbone parameters fixed
95 [Zhou et al., 2022b,a, Khattak et al., 2023a,b, Ding et al., 2025]. Parameter-efficient fine-tuning
96 via LoRA modifies internal weights through low-rank updates [Hu et al., 2022]. Adapter-based
97 and visual-prompt methods provide complementary mechanisms [Gao et al., 2024, Jia et al., 2022],
98 while distributionally robust optimization, source-free adaptation, and test-time prompt tuning target
99 robustness directly [Sagawa et al., 2020, Singha et al., 2023, Shu et al., 2022].

100 However, this literature evaluates adaptation primarily through output behavior: accuracy, transfer, or
101 calibration. These metrics answer whether adaptation improves performance, but not what it does to
102 the internal feature basis. Whether adaptation reuses, repurposes, suppresses, or replaces pre-trained
103 features remains unclear, yet this distinction is central for interpretability: two adapted models with
104 similar accuracy may rely on very different internal mechanisms.

105 **From Output Explanations to Internal Representation Analysis:** Attribution methods such as
106 Grad-CAM, integrated gradients, and relevance propagation localize influential input regions but
107 provide limited information about feature-level organization [Selvaraju et al., 2020, Sundararajan
108 et al., 2017, Lapuschkin et al., 2015]. This limitation is especially important under domain shift,
109 where failures may arise from non-local cues such as texture, acquisition artifacts, or entangled
110 feature reuse. Earlier representation-level work analyzed internal features through feature inversion,
111 network dissection, and representation similarity [Mahendran and Vedaldi, 2015, Bau et al., 2017,
112 Durrani et al., 2020, Csiszárík et al., 2021]. For VLMs, Gandelsman et al. decompose CLIP-ViT
113 representations into layer, head, and token contributions interpretable via text directions [Gandelsman
114 et al., 2024].

115 Nevertheless, architectural decompositions do not directly answer whether the underlying feature basis
116 is disentangled. A head or direction may contribute to a prediction while combining multiple unrelated
117 concepts. An adapted model may preserve high-level architectural pathways while changing the
118 feature-level dictionary inside those pathways. Our work therefore targets feature-level interpretability
119 rather than output or architectural attribution alone.

120 **Sparse Autoencoders as Feature-Level Interpretability Tools:** Sparse autoencoders (SAEs)
121 decompose neural activations into sparse, monosemantic features via overcomplete dictionaries
122 trained to reconstruct intermediate activations under sparsity constraints [Elhage et al., 2022, Bricken
123 et al., 2023, Cunningham et al., 2024]. Recent extensions to vision and vision–language encoders
124 use SAE dictionaries as concept bottlenecks [Rao et al., 2024], demonstrate causal interventions
125 across recognition and segmentation [Stevens et al., 2025], steer multimodal LLM outputs via CLIP
126 vision-encoder SAE features [Pach et al., 2025], and explore sparse concept embeddings, steerability,
127 and hierarchical SAE variants for visual representations [Bhalla et al., 2024, Joseph et al., 2025,
128 Zaremba et al., 2025, Bussmann et al., 2025]. Patch-level SAEs [Lim et al., 2024] are especially
129 relevant as they operate over spatial tokens, enabling localized concept extraction that can reveal
130 whether domain shifts manifest locally, globally, or both.

We position our work as a feature-level study of adaptation. Robustness benchmarks measure performance under shift; adaptation papers optimize that performance; text-grounded decompositions identify architectural contributions; prior SAE work extracts sparse concepts from fixed or lightly adapted models. What remains underexplored is whether the sparse feature dictionary learned from a base model continues to faithfully explain models adapted to substantially different domains. We address this gap by evaluating reconstruction fidelity, sparsity, monosemanticity, and causal faithfulness across model architectures, adaptation families, and domain shifts.

3 Studying SAEs under Domain Shift

In this paper, we study how adapting a Large Pre-Trained Model L with an adapter A affects its interpretability under a mechanistic interpretability tool S . We consider combinations of several visual encoders, adapters, and Sparse Auto-Encoders (SAEs) for this study. A *Generic SAE* (G-SAE) $\bar{S}_L$ is trained on activations of L using a large, pretraining-like corpus (we use ImageNet in this paper). A *Finetuned SAE* (FT-SAE) $S_{\hat{L}}$ is trained on the adapted model $\hat{L}$ using the target dataset.

Core claim. A sparse autoencoder trained on a base model should not automatically be treated as an interpreter for every adapted descendant of that model. Our working hypothesis is that the SAE dictionary is partly a model the activation distribution on which it was trained: when adaptation moves the encoder into a new domain, the frozen dictionary can become misaligned with the adapted features it is asked to explain. We test this hypothesis across four encoders, three adapter families, and 16 benchmarks by comparing a generic SAE trained on the base model with a domain-matched SAE retrained on the adapted model.

Evaluating the claim. We evaluate the following three SAE configurations using several metrics across a number of encoders, adapters, SAEs and datasets to establish the claim.

1. ZS+G-SAE: $\bar{S}_L(L(I))$: the base model with the generic SAE (reference);
2. FT+G-SAE: $\bar{S}_L(\hat{L}(I))$: adapted model with the generic SAE. The gap from the previous indicates how far adaptation pushes activations off the base dictionary.
3. FT+FT-SAE: $S_{\hat{L}}(\hat{L}(I))$: adapted model with the SAE trained on it. The gap from the previous indicates how much the Generic SAE must adapt.

Diagnostic Metrics. We compute four aspects on each configuration: (i) *Predictive utility*: classification accuracy after replacing activations with their SAE reconstruction [Lim et al., 2024]; a drop for FT+G-SAE relative to the FT-SAE oracle indicates the generic dictionary no longer carries the information the adapted model uses. (ii) *Reconstruction fidelity*: MSE $E_{\text{rec}} = \mathbb{E}[\| \text{SAE}(z) - z \|_2^2]$; high E_{rec} for FT+G-SAE paired with low E_{rec} for FT+FT-SAE is a direct signature of dictionary drift. (iii) *Sparsity & usage*: per-latent activation frequency and mean activation [Cunningham et al., 2024, Gao et al., 2025]; adaptation may induce dead features, diffuse activations, or concentration on a narrower latent set. (iv) *Selectivity*: label entropy over activation-weighted class distributions and monosemanticity [Cunningham et al., 2024] (pairwise cosine similarity in CLIP space among top-activating images); low entropy = single-label concentration. Formal definitions of the specific metrics are in Appendix A.2.

3.1 SAEs under Adaptation: Hypothesis

A generic SAE encodes the statistical structure of its pretraining corpus, not of the adapted network’s current representations. After adaptation, the frozen dictionary is structurally misaligned with the network’s new feature space. We operationalise this through four axiomatic predictions:

1. **H1** (*downstream utility*): domain-matched SAEs preserve task accuracy better than generic SAEs; the gap grows with domain shift.
2. **H2** (*dictionary structure*): domain-matched SAEs achieve more efficient reconstruction-sparsity profiles.
3. **H3** (*inflated monosemanticity*): standard monosemanticity scores over-report quality for generic SAEs under shift; a coverage-aware metric (DAMS) corrects this bias.
4. **H4** (*scaling with domain distance*): the generic-vs-specific gap scales monotonically with MMD distance from the pretraining distribution.

Table 1: **H1: Classification accuracy (%) for G-SAE and FT-SAE.** Columns ordered by Maximum Mean Discrepancy from ImageNet (near $\rightarrow$ far). G-SAE: trained on base model, FT-SAE: trained on adapted model. **Bold:** best SAE-augmented result per backbone. Gain of finetuned SAE widen as domain shift farther, as predicted by H1 and H4.

Encoder	Configuration	Caltech101	Pets	ImageNet-A	SUN397	ImageNet-Sk.	Corruption	Food101	DTD	UCF101	StanfordCars	Flowers102	FGVC	EuroSAT	ChestMNIST	PathMNIST
CLIP	ZS	93.3	84.9	47.1	62.3	52.4	38.6	78.2	45.2	64.5	58.1	72.4	23.7	45.1	21.5	17.9
	FT	96.1	93.5	72.8	76.1	80.1	64.3	90.4	72.0	77.6	79.3	88.2	46.4	90.8	68.2	90.5
	ZS+G-SAE	92.1	82.5	44.8	60.2	50.6	36.9	75.1	45.9	61.9	55.8	70.2	21.1	59.6	20.1	18.2
	FT+G-SAE	93.2	89.7	68.2	70.2	74.9	58.1	85.3	66.8	71.3	73.8	83.1	38.5	85.9	63.4	84.1
	FT+FT-SAE	95.6	92.7	71.2	74.8	78.3	62.9	89.2	71.1	75.9	77.8	86.9	44.8	90.4	66.9	87.6
SigLIP	ZS	97.0	83.9	47.1	62.3	52.4	40.1	78.2	45.2	64.5	69.07	70.0	28.11	41.4	20.5	16.11
	FT	96.8	94.3	74.2	77.9	81.6	66.1	91.8	73.8	78.6	80.7	89.5	48.9	92.1	69.8	91.4
	ZS+G-SAE	92.9	83.2	46.8	61.4	52.3	38.4	76.2	46.1	62.8	56.9	71.6	22.5	60.9	21.6	19.5
	FT+G-SAE	93.9	90.5	69.6	71.8	76.2	59.7	86.7	68.5	72.4	74.8	84.2	40.1	86.9	64.8	85.9
	FT+FT-SAE	96.2	93.4	73.1	76.5	80.2	64.7	90.8	72.9	76.9	79.1	87.9	46.9	91.7	68.1	89.3
DINO	ZS	91.2	82.1	45.3	59.8	50.8	36.2	75.6	44.1	62.8	55.4	68.9	22.5	43.9	20.4	16.8
	FT	94.8	91.6	70.5	73.9	77.8	61.7	88.1	70.3	75.4	76.2	85.7	44.2	89.2	66.1	88.8
	ZS+G-SAE	89.5	79.8	43.2	57.6	48.4	34.5	73.2	42.6	60.1	52.9	66.5	19.8	58.2	19.1	17.0
	FT+G-SAE	91.8	87.4	66.4	68.9	73.1	56.0	83.5	64.5	69.2	71.1	80.2	36.8	84.0	60.8	81.9
	FT+FT-SAE	94.1	90.8	69.2	72.8	76.1	60.1	87.2	69.1	73.6	75.1	84.1	42.3	88.4	64.2	85.7
ALIGN	ZS	92.5	83.4	46.9	61.5	51.8	37.9	77.3	46.0	63.9	57.2	70.8	24.1	44.9	22.4	18.5
	FT	95.5	92.6	71.9	75.4	79.4	63.4	89.3	71.6	76.6	78.1	87.3	45.7	90.1	67.4	89.9
	ZS+G-SAE	91.1	81.7	44.9	60.2	50.4	36.3	74.8	44.8	61.4	54.7	68.9	21.8	58.7	21.2	18.9
	FT+G-SAE	92.9	88.9	68.4	69.7	74.7	57.8	85.0	66.1	70.6	73.1	82.5	38.9	85.5	63.1	83.7
	FT+FT-SAE	94.9	91.8	71.2	74.2	78.1	62.3	88.7	70.8	75.1	77.2	86.1	44.4	89.8	66.0	87.6
MMD Score		0.028	0.029	0.05	0.057	0.07	0.079	0.08	0.09	0.126	0.14	0.152	0.23	0.291	0.410	0.423

3.2 Experimental Setup

Encoders. CLIP ViT-B/16 [Radford et al., 2021], SigLIP ViT-B/16 [Zhai et al., 2023], ALIGN ViT-B/16 [Jia et al., 2021], DINOv2 ViT-B/14 [Oquab et al., 2024]. The first three are language-supervised; DINOv2 is purely self-supervised, letting us test whether language grounding affects SAE decomposability.

Adaptation. For each encoder: zero-shot (ZS), LoRA [Hu et al., 2022] (rank-16, query/value projections, 10 epochs, lr 10^{-4}), MaPLE [Khattak et al., 2023a] (multi-modal coupled prompt learning), TAP [Ding et al., 2025] ($P=16$ prompt tokens). LoRA modifies weights directly; MaPLE and TAP leave the backbone frozen. This split lets us test whether weight-space adaptation changes the feature geometry more than prompt-based adaptation, and therefore whether generic-SAE transfer depends on the mechanism used to adapt the model.

Datasets. We use 16 benchmarks ordered by Maximum Mean Discrepancy (MMD) from ImageNet distribution, grouped into four tiers: *Near-domain* (Caltech101, Pets, Flowers102, StanfordCars, FGVC-Aircraft); *Specialized* (DTD, UCF101, CUB, EuroSAT, Food101, SUN397); *Far-domain* (PathMNIST, ChestMNIST); *OOD robustness* (ImageNet-A, ImageNet-Sketch, ImageNet-C) [Fei-Fei et al., 2004, Parkhi et al., 2012, Nilsback and Zisserman, 2008, Krause et al., 2013, Maji et al., 2013, Cimpoi et al., 2013, Soomro et al., 2012, Helber et al., 2019, Bossard et al., 2014, Xiao et al., 2010, Yang et al., 2023, Irvin et al., 2019, Hendrycks et al., 2021, Wang et al., 2019, Hendrycks and Dietterich, 2019].

SAE variants. We explore different SAEs: ReLU [Cunningham et al., 2024], Top- k [Gao et al., 2025], Gated [Rajamanoharan et al., 2024a], Matryoshka [Bussmann et al., 2025, Zaremba et al., 2025] (details in Appendix A.1). Results shown are for Gated SAE; others are given in Appendix.

SAE training. For each configuration (encoder, adapter, dataset), we follow the protocol of PatchSAE to train an SAE on patch activations from the penultimate layer of the last block. We use standard expansion factors (ranging from 16 to 64) for SAE’s dictionary. We use an Adam learning rate of 3×10^{-4} for 50k steps on 1M sampled patch activations.

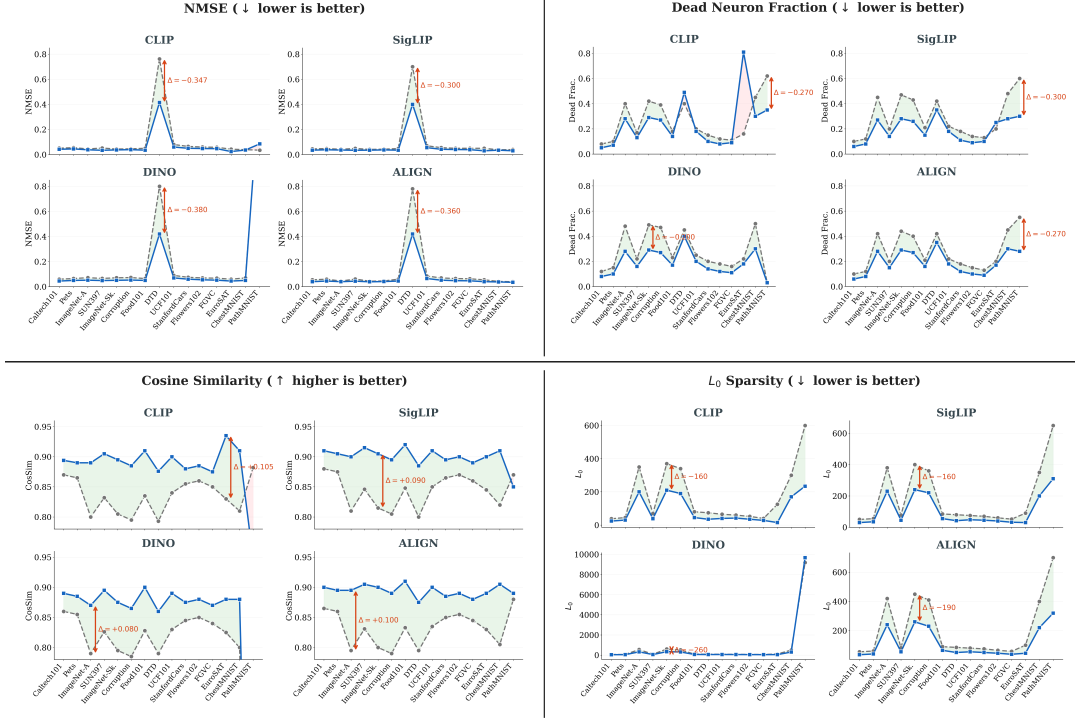


Figure 2: **SAE reconstruction diagnostics:** FT-SAE vs. generic base SAE $\bar{S}$ across 15 downstream datasets and four vision encoders. *Top-left:* NMSE — FT-SAE achieves uniformly lower reconstruction error, with the largest reductions on DTD ($\Delta \approx -0.3$ to -0.38). *Top-right:* Dead neuron fraction — FT-SAE reactivates 20–50% of dormant latents, especially on far-domain benchmarks; CLIP–EuroSAT anomaly (red) reflects dictionary collapse on satellite imagery. *Bottom-left:* Cosine similarity — FT-SAE (blue) consistently exceeds G-SAE (grey), with largest gains on far-domain and OOD benchmarks. *Bottom-right:* L_0 sparsity — FT-SAE activates fewer latents while maintaining reconstruction quality; DINO–PathMNIST anomaly ($L_0 > 9000$) reflects near-total activation on far-domain imagery. Green shading indicates $\hat{S}$ improvement; red shading marks anomalous regressions.

3.3 Hypothesis Testing

H1: FT-SAEs recover accuracy that generic SAEs lose. We establish this hypothesis by evaluating the downstream task of classification accuracy using SAE outputs as a proxy for LPTM encoding. Table 1 shows results for LoRA adaptor on four encoders on 15 datasets ordered by MMD. The FT+FT-SAE consistently performs better than FT+G-SAE for all backbone models and datasets. Its accuracy is comparable to the adapted model itself in many cases, demonstrating the SAE dictionary has captured the adapted representation. The accuracy improvement is broadly related to the MMD, with greater gains for farther distributions. Table 2 shows that this property holds also for adaptors MaPLe and TAP. We also observe that the prompt based adaptation strategy is more brittle representation than LoRA under distribution shifts- the degradation in dictionary quality is higher as evidenced by the higher drops in accuracy values when the G-SAE is used with the adapted model. For more SAE architectures and adaptation configurations refer Tables 7, 8, 9, 10, in appendix.

H2: FT-SAEs achieve a more efficient reconstruction-sparsity profile. We establish this hypothesis by looking at various SAE metrics of G-SAE and FT-SAE. Figure 2 shows 4 relevant metrics on the entire benchmark datasets. FT-SAE has lower L_0 consistently, showing that it encodes the adapted model’s features better. This is also demonstrated by consistently lower NMSE and higher Cosine Similarity metrics of FT-SAE. It also performs better consistently (with an anomaly on DTD and EuroSAT) on the Dead Neuron metric, establishing that more SAE neurons are effectively utilized.

This matters because H1 alone could be explained by a task-specific effect: perhaps the FT-SAE improves classification without being a better representation of the adapted features. H2 tests a stronger requirement. If the FT-SAE is truly better matched to the adapted model, it should also reconstruct held-out activations more efficiently.

Table 2: **Classification accuracy (%) for CLIP using different adapters (SAE-1)** Columns ordered by MMD from ImageNet (near $\rightarrow$ far). G-SAE (trained on frozen model). FT-SAE (retrained after adaptation). **Bold**: best SAE-augmented result per method group.

Method	Configuration	Caltech101	DTD	UCF101	CUB	FGVC	EuroSAT	PathMNIST
LoRA	FT	96.06	72.04	77.56	79.32	46.38	90.78	90.40
	FT+G-SAE	93.20	66.80	71.30	58.30	38.50	85.90	84.10
	FT+FT-SAE	95.60	71.10	75.90	63.44	44.80	90.40	87.50
MaPLE	FT	96.12	56.44	80.40	58.32	25.45	80.93	87.65
	FT+G-SAE	87.15	52.89	62.18	42.75	20.16	46.40	60.20
	FT+FT-SAE	87.25	53.21	65.67	46.38	24.02	64.18	87.10
TAP	FT	95.50	68.00	73.20	52.18	36.50	86.22	90.90
	FT+G-SAE	75.00	39.49	41.33	30.84	18.95	22.12	11.30
	FT+FT-SAE	81.46	44.75	46.40	34.92	20.50	54.13	64.00

229 *Observation*: FT-SAE reduce dead neurons by 31% on average in near-domain settings (Fig. 6 of
 230 Appendix). The exception is EuroSAT, where the dead fraction *rises* from 0.16 to 0.81. Combined
 231 with an L_0 drop from 125 to 15 and a CosSim gain of +0.105, this suggests that the FT-SAE creates
 232 a *hyper-specialised* dictionary: a small number of satellite-specific neurons carry all the signal, while
 233 the rest remain dormant. In this setting, a high dead-neuron fraction is better interpreted alongside
 234 sparsity and reconstruction fidelity, rather than as an isolated failure signal.

235 **H3: Standard monosemanticity metrics overestimate interpretability under shift.** One of the
 236 most common methods of evaluating and understanding an SAE’s performance qualitatively is to
 237 look at the top activating set of images for that neuron. that gives us an idea of how monosemantic
 238 the neuron is- the more correlated the set of activating images are the better is the monosemanticity
 239 of the neuron. which is the intuition for the existing metric for Vision SAEs [Pach et al., 2025] who
 240 proposed a cosine similarity 21 (Appendix) based measure. But the flaw remains that if the activating
 241 set of images correlate with each other but they are not relevant to the input image to the SAE, it is not
 242 a reliable measure of interpretability as the dictionary suffers from the effects of OOD degradation.
 243 We, therefore, propose a new metric to make the monosemanticity measure more distribution aware.

DAMS = $EC^\rho [\alpha \text{CSS}_{\text{norm}} + \beta \text{FSS} + \gamma \text{DAS}]$, $\alpha = (1-\gamma)\phi$, $\beta = (1-\gamma)(1-\phi)$, (1)
 244 with sub-metrics defined as follows. *Effective Coverage* penalises dead and indiscernible neurons:

$$EC = (1 - f_{\text{dead}})(1 - \bar{d}), \quad f_{\text{dead}} = \frac{|\{j: z_j = 0\}|}{L}, \quad \bar{d} = \frac{1}{L_{\text{alive}}} \sum_{j \in \mathcal{A}} \frac{|\{i: z_{ij} > 0\}|}{N}. \quad (2)$$

245 *Class Separability* uses the Fisher ratio with saturation normalisation:

$$\text{CSS}_{\text{norm}} = \frac{\text{CSS}_{\text{raw}}}{\text{CSS}_{\text{raw}} + \kappa}, \quad \text{CSS}_{\text{raw}} = \frac{1}{C} \text{tr}((\mathbf{S}_W + \epsilon \mathbf{I})^{-1} \mathbf{S}_B), \quad (3)$$

246 where $\mathbf{S}_B = \sum_c n_c (\boldsymbol{\mu}_c - \boldsymbol{\mu})(\boldsymbol{\mu}_c - \boldsymbol{\mu})^\top$ and $\mathbf{S}_W = \sum_c \sum_{i \in \mathcal{I}_c} (\mathbf{z}_i - \boldsymbol{\mu}_c)(\mathbf{z}_i - \boldsymbol{\mu}_c)^\top$ are between- and
 247 within-class scatter in SAE activation space. *Feature Specificity* measures entropy-sharpened per-
 248 latent class purity:

$$\text{FSS} = \frac{1}{L_{\text{alive}}} \sum_{j \in \mathcal{A}} (1 - H_{\text{norm}}(j))^s \max_c p(c|j), \quad p(c|j) = \frac{\sum_{i \in \mathcal{I}_c} z_{ij}}{\sum_i z_{ij}}, \quad (4)$$

249 where $H_{\text{norm}}(j) = -\sum_c p(c|j) \log p(c|j) / \log C$ and $s \geq 1$ sharpens the entropy gate. *Domain*
 250 *Alignment* is centered kernel alignment between class-pooled SAE activations and ideal label kernel:

$$\text{DAMS} = \text{CKA}(\mathbf{K}_{\text{SAE}}, \mathbf{K}_{\text{label}}), \quad [\mathbf{K}_{\text{label}}]_{cc'} = \mathbf{1}[c=c']. \quad (5)$$

251 Thus, DAMS is high only when an SAE both preserves useful target-domain representation structure
 252 and produces sparse features that are class-specific. A generic SAE on a far-domain benchmark may
 253 obtain high MS_h due to broad, non-discriminative firing, but it should obtain lower DAMS because
 254 such features have weak effective coverage and poor class separability.

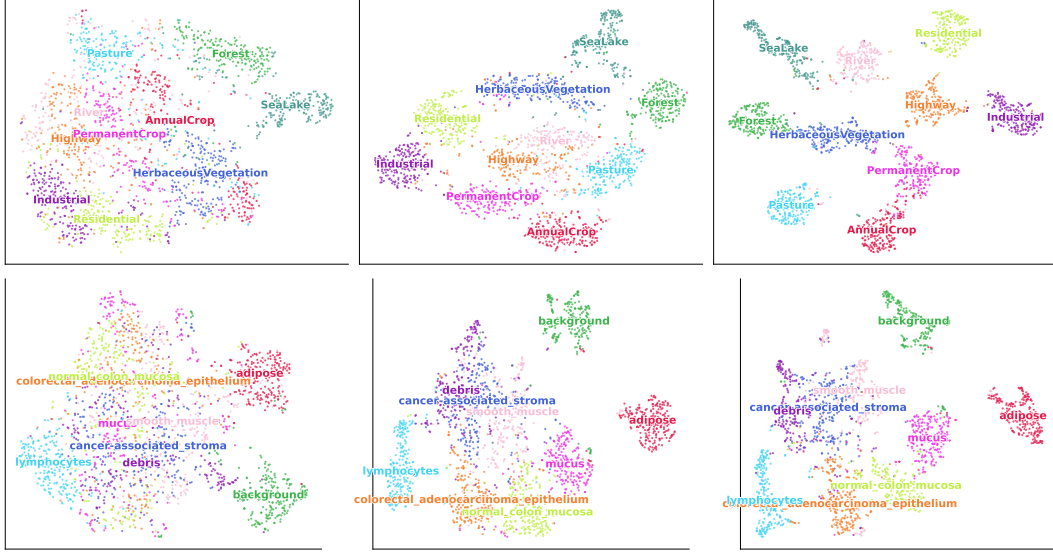


Figure 3: **t-SNE visualisations of SAE latent activations: G-SAE vs FT-SAE for datasets EUROSAT(top) and PathMNIST(Bottom)** Each panel shows patch-level SAE activations projected to 2D via t-SNE, coloured by class label. Domain-matched SAEs produce more compact, class-separable clusters, especially on far-domain benchmarks, consistent with the lower label entropy and higher downstream accuracy in Table 8 and Table 1.

H4: The interpretability gap scales with domain shift. It can be observed from Tables 1, 7, and 10 as well as Figures 2 and 3 that the degradation of G-SAE and the improvement due to FT-SAE is correlated to the MMD score with farther distributions benefitting more from the finetuned SAE. All metrics roughly demonstrate this behavior. Figure 4 shows the systematic change in similarity, related to distribution distance.

H4 is important because it is a prediction about structure, not just a post-hoc explanation of individual failures. The dictionary-mismatch hypothesis predicts that degradation should increase with domain distance rather than appear as an arbitrary collection of dataset-specific effects. This prediction would be weakened if near-domain benchmarks showed large degradation while far-domain benchmarks showed lower. The practical implication is direct: given a new target domain, a researcher can compute its MMD distance from ImageNet and use 3 as a first estimate of whether generic-SAE degradation is likely to justify retraining before running the full comparison.

4 Observations, Ablations and Analysis

Some patterns in the results deserve closer attention because they either sharpen the main conclusions or serve as cautionary notes for practitioners.

Table 3: **MS vs. DAMS across datasets (ordered by MMD)**. MS: activation-weighted semantic coherence Pach et al. [2025]. DAMS: Domain-Aware Monosemanticity Score (ours).

Dataset	MS		DAMS		
	G-SAE	FT-SAE	G-SAE	FT-SAE	Δ
Caltech101	0.657	0.610	0.620	0.563	-0.057
DTD	0.520	0.540	0.300	0.585	+0.285
UCF101	0.687	0.690	0.678	0.818	+0.140
FGVC	0.743	0.760	0.280	0.500	+0.500
EuroSAT	0.750	0.756	0.676	0.629	-0.047
PathMNIST	0.840	0.880	0.682	0.980	+0.298

Table 4: **Ablation: SAE expansion factor and training set.** G-SAE is trained either on ImageNet or on CC3M **Bold**: best SAE result.

Method	Exp.	Caltech101	Oxford Pets	FGVC	DTD	UCF101	EuroSAT	PathMNIST
LoRA-FT	—	96.1	93.5	46.4	72.0	77.6	90.8	90.5
G-SAE (IN)	$\times 32$	89.8	85.4	33.2	62.1	66.8	81.3	78.5
G-SAE (IN)	$\times 64$	92.4	88.6	37.1	65.8	70.4	85.0	82.9
G-SAE (IN)	$\times 128$	93.1	89.5	38.4	66.9	71.6	86.2	83.8
G-SAE (CC3M)	$\times 64$	47.8	28.3	5.8	35.7	43.3	49.8	31.0
FT-SAE	$\times 64$	95.7	92.4	44.5	71.8	76.2	90.7	88.7

Adapter family determines how urgently the SAE needs retraining. LoRA modifies model weights directly, rotating and scaling the representation space in the layers it touches. As a result, it behaves as a more stable finetuning method. MaPLE and TAP leave backbone weights frozen and learn only prompt tokens that steer activations at inference time. Table 2 shows that LoRA is a more stable adapter, with its accuracy being affected less when using the Generic SAE compared to MaPLE and TAP. This suggests prompt-based adaptors need finetuned SAE to recover the lost accuracy.

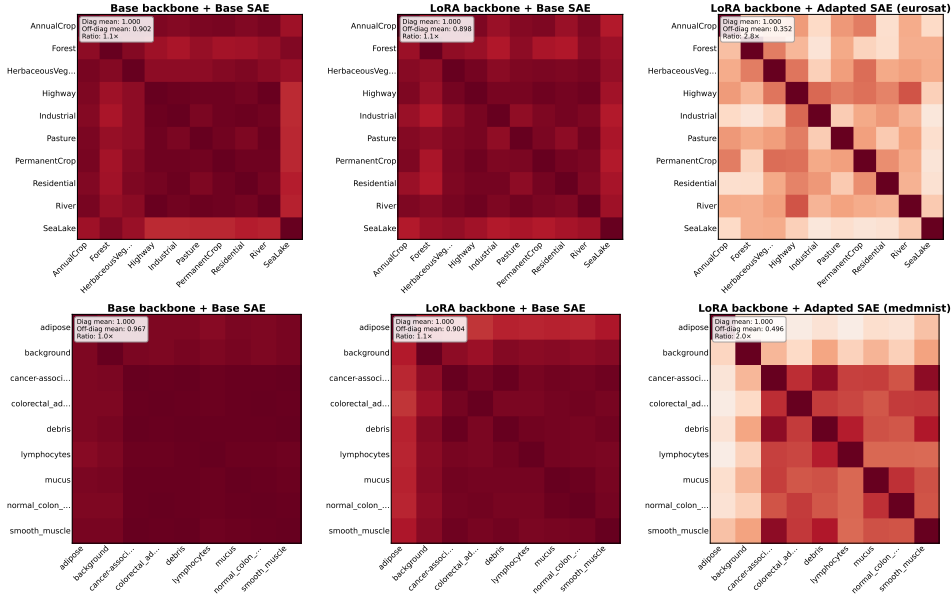


Figure 4: Heat map of cosine similarity of top activating neurons averaged for each class. Top row: EuroSAT, bottom: PathMNIST. Left col: ZS+G-SAE, middle: FT+G-SAE, right: FT+FT-SAE. Finetuned SAEs learn more class discriminative features.

Language supervision is required for SAE decomposability on far-domain data. DINOv2, the only backbone trained without language signal, tracks the three language-supervised models except on PathMNIST. DINOv2’s FT-SAE has low cosine similarity, high NMSE, and increased L_0 compared to CLIP, SigLIP, and ALIGN (Table 11). Language-supervised training builds a feature space whose principal directions align with semantic categories, making sparse decomposition tractable. DINOv2’s features, optimised for spatial correspondence via self-distillation, lack this alignment on medical data where the visual vocabulary shares almost no overlap with natural-scene statistics. SAE-based interpretability of self-supervised encoders on far-OOD domains may be structurally out of reach without additional language-grounding.

Findings are robust to SAE architecture, backbone, and adaptation method. Our observations on the Generic SAE degrading and the Finetuned SAE recapturing performance work across SAE architectures as well as across adapters and models. Tables 1, 7, 8, and 9 clearly show this. To test that the procedure itself is not specific to the CLIP + LoRA + ReLU configuration the main results use, we ran the full pipeline over a wider matrix: three further encoders (DINOv2, which has no text tower at all; ALIGN, whose convolutional vision tower emits no token sequence; and SigLIP2), two further SAE architectures (Top- k [Gao et al., 2025] and JumpReLU [Rajamanoharan et al., 2024b]), and two further adaptation methods (MaPLE [Khattak et al., 2023a] and VPT-Deep [Jia et al., 2022]). Masked finetuning runs unchanged across every combination, and unit protection is exact — including for JumpReLU’s learned per-unit threshold, which must be masked alongside the encoder and decoder weights or the units the method exists to preserve are silently modified. Appendix A.8 reports the matrix, along with the two structural limits it exposes: MaPLE reaches CLIP alone because its deep visual prompts are coupled to a paired text tower, while VPT is the only method here that reaches a vision-only encoder.

Domain distance predicts degradation, but not the distance one would first reach for. The correlation between embedding-space MMD² and generic-SAE degradation does not survive extending the cohort from six domains to eight: apparent R^2 falls to 0.004, driven by a single domain (Oxford Pets) that is stylistically the most distant in the cohort yet degrades least. The resolution is that embedding distance conflates how different a domain’s images *look* with how different its

concepts are from those the dictionary was fit on — and ImageNet-1k already covers Oxford Pets’ vocabulary almost completely. Measuring concept distance directly, as the mean cosine distance from each target class name to its nearest ImageNet-1k class name in CLIP text-embedding space, recovers a strong relationship ($\rho = 0.95$, leave-one-domain-out $R^2 = 0.506$ where the MMD fit is negative). Combining the two yields a rule that calls retrain-versus-reuse correctly in 7 of 8 domains out-of-sample, using only quantities measurable before any SAE is trained. Appendix A.4 gives the fit, the model-selection procedure, and the reasons this should be read as a candidate rule rather than a validated instrument.

The generic dictionary is not merely a worse description — it is not causally load-bearing.

Accuracy, reconstruction fidelity and entropy are all correlational, and are equally consistent with the generic SAE being a slightly poorer but still faithful account of the adapted model. Intervening directly on latents rules that reading out. Using an error-preserving edit for which an unmodified latent is an exact no-op, ablating or amplifying a generic-SAE latent on the adapted model produces an effect whose confidence interval covers zero in every condition tested, indistinguishable from editing a random activity-matched latent; the finetuned SAE’s latents produce far larger effects in every condition. Extending this to multi-latent edits, how far a dictionary’s top latents are *necessary* to the model’s correct predictions tracks domain distance with rank correlation 1.0, while *sufficiency* under amplification shows no reliable trend — the two should not be collapsed into a single steerability number. Appendix A.5 reports both. A separate ablation (Appendix A.6) isolates what the generic checkpoint itself contributes: near the pretraining distribution a scratch-trained SAE matches the finetuned one, and the initialisation only begins to pay at moderate and far distance.

Ablations: We explore of a different combination of hyperparameters for SAE can compensate for the loss in interpretability performance. We explored different expansion factors for the the SAE encoder layer to see if a richer SAE can preserve semantics better. Table 4 shows that a larger Generic SAE does help, but reaching the performance of FT-SAE may be a long way off. Larger SAEs also need significantly higher computations.

We also explored if training the Generic SAE on a richer base dataset can compensate for the loss in interpretability performance. Second-last row of Table 4 shows the results of training a $64\times$ SAE on the larger, CC3M dataset. The larger dataset seems to have made the performance significantly worse. This aspect needs further exploration to reach definite conclusions with our observation providing one datapoint.

Computation cost: Training of the Generic SAE takes around 9 hours on an Nvidia RTX A6000 Ada GPU. The SAE finetuning experiments were run on a single RTX3090 and take around 6 hours to train with the specified configuration mentioned in 3.2. VLM and DINOv2 adaptation takes around 3-5 mins.

Limitations: We study adaptation of popular Vision Encoders across multiple domain shifts. Due to the scope of this study, we do not do a full mechanistic analysis of effect of adaptation itself against full fine tuning of the model. Also, Unsupervised domain adaptation of CLIP models remains unexplored and the possible implications of adapting a model without any labelled data are yet to be uncovered. Our work serves as a mechanistic understanding of popular lightweight fine tuning methods and how they shape model’s activation space, what methods are brittle against extreme domain shifts and how these geometries collapse with increasing distance from Imagenet. Three limits on the newer results deserve explicit statement. The retrain/reuse rule of Appendix A.4 is fit on eight domains and was not pre-registered — the concept-distance predictor was constructed after observing the anomaly it explains — and it has not yet been scored against the domains reserved for confirmatory testing. The causal interventions of Appendix A.5 use a single SAE training seed per dataset, with intervals bootstrapped over evaluation examples rather than over initialisations. And the reconstruction figures in the expanded matrix of Appendix A.8 are training losses rather than held-out measurements, so they speak to whether the procedure runs and fits, not to how well it generalises.

References

David Bau, Bolei Zhou, Aditya Khosla, Aude Oliva, and Antonio Torralba. Network dissection: Quantifying interpretability of deep visual representations. In *IEEE Conf. Comput. Vis. Pattern Recog.*, 2017.

357 Usha Bhalla, Alex Oesterling, Suraj Srinivas, Flavio Calmon, and Himabindu Lakkaraju. Interpreting
358 CLIP with sparse linear concept embeddings (splICE). In *Adv. Neural Inform. Process. Syst.*, 2024.

359 Rishi Bommasani, Drew A Hudson, Ehsan Adeli, Russ Altman, Simran Arber, et al. On the
360 opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258*, 2021.

361 Lukas Bossard, Matthieu Guillaumin, and Luc Van Gool. Food-101 – mining discriminative compo-
362 nents with random forests. In *ECCV*, 2014.

363 Trenton Bricken, Adly Templeton, Joshua Batson, Brian Chen, Adam Jermyn, Tom Conerly, Nick
364 Turner, Cem Anil, Carson Denison, Amanda Askell, Robert Lasenby, Yifan Wu, Shauna Kravec,
365 Nicholas Schiefer, Tim Maxwell, Nicholas Joseph, Zac Hatfield-Dodds, Alex Tamkin, Karina
366 Nguyen, Brayden McLean, Josiah E Burke, Tristan Hume, Shan Carter, Tom Henighan, and
367 Christopher Olah. Towards monosemanticity: Decomposing language models with dictionary
368 learning. *Transformer Circuits Thread*, 2023.

369 Bart Bussmann, Noa Nabeshima, Adam Karvonen, and Neel Nanda. Learning multi-level features
370 with matryoshka sparse autoencoders. In *Int. Conf. Mach. Learn.*, 2025.

371 Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and
372 Armand Joulin. Emerging properties in self-supervised vision transformers. In *Int. Conf. Comput.*
373 *Vis.*, 2021.

374 Mircea Cimpoi, Subhansu Maji, Iasonas Kokkinos, Sammy Mohamed, and Andrea Vedaldi. De-
375 scribing textures in the wild, 2013. URL <https://arxiv.org/abs/1311.3618>.

376 Adrián Csiszárík, Péter Kőrösi-Szabó, Ákos K. Matszangosz, Gergely Papp, and Dániel Varga.
377 Similarity and matching of neural network representations. In *Advances in Neural Information*
378 *Processing Systems*, 2021.

379 Hoagy Cunningham, Aidan Ewart, Logan Riggs, Robert Huben, and Lee Sharkey. Sparse au-
380 toencoders find highly interpretable linguistic features in language models. In *Int. Conf. Learn.*
381 *Represent.*, 2024.

382 Tong Ding, Wanhua Li, Zhongqi Miao, and Hanspeter Pfister. Tree of attributes prompt learning for
383 vision-language models. In *Int. Conf. Learn. Represent.*, 2025.

384 Nadir Durrani, Hassan Sajjad, Fahim Dalvi, and Yonatan Belinkov. Analyzing individual neurons in
385 pre-trained language models. In *Proceedings of the 2020 Conference on Empirical Methods in*
386 *Natural Language Processing (EMNLP)*, pages 4865–4880, 2020.

387 Nelson Elhage, Tristan Hume, Catherine Olsson, Nicholas Schiefer, Tom Henighan, Shauna Kravec,
388 Zac Hatfield-Dodds, Robert Lasenby, Dawn Drain, Carol Chen, Roger Grosse, Sam McCand-
389 lish, Jared Kaplan, Dario Amodei, Martin Wattenberg, and Christopher Olah. Toy models of
390 superposition. *Transformer Circuits Thread*, 2022.

391 Li Fei-Fei, Rob Fergus, and Pietro Perona. Learning generative visual models from few training
392 examples: An incremental bayesian approach tested on 101 object categories. In *CVPR Workshops*,
393 2004.

394 Yossi Gandelsman, Alexei A Efros, and Jacob Steinhardt. Interpreting CLIP’s image representation
395 via text-based decomposition. In *Int. Conf. Learn. Represent.*, 2024.

396 Leo Gao, Tom Dupré la Tour, Henk Tillman, Gabriel Goh, Rajan Troll, Alec Radford, Ilya Sutskever,
397 Jan Leike, and Jeffrey Wu. Scaling and evaluating sparse autoencoders. In *Int. Conf. Learn.*
398 *Represent.*, 2025.

399 Peng Gao, Shijie Geng, Renrui Zhang, Teli Ma, Rongyao Fang, Yongfeng Zhang, Hongsheng Li, and
400 Yu Qiao. CLIP-Adapter: Better vision-language models with feature adapters. *Int. J. Comput. Vis.*,
401 132(2):581–595, 2024.

402 Arthur Gretton, Karsten M. Borgwardt, Malte J. Rasch, Bernhard Schölkopf, and Alexander Smola.
403 A kernel two-sample test. *Journal of Machine Learning Research*, 13:723–773, 2012.

Patrick Helber, Benjamin Bischke, Andreas Dengel, and Damian Borth. EuroSAT: A novel dataset and deep learning benchmark for land use and land cover classification. *IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens.*, 12(7):2217–2226, 2019.

Dan Hendrycks and Thomas Dietterich. Benchmarking neural network robustness to common corruptions and perturbations. In *Int. Conf. Learn. Represent.*, 2019.

Dan Hendrycks, Kevin Zhao, Steven Basart, Jacob Steinhardt, and Dawn Song. Natural adversarial examples. In *CVPR*, 2021.

Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *Int. Conf. Learn. Represent.*, 2022.

Jeremy Irvin, Pranav Rajpurkar, Michael Ko, Yifan Yu, Silvana Ciosi, Christopher Chute, Riley L. Ball, Matthew Lungren, and Andrew Y. Ng. CheXpert: A large chest radiograph dataset with uncertainty labels and expert comparison. In *AAAI*, 2019.

Chao Jia, Yinfei Yang, Ye Xia, Yi-Ting Chen, Zarana Parekh, Hieu Pham, Quoc Le, Yun-Hsuan Sung, Zhen Li, and Tom Duerig. Scaling up visual and vision-language representation learning with noisy text supervision. In *International conference on machine learning*, pages 4904–4916. PMLR, 2021.

Menglin Jia, Luming Tang, Bor-Chun Chen, Claire Cardie, Serge Belongie, Bharath Hariharan, and Ser-Nam Lim. Visual prompt tuning. In *Eur. Conf. Comput. Vis.*, pages 709–727, 2022.

Sonia Joseph, Praneet Suresh, Ethan Goldfarb, Lorenz Hufe, Yossi Gandelsman, Robert Graham, Danilo Bzdok, Wojciech Samek, and Blake Aaron Richards. Steering clip’s vision transformer with sparse autoencoders, 2025. URL <https://arxiv.org/abs/2504.08729>.

Subhash Kantamneni, Joshua Engels, Senthooran Rajamanoharan, Max Tegmark, and Neel Nanda. Are sparse autoencoders useful? A case study in sparse probing. In Aarti Singh, Maryam Fazel, Daniel Hsu, Simon Lacoste-Julien, Felix Berkenkamp, Tegan Maharaj, Kiri Wagstaff, and Jerry Zhu, editors, *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 29018–29049. PMLR, 13–19 Jul 2025.

Muhammad Uzair Khattak, Hanoona Rasheed, Muhammad Maaz, Salman Khan, and Fahad Shahbaz Khan. MaPLe: Multi-modal prompt learning. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 19113–19122, 2023a.

Muhammad Uzair Khattak, Syed Talal Wasim, Muzammal Naseer, Salman Khan, Ming-Hsuan Yang, and Fahad Shahbaz Khan. Self-regulating prompts: Foundational model adaptation without forgetting. In *Int. Conf. Comput. Vis.*, pages 15190–15200, 2023b.

Been Kim, Martin Wattenberg, Justin Gilmer, Carrie Cai, James Wexler, Fernanda Viegas, and Rory Sayres. Interpretability beyond feature attribution: Quantitative testing with concept activation vectors (TCAV). In *Int. Conf. Mach. Learn.*, 2018.

Jonathan Krause, Michael Stark, Jia Deng, and Li Fei-Fei. 3D object representations for fine-grained categorization. In *ICCV Workshops*, 2013.

Sebastian Lapuschkin, Alexander Binder, Grégoire Montavon, Frederick Klauschen, Klaus-Robert Müller, and Wojciech Samek. On pixel-wise explanations for non-linear classifier decisions by layer-wise relevance propagation. *PLoS ONE*, 10(7):e0130140, 2015.

Hyesu Lim, Jinho Choi, Jaegul Choo, and Steffen Schneider. Sparse autoencoders reveal selective remapping of visual concepts during adaptation. *arXiv preprint arXiv:2412.05276*, 2024.

Aravindh Mahendran and Andrea Vedaldi. Understanding deep image representations by inverting them. In *IEEE Conf. Comput. Vis. Pattern Recog.*, 2015.

Subhransu Maji, Esa Rahtu, Juho Kannala, Matthew Blaschko, and Andrea Vedaldi. Fine-grained visual classification of aircraft. In *arXiv*, 2013.

451 Maria-Elena Nilsback and Andrew Zisserman. Automated flower classification over a large number
452 of classes. In *Indian Conference on Computer Vision, Graphics and Image Processing*, 2008.

453 Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy V. Vo, Marc Szafraniec, Vasil Khalidov,
454 Pierre Fernandez, Daniel HAZIZA, Francisco Massa, Alaaeldin El-Nouby, Mido Assran, Nicolas
455 Ballas, Wojciech Galuba, Russell Howes, Po-Yao Huang, Shang-Wen Li, Ishan Misra, Michael
456 Rabbat, Vasu Sharma, Gabriel Synnaeve, Hu Xu, Herve Jegou, Julien Mairal, Patrick Labatut, Ar-
457 mand Joulin, and Piotr Bojanowski. DINOv2: Learning robust visual features without supervision.
458 *Transactions on Machine Learning Research*, 2024.

459 Vitória Barin Pacela, Shruti Joshi, Isabela Camacho, Simon Lacoste-Julien, and David Klindt.
460 Stop probing, start coding: Why linear probes and sparse autoencoders fail at compositional
461 generalisation, 2026. URL <https://arxiv.org/abs/2603.28744>.

462 Mateusz Pach, Shyamgopal Karthik, Quentin Bouniot, Serge Belongie, and Zeynep Akata. Sparse
463 autoencoders learn monosemantic features in vision-language models. In *Adv. Neural Inform.*
464 *Process. Syst.*, 2025.

465 Omkar M. Parkhi, Andrea Vedaldi, Andrew Zisserman, and C. V. Jawahar. Cats and dogs. In *CVPR*,
466 2012.

467 Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal,
468 Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual
469 models from natural language supervision. In *Int. Conf. Mach. Learn.*, 2021.

470 Senthooran Rajamanoharan, Arthur Conmy, Lewis Smith, Tom Lieberum, Vikrant Varma, János
471 Kramár, Rohin Shah, and Neel Nanda. Improving sparse decomposition of language model
472 activations with gated sparse autoencoders. In *Adv. Neural Inform. Process. Syst.*, 2024a.

473 Senthooran Rajamanoharan, Tom Lieberum, Nicolas Sonnerat, Arthur Conmy, Vikrant Varma, János
474 Kramár, and Neel Nanda. Jumping ahead: Improving reconstruction fidelity with JumpReLU
475 sparse autoencoders. *arXiv preprint arXiv:2407.14435*, 2024b.

476 Sukrut Rao, Sweta Mahajan, Moritz Böhle, and Bernt Schiele. Discover-then-name: Task-agnostic
477 concept bottlenecks via automated concept discovery. In *Eur. Conf. Comput. Vis.*, 2024.

478 Tilman Räuher, Anson Ho, Stephen Casper, and Dylan Hadfield-Menell. Toward transparent AI: A
479 survey on interpreting the inner structures of deep neural networks. In *IEEE Conf. Secure and*
480 *Trustworthy Machine Learning (SaTML)*, pages 464–483, 2023.

481 Shiori Sagawa, Pang Wei Koh, Tatsunori B Hashimoto, and Percy Liang. Distributionally robust
482 neural networks for group shifts: On the importance of regularization for worst-case generalization.
483 In *Int. Conf. Learn. Represent.*, 2020.

484 Ramprasaath R. Selvaraju, Michael Cogswell, Abhishek Das, Ramakrishna Vedantam, Devi Parikh,
485 and Dhruv Batra. Grad-CAM: Visual explanations from deep networks via gradient-based local-
486 ization. *Int. J. Comput. Vis.*, 128(2):336–359, 2020.

487 Manli Shu, Weili Nie, De-An Huang, Zhiding Yu, Tom Goldstein, Anima Anandkumar, and Chaowei
488 Xiao. Test-time prompt tuning for zero-shot generalization in vision-language models. In *Adv.*
489 *Neural Inform. Process. Syst.*, 2022.

490 Mainak Singha, Harsh Pal, Ankit Jha, and Biplab Banerjee. AD-CLIP: Adapting domains in prompt
491 space using CLIP. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*
492 *Workshops*, 2023.

493 Lewis Smith, Senthooran Rajamanoharan, Arthur Conmy, Callum McDougall, Tom Lieberum,
494 János Kramár, Rohin Shah, and Neel Nanda. Negative results for sparse autoencoders on
495 downstream tasks and deprioritising SAE research. Google DeepMind Mechanistic Inter-
496 pretability Team Update, 2025. URL [https://deepmindsafetyresearch.medium.com/](https://deepmindsafetyresearch.medium.com/negative-results-for-sparse-autoencoders-on-downstream-tasks-and-deprioritising-sae-research-6)
497 [negative-results-for-sparse-autoencoders-on-downstream-tasks-and-deprioritising-sae-research-6](https://deepmindsafetyresearch.medium.com/negative-results-for-sparse-autoencoders-on-downstream-tasks-and-deprioritising-sae-research-6)

498 Khurram Soomro, Amir Roshan Zamir, and Mubarak Shah. UCF101: A dataset of 101 human action
499 classes from videos in the wild. *arXiv preprint arXiv:1212.0402*, 2012.

500 Samuel Stevens, Wei-Lun Chao, Tanya Berger-Wolf, and Yu Su. Interpretable and testable vision
501 features via sparse autoencoders. *arXiv preprint arXiv:2502.06755*, 2025.

502 Mukund Sundararajan, Ankur Taly, and Qiqi Yan. Axiomatic attribution for deep networks. In *Int.*
503 *Conf. Mach. Learn.*, 2017.

504 Michael Tschannen, Alexey Gritsenko, Xiao Wang, Muhammad Ferjad Naeem, Ibrahim Alabdul-
505 mohsin, Nikhil Parthasarathy, Talfan Evans, Lucas Beyer, Ye Xia, Basil Mustafa, Olivier Hénaff,
506 Jeremiah Harmsen, Andreas Steiner, and Xiaohua Zhai. SigLIP 2: Multilingual vision-language
507 encoders with improved semantic understanding, localization, and dense features. *arXiv preprint*
508 *arXiv:2502.14786*, 2025.

509 Haohan Wang, Songwei Ge, Zachary Lipton, and Eric P. Xing. Learning robust global representations
510 by penalizing local predictive power. In *Advances in Neural Information Processing Systems*,
511 2019.

512 Jianxiong Xiao, James Hays, Krista A. Ehinger, Aude Oliva, and Antonio Torralba. SUN database:
513 Large-scale scene recognition from abbey to zoo. In *CVPR*, 2010.

514 Jiancheng Yang, Rui Shi, Donglai Wei, Zequan Liu, Lin Zhao, Bilian Ke, Hanspeter Pfister, and
515 Bingbing Ni. MedMNIST v2 – a large-scale lightweight benchmark for 2d and 3d biomedical
516 image classification. *Scientific Data*, 10(1):41, 2023.

517 Wojciech Zaremba et al. Interpreting CLIP with hierarchical sparse autoencoders. In *International*
518 *Conference on Machine Learning*, 2025.

519 Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language
520 image pre-training. In *Int. Conf. Comput. Vis.*, 2023.

521 Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Conditional prompt learning for
522 vision-language models. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 16816–16825, 2022a.

523 Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Learning to prompt for vision-
524 language models. *Int. J. Comput. Vis.*, 130(9):2337–2348, 2022b.

525 A Technical appendices and supplementary material

526 A.1 SAE Variant Formulations

527 All SAE variants share a linear encoder, a nonlinearity $\sigma(\cdot)$, and a linear decoder trained to reconstruct
 528 hooked ViT token activations. Let $z \in \mathbb{R}^d$ be a hooked token vector (CLS or patch) at layer ℓ , and let
 529 $d_{\text{SAE}} \gg d$ be the overcomplete latent dimension. The general form is

$$\text{SAE}(z) = W_D^\top h(z) + b_D, \quad h(z) = \sigma(W_E^\top (z - b_D) + b_E) \in \mathbb{R}_{\geq 0}^{d_{\text{SAE}}}, \quad (6)$$

530 where $W_E \in \mathbb{R}^{d \times d_{\text{SAE}}}$, $W_D \in \mathbb{R}^{d_{\text{SAE}} \times d}$, and b_E, b_D are bias terms.

531 **ReLU SAE [Cunningham et al., 2024].** Uses $\sigma = \text{ReLU}$ with an ℓ_1 penalty:

$$\mathcal{L}_{\text{ReLU}} = \|\text{SAE}(z) - z\|_2^2 + \lambda_{\ell_1} \|h(z)\|_1. \quad (7)$$

532 **Top- k SAE [Gao et al., 2025].** Retains only the k largest pre-activations:

$$h(z) = \text{TopK}_k(W_E^\top (z - b_D) + b_E), \quad \mathcal{L}_{\text{TopK}} = \|\text{SAE}(z) - z\|_2^2. \quad (8)$$

533 Because Top- k carries no ℓ_1 term to bound latent magnitudes, we revive dead latents with the auxiliary
 534 reconstruction loss of Gao et al. [2025] rather than the ghost-gradient scheme used for the ReLU
 535 variants: the k_{aux} most-active dead latents are asked to reconstruct the detached residual, weighted by
 536 $\frac{1}{32}$. The exponential ghost-gradient term is unbounded without an ℓ_1 penalty holding pre-activations
 537 down, and diverged in practice.

538 **Gated SAE [Rajamanoharan et al., 2024a].** Decouples gating from magnitude using $\pi(z) =$
 539 $W_E^\top (z - b_D)$:

$$h_{\text{gate}}(z) = \mathbb{I}(\pi(z) + b_{\text{gate}} > 0) \odot \text{ReLU}(\exp(r) \odot \pi(z) + b_{\text{mag}}), \quad (9)$$

540 where $r \in \mathbb{R}^{d_{\text{SAE}}}$ is a learned rescaling. The loss is:

$$\mathcal{L}_{\text{Gated}} = \|\text{SAE}(z) - z\|_2^2 + \lambda_{\ell_1} \|\text{ReLU}(\pi(z) + b_{\text{gate}})\|_1 + \|\hat{z}_{\text{gate}}(z) - z\|_2^2, \quad (10)$$

541 where $\hat{z}_{\text{gate}}$ is the reconstruction using only the gate pathway.

542 **JumpReLU SAE [Rajamanoharan et al., 2024b].** Replaces the ReLU with a per-unit learned
 543 threshold $\theta = \exp(\log \theta)$, $\log \theta \in \mathbb{R}^{d_{\text{SAE}}}$, applied as a hard shrinkage:

$$h(z) = \pi(z) \odot \mathbb{I}(\pi(z) > \theta), \quad \pi(z) = W_E^\top (z - b_D) + b_E, \quad (11)$$

544 and trained against a hard L_0 penalty rather than an ℓ_1 surrogate:

$$\mathcal{L}_{\text{JumpReLU}} = \|\text{SAE}(z) - z\|_2^2 + \lambda_{L_0} \|h(z)\|_0. \quad (12)$$

545 Both the threshold gate and the L_0 count are piecewise constant in θ , so neither term supplies a
 546 gradient to $\log \theta$ directly. We follow the straight-through estimator of Rajamanoharan et al. [2024b],
 547 substituting a rectangle kernel of bandwidth ε centred on the threshold in the backward pass. Writing
 548 $K_\varepsilon(u) = \frac{1}{\varepsilon} \mathbb{I}(|u| < \frac{\varepsilon}{2})$, the surrogate gradients are

$$\frac{\partial h_j}{\partial \theta_j} \approx -\theta_j K_\varepsilon(\pi_j(z) - \theta_j), \quad \frac{\partial \|h(z)\|_0}{\partial \theta_j} \approx -\theta_j K_\varepsilon(\pi_j(z) - \theta_j). \quad (13)$$

549 The forward pass uses the exact hard threshold and the exact integer L_0 ; only the backward pass is
 550 relaxed. This distinction matters in our setting: a sigmoid relaxation in the forward pass would make
 551 the reported sparsity a soft approximation rather than the realised one.

552 **Matryoshka SAE [Bussmann et al., 2025, Zaremba et al., 2025].** Enforces a nested hierarchy
 553 via prefix-truncated reconstructions. Given prefix sizes $m_1 < m_2 < \dots < m_M = d_{\text{SAE}}$, let $h_{1:m}(z)$
 554 retain only the first m latent entries:

$$\mathcal{L}_{\text{Mat}} = \sum_{k=1}^M \alpha_k \left[\|W_D^\top h_{1:m_k}(z) + b_D - z\|_2^2 + \lambda_{\ell_1} \|h_{1:m_k}(z)\|_1 \right]. \quad (14)$$

555 **PatchSAE [Lim et al., 2024].** Uses the ReLU objective (Eq. (7)) trained on patch tokens. For
 556 neuron s on image i , patch-level and image-level activation counts are:

$$a_{ij}[s] = \mathbb{1}(h_{ij}[s] > \tau), \quad a_i[s] = \sum_{j=1}^N a_{ij}[s]. \quad (15)$$

557 A.2 Metric Definitions

$$L_0(z) = \|z\|_0 = \sum_{j=1}^m \mathbb{1}\{z_j \neq 0\}.$$

558 For a sparse autoencoder (SAE), if $z \in \mathbb{R}^m$ is the latent activation vector, then $L_0(z)$ counts how
 559 many latent features are active.

560 A dataset-level version is given by

$$L_0 = \frac{1}{N} \sum_{i=1}^N \|z_i\|_0 = \frac{1}{N} \sum_{i=1}^N \sum_{j=1}^m \mathbb{1}\{z_{ij} \neq 0\}, \quad (16)$$

561 where z_i is the SAE latent activation for input x_i . Lower L_0 indicates sparser activations.

Reconstruction fidelity.

$$E_{\text{rec}} = \mathbb{E}[\|\text{SAE}(z) - z\|_2^2]. \quad (17)$$

Activated frequency.

$$\text{Freq}[s] = \frac{|\{i \in \mathcal{I} : h_i[s] > 0\}|}{|\mathcal{I}|}. \quad (18)$$

Mean activation.

$$\text{MeanAct}[s] = \frac{1}{|\{i \in \mathcal{I} : h_i[s] > 0\}|} \sum_{\substack{i \in \mathcal{I} \\ h_i[s] > 0}} h_i[s]. \quad (19)$$

562 **Label entropy.** For latent s with reference set R_s (top- k images by image-level activation), let
 563 $\text{sum}_c = \sum_{i \in R_s : y_i = c} h_i[s]$ and $p_c = \text{sum}_c / \sum_{c'} \text{sum}_{c'}$:

$$\text{Ent}[s] = - \sum_{c \in \mathcal{C}} p_c \log p_c. \quad (20)$$

564 **Monosemanticity.** Let x_i be the CLIP embedding of image i and $z_i^h \geq 0$ the activation of latent h
 565 on i :

$$\text{MS}_h = \frac{\sum_{i < j} z_i^h z_j^h \cos(x_i, x_j)}{\sum_{i < j} z_i^h z_j^h}. \quad (21)$$

566 A.3 SAE statistics and architecture ablations

567 A.4 Predicting when a generic SAE needs retraining

568 The main text establishes that generic-SAE degradation grows with domain distance. A practitioner
 569 needs something stronger than that trend: a rule for deciding, before paying for SAE training, whether
 570 the generic dictionary can simply be reused. This appendix builds one and reports honestly on where
 571 it holds.

572 **Embedding distance alone does not survive more domains.** Extending the development cohort
 573 from six to eight domains does not strengthen the $\text{MMD}^2 \rightarrow$ degradation relationship, it removes it:
 574 apparent R^2 falls from 0.161 to 0.004. Table 12 shows why. Oxford Pets has the largest embedding
 575 distance in the cohort and one of the smallest degradations, inverting the hypothesis, and its Cook’s
 576 distance (1.63) is five times the next domain’s — a single point bending the entire fit.

Table 5: **H2: Reconstruction quality and feature utilisation.** CosSim $\uparrow$, NMSE $\downarrow$, Dead-neuron fraction $\downarrow$ for G-SAE and FT-SAE across all four backbones. Columns ordered by Maximum Mean Discrepancy from ImageNet (near $\rightarrow$ far). **Bold:** best result per metric per backbone per dataset.

Encoder	Metric	SAE	Caltech101	Pets	ImageNet-A	SUN397	ImageNet-Sk.	Corruption	Food101	DTD	UCF101	StanfordCars	Flowers102	FGVC	EuroSAT	ChestMNIST	PathMNIST
CLIP	CosSim↑	G-SAE	0.870	0.865	0.800	0.832	0.805	0.795	0.835	0.793	0.840	0.855	0.860	0.850	0.830	0.810	0.882
		FT-SAE	0.894	0.890	0.890	0.905	0.895	0.885	0.910	0.876	0.900	0.880	0.885	0.875	0.935	0.910	0.730↓
	NMSE↓	G-SAE	0.051	0.055	0.045	0.052	0.044	0.046	0.050	0.762	0.080	0.065	0.060	0.058	0.043	0.039	0.035
		FT-SAE	0.042	0.045	0.038	0.034	0.037	0.039	0.035	0.415	0.060	0.050	0.048	0.047	0.024	0.036	0.085↓
	Dead↓	G-SAE	0.08	0.10	0.40	0.17	0.42	0.39	0.18	0.40	0.20	0.15	0.12	0.11	0.16	0.45	0.62
		FT-SAE	0.05	0.07	0.28	0.13	0.29	0.27	0.14	0.49↑	0.18	0.10	0.08	0.09	0.81↑	0.30	0.35
SigLIP	CosSim↑	G-SAE	0.880	0.875	0.810	0.846	0.815	0.805	0.848	0.800	0.850	0.865	0.870	0.860	0.845	0.820	0.870
		FT-SAE	0.910	0.905	0.900	0.915	0.905	0.895	0.920	0.885	0.910	0.895	0.900	0.890	0.900	0.910	0.850
	NMSE↓	G-SAE	0.045	0.048	0.042	0.049	0.041	0.043	0.048	0.700	0.070	0.055	0.050	0.050	0.050	0.038	0.040
		FT-SAE	0.035	0.038	0.036	0.034	0.035	0.037	0.035	0.400	0.055	0.042	0.040	0.039	0.030	0.035	0.030
	Dead↓	G-SAE	0.10	0.12	0.45	0.20	0.47	0.43	0.21	0.42	0.22	0.18	0.14	0.13	0.20	0.48	0.60
		FT-SAE	0.06	0.08	0.27	0.14	0.28	0.26	0.15	0.35	0.18	0.11	0.09	0.10	0.25↑	0.28	0.30
DINO	CosSim↑	G-SAE	0.860	0.855	0.790	0.826	0.795	0.785	0.828	0.790	0.830	0.845	0.850	0.840	0.825	0.800	0.013↑
		FT-SAE	0.890	0.885	0.870	0.895	0.875	0.865	0.900	0.860	0.890	0.875	0.880	0.870	0.880	0.880	0.013↑
	NMSE↓	G-SAE	0.060	0.065	0.072	0.066	0.071	0.073	0.065	0.800	0.090	0.075	0.070	0.068	0.060	0.070	1.600↑
		FT-SAE	0.045	0.050	0.052	0.049	0.051	0.053	0.050	0.420	0.070	0.060	0.055	0.052	0.045	0.050	1.610↑
	Dead↓	G-SAE	0.12	0.15	0.48	0.22	0.49	0.47	0.23	0.45	0.25	0.20	0.18	0.16	0.22	0.50	0.03↑
		FT-SAE	0.08	0.10	0.28	0.16	0.29	0.27	0.17	0.40	0.20	0.14	0.12	0.11	0.18	0.30	0.03↑
ALIGN	CosSim↑	G-SAE	0.865	0.860	0.795	0.831	0.800	0.790	0.833	0.795	0.835	0.850	0.855	0.845	0.830	0.805	0.880
		FT-SAE	0.900	0.895	0.895	0.905	0.900	0.890	0.910	0.875	0.900	0.885	0.890	0.880	0.890	0.905	0.890
	NMSE↓	G-SAE	0.055	0.060	0.045	0.061	0.044	0.046	0.060	0.780	0.085	0.070	0.065	0.063	0.055	0.042	0.040
		FT-SAE	0.040	0.045	0.040	0.044	0.039	0.041	0.045	0.420	0.065	0.052	0.048	0.047	0.040	0.038	0.035
	Dead↓	G-SAE	0.10	0.12	0.42	0.20	0.44	0.40	0.21	0.42	0.22	0.18	0.15	0.13	0.20	0.45	0.55
		FT-SAE	0.06	0.08	0.28	0.15	0.29	0.27	0.16	0.35	0.18	0.12	0.10	0.09	0.17	0.30	0.28
MMD Score			0.028	0.029	0.05	0.057	0.07	0.079	0.08	0.09	0.126	0.14	0.152	0.23	0.291	0.410	0.423

Table 6: **H1 (additional benchmarks): Classification accuracy (%) on OfficeHome, KITTI, and Cityscapes.** $\bar{S}$: generic/base SAE. $\hat{S}$: domain-matched SAE (LoRASAE). The generic SAE degrades after LoRA adaptation, while the FT-SAE partially recovers performance.

Configuration	OfficeHome	KITTI	Cityscapes
ZS	83.02	32.78	11.2
LoRA-FT	87.25	64.72	47.6
ZS + $\bar{S}$	62.30	21.50	11.2
LoRA-FT + $\bar{S}$	69.45	58.70	6.5
LoRA-FT + $\hat{S}$	86.90	61.67	42.01

Concept distance explains the anomaly. Raw embedding MMD [Gretton et al., 2012] conflates two things: how different a domain’s *images* look, and how different its *concepts* are from those the dictionary was fit on. ImageNet-1k already contains roughly 120 dog breeds and many cat classes, so Oxford Pets can be stylistically distant while being conceptually redundant. We therefore measure a second quantity, `concept_gap`: embed each target class name and all 1000 ImageNet-1k class names with the CLIP text encoder, and average, over target classes, the cosine distance to the nearest ImageNet class. Oxford Pets has the lowest `concept_gap` of all eight domains, and CUB-200 — a fine-grained bird taxonomy with no good ImageNet-1k analogue — the highest, matching its high degradation. Across every association measure in Table 12, `concept_gap` dominates MMD^2 , including a positive leave-one-domain-out R^2 where the MMD fit is strongly negative.

A decision rule, selected out-of-sample. Table 13 fits every subset of $\{\text{MMD}^2, \text{concept_gap}, n_{\text{classes}}\}$ and selects by LODO R^2 rather than in-sample fit. The chosen model is

$$\widehat{\text{degradation}}_{\text{pp}} = -6.83 + 8.72 \text{MMD}^2 + 51.56 \text{concept_gap}, \quad (22)$$

Table 7: **Classification accuracy (%) G-SAE vs. FT-SAE for JumpReLU SAE architecture** Columns ordered by MMD from ImageNet (near $\rightarrow$ far). (G-SAE:trained on frozen model). $\hat{S}_2$: (FT-SAE:fine tuned on adapted model). **Bold**: best SAE-augmented result per backbone.

Encoder	Configuration	Caltech101	Pets	ImageNet-A	SUN397	ImageNet-Sk.	Corruption	Food101	DTD	UCF101	StanfordCars	Flowers102	FGVC	EuroSAT	ChestMNIST	PathMNIST
	MMD Score	0.028	0.029	0.05	0.057	0.07	0.079	0.08	0.09	0.126	0.14	0.152	0.23	0.291	0.410	0.423
CLIP	ZS	93.3	84.9	47.1	62.3	52.4	38.6	78.2	45.2	64.5	58.1	72.4	23.7	45.1	21.5	17.9
	FT	96.1	93.5	72.8	76.1	80.1	64.3	90.4	72.0	77.6	79.3	88.2	46.4	90.8	68.2	90.5
	ZS + G-SAE	91.8	82.1	44.1	59.8	49.9	36.4	74.6	45.2	61.2	55.3	69.8	20.7	43.9	19.8	17.9
	FT + G-SAE	92.8	89.1	67.8	69.8	74.3	57.6	84.9	66.2	70.9	73.2	82.6	37.9	85.4	62.9	83.5
	FT + FT-SAE	95.1	92.1	70.9	74.4	78.1	62.5	88.9	72.6	75.6	77.1	86.5	44.1	90.2	66.5	90.0
SigLIP	ZS	93.3	84.9	47.1	62.3	52.4	40.1	78.2	45.2	64.5	58.1	72.4	23.7	45.1	21.5	17.9
	FT	96.8	94.3	74.2	77.9	81.6	66.1	91.8	73.8	78.6	80.7	89.5	48.9	92.1	69.8	91.4
	ZS + G-SAE	92.5	82.9	46.2	60.8	51.8	37.9	75.6	45.8	62.1	56.4	71.1	22.0	44.7	21.2	19.1
	FT + G-SAE	93.6	89.9	69.1	71.1	75.7	59.1	86.1	67.9	71.9	74.2	83.8	39.5	86.4	64.2	85.1
	FT + FT-SAE	95.9	93.0	72.8	76.1	79.8	64.3	90.4	73.4	76.6	78.7	87.5	46.3	91.4	67.8	90.6
DINO	ZS	91.2	82.1	45.3	59.8	50.8	36.2	75.6	44.1	62.8	55.4	68.9	22.5	43.9	20.4	16.8
	FT	94.8	91.6	70.5	73.9	77.8	61.7	88.1	70.3	75.4	76.2	85.7	44.2	89.2	66.1	88.8
	ZS + G-SAE	89.1	79.3	42.8	57.1	48.0	34.0	72.6	42.1	59.5	52.4	66.0	19.3	42.7	18.9	16.8
	FT + G-SAE	91.4	86.9	65.8	68.2	72.6	55.4	82.9	63.9	68.6	70.5	79.7	36.2	83.5	60.1	81.3
	FT + FT-SAE	93.8	90.4	69.0	72.4	75.8	59.8	86.8	70.0	73.2	74.7	83.7	41.9	88.0	63.9	87.1
ALIGN	ZS	92.5	83.4	46.9	61.5	51.8	37.9	77.3	46.0	63.9	57.2	70.8	24.1	44.9	22.4	18.5
	FT	95.5	92.6	71.9	75.4	79.4	63.4	89.3	71.6	76.6	78.1	87.3	45.7	90.1	67.4	89.9
	ZS + G-SAE	90.7	81.3	44.3	59.6	49.9	35.8	74.2	44.4	60.9	54.1	68.4	21.3	43.6	20.8	18.5
	FT + G-SAE	92.5	88.3	67.9	69.0	74.1	57.2	84.5	65.6	70.0	72.5	82.0	38.2	85.0	62.5	83.1
	FT + FT-SAE	94.6	91.4	70.9	73.9	77.9	62.0	88.4	71.3	74.8	76.8	85.7	43.9	89.6	65.8	88.9

Table 8: **Classification accuracy (%) G-SAE vs. FT-SAE for Top-K SAE architecture** Columns ordered by MMD from ImageNet (near $\rightarrow$ far). (G-SAE: trained on frozen model). (FT-SAE: retrained on adapted model). **Bold**: best SAE-augmented result per backbone.

Encoder	Configuration	Caltech101	Pets	ImageNet-A	SUN397	ImageNet-Sk.	Corruption	Food101	DTD	UCF101	StanfordCars	Flowers102	FGVC	EuroSAT	ChestMNIST	PathMNIST
	MMD Score	0.028	0.029	0.05	0.057	0.07	0.079	0.08	0.09	0.126	0.14	0.152	0.23	0.291	0.410	0.423
CLIP	ZS	93.3	84.9	47.1	62.3	52.4	38.6	78.2	45.2	64.5	58.1	72.4	23.7	45.1	21.5	17.9
	FT	96.1	93.5	72.8	76.1	80.1	64.3	90.4	72.0	77.6	79.3	88.2	46.4	90.8	68.2	90.5
	ZS + G-SAE	91.1	81.4	43.5	58.9	49.2	35.8	73.8	45.2	60.3	54.6	69.0	19.8	40.9	19.2	17.6
	FT + G-SAE	92.4	88.6	67.1	69.1	73.8	56.9	84.2	65.8	70.4	72.6	82.0	37.1	85.0	62.1	82.9
	FT + FT-SAE	95.7	92.4	71.1	74.9	78.3	62.8	89.4	71.8	76.2	77.4	86.7	44.5	90.7	66.8	88.7
SigLIP	ZS	93.3	84.9	47.1	62.3	52.4	40.1	78.2	45.2	64.5	58.1	72.4	23.7	45.1	21.5	17.9
	FT	96.8	94.3	74.2	77.9	81.6	66.1	91.8	73.8	78.6	80.7	89.5	48.9	92.1	69.8	91.4
	ZS + G-SAE	92.1	82.4	45.5	60.0	51.2	37.2	74.9	45.2	61.5	55.8	70.4	21.4	41.5	20.8	18.8
	FT + G-SAE	93.1	89.1	68.4	70.5	75.1	58.4	85.4	67.2	71.2	73.6	83.0	38.9	85.8	63.6	84.4
	FT + FT-SAE	96.3	93.2	72.9	76.6	80.0	64.5	90.6	73.1	76.8	78.9	87.6	46.5	91.9	68.0	89.9
DINO	ZS	91.2	82.1	45.3	59.8	50.8	36.2	75.6	44.1	62.8	55.4	68.9	22.5	43.9	20.4	16.8
	FT	94.8	91.6	70.5	73.9	77.8	61.7	88.1	70.3	75.4	76.2	85.7	44.2	89.2	66.1	88.8
	ZS + G-SAE	88.6	78.9	42.2	56.4	47.4	33.3	71.9	41.6	58.9	51.9	65.5	18.8	40.8	18.5	16.4
	FT + G-SAE	90.9	86.1	65.1	67.4	71.9	54.8	82.2	63.2	68.0	69.8	78.9	35.5	82.9	59.4	80.6
	FT + FT-SAE	94.2	90.6	69.1	72.9	76.0	60.0	87.0	69.5	73.4	75.0	83.9	42.1	88.7	64.1	86.4
ALIGN	ZS	92.5	83.4	46.9	61.5	51.8	37.9	77.3	46.0	63.9	57.2	70.8	24.1	44.9	22.4	18.5
	FT	95.5	92.6	71.9	75.4	79.4	63.4	89.3	71.6	76.6	78.1	87.3	45.7	90.1	67.4	89.9
	ZS + G-SAE	90.1	80.8	43.8	58.8	49.2	35.1	73.4	43.9	60.2	53.6	67.9	20.7	41.8	20.2	18.0
	FT + G-SAE	91.9	87.6	67.2	68.4	73.4	56.4	83.7	64.8	69.4	71.8	81.2	37.4	84.3	61.8	82.3
	FT + FT-SAE	94.8	91.6	71.1	74.1	78.0	62.2	88.6	71.0	75.0	77.0	85.9	44.1	89.9	66.0	87.9

L_0 Sparsity: Generic vs. Specific SAE across domain shift (H2)

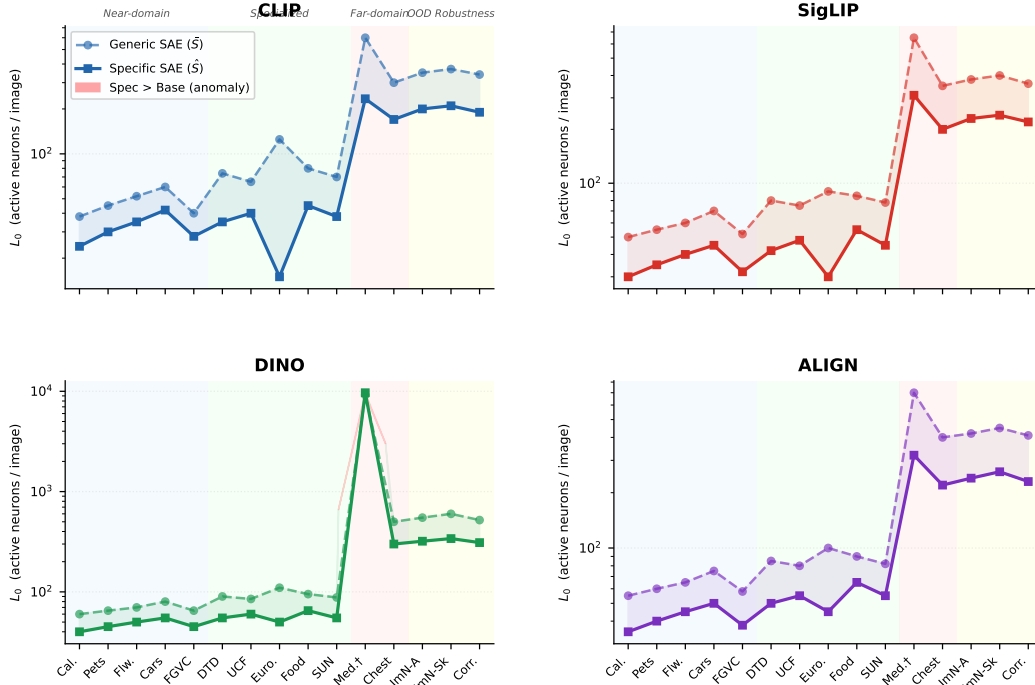


Figure 5: L_0 active neurons per image: generic ($\bar{S}$, dashed) vs. FT-SAE. Log-scale y -axis; shaded bands mark domain tiers. FT-SAE are generally sparser, with larger reductions on shifted domains. Red fill marks the single anomaly where $\hat{S}$ activates *more* neurons (DINO PathMNIST L_0 : 9,185 → 9,676): DINOv2’s language-free features are not sparse-decomposable on medical imagery.

590 with LODO $R^2 = 0.621$ and LODO MAE 2.43 pp. Read against the 3.65 pp self-degradation floor
591 of Table 15, it gives the retrain/reuse call correctly in 7/8 domains using only quantities measurable
592 before any SAE is trained (Table 14).

593 **Limits of this rule, stated plainly.** concept_gap was constructed *after* observing the Oxford Pets
594 anomaly, not pre-registered. That is a genuine garden-of-forking-paths risk, mitigated — but not
595 removed — by the fact that a specific named anomaly motivated it rather than a blind search over
596 candidate predictors. Neither the predictor nor Eq. (22) has been scored against the three domains
597 held out for confirmatory testing (OfficeHome, KITTI, Cityscapes); LODO resamples within the
598 same eight domains that generated the hypothesis. At $n = 8$ with two predictors only five residual
599 degrees of freedom remain, and the 3.65 pp floor is itself a single-run point estimate rather than a
600 validated threshold. We report Eq. (22) as a candidate rule with real out-of-sample support, not as a
601 validated instrument.

602 A.5 Are generic-SAE latents causally load-bearing?

603 Every degradation measure elsewhere in this paper — accuracy, reconstruction fidelity, entropy,
604 DAMS — is correlational. Each is consistent with the generic dictionary being merely a somewhat
605 worse *description* of the adapted model. The experiments here test the stronger claim directly, by
606 intervening on latents and measuring what the model does.

607 **Single-latent interventions.** Table 16 ablates and amplifies the top-activating latent per class on
608 LoRA-adapted CLIP. The edit is error-preserving, $x' = x + W_D^T(z' - z)$, so leaving z unmodified is
609 an exact no-op and no part of the measured effect is reconstruction noise; every effect is reported
610 against a control latent matched on activity frequency. The generic dictionary’s own effect interval

Dead-neuron Fraction: Generic vs. Specific SAE across domain shift (H2)

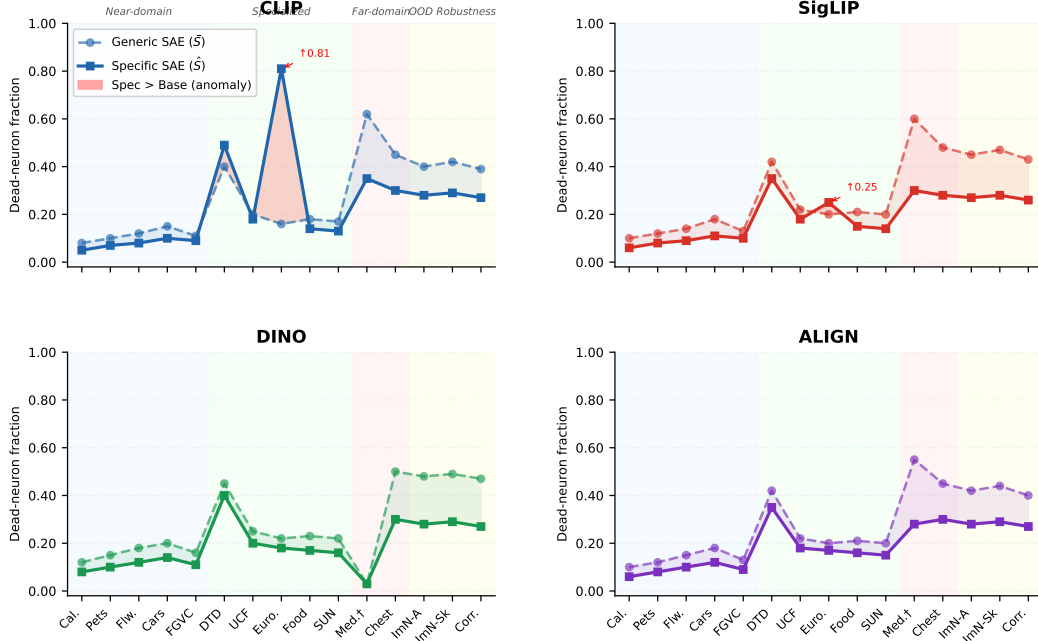


Figure 6: **Dead-neuron fraction: generic ($\bar{S}$, dashed) vs. FT-SAE.** FT-SAEs reduce dead neurons on most benchmarks (-31% avg. near-domain). The EuroSAT spike (CLIP: $0.16 \rightarrow 0.81$, annotated) is an instance of domain specialisation: the FT-SAE concentrates signal into a small set of satellite-specific neurons while leaving the rest dormant.

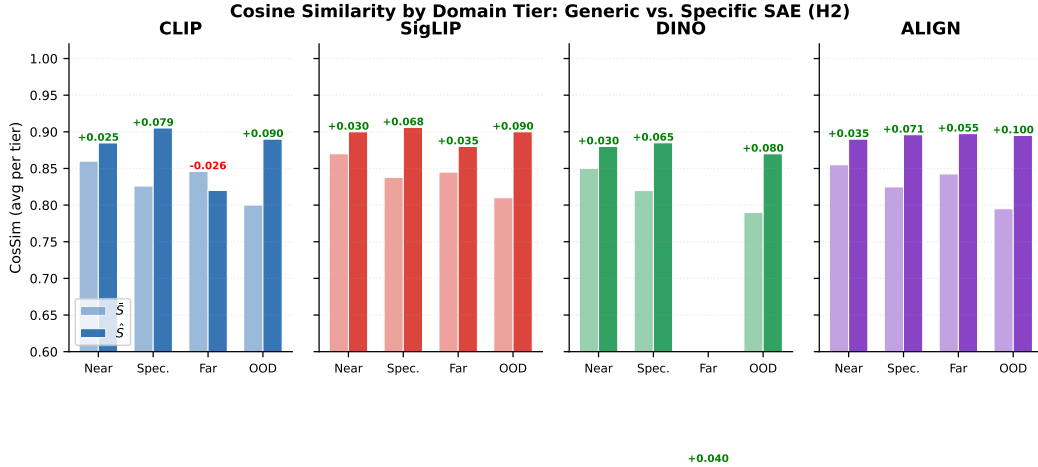


Figure 7: **Cosine similarity by domain tier: G-SAE vs. FT-SAE** Bars show per-tier averages; Δ labels give Specific–Generic (green = improvement). SigLIP and ALIGN improve on all four tiers. The Far-domain regression for CLIP is driven entirely by PathMNIST, ChestMNIST: the FT-SAE’s features are orthogonal to the pretraining dictionary yet more useful for classification (Table 1), suggesting that CosSim with the base feature space can be misleading under large shift.

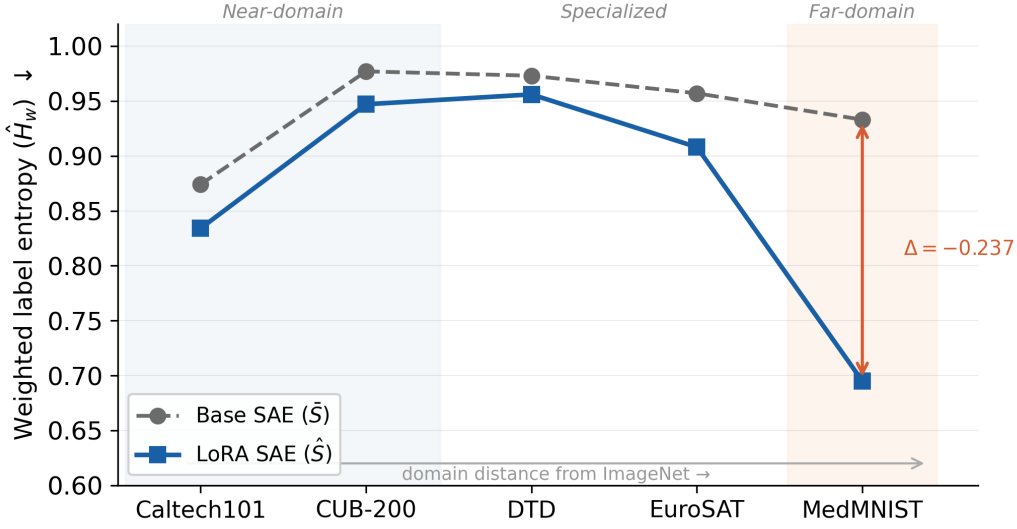


Figure 8: **Label entropy (H2): weighted per-neuron label entropy $\hat{H}_w$ for generic ($\bar{S}$) vs. domain-matched ($\hat{S}$) SAE, ordered by MMD distance from ImageNet.** *Top:* Base SAE entropy remains uniformly high (0.93–0.98) across all domains, while the LoRA SAE diverges sharply on far-domain benchmarks (PathMNIST: $\Delta \hat{H}_w = -0.237$). *Bottom:* Entropy reduction grows with domain distance, consistent with H4. The near-domain cluster (Caltech101, CUB-200, DTD) shows modest reductions (−0.016 to −0.040); EuroSAT is intermediate (−0.049); PathMNIST is an order of magnitude larger.

Table 9: **Classification accuracy (%) for Matryoshka SAE architecture G-SAE vs. FT-SAE.** Columns ordered by MMD from ImageNet (near → far). **Bold:** best SAE-augmented result per backbone.

Encoder	Configuration	Caltech101	Pets	ImageNet-A	SUN397	ImageNet-Sk.	Corruption	Food101	DTD	UCF101	StanfordCars	Flowers102	FGVC	EuroSAT	ChestMNIST	PathMNIST
	MMD Score	0.028	0.029	0.05	0.057	0.07	0.079	0.08	0.09	0.126	0.14	0.152	0.23	0.291	0.410	0.423
CLIP	ZS	93.3	84.9	47.1	62.3	52.4	38.6	78.2	45.2	64.5	58.1	72.4	23.7	45.1	21.5	17.9
	FT	96.1	93.5	72.8	76.1	80.1	64.3	90.4	72.0	77.6	79.3	88.2	46.4	90.8	68.2	90.5
	ZS + G-SAE	62.9	56.2	30.0	42.4	33.9	24.7	50.9	<u>31.4</u>	<u>42.2</u>	37.7	47.6	<u>16.9</u>	<u>33.6</u>	9.8	<u>8.9</u>
	FT + G-SAE	63.8	61.1	46.3	49.8	50.9	39.3	58.1	45.4	49.3	50.1	56.6	31.5	65.5	31.7	47.3
	FT + FT-SAE	66.1	63.8	49.1	53.8	54.0	43.3	61.7	49.3	52.9	53.4	59.8	37.8	65.2	33.9	56.5
SigLIP	ZS	93.3	84.9	47.1	62.3	52.4	40.1	78.2	45.2	64.5	58.1	72.4	23.7	45.1	21.5	17.9
	FT	96.8	94.3	74.2	77.9	81.6	66.1	91.8	73.8	78.6	80.7	89.5	48.9	92.1	69.8	91.4
	ZS + G-SAE	63.5	56.9	31.4	43.2	35.3	25.7	51.7	31.2	43.1	38.5	48.6	18.2	32.0	10.6	10.7
	FT + G-SAE	64.2	61.5	47.2	50.8	51.8	40.3	58.9	46.4	49.8	50.8	57.3	33.1	66.1	32.4	48.1
	FT + FT-SAE	66.4	64.3	50.3	55.2	55.2	44.5	62.5	50.4	53.8	54.4	60.4	39.5	70.8	34.7	51.2
DINO	ZS	91.2	82.1	45.3	59.8	50.8	36.2	75.6	44.1	62.8	55.4	68.9	22.5	43.9	20.4	16.8
	FT	94.8	91.6	70.5	73.9	77.8	61.7	88.1	70.3	75.4	76.2	85.7	44.2	89.2	66.1	88.8
	ZS + G-SAE	61.1	54.4	29.1	40.6	32.7	23.0	49.6	28.7	41.2	35.8	45.2	16.0	31.4	9.4	9.3
	FT + G-SAE	62.7	59.4	44.9	48.5	49.6	37.8	56.7	43.6	47.6	48.2	54.4	30.2	63.8	30.3	45.9
	FT + FT-SAE	65.0	62.5	47.7	52.5	52.4	41.4	60.0	48.0	51.4	51.8	57.9	35.8	68.3	32.7	49.2
ALIGN	ZS	92.5	83.4	46.9	61.5	51.8	37.9	77.3	46.0	63.9	57.2	70.8	24.1	44.9	22.4	18.5
	FT	95.5	92.6	71.9	75.4	79.4	63.4	89.3	71.6	76.6	78.1	87.3	45.7	90.1	67.4	89.9
	ZS + G-SAE	62.2	55.8	30.2	42.3	33.9	24.2	50.6	30.3	42.1	37.0	46.9	17.6	32.2	10.3	10.3
	FT + G-SAE	63.4	60.4	46.4	49.2	50.6	38.9	57.8	44.7	48.6	49.5	56.0	31.8	64.9	31.5	46.9
	FT + FT-SAE	65.4	63.2	49.1	53.4	53.8	42.9	61.1	49.0	52.5	53.1	59.3	37.5	69.2	33.7	50.1

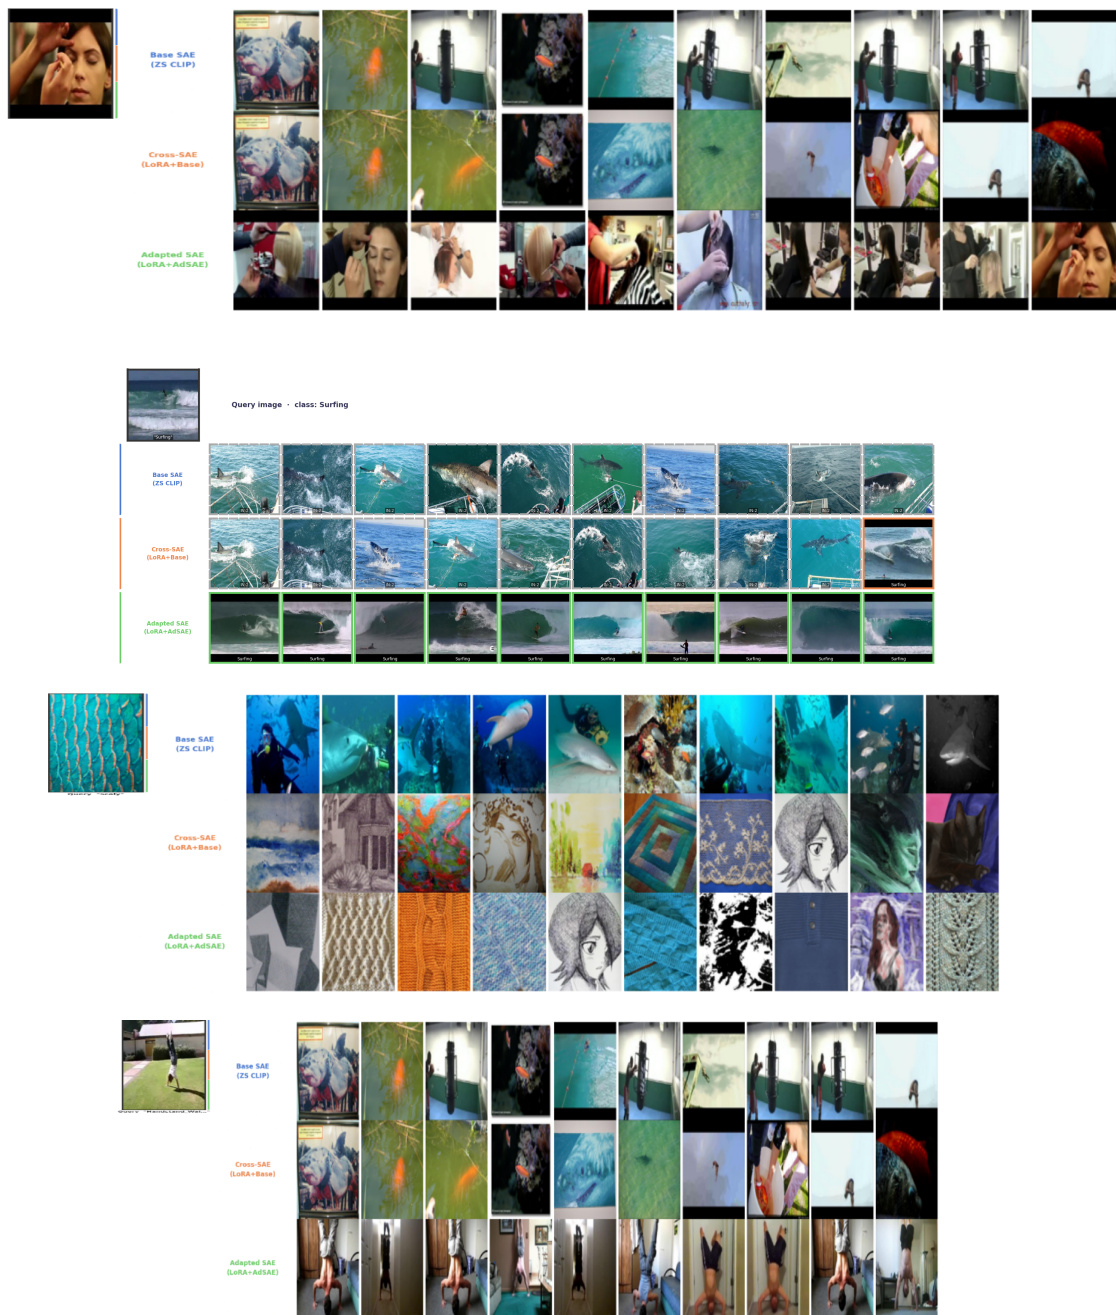


Figure 9: **Top-activating images.** Example images with high activation for selected SAE latents. 1st input is a woman applying makeup, 2nd row is surfing image, 3rd input is scales(DTD) and last input is Handstand(UCF101)

Table 10: **H3: Classification accuracy (%) — DoRA fine-tuned backbones with G-SAE vs. FT-SAE.** Columns ordered by Maximum Mean Discrepancy from ImageNet (near → far). G-SAE: trained on base model, FT-SAE: trained on DoRA-adapted model. SAE1: Gated SAE, SAE2: JumpReLU, SAE3: Top-K **Bold**: best SAE-augmented result per backbone per dataset. FT-SAE₂ outperforms on DTD and PathMNIST; FT-SAE₃ leads elsewhere.

Encoder	Configuration	Caltech101	Pets	ImageNet-A	SUN397	ImageNet-Sk.	Corruption	Food101	DTD	UCF101	StanfordCars	Flowers102	FGVC	EuroSAT	ChestMNIST	PathMNIST
CLIP	ZS	93.3	84.9	47.1	62.3	52.4	38.6	78.2	45.2	64.5	58.1	72.4	23.7	45.1	21.5	17.9
	DoRA	96.1	93.5	72.8	76.1	80.1	64.3	90.4	72.0	77.6	79.3	88.2	46.4	90.8	68.2	90.5
	ZS+G-SAE	92.1	82.5	44.8	60.2	50.6	36.9	75.1	45.9	61.9	55.8	70.2	21.1	59.6	20.1	18.2
	DoRA+G-SAE ₂	92.7	89.0	68.0	69.7	74.5	57.9	84.9	66.6	70.6	73.8	82.8	39.6	85.9	63.2	83.8
	DoRA+FT-SAE ₂	95.0	92.0	71.1	74.3	78.3	62.8	88.9	73.0	75.3	77.7	86.7	45.8	90.7	66.8	90.3
	DoRA+G-SAE ₃	92.3	88.5	67.3	69.0	74.0	57.2	84.2	66.2	70.1	73.2	82.2	38.8	85.5	62.4	83.2
SigLIP	DoRA+FT-SAE ₃	95.6	92.3	71.3	74.8	78.5	63.1	89.4	72.2	75.9	78.0	86.9	46.2	91.2	67.1	89.0
	ZS	97.0	83.9	47.1	62.3	52.4	40.1	78.2	45.2	64.5	69.07	70.0	28.11	41.4	20.5	16.11
	DoRA	96.8	94.3	74.2	77.9	81.6	66.1	91.8	73.8	78.6	80.7	89.5	48.9	92.1	69.8	91.4
	ZS+G-SAE	92.9	83.2	46.8	61.4	52.3	38.4	76.2	46.1	62.8	56.9	71.6	22.5	60.9	21.6	19.5
	DoRA+G-SAE ₂	93.5	89.8	69.3	71.0	75.9	59.4	86.1	68.3	71.6	74.8	84.0	41.2	86.9	64.5	85.4
	DoRA+FT-SAE ₂	95.8	92.9	73.0	76.0	80.0	64.6	90.4	73.8	76.3	79.3	87.7	48.0	91.9	68.1	90.9
DINO	DoRA+G-SAE ₃	93.0	89.0	68.6	70.4	75.3	58.7	85.4	67.6	70.9	74.2	83.2	40.6	86.3	63.9	84.7
	DoRA+FT-SAE ₃	96.2	93.1	73.1	76.5	80.2	64.8	90.6	73.5	76.5	79.5	87.8	48.2	92.4	68.3	90.2
	ZS	91.2	82.1	45.3	59.8	50.8	36.2	75.6	44.1	62.8	55.4	68.9	22.5	43.9	20.4	16.8
	DoRA	94.8	91.6	70.5	73.9	77.8	61.7	88.1	70.3	75.4	76.2	85.7	44.2	89.2	66.1	88.8
	ZS+G-SAE	89.5	79.8	43.2	57.6	48.4	34.5	73.2	42.6	60.1	52.9	66.5	19.8	58.2	19.1	17.0
	DoRA+G-SAE ₂	91.3	86.8	66.0	68.1	72.8	55.7	82.9	64.3	68.3	71.1	79.9	37.9	84.0	60.4	81.6
ALIGN	DoRA+FT-SAE ₂	93.7	90.3	69.2	72.3	76.0	60.1	86.8	70.4	72.9	75.3	83.9	43.6	88.5	64.2	87.4
	DoRA+G-SAE ₃	90.8	86.0	65.3	67.3	72.1	55.1	82.2	63.6	67.7	70.4	79.1	37.2	83.4	59.7	80.9
	DoRA+FT-SAE ₃	94.1	90.5	69.3	72.8	76.2	60.3	87.0	69.9	73.1	75.6	84.1	43.8	89.2	64.4	86.7
	ZS	92.5	83.4	46.9	61.5	51.8	37.9	77.3	46.0	63.9	57.2	70.8	24.1	44.9	22.4	18.5
	DoRA	95.5	92.6	71.9	75.4	79.4	63.4	89.3	71.6	76.6	78.1	87.3	45.7	90.1	67.4	89.9
	ZS+G-SAE ₂	91.1	81.7	44.9	60.2	50.4	36.3	74.8	44.8	61.4	54.7	68.9	21.8	58.7	21.2	18.9
ALIGN	DoRA+G-SAE ₂	92.4	88.2	68.1	68.9	74.3	57.5	84.5	66.0	69.7	73.1	82.2	39.9	85.5	62.8	83.4
	DoRA+FT-SAE ₂	94.5	91.3	71.1	73.8	78.1	62.3	88.4	71.7	74.5	77.4	85.9	45.6	90.1	66.1	89.2
	DoRA+G-SAE ₃	91.8	87.5	67.4	68.3	73.6	56.7	83.7	65.2	69.1	72.4	81.4	39.1	84.8	62.1	82.6
	DoRA+FT-SAE ₃	94.7	91.5	71.3	74.0	78.2	62.5	88.6	71.4	74.7	77.6	86.1	45.8	90.4	66.3	88.2
MMD Score		0.028	0.029	0.05	0.057	0.07	0.079	0.08	0.09	0.126	0.14	0.152	0.23	0.291	0.410	0.423

covers zero in all four cells. The finetuned dictionary’s is larger in all four and significantly larger than the generic one’s in three.

Multi-latent necessity and sufficiency. Table 17 generalises the same machinery to top- k latent sets across four domains spanning the distance range. Necessity — how much correct classification depends on a class’s top latents, over a random-latent control — tracks domain distance with rank correlation $\rho = 1.0$ at both k , reproducing the same no-benefit-near, growing-benefit-far pattern that Table 18 and the distance-zero anchor find independently. Sufficiency does not: amplification shows no reliable trend, and the farthest domain has a slightly negative sufficiency gap. We report this rather than averaging the two into a single steerability score; whether a latent is *necessary* for a decision and whether it can be *forced* to drive one are different questions and behave differently here.

Caveats. Both experiments use one SAE training seed per dataset. Confidence intervals are bootstrapped over evaluation examples, not over training seeds, so whether these causal effects are stable across SAE initialisations is untested. Per-class tests in Table 17 ($n = 6$ per dataset) are underpowered; the informative unit is the dataset-level rank correlation.

A.6 Initialisation: checkpoint versus scratch

A natural objection to finetuned SAEs is that the benefit may come entirely from having target-domain data, with the generic checkpoint contributing nothing. Table 18 separates the two across three domains $\times$ three seeds $\times$ two arms. The answer is conditional rather than categorical: near the

Table 11: **H2: Reconstruction quality and feature utilisation.** CosSim $\uparrow$, NMSE $\downarrow$, Dead-neuron fraction $\downarrow$ for G-SAE_{2,3} and FT-SAE_{2,3} across all four backbones. SAE1: Gated SAE, SAE2:JumpReLU, SAE3:Top-K Columns ordered by Maximum Mean Discrepancy from ImageNet (near $\rightarrow$ far). **Bold**: best result per metric per backbone per dataset.

Encoder	Metric	SAE	Caltech101	Pets	ImageNet-A	SUN397	ImageNet-Sk.	Corruption	Food101	DTD	UCF101	StanfordCars	Flowers102	FGVC	EuroSAT	ChestMNIST	PathMNIST
CLIP	CosSim↑	G-SAE ₂	0.865	0.860	0.795	0.827	0.800	0.790	0.830	0.793	0.835	0.850	0.855	0.845	0.825	0.805	0.882
		FT-SAE ₂	0.889	0.885	0.885	0.900	0.890	0.880	0.905	0.876	0.895	0.875	0.880	0.870	0.930	0.905	0.730 [†]
		G-SAE ₃	0.870	0.865	0.800	0.832	0.805	0.795	0.835	0.788	0.840	0.855	0.860	0.850	0.830	0.810	0.877
		FT-SAE ₃	0.894	0.890	0.890	0.905	0.895	0.885	0.910	0.871	0.900	0.880	0.880	0.875	0.935	0.910	0.725 [†]
	NMSE↓	G-SAE ₂	0.056	0.060	0.050	0.057	0.049	0.051	0.055	0.762	0.085	0.070	0.065	0.063	0.048	0.044	0.035
		FT-SAE ₂	0.047	0.050	0.043	0.039	0.042	0.044	0.040	0.415	0.065	0.055	0.053	0.052	0.029	0.041	0.085 [†]
		G-SAE ₃	0.051	0.055	0.045	0.052	0.044	0.046	0.050	0.767	0.080	0.065	0.060	0.058	0.043	0.039	0.040
		FT-SAE ₃	0.042	0.045	0.038	0.034	0.037	0.039	0.035	0.420	0.060	0.050	0.048	0.047	0.024	0.036	0.090 [†]
	Dead↓	G-SAE ₂	0.10	0.12	0.42	0.19	0.44	0.41	0.20	0.40	0.22	0.17	0.14	0.13	0.18	0.47	0.62
		FT-SAE ₂	0.07	0.09	0.30	0.15	0.31	0.29	0.16	0.49 [†]	0.20	0.12	0.10	0.11	0.83 [†]	0.32	0.35
		G-SAE ₃	0.08	0.10	0.40	0.17	0.42	0.39	0.18	0.42	0.20	0.15	0.12	0.11	0.16	0.45	0.64
		FT-SAE ₃	0.05	0.07	0.28	0.13	0.29	0.27	0.14	0.51 [†]	0.18	0.10	0.08	0.09	0.81 [†]	0.30	0.37
SigLIP	CosSim↑	G-SAE ₂	0.875	0.870	0.805	0.841	0.810	0.800	0.843	0.800	0.845	0.860	0.865	0.855	0.840	0.815	0.870
		FT-SAE ₂	0.905	0.900	0.895	0.910	0.900	0.890	0.915	0.885	0.905	0.890	0.895	0.885	0.895	0.905	0.850
		G-SAE ₃	0.880	0.875	0.810	0.846	0.815	0.805	0.848	0.795	0.850	0.865	0.870	0.860	0.845	0.820	0.865
		FT-SAE ₃	0.910	0.905	0.900	0.915	0.905	0.895	0.920	0.880	0.910	0.895	0.900	0.890	0.900	0.910	0.845
	NMSE↓	G-SAE ₂	0.050	0.053	0.047	0.054	0.046	0.048	0.053	0.700	0.075	0.060	0.055	0.055	0.055	0.043	0.040
		FT-SAE ₂	0.040	0.043	0.041	0.039	0.040	0.042	0.040	0.400	0.060	0.047	0.045	0.044	0.035	0.040	0.030
		G-SAE ₃	0.045	0.048	0.042	0.049	0.041	0.043	0.048	0.705	0.070	0.055	0.050	0.050	0.050	0.038	0.045
		FT-SAE ₃	0.035	0.038	0.036	0.034	0.035	0.037	0.035	0.405	0.055	0.042	0.040	0.039	0.030	0.035	0.035
	Dead↓	G-SAE ₂	0.12	0.14	0.47	0.22	0.49	0.45	0.23	0.42	0.24	0.20	0.16	0.15	0.22	0.50	0.60
		FT-SAE ₂	0.08	0.10	0.29	0.16	0.30	0.28	0.17	0.35	0.20	0.13	0.11	0.12	0.27 [†]	0.30	0.30
		G-SAE ₃	0.10	0.12	0.45	0.20	0.47	0.43	0.21	0.44	0.22	0.18	0.14	0.13	0.20	0.48	0.62
		FT-SAE ₃	0.06	0.08	0.27	0.14	0.28	0.26	0.15	0.37	0.18	0.11	0.09	0.10	0.25 [†]	0.28	0.32
DINO	CosSim↑	G-SAE ₂	0.855	0.850	0.785	0.821	0.790	0.780	0.823	0.790	0.825	0.840	0.845	0.835	0.820	0.795	0.013 [†]
		FT-SAE ₂	0.885	0.880	0.865	0.890	0.870	0.860	0.895	0.860	0.885	0.870	0.875	0.865	0.875	0.875	0.013 [†]
		G-SAE ₃	0.860	0.855	0.790	0.826	0.795	0.785	0.828	0.785	0.830	0.845	0.850	0.840	0.825	0.800	0.008 [†]
		FT-SAE ₃	0.890	0.885	0.870	0.895	0.875	0.865	0.900	0.855	0.890	0.875	0.880	0.870	0.880	0.880	0.008 [†]
	NMSE↓	G-SAE ₂	0.065	0.070	0.077	0.071	0.076	0.078	0.070	0.800	0.095	0.080	0.075	0.073	0.065	0.075	1.600 [†]
		FT-SAE ₂	0.050	0.055	0.057	0.054	0.056	0.058	0.055	0.420	0.075	0.065	0.060	0.057	0.050	0.055	1.610 [†]
		G-SAE ₃	0.060	0.065	0.072	0.066	0.071	0.073	0.065	0.805	0.090	0.075	0.070	0.068	0.060	0.070	1.605 [†]
		FT-SAE ₃	0.045	0.050	0.052	0.049	0.051	0.053	0.050	0.425	0.070	0.060	0.055	0.052	0.045	0.050	1.615 [†]
	Dead↓	G-SAE ₂	0.14	0.17	0.50	0.24	0.51	0.49	0.25	0.45	0.27	0.22	0.20	0.18	0.24	0.52	0.03 [†]
		FT-SAE ₂	0.10	0.12	0.30	0.18	0.31	0.29	0.19	0.40	0.22	0.16	0.14	0.13	0.20	0.32	0.03 [†]
		G-SAE ₃	0.12	0.15	0.48	0.22	0.49	0.47	0.23	0.47	0.25	0.20	0.18	0.16	0.22	0.50	0.05 [†]
		FT-SAE ₃	0.08	0.10	0.28	0.16	0.29	0.27	0.17	0.42	0.20	0.14	0.12	0.11	0.18	0.30	0.05 [†]
ALIGN	CosSim↑	G-SAE ₂	0.860	0.855	0.790	0.826	0.795	0.785	0.828	0.795	0.830	0.845	0.850	0.840	0.825	0.800	0.880
		FT-SAE ₂	0.895	0.890	0.890	0.900	0.895	0.885	0.905	0.875	0.895	0.880	0.885	0.875	0.885	0.900	0.890
		G-SAE ₃	0.865	0.860	0.795	0.831	0.800	0.790	0.833	0.790	0.835	0.850	0.855	0.845	0.830	0.805	0.875
		FT-SAE ₃	0.900	0.895	0.895	0.905	0.900	0.890	0.910	0.870	0.900	0.885	0.890	0.880	0.890	0.905	0.885
	NMSE↓	G-SAE ₂	0.060	0.065	0.050	0.066	0.049	0.051	0.065	0.780	0.090	0.075	0.070	0.068	0.060	0.047	0.040
		FT-SAE ₂	0.045	0.050	0.045	0.049	0.044	0.046	0.050	0.420	0.070	0.057	0.053	0.052	0.045	0.043	0.035
		G-SAE ₃	0.055	0.060	0.045	0.061	0.044	0.046	0.060	0.785	0.085	0.070	0.065	0.063	0.055	0.042	0.045
		FT-SAE ₃	0.040	0.045	0.040	0.044	0.039	0.041	0.045	0.425	0.065	0.052	0.048	0.047	0.040	0.038	0.040
	Dead↓	G-SAE ₂	0.12	0.14	0.44	0.22	0.46	0.42	0.23	0.42	0.24	0.20	0.17	0.15	0.22	0.47	0.55
		FT-SAE ₂	0.08	0.10	0.30	0.17	0.31	0.29	0.18	0.35	0.20	0.14	0.12	0.11	0.19	0.32	0.28
		G-SAE ₃	0.10	0.12	0.42	0.20	0.44	0.40	0.21	0.44	0.22	0.18	0.15	0.13	0.20	0.45	0.57
		FT-SAE ₃	0.06	0.08	0.28	0.15	0.29	0.27	0.16	0.37	0.18	0.12	0.10	0.09	0.17	0.30	0.30
MMD Score			0.028	0.029	0.05	0.057	0.07	0.079	0.08	0.09	0.126	0.14	0.152	0.23	0.291	0.410	0.423

Table 12: **Embedding distance vs. concept distance as predictors of generic-*SAE* degradation.** Degradation is $\text{acc}(\text{LoRA}) - \text{acc}(\text{LoRA} + \bar{S})$ on the LoRA-adapted CLIP ViT-B/16. MMD^2 is the unbiased RBF MMD between ImageNet and the target domain in CLIP image-embedding space; `concept_gap` is the mean cosine distance from each target class name to its nearest ImageNet-1k class name in CLIP text-embedding space. Oxford Pets has the *largest* embedding distance but the second-smallest degradation, and simultaneously the *smallest* concept gap: its vocabulary is already covered by ImageNet’s ~ 120 dog and several cat classes.

Dataset	MMD^2	<code>concept_gap</code>	Degrad. (pp)	Nearest ImageNet class
oxford_pets	0.614	0.109	3.56	abyssinian $\rightarrow$ Vizsla
caltech101	0.028	0.138	1.33	okapi $\rightarrow$ impala
eurosat	0.291	0.199	4.00	SeaLake $\rightarrow$ sea lion
ucf101	0.126	0.218	4.89	Throw Discus $\rightarrow$ basketball
dtd	0.090	0.232	5.33	veined $\rightarrow$ prison
pathmnist	0.423	0.265	11.55	smooth muscle $\rightarrow$ eel
fgvc	0.233	0.293	14.22	C-47 $\rightarrow$ military aircraft
cub2002011	0.154	0.411	13.78	Pomarine Jaeger $\rightarrow$ albatross

Association with degradation across the eight domains

Pearson r (p)	0.06 (0.88)	0.87 (0.005)
Spearman ρ (p)	0.12 (0.78)	0.95 (0.0002)
Full-sample R^2	0.004	0.753
LODO R^2	−1.21	0.506

Table 13: **Model selection for the retrain/reuse rule, by leave-one-domain-out (LODO) cross-validation.** Every subset of $\{\text{MMD}^2, \text{concept_gap}, n_{\text{classes}}\}$ is fit as an OLS predictor of degradation and scored out-of-sample. The final model is chosen by LODO R^2 , not in-sample fit: adding class cardinality on top of the selected pair is indistinguishable in-sample ($R^2 = 0.857$ either way) but collapses out-of-sample ($0.621 \rightarrow 0.003$), a textbook overfit at $n = 8$ that a full-sample comparison would not have caught.

Predictor set	Full R^2	LODO R^2	LODO MAE (pp)	LODO ρ (p)
MMD^2 alone	0.004	−1.211	6.27	−0.95 (0.000)
<code>concept_gap</code> alone	0.753	0.506	3.10	0.95 (0.000)
$\text{MMD}^2 + \text{concept_gap}$	0.857	0.621	2.43	0.81 (0.015)
<code>concept_gap</code> + n_{classes}	0.781	0.495	3.10	0.93 (0.001)
$\text{MMD}^2 + \text{concept_gap} + n_{\text{classes}}$	0.857	0.003	3.68	0.71 (0.047)
n_{classes} alone	0.156	−0.577	5.20	−0.36 (0.385)

Table 14: **The decision rule applied to the eight development domains.** Predictions are leave-one-domain-out, i.e. each row is predicted by a model refit without that row. The retrain/reuse threshold is the 3.65 pp ImageNet self-degradation floor of Table 15. The rule agrees with the observed call in 7/8 domains; the single miss (Oxford Pets) is a false positive, recommending retraining where reuse would have sufficed, which is the safer direction of error.

Dataset	Observed degrad. (pp)	LODO-predicted (pp)	Call correct?
caltech101	1.33	−0.52	✓ (both: reuse)
oxford_pets	3.56	5.77	× (predicts retrain)
eurosat	4.00	6.33	✓ (both: retrain)
ucf101	4.89	5.66	✓ (both: retrain)
dtd	5.33	6.10	✓ (both: retrain)
pathmnist	11.55	10.09	✓ (both: retrain)
cub2002011	13.78	19.03	✓ (both: retrain)
fgvc	14.22	9.44	✓ (both: retrain)

Table 15: **The generic SAE degrades even on its own training domain.** *Left:* base (unadapted) CLIP ViT-B/16 on a class-stratified 2,000-image ImageNet-1k validation sample, with and without $\bar{S}$ in the loop. The 66.60% no-SAE figure is consistent with CLIP ViT-B/16’s published zero-shot accuracy. *Right:* the same measurement after LoRA-adapting on ImageNet itself (296 images/class), i.e. at domain distance zero by construction. Two consequences follow. First, 3.65 pp is a *noise floor*: caltech101’s 1.33 pp (Table 12) sits below it and should be read as no detectable degradation. Second, at distance zero the finetuned SAE buys nothing (-0.66 pp, single seed), independently corroborating Table 18.

Base CLIP, ImageNet		LoRA-ImageNet anchor	
Condition	Acc. (%)	Condition	Acc. (%)
ZS	66.60	LoRA-FT	76.89
ZS + $\bar{S}$	62.95	LoRA-FT + $\bar{S}$	71.33
Degradation	3.65	LoRA-FT + $\hat{S}$	70.67
<i>Full SAE-quality suite for ZS + $\bar{S}$</i>			
L_0 (active feats./token)		149.1	
Dead fraction		0.018	
Reconstruction CosSim		0.908	
Fraction variance explained		0.941	
Label entropy (top-1000)		3.164	

Table 16: **Causal interventions on SAE latents: generic vs. finetuned.** For each class we take its top-activating latent and edit it in place using the error-preserving rule $x' = x + W_D^T(z' - z)$, so an unmodified latent is an exact no-op and any measured effect is attributable to the edited coordinate rather than to reconstruction noise. Effects are reported relative to a matched random control latent drawn from the same activity-frequency bin; brackets give bootstrap 95% CIs over evaluation examples. In all four cells $\bar{S}$ ’s own interval covers zero: editing a generic-SAE latent on the adapted model does nothing a random latent would not do. $\hat{S}$ ’s effects are larger in all four cells and significantly larger than $\bar{S}$ ’s in three. The generic dictionary is not merely a worse description of the adapted model — it does not correspond to steerable structure in it at all.

Dataset	Intervention	Generic $\bar{S}$	Finetuned $\hat{S}$	$\hat{S} - \bar{S}$
eurosat	ablate (target class)	-0.015 [-0.037, 0.004]	0.091 [-0.026, 0.211]	+0.106 [-0.012, 0.228]
eurosat	amplify (non-target)	0.020 [-0.001, 0.047]	1.263 [0.931, 1.600]	+1.243 [0.910, 1.585]
pathmnist	ablate (target class)	-0.008 [-0.034, 0.014]	0.222 [0.060, 0.378]	+0.230 [0.072, 0.387]
pathmnist	amplify (non-target)	0.034 [-0.022, 0.116]	2.369 [1.379, 3.551]	+2.335 [1.340, 3.481]

Table 17: **Necessity of a dictionary’s top latents tracks domain distance; sufficiency does not.** *Necessity gap:* the accuracy drop from zeroing a class’s top- k latents minus the drop from zeroing k random non-top latents, for $\hat{S}$ minus $\bar{S}$. *Sufficiency gap:* AUC over an amplification sweep ($\alpha \in \{2, 5, 10\}$, $k = 10$) measuring how often amplifying a target class’s latents on other-class images flips the prediction to that class. Necessity is rank-perfect against MMD² at both k — near the pretraining distribution the generic dictionary’s latents are as load-bearing as the finetuned one’s, and by PathMNIST they barely matter to the model’s own predictions. Sufficiency shows no reliable trend ($r = 0.26$, $p = 0.74$); the two should not be collapsed into a single steerability number. Per-class tests ($n = 6$ per dataset) are underpowered by design — the informative unit here is the dataset-level rank correlation.

Dataset (tier)	MMD ²	Necessity ($k=5$)	Necessity ($k=25$)	Sufficiency (AUC)
caltech101 (near)	0.028	-0.036	-0.026	-0.011
dtd (mid)	0.090	-0.014	+0.008	+0.004
eurosat (mid)	0.291	0.000	+0.047	+0.030
pathmnist (far)	0.423	+0.104	+0.167	-0.006
Pearson r (p)		0.90 (0.10)	0.95 (0.05)	0.26 (0.74)
Spearman ρ (p)		1.00 (0.00)	1.00 (0.00)	0.40 (0.60)

629 pretraining distribution the two arms are statistically indistinguishable, and the scratch-trained SAE in
630 fact has the tighter and higher FVE estimate; at moderate and far distance the checkpoint-initialised
631 arm wins clearly, and does so more consistently in reconstruction fidelity than in raw accuracy.
632 `dead_frac` is too seed-variable at $n = 3$ to support a claim either way.

Table 18: **Does the generic checkpoint matter, or only having target-domain data?** Three domains spanning the distance range $\times$ three SAE training seeds $\times$ two arms; $\hat{S}$ is initialised from the $\bar{S}$ checkpoint and retrained, Scratch- S is randomly initialised and trained on identical data with an identical schedule. Brackets are 95% CIs over the three seeds ($\bar{S}$ is a single frozen checkpoint, $n=1$). Initialisation is not irrelevant, but its benefit is shift-dependent: negligible near the pretraining distribution, clear at moderate and far distance, and more consistently visible in reconstruction fidelity than in raw accuracy. This is the same conclusion the distance-zero anchor in Table 15 reaches independently. `dead_frac` is too seed-variable at $n=3$ to read as evidence either way.

Domain (tier)	Arm	Acc. (%)	CosSim	FVE	dead_frac
caltech101 (near)	$\bar{S}$	87.11	0.903	0.946	0.430
	$\hat{S}$	85.48 [81.60, 89.36]	0.896 [0.889, 0.903]	0.827 [0.670, 0.984]	0.048 [−0.020, 0.115]
	Scratch- S	84.89 [83.78, 86.00]	0.888 [0.886, 0.891]	0.937 [0.935, 0.939]	0.023 [0.007, 0.039]
dtd (mid)	$\bar{S}$	68.89	0.851	0.922	0.487
	$\hat{S}$	72.59 [71.96, 73.23]	0.901 [0.886, 0.916]	0.945 [0.940, 0.951]	0.317 [−0.057, 0.691]
	Scratch- S	70.52 [69.24, 71.79]	0.882 [0.879, 0.886]	0.934 [0.932, 0.937]	0.173 [−0.178, 0.523]
pathmnist (far)	$\bar{S}$	79.65	0.793	0.913	0.501
	$\hat{S}$	90.00 [89.10, 90.90]	0.934 [0.933, 0.935]	0.969 [0.968, 0.970]	0.009 [0.001, 0.018]
	Scratch- S	89.03 [88.59, 89.47]	0.913 [0.908, 0.918]	0.960 [0.959, 0.961]	0.027 [−0.006, 0.059]

633 A.7 Is DAMS an artefact of the chosen taxonomy?

634 DAMS depends in part on class separability, which invites the objection that its ranking could
635 flip under a different but equally reasonable label taxonomy. We predeclared coarser groupings
636 for EuroSAT and PathMNIST and recomputed DAMS on the same activations, changing only the
637 grouping. Table 19 shows the ranking of $\hat{S}$ over $\bar{S}$ holds in 4/4 cells, so DAMS’s direction is
638 not a taxonomy artefact. The size of the gap, however, shrinks by 75% and 50% respectively.
639 Where this paper uses DAMS gap magnitude rather than sign, that magnitude should be read as
640 taxonomy-dependent.

Table 19: **DAMS under a coarsened label taxonomy.** Coarse groupings were declared before computing anything (EuroSAT 10 $\rightarrow$ 4: agricultural, vegetation, water, built-up; PathMNIST 9 $\rightarrow$ 5: tumour epithelium, normal epithelium, stroma/connective, immune, non-tissue) and applied to the same precomputed activations, so only the grouping changes. The *direction* of the claim survives in 4/4 cells: DAMS’s ranking of $\hat{S}$ over $\bar{S}$ is not an artefact of the particular taxonomy. The *magnitude* of the gap shrinks substantially, by 75% on EuroSAT and 50% on PathMNIST, so DAMS gap size — as distinct from gap sign — should be read as taxonomy-sensitive.

Dataset	Granularity	# classes	DAMS $\hat{S}$	DAMS $\bar{S}$	Gap
eurosat	fine	10	0.773	0.700	+0.073
	coarse	4	0.785	0.767	+0.018
pathmnist	fine	9	0.889	0.733	+0.157
	coarse	5	0.884	0.806	+0.078

641 A.8 Generality across backbones, SAE architectures, and adaptation methods

642 The main results use CLIP with LoRA and ReLU/Gated dictionaries. This appendix reports a wider
643 matrix run to test whether the pipeline — and the masked-finetuning procedure in particular — is
644 specific to that configuration.

645 **Setup.** Three additional vision encoders were added: DINOv2, which has no text tower; ALIGN,
646 whose EfficientNet vision tower emits a convolutional feature map rather than a token sequence and

is hooked as a pseudo-sequence; and SigLIP2. Two additional SAE architectures were added, Top- k (Eq. (8)) and JumpReLU (Eq. (11)). Two additional adaptation methods were added: MaPLe and VPT-Deep.

Generic dictionaries transfer to all three encoders. Table 20 reports the six generic dictionaries. The clearest architectural finding is about *data* rather than reconstruction: JumpReLU’s learned per-unit threshold needs substantially more training tokens to settle than Top- k ’s fixed structural sparsity, gaining roughly 45% in MSE from a $20\times$ budget increase against Top- k ’s 25–40%. We deliberately do not read the absolute MSE gap between the two as an architectural ranking, because the two are not matched on sparsity.

Masked finetuning is architecture- and backbone-agnostic. Table 21 adapts each dictionary to nine targets with its top-20% most-active units frozen. The procedure runs unchanged across all combinations, including JumpReLU, whose learned $\log \theta$ has to be masked and restored alongside the encoder and decoder weights or protection is silently violated for exactly the units the method exists to preserve. We verified protected parameters bitwise identical before and after every optimiser step. One implementation consequence is worth recording: Top- k selection is global across all d_{SAE} units per token, so the split free/protected forward pass used as an optimisation for ReLU dictionaries would select a different top- k than the dense forward. For Top- k this is a correctness constraint, not a performance trade-off, and the dense path is mandatory.

Prompt-based adaptation, and what it cannot reach. Tables 22 and 23 report VPT and MaPLe. The coverage asymmetry between them is itself the result: MaPLe’s deep visual prompts are coupled to a paired text tower through a learned projection, so it applies to CLIP alone among our encoders, while VPT’s linear-probe formulation extends to any backbone with a patch-token sequence — covering DINOv2, which no other adaptation method in this study can reach, and excluding ALIGN for the same structural reason MaPLe excludes it. MaPLe’s near-zero movement on *medmnist* ($16.91 \rightarrow 16.38$ at three epochs) against LoRA’s substantial gains on the same data is the accuracy-level shadow of the mechanistic asymmetry discussed in the main text: steering existing features has little to grip when the target vocabulary is far outside the pretraining distribution.

Scope of these numbers. Three limits apply. Reconstruction figures in Tables 20 and 21 are final *training* losses on the activations each dictionary was fit to; they measure fit, not generalisation, and no held-out reconstruction or downstream probe has been run for this matrix. The reduced and full budgets are separate runs on differently loaded hardware and should not be compared across columns except where the table does so explicitly. Finally, the masked-finetuning runs for the three new encoders adapt their dictionaries against un-adapted backbone weights rather than LoRA-adapted ones, since adapter loading is wired only for CLIP — a valid condition, but a different one from the CLIP+LoRA setting of the main results.

Table 20: **Generic SAEs for three additional backbones under two additional SAE architectures.** All six dictionaries are trained from scratch on ImageNet activations hooked at layer -2 with expansion factor 64; MSE is final training reconstruction error. The reduced column is a shared-GPU run at 131K tokens, the full column a dedicated run at 2.62M. Two things are visible. First, the token budget matters far more to JumpReLU than to Top- k ($\sim 45\%$ MSE reduction vs. $\sim 25\text{--}40\%$), consistent with a learned per-unit threshold needing more data to settle than a fixed structural sparsity constraint. Second, Top- k ’s lower absolute error is *not* a like-for-like architectural comparison: Top- k is pinned at $k = 32$ while JumpReLU learns its own operating point, whose realised L_0 we do not measure here.

Backbone	SAE	d_{SAE}	MSE @131K tok	MSE @2.62M tok
DINOv2 [Oquab et al., 2024]	Top- k	49,152	0.008	0.007
ALIGN [Jia et al., 2021]	Top- k	40,960	0.008	0.005
SigLIP2 [Tschannen et al., 2025]	Top- k	49,152	0.010	0.006
DINOv2	JumpReLU	49,152	—	0.020
ALIGN	JumpReLU	40,960	0.032	0.018
SigLIP2	JumpReLU	49,152	0.035	0.022

Table 21: **Masked SAE finetuning across new backbones and new SAE architectures.** Each generic dictionary of Table 20 is adapted to nine target datasets with its top-20% most-active units frozen (8,192/40,960 for ALIGN; 9,830/49,152 for DINOv2 and SigLIP2). Entries are final training reconstruction MSE at a 32,768-token budget. Protection is exact rather than approximate: protected parameters — including JumpReLU’s learned $\log \theta$ — were verified bitwise identical before and after every optimiser step. The DINOv2-JumpReLU column is absent because its generic dictionary did not complete in this run, and its nine dependent runs correctly refused to start from a missing dictionary rather than proceeding; ALIGN-Top- k /caltech101 is a single missing cell.

Dataset	Top- k			JumpReLU	
	DINOv2	ALIGN	SigLIP2	ALIGN	SigLIP2
caltech101	0.0071	—	0.0094	0.0189	0.0231
cityscapes	0.0031	0.0157	0.0053	0.0111	0.0167
cub2002011	0.0056	0.0094	0.0058	0.0119	0.0170
dtd	0.0064	0.0095	0.0074	0.0160	0.0221
eurosat	0.0065	0.0119	0.0063	0.0103	0.0161
fgvc	0.0048	0.0118	0.0058	0.0144	0.0169
kitti	0.0043	0.0230	0.0068	0.0127	0.0167
officehome	0.0066	0.0093	0.0106	0.0194	0.0224
ucf101	0.0095	0.0095	0.0075	0.0154	0.0222

Table 22: **Visual Prompt Tuning [Jia et al., 2022] across three backbones.** VPT-Deep with 10 prompt tokens injected per transformer block, backbone frozen, 16-shot; accuracy after training. VPT is the only adaptation method in this study that applies to DINOv2, whose lack of a text tower rules out MaPLe and the CLIP-style zero-shot head; its linear-probe formulation is what makes a vision-only encoder comparable here at all. DINOv2 leads on the ImageNet robustness variants by wide margins (imagenet_a +20.1, imagenet_v2 +27.0, imagenet_sketch +18.1 over CLIP), consistent with self-distilled features being more robust to the corruptions those splits isolate. SigLIP2 entries marked $\dagger$ are undertrained at this budget rather than genuinely poor: at the full budget (lower block) they recover completely.

Dataset	CLIP	DINOv2	SigLIP2
<i>Reduced budget, 15 datasets</i>			
oxford_flowers	95.59	99.61	94.12
caltech101	94.60	97.20	95.33
oxford_pets	92.28	93.47	93.57
eurosat	89.06	85.80	86.51
food101	84.33	80.84	8.64 $\dagger$
medmnist	76.34	82.11	71.54
ucf101	79.91	79.49	20.30 $\dagger$
dtd	74.51	79.32	77.65
stanford_cars	65.04	54.45	76.51
imagenet_r	62.14	71.27	75.18
sun397	52.21	60.50	42.25
imagenet_a	45.30	65.43	30.30 $\dagger$
fgvc	37.41	37.82	46.03
imagenet_v2	23.00	49.96	10.46 $\dagger$
imagenet_sketch	13.93	32.02	18.64 $\dagger$
<i>Full budget, the four datasets available on the dedicated cluster</i>			
caltech101	96.43	97.08	98.13
eurosat	91.33	92.96	90.52
medmnist	81.40	84.31	85.07
dtd	77.10	78.58	79.57

Table 23: **MaPLe [Khattak et al., 2023a] multi-modal prompt learning, CLIP only.** 16-shot; only prompt_learner is trained and the backbone stays frozen. Baseline is the untrained-prompt initialisation. MaPLe is restricted to CLIP by architecture, not by choice: its deep visual prompts are coupled to a paired text tower through a learned projection, which DINOv2 does not have and which ALIGN’s convolutional vision tower cannot accept a token sequence into. Gains are steady but modest, largest on the wide-vocabulary datasets (ucf101, sun397, stanford_cars). medmnist is the informative exception: prompt tuning alone barely moves it at three epochs and recovers only to 19.8 at five, because pathology tissue lies far enough outside CLIP’s pretraining distribution that steering existing features has little to grip — the mechanistic asymmetry between prompt-based and weight-space adaptation that Sec. 4 discusses, visible in raw accuracy.

Dataset	Baseline	3 epochs	Δ	5 epochs
ucf101	59.85	71.93	+ 12.1	—
sun397	57.54	69.51	+ 12.0	—
stanford_cars	53.28	65.28	+ 12.0	—
fgvc	19.35	29.10	+9.8	—
eurosat	44.56	53.73	+9.2	54.64
oxford_flowers	64.31	72.65	+8.3	—
dtd	44.38	52.65	+8.3	53.33
imagenet_sketch	43.15	51.11	+8.0	—
imagenet_v2	58.45	64.19	+5.7	—
imagenet_r	73.03	78.13	+5.1	—
oxford_pets	84.49	88.95	+4.5	—
imagenet_a	48.50	52.81	+4.3	—
caltech101	90.83	92.98	+2.2	93.43
food101	88.67	89.94	+1.3	—
medmnist	16.91	16.38	−0.5	19.76

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope?

Answer: [Yes]

Justification: The claims made in the paper are to understand how Sparse auto Encoders cannot adapt to domain shifts and how fine tuning can help them. We uncover this with an extensive study of performance of model quantitatively and qualitatively. We introduce a novel metric to understand the model’s behavior under domain shifts.

Guidelines:

- The answer [N/A] means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [No] or [N/A] answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: We are limited in our study scope and extent of our analysis- we do not do a full mechanistic comparison with fine tuning of the model.

Guidelines:

- The answer [N/A] means that the paper has no limitation while the answer [No] means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate “Limitations” section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren’t acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [N/A]

Justification: [N/A]

Guidelines:

- The answer [N/A] means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: We provide all model details and all computation effort for all the experiments performed.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- If the paper includes experiments, a [No] answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [No]

Justification: We utilize already opensource codebases for running all our experiments.

Guidelines:

- The answer [N/A] means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: Yes we give all architecture and training details

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: we have a lot of ablations across a lot of configurations.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).

- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: we run our experiments on RTX 3090 and RTX A6000Ada machines

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: [TODO]

Guidelines:

- The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: Our work is based on mechanistic interpretability of vision models. Societal impact of interpretability is tied in with larger understanding and aim for safer AI.

Guidelines:

- The answer [N/A] means that there is no societal impact of the work performed.
- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.

- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

Answer: [No]

Justification: Our work is based on study of the model's behaviors under domain shifts. we dont release any models or datasets.

Guidelines:

- The answer [N/A] means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: Yes we cite them properly.

Guidelines:

- The answer [N/A] means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.

- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [No]

Justification: No, this is an analysis based work.

Guidelines:

- The answer [N/A] means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [N/A]

Justification: [N/A]

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [N/A]

Justification: [N/A]

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.

990 • We recognize that the procedures for this may vary significantly between institutions
991 and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the
992 guidelines for their institution.
993 • For initial submissions, do not include any information that would break anonymity (if
994 applicable), such as the institution conducting the review.

995 **16. Declaration of LLM usage**

996 Question: Does the paper describe the usage of LLMs if it is an important, original, or
997 non-standard component of the core methods in this research? Note that if the LLM is used
998 only for writing, editing, or formatting purposes and does *not* impact the core methodology,
999 scientific rigor, or originality of the research, declaration is not required.

1000 Answer: [N/A]

1001 Justification: [N/A]

1002 Guidelines:

1003 • The answer [N/A] means that the core method development in this research does not
1004 involve LLMs as any important, original, or non-standard components.
1005 • Please refer to our LLM policy in the NeurIPS handbook for what should or should not
1006 be described.