

Array

1. Single Dimensional Array


int []arr = new int[5];

2. Multidimensional Array

int [][] arr = new int[2][3]

3. Ragged Array

// cpp
int **ptr = new int*[2];
ptr[0] = new int[3];
ptr[1] = new int[3];

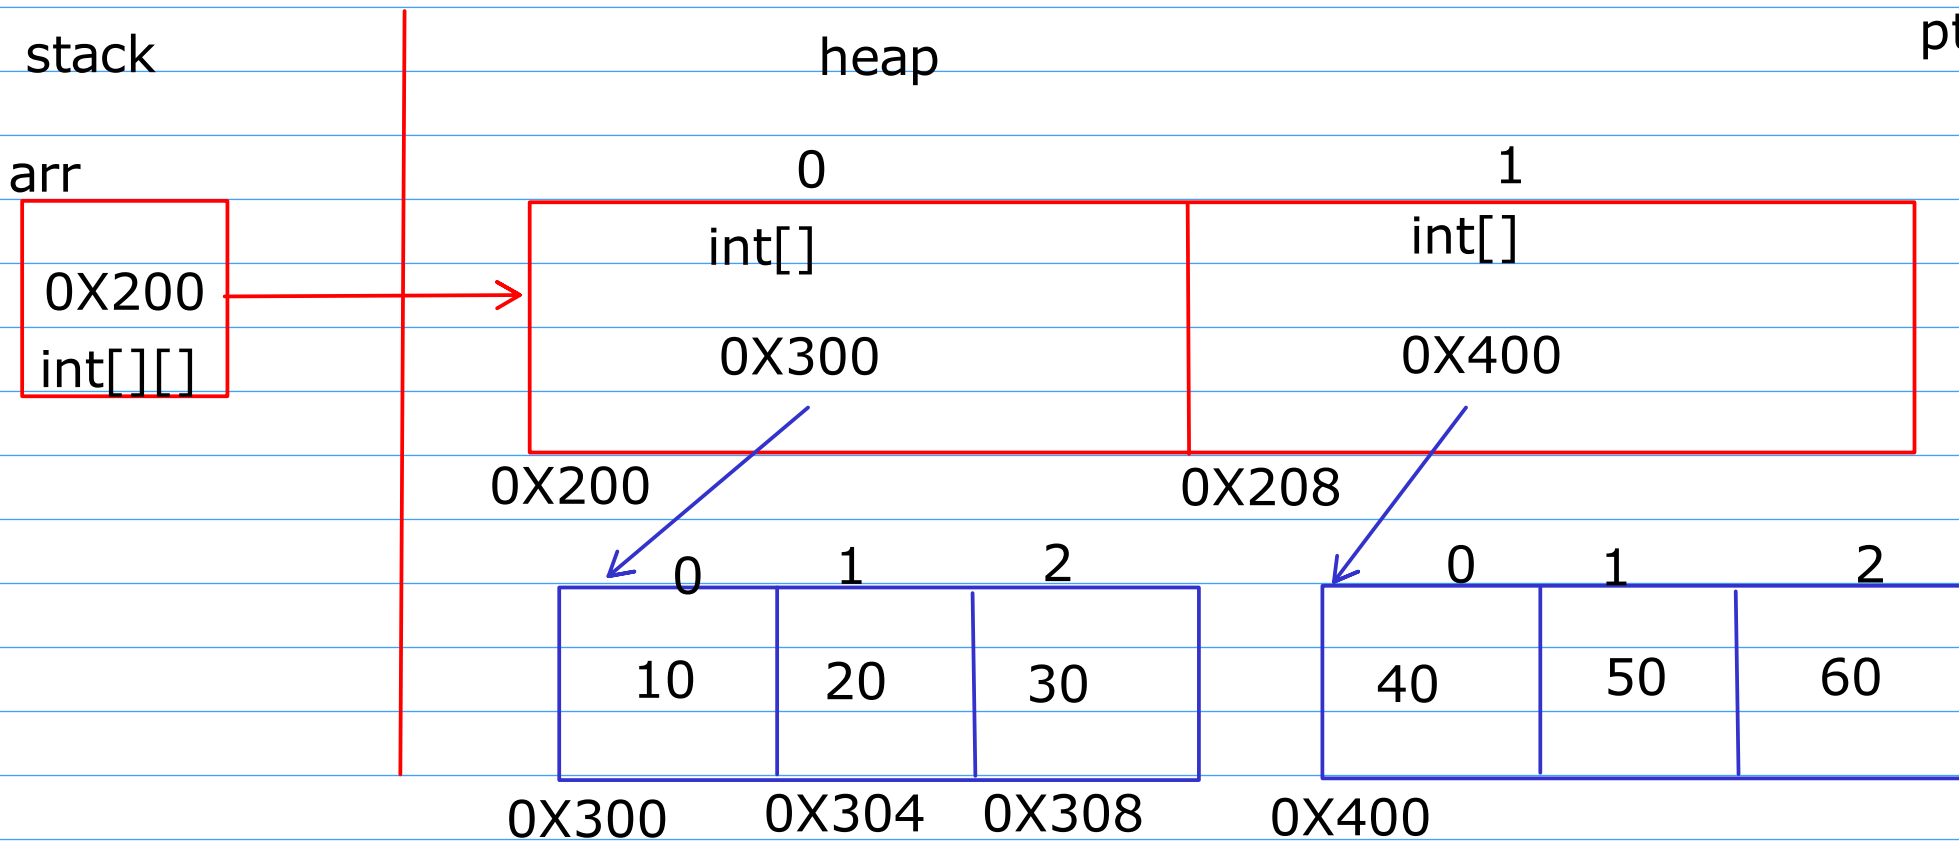


0X300 [0] = 10

arr[1][0]

0X200[0][0] = 10

0X308 = 30

arr[0][0] = 10

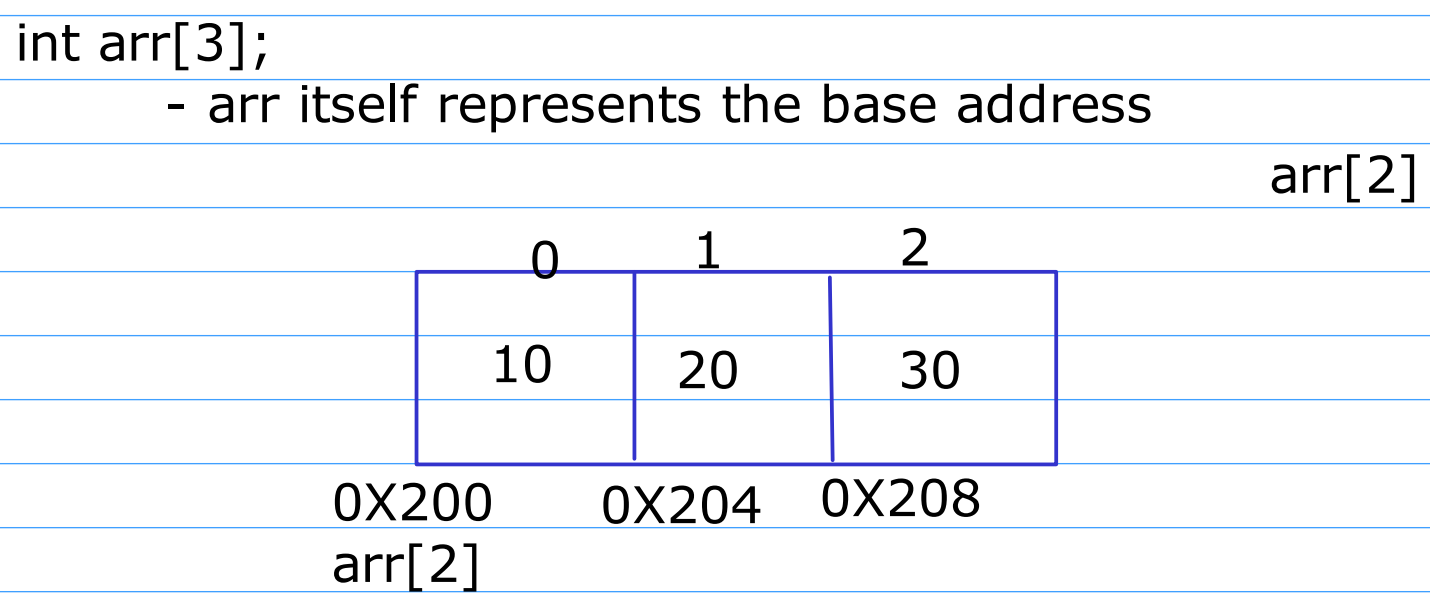


Ragged Array

- It is an array whose size of inner arrays are different

- int [][]arr = new int[2][];


```
int[][] arr = new int[2][];  
arr[0] = new int[3];  
arr[1] = new int[2];
```

Ragged Array

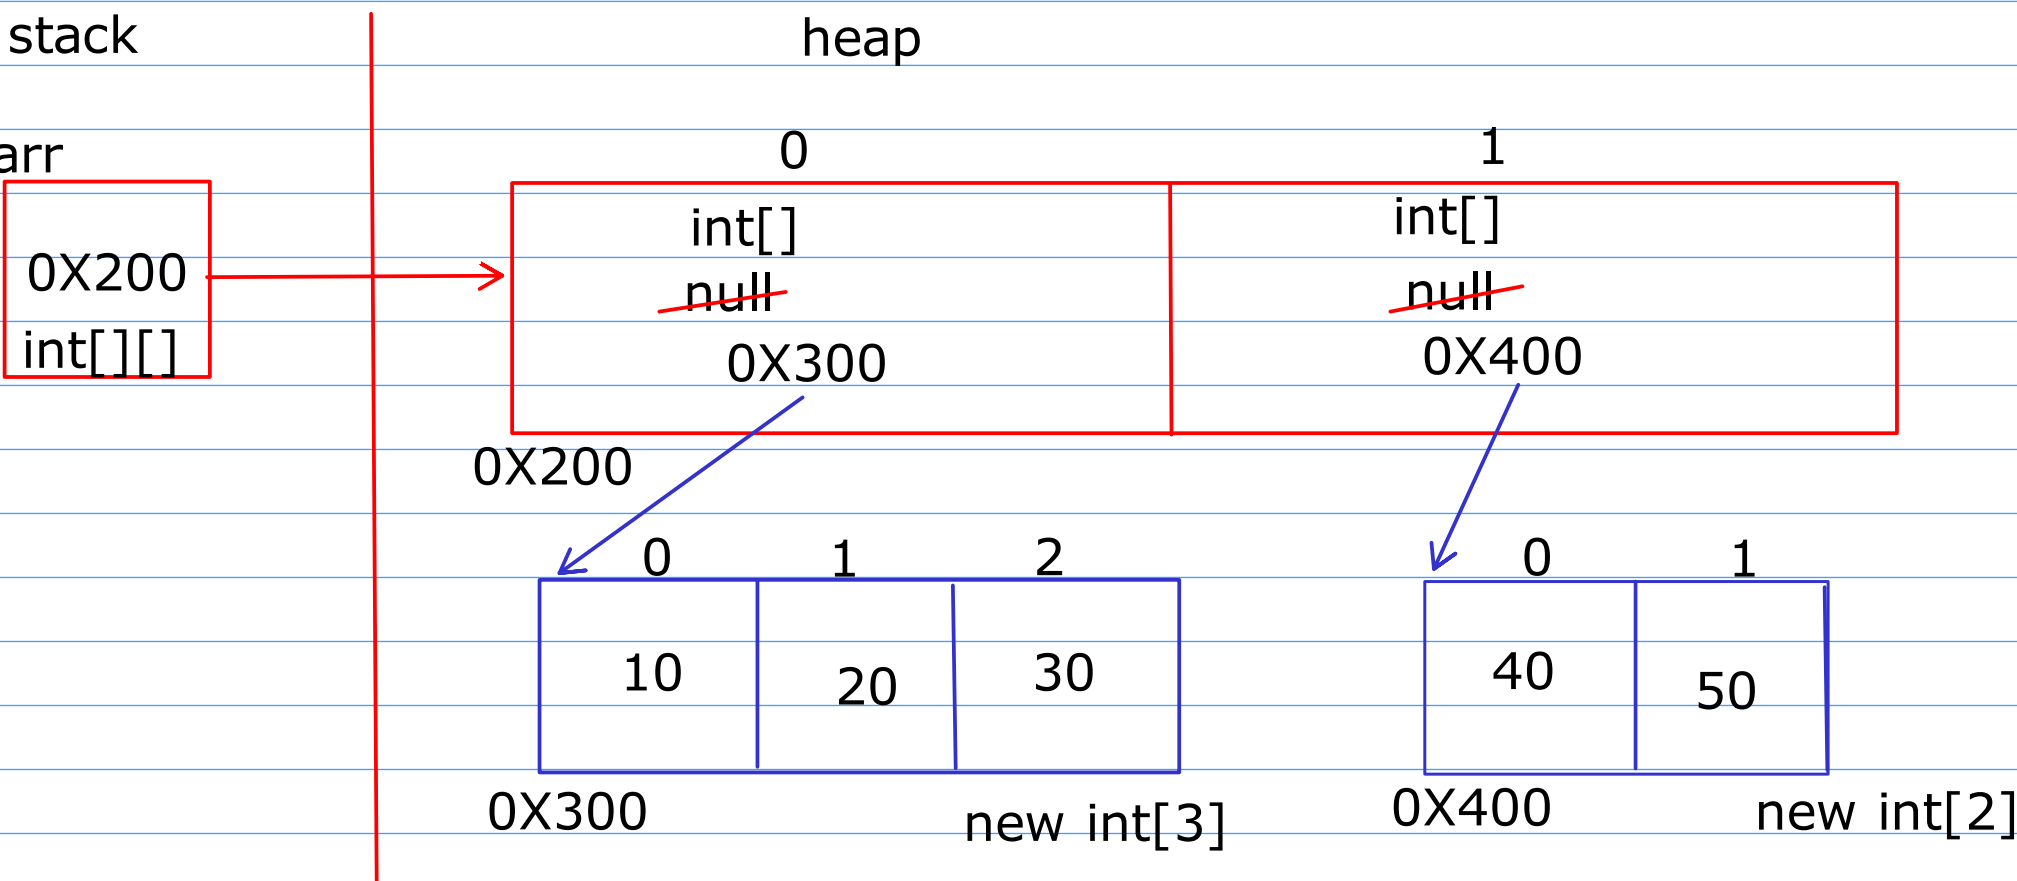

```
Students[100]  
Apti  
CPP  
Java  
DS  
Python
```

`0X400[0] = 40`
`0X200[1][0] = 40`
`arr[1][0] = 40`

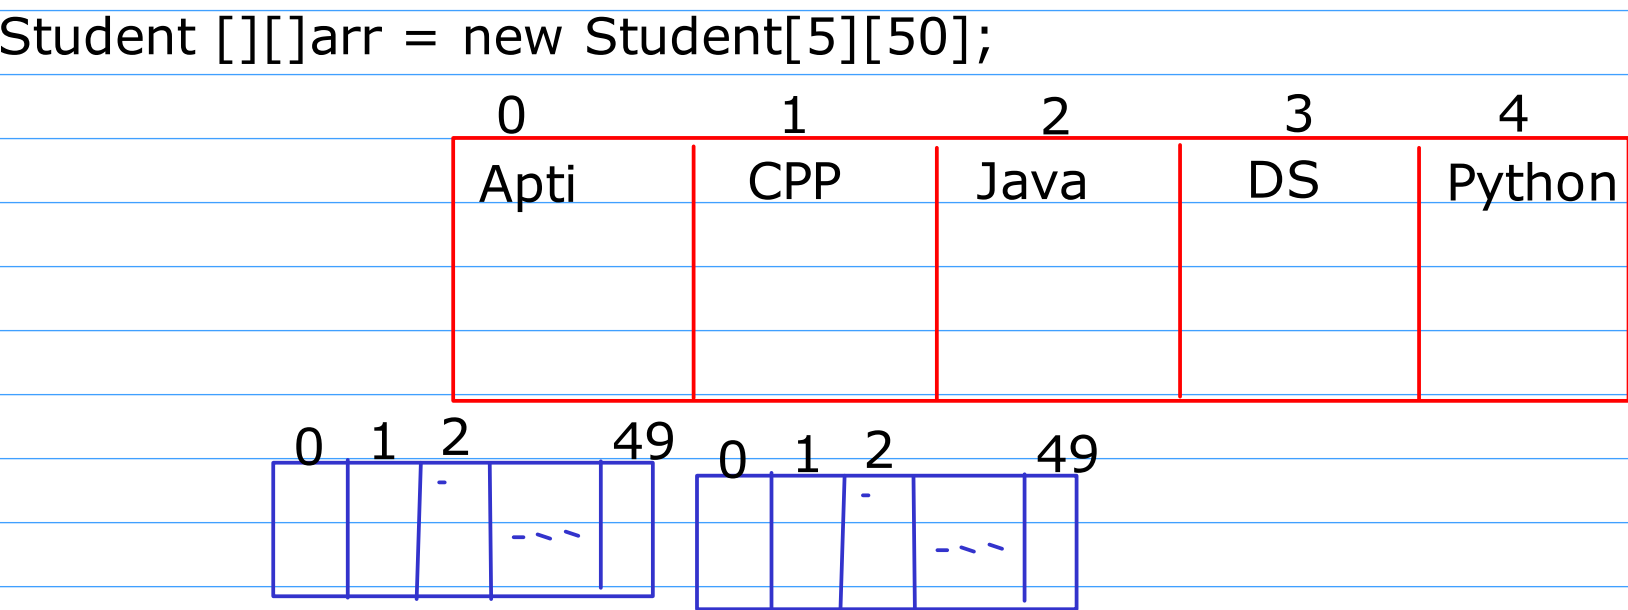

```
Student [][]arr = new Student[6][];  
//DAC arr[0] = new Student[240]  
//DMC arr[1] = new Student[120]  
// DBDA arr[2] = new Student[60];
```

// ragged Array

```
new int [2][];
```

Field Initializer
Object Initializer
Constructors



To initialize the state of an object

#Static

- It is a keyword which can be used to declare
 1. Field
 2. Method
 3. Block
 4. Nested class

1. Static Field

- The memory for the static fields will be allocated only once on the method area at the time of class loading

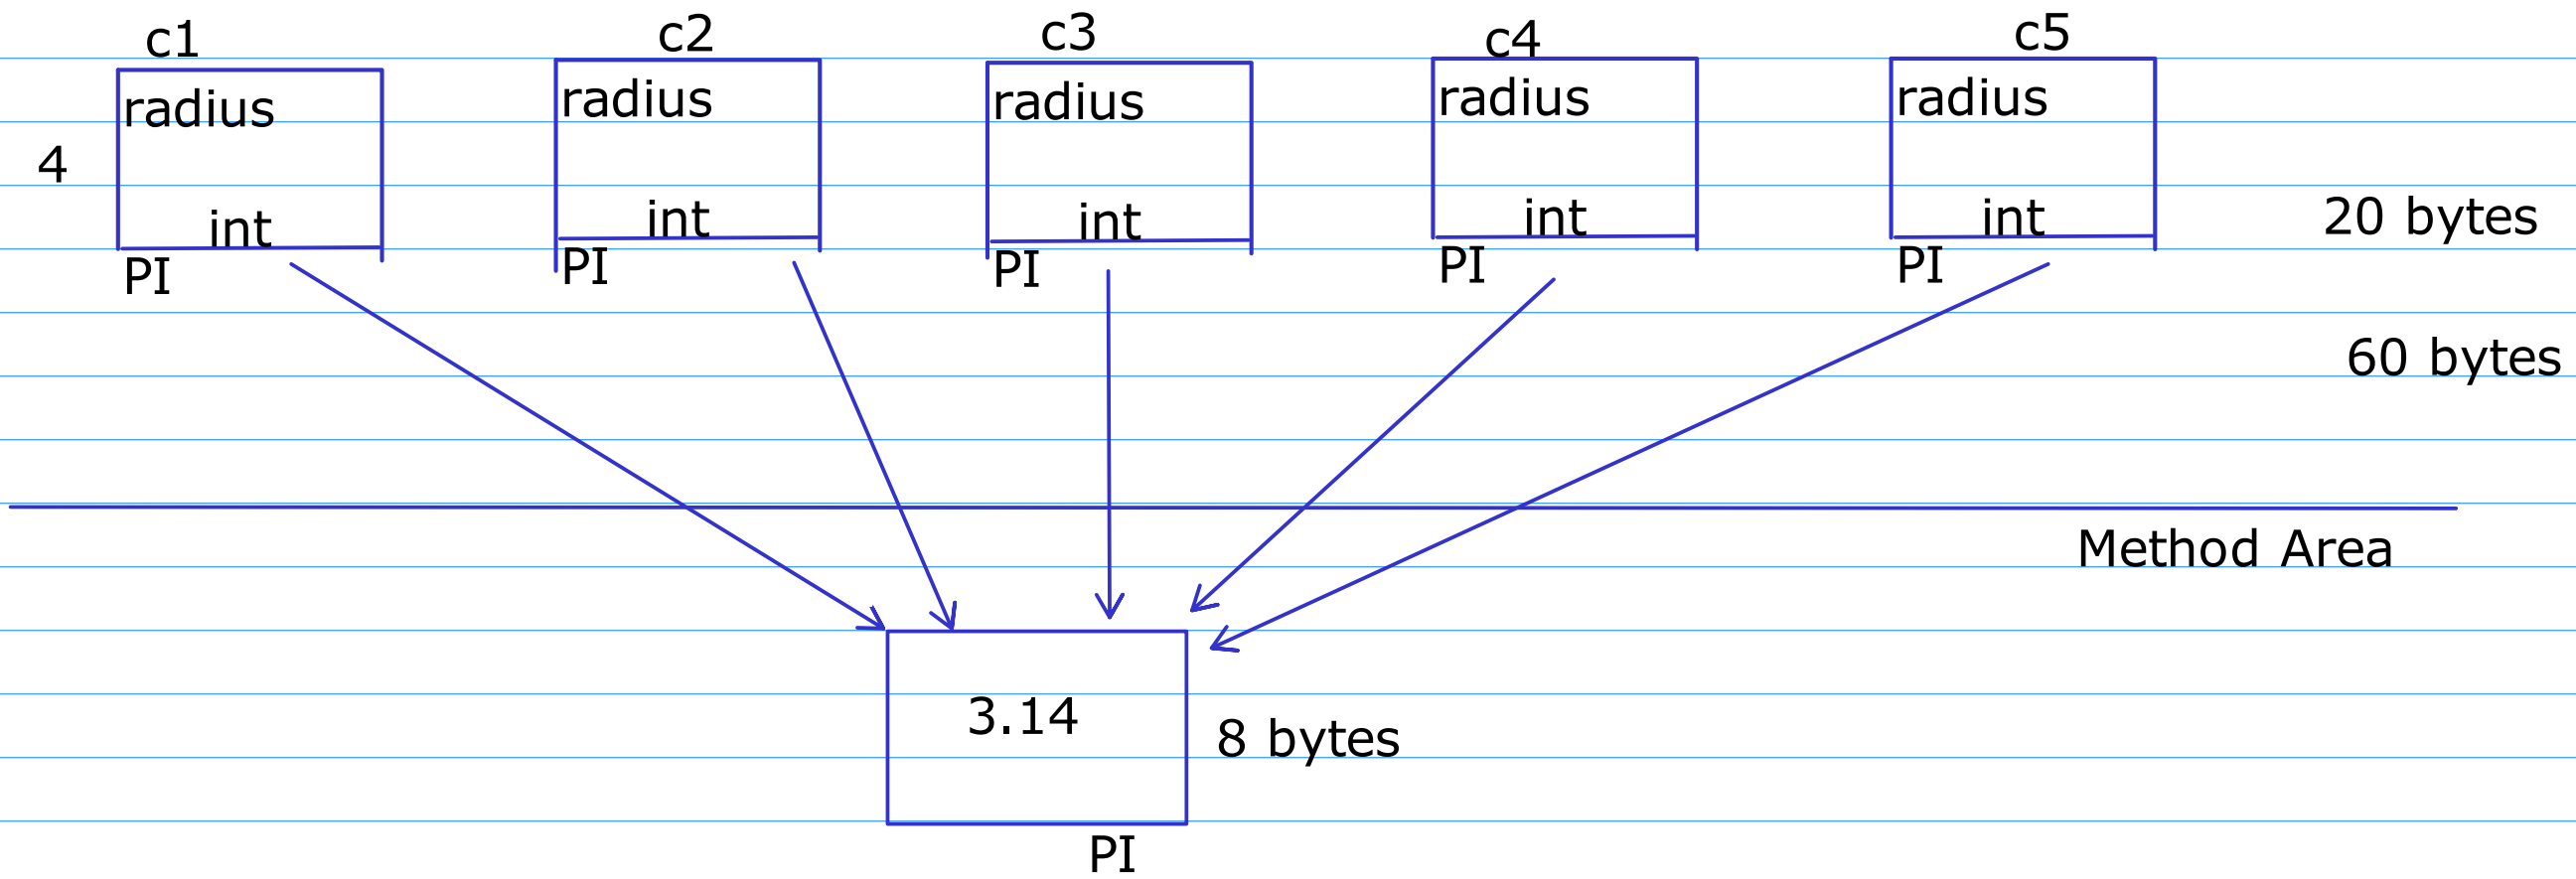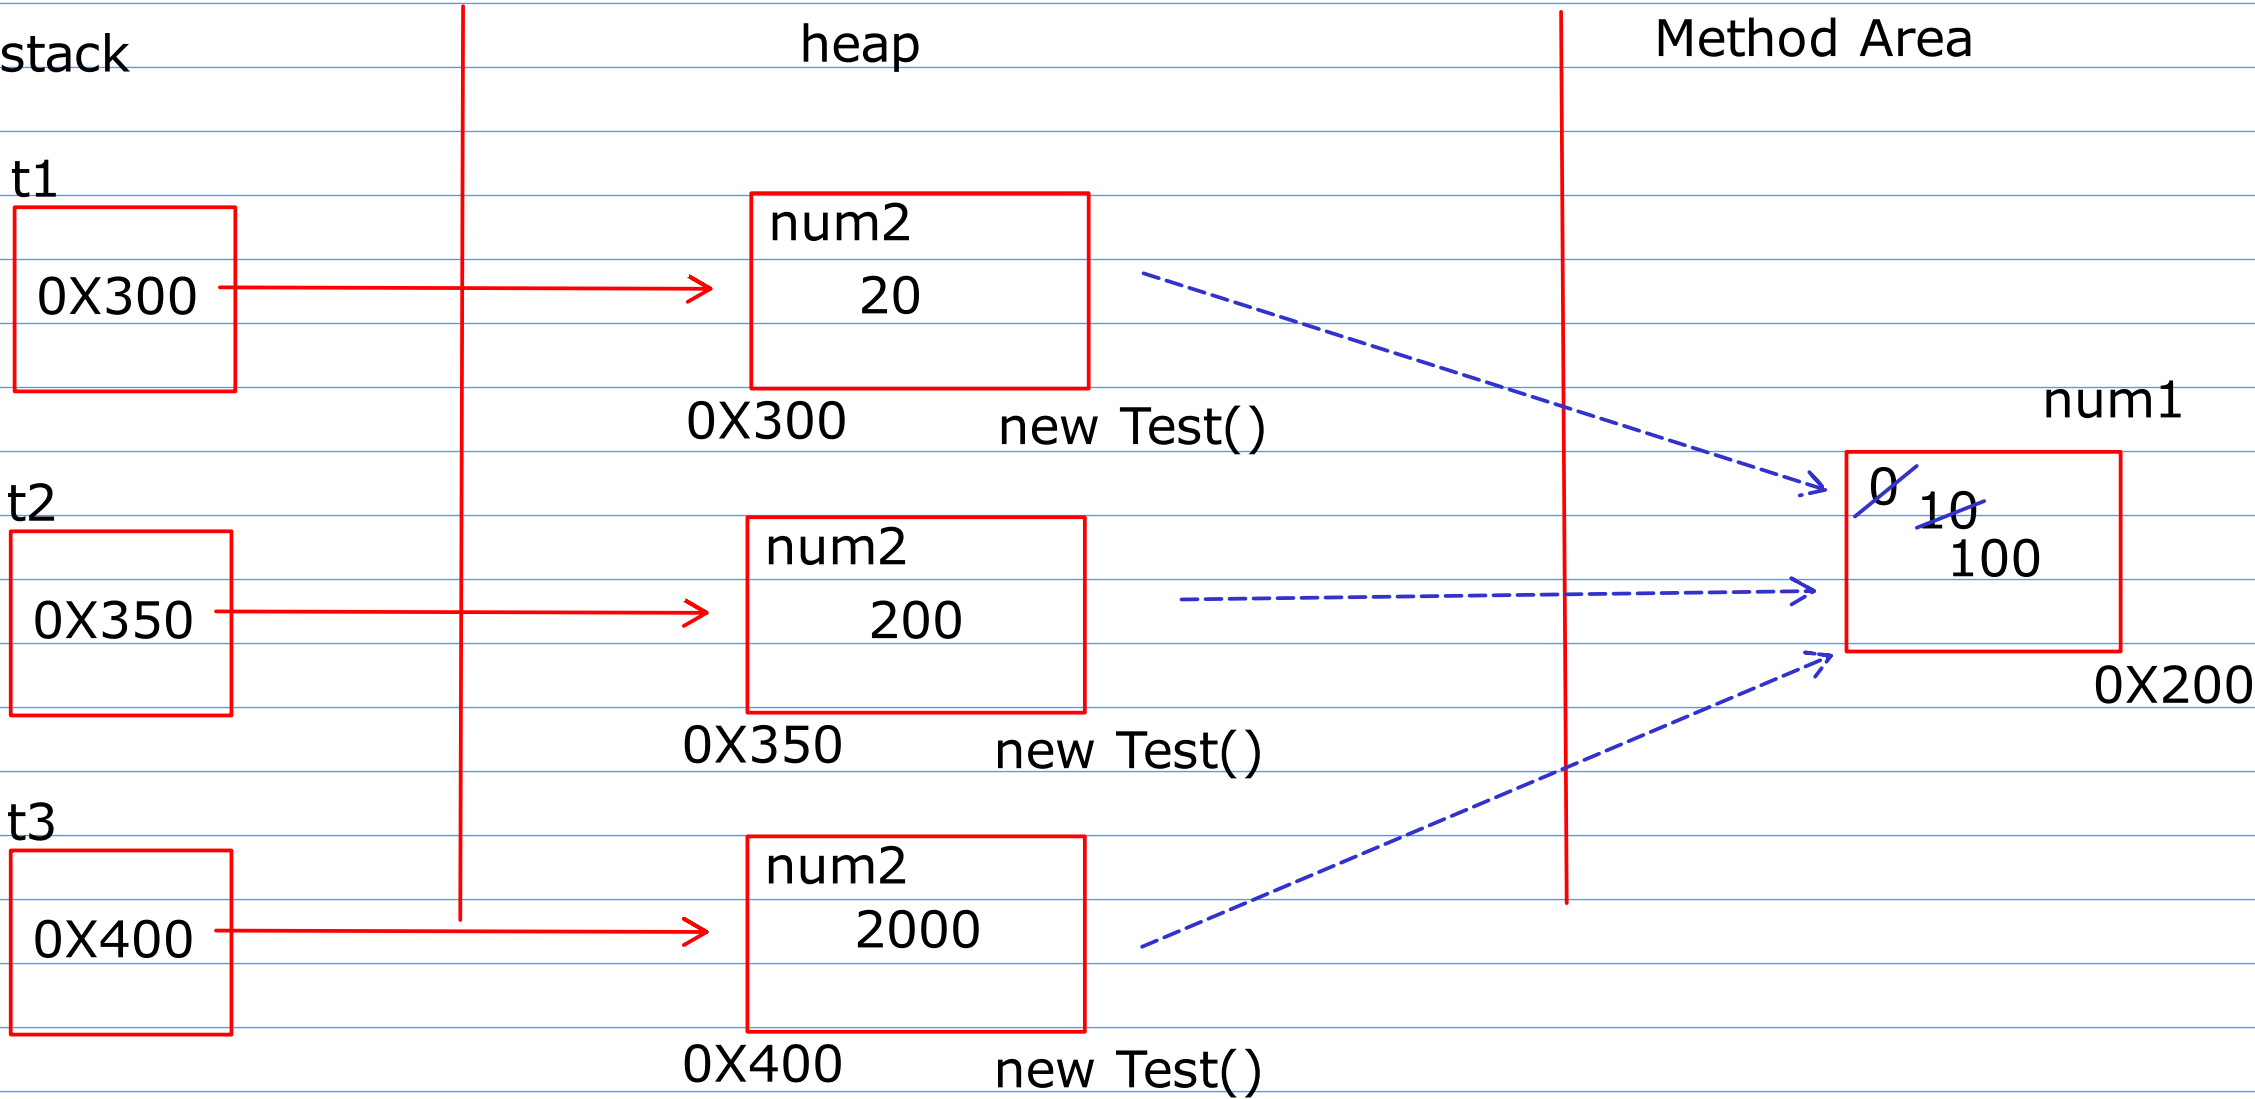

int main(){	class Program{	
return 0;	public static void main(String[] args){	java Program
}	}	Program.main();
	}	
a.exe	System.out	
	System.in	