

Primitive (Value types)

- boolean
- char
- byte
- short
- int
- long
- float
- double

NonPrimitive (Reference Types)

- class
- array
- interface
- enum

Wrapper classes

- For all the primitive types, java have provides classes for it called as wrapper class
- The use of wrapper class is
 1. Use the value types as reference types
 2. Provide the helper methods
 3. Used for conversion between value to reference type and vice versa



Boxing

- The conversion of primitive type of value in to non primitive type is called as boxing

UnBoxing

- The conversion of non primitive type of value in to primitive type is called as unboxing

JVM

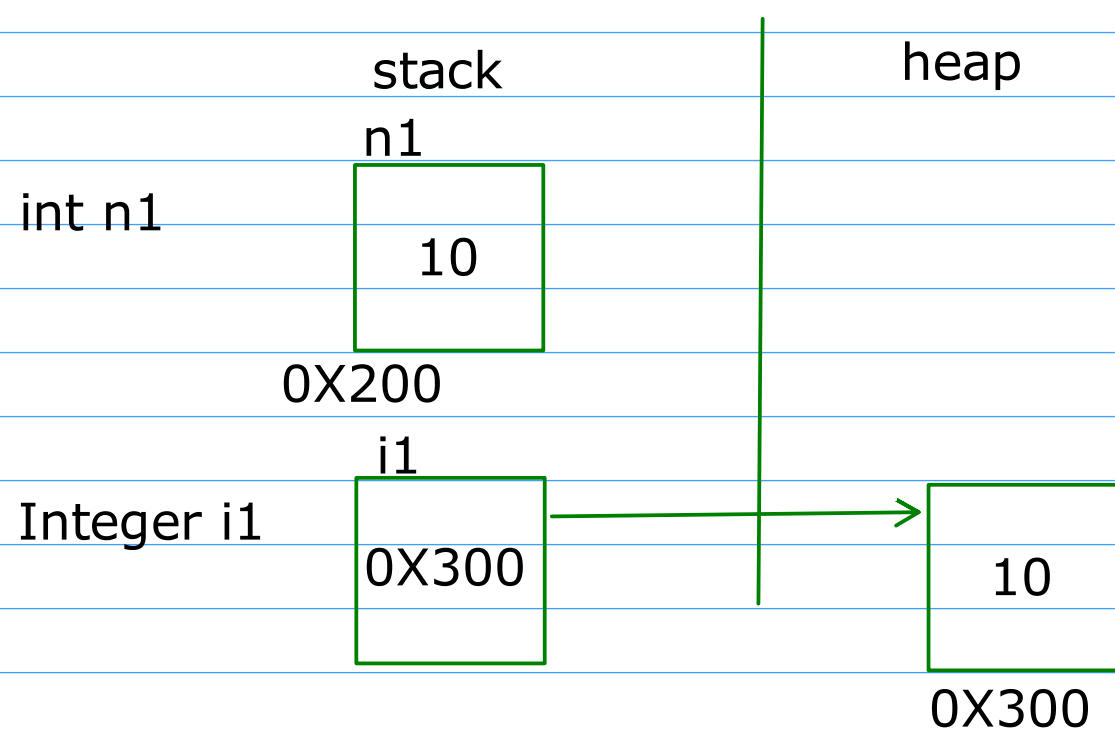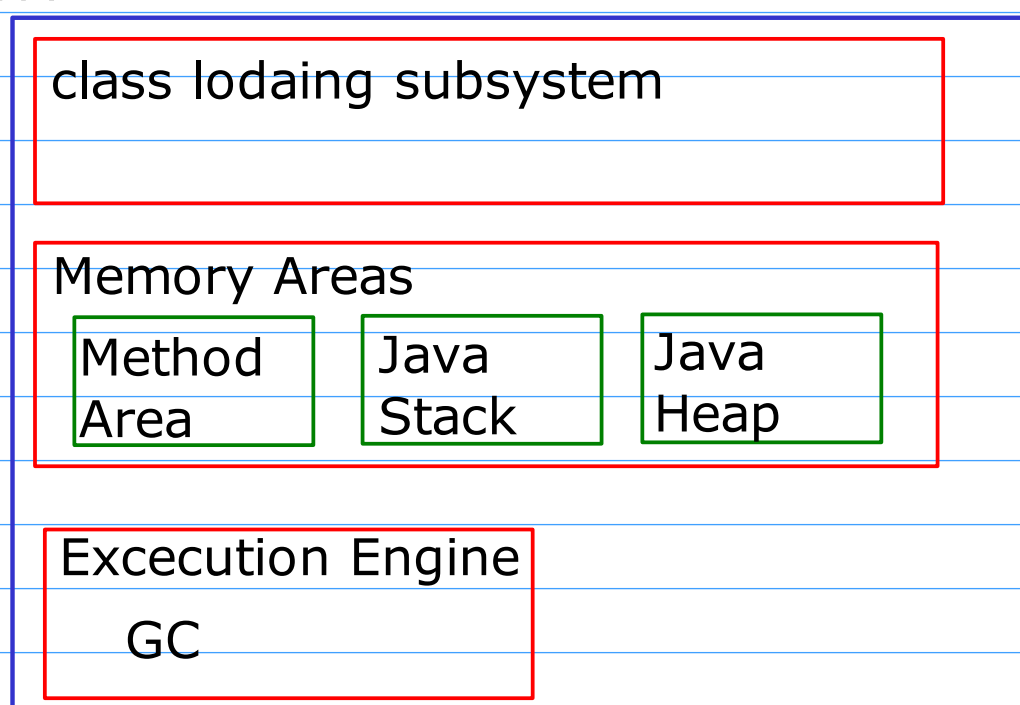

Packages

- To organise the code
- Create a Group to store the related classes together
- to restrict the types to used in to other non related classes

java.lang

java.util

java.io

java.sql

- the name of the package should be in small case

- the name of the package should be kept on company domain name in reverse order

www.sunbeaminfo.com

package name -> com.sunbeaminfo.carpool.testter

com.sunbeaminfo.carpool.entities

com.sunbeaminfo.carpool.service

domainname.projectname.foldername

Access Modifiers for visibility

1. private

- these are accessible only within the same class.
- these are not accessible outside the class or the package

2. default

- these are accessible within the same class.
- these are also accessible outside the class within the same package

3. protected

- these are accessible within the same class.
- these are also accessible outside the class and even in different package but only in its subclass

4. public

- these are accessible everywhere

- a class can be either public or default(non public)
- a public class is designed to be accessible outside the package
- a non public class cannot be accessed outside the package


Polymorphism

- CompileTime (Method overloading)
- RunTime

Method/Function Overloading

- Defining multiple methods with same name but with different signature
- Different signature means
 1. Change in no of parameters
 2. Change in type of parameters
 3. Change in order of type of parameters

this reference

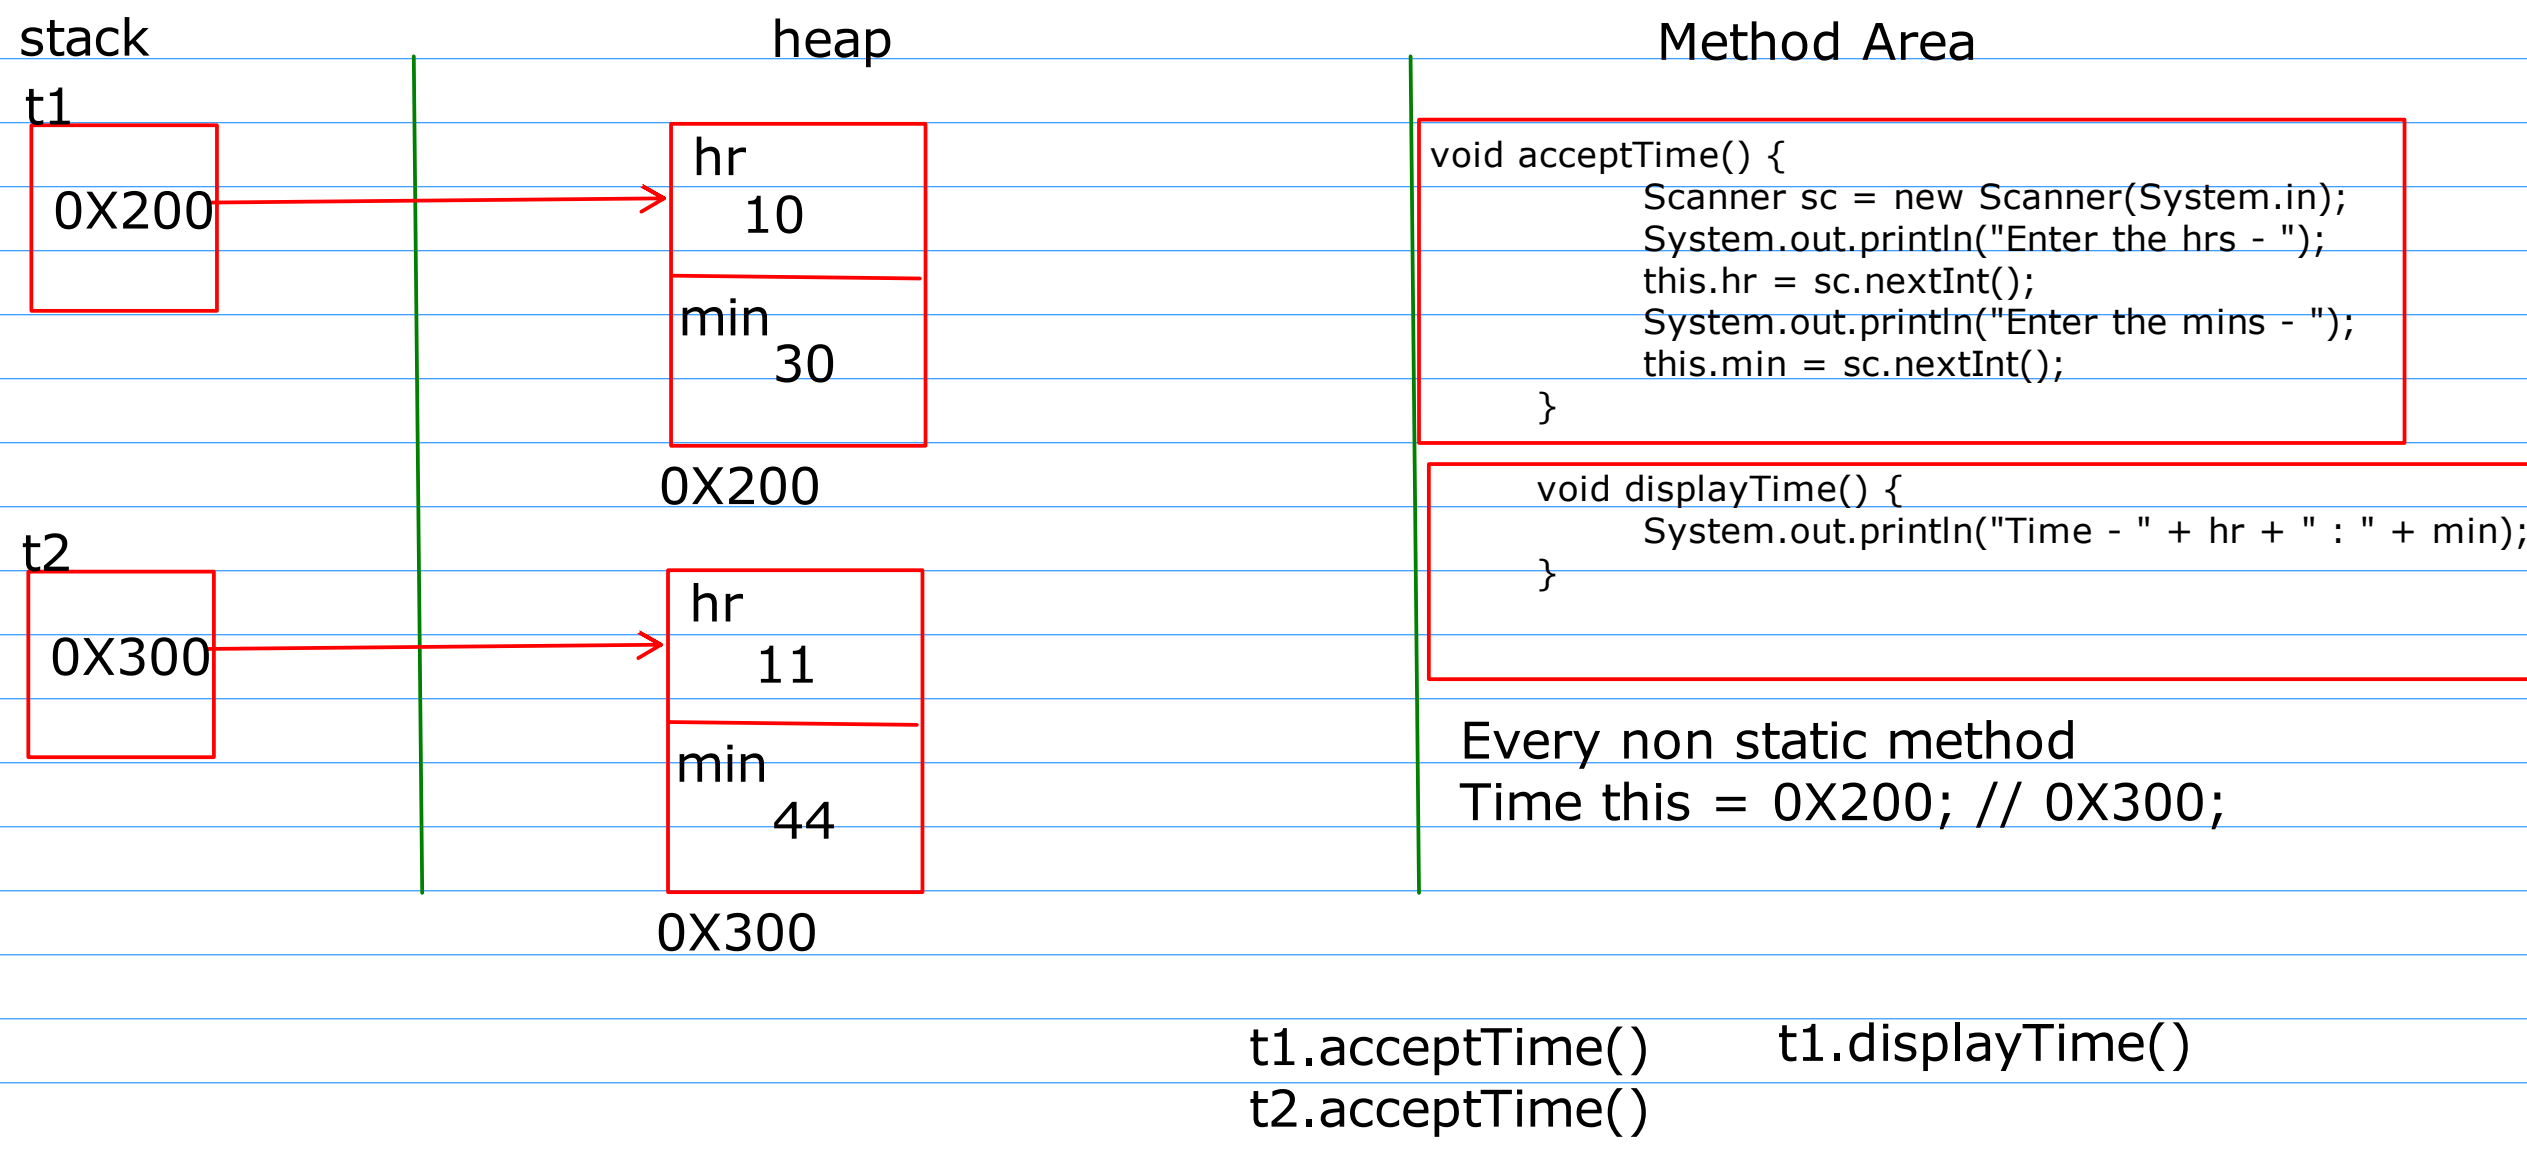

- this reference is a hidden reference passed to all the non static methods of the class
- It stores the address of the current calling object
- this can be used inside the methods to only point at the members(fields or methods) of the class
- this cannot be used to point at local variables or parameter of the method
- using this keyword inside the method is optional
- however if the name of local variable /parameter is same as that of class fields then to differentiate between these variables and fields this reference must be used

types of methods

1. constructor
2. Setter
3. Getter
4. Facilitator

constructor

- It is a very special method of a class
- why is it so special ?
 1. Its name is same as that of class name
 2. It does not have any return type
 3. It gets automatically called when object is created.