


SitHub hook trigger for GITScm polling ? Foil SCM ?	
Poll SCM ?	
환경	
Delete workspace before build starts	
Jse secret text(s) or file(s) ?	
send files or execute commands over SSH before the build starts ?	
send files or execute commands over SSH after the build runs ?	
SH Publishers	
SSH Server Name ?	
cenosTEST	
73 v	
Transfers	
Transfer Set Source files ?	×
build/libs/demo-0.0.1-SNAPSHOT.jar	
Remove prefix ?	
build/libs	
Remote directory ?	
Exec command ?	
	li di
All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables	
고급 ✔	
Transfer Set	×
Source files ?	
test*	
Remove prefix ?	
Remote directory ?	
Exec command ②	•
Exec command ?  chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh	Ť
chmod +x /svc/jenkins/testsh sh /svc/jenkins/testsh	A
chmod +x /svc/jenkins/test.sh	÷
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables 고급 ^ ② Edited	÷
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh sh /svc/jenkins/test.sh All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables	A V
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables 고급 ^ ② Edited	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables 고급 ^ ② Edited	
chmod +x /svc/jenkins/testsh sh /svc/jenkins/testsh All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables 교급 ^ ② Edited  Exclude files ②	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  I all A  Edited  Exclude files ?  Pattern separator ?  [L]+	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  \[ \begin{align*}	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  \[ \begin{align*}	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  \[ \begin{align*}	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  ### ### ### #### ###################	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  \[ \begin{align*}	
chmod +x./svc/jenkins/test.sh sh /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  ### ### ### ### #### ###############	
chmod +x./svc/jenkins/test.sh sh/svc/jenkins/test.sh sh/svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  ### ### ### ### #### ###############	
chmod +x./svc/jenkins/test.sh sh /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  ### ### ### ### #### ###############	
chmod +x./svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  Exclude files ?  Pattern separator ?  [,]+  No default excludes ?  Make empty dirs ?  Flatten files ?  Clean remote  Remote directory/s a date format ?  Exec timeout (ms) ?  0  Exec using Agent Forwarding ?	
chmod +x /svc/jenkins/test.sh sh /svc/jenkins/test.sh  All of the transfer fields (except for Exec timeout) support substitution of Jenkins environment variables  \[ \begin{align*}	

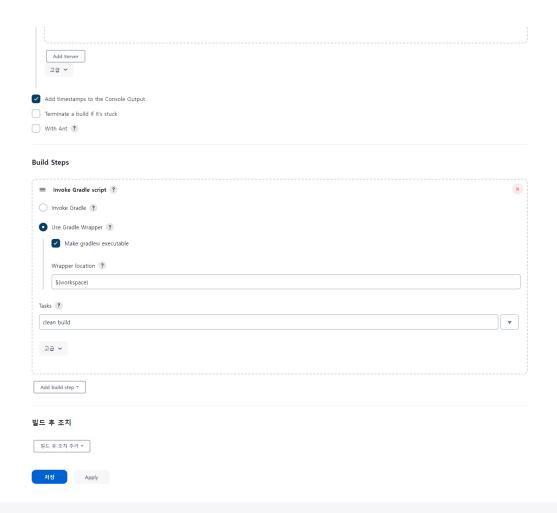

REST API Jenkins 2.401.2