


Client

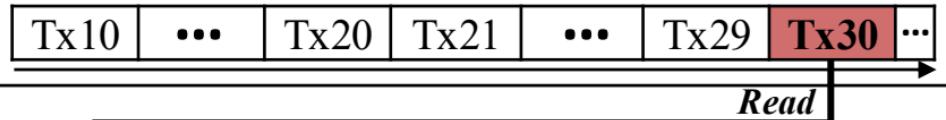

Master

Requested pages

Page

Calculate

Hash
 $f(x)$

Selected Group

S1

...

S4

S5

...

Sn

Active slave instance

Global Version Table

GCP	LCP (S1)	...	LCP (S4)	...
:	:	...	:	...
50	27	...	31	...

51

28

31

2 Send read request

Slave 1

LCP Sequence

1	...	28	↓
---	-----	----	---

Latest



LCP File

Slave 4

LCP Sequence

1	...	31	↓
---	-----	----	---

Latest



LCP File

3 Return request data