


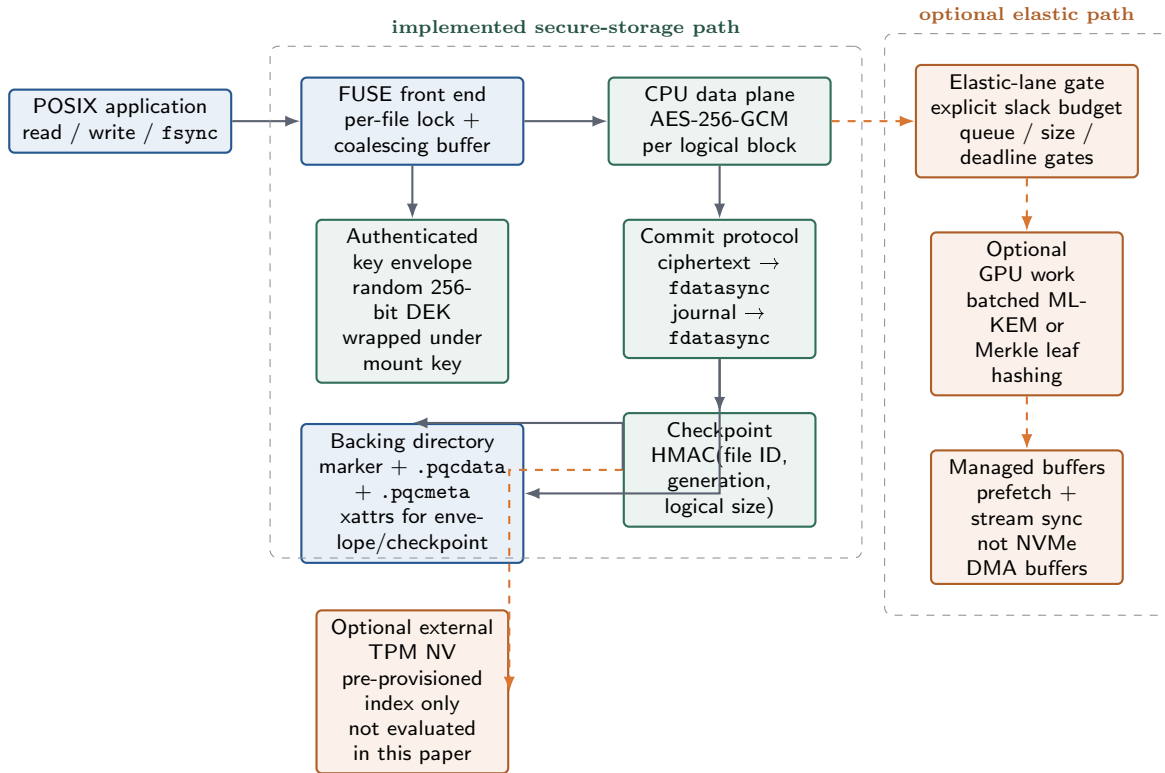

The implementation uses ordinary POSIX `pread/pwrite`; it does not claim `O_DIRECT` into managed memory, `io_uring` completion bypass, or eBPF-triggered CUDA work.