



Let's build a project right now!

cloud.google.com/translate/docs/languages

Find appropriate language code, then update argument to the 'useTranslate' function

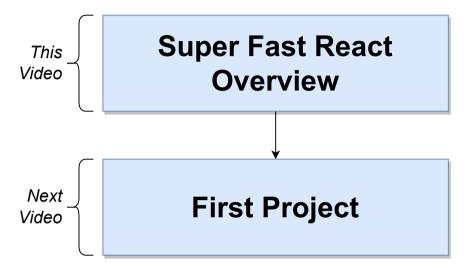


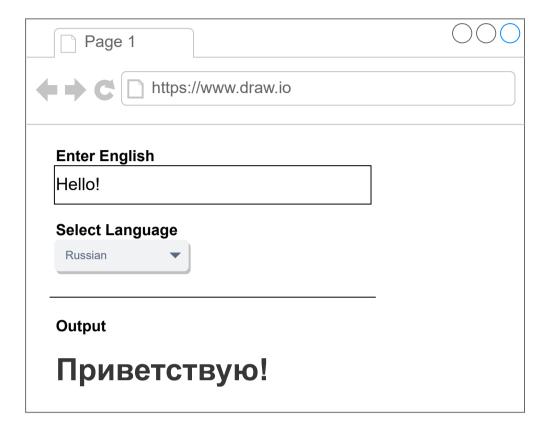



This first project will be written using an online IDE

codesandbox.io/s/react-yud4c

All other projects will be created on your local machine

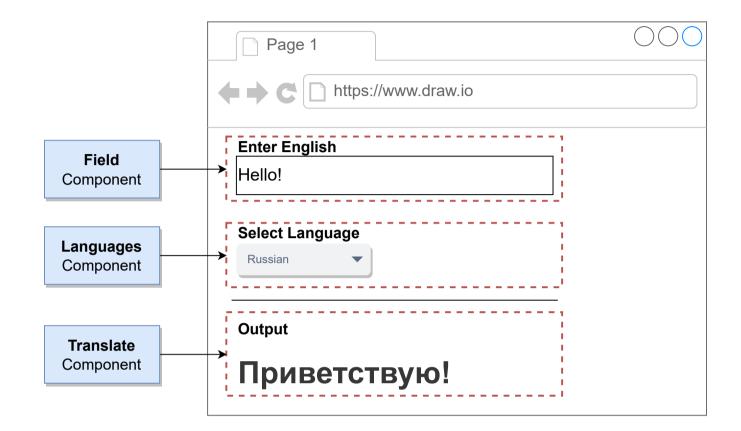

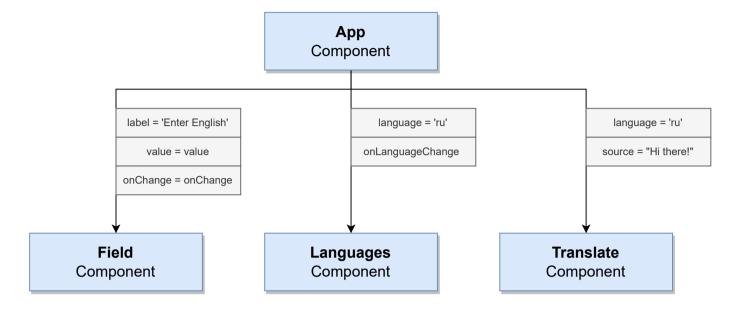

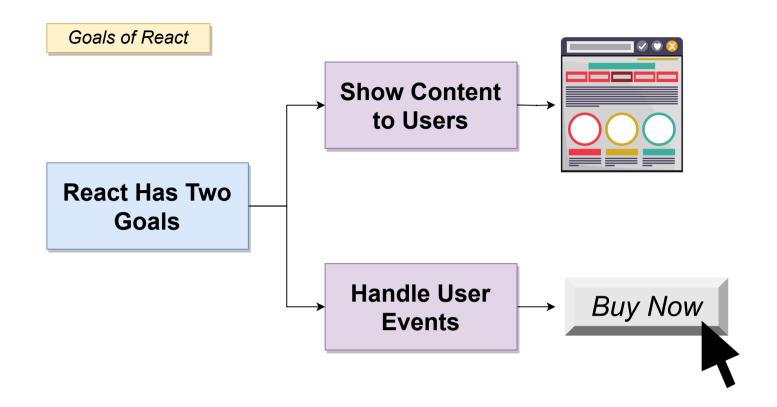



Class Component

Function Component

Function Component

```
<div>
     <h1>Hi there!</h1>
     My dog's name is Rusty.
</div>
```


JSX we write




```
React.createElement(
   "div",
   null,
   React.createElement("h1", null, "Hi There!"),
   React.createElement("p", null, "My dog's name is Rusty.")
);
```


How React interprets it


Parts of JSX

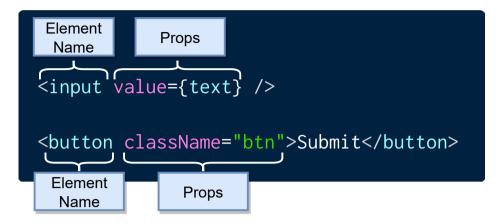

JSX Creates Content

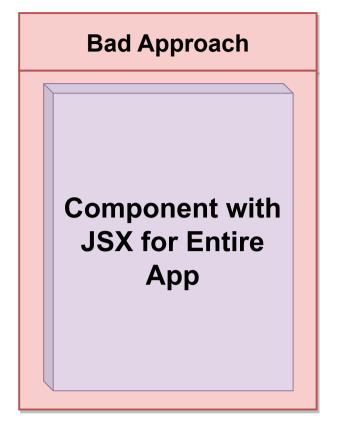


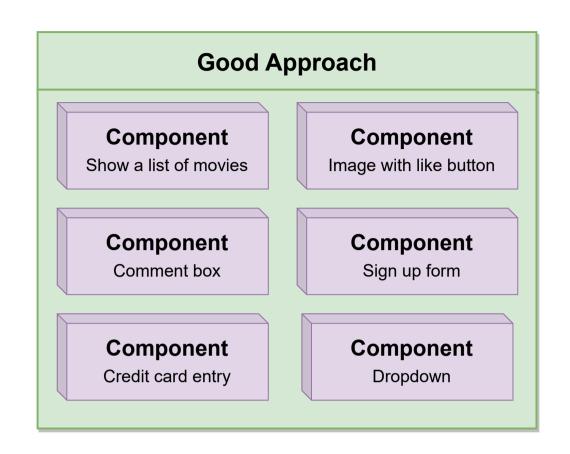

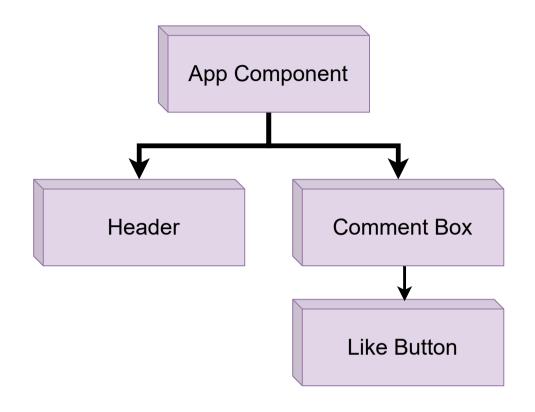




Event Listeners

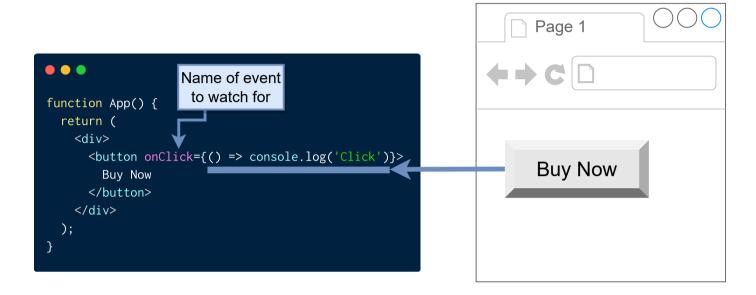


Three Data Systems

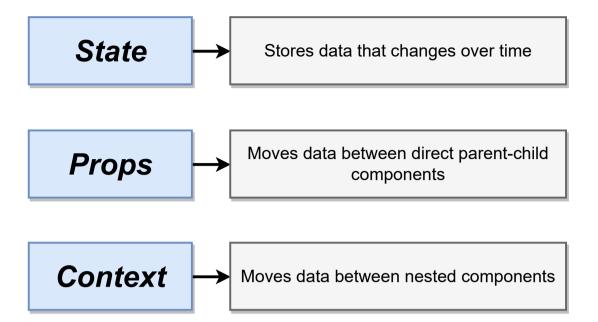


Dropdown Component

open: false





Dropdown Component

open: true



Props System

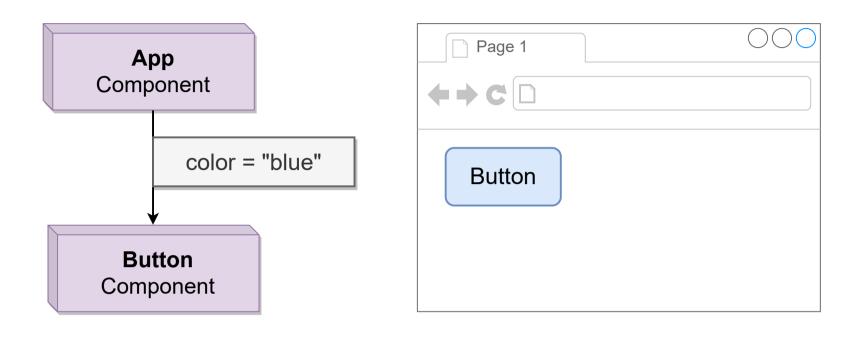

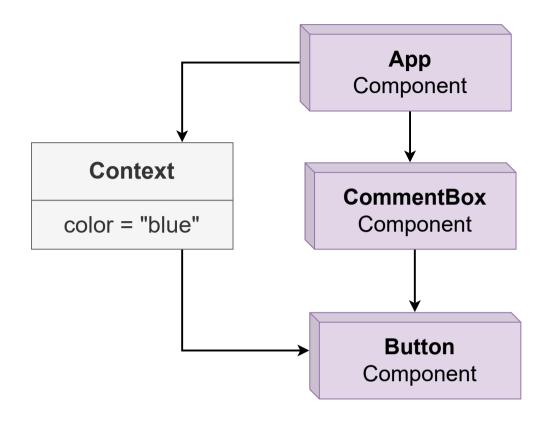



Hooks

