


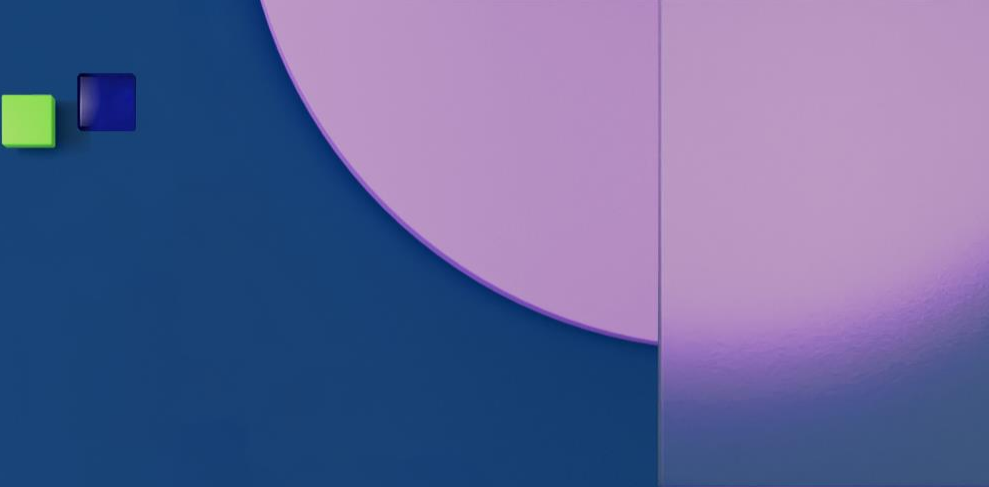

P500QVR01.0

Source IC EC

Ken KC Liu
PPDAB0
2024/03/11

EC Proposal

- Purpose
Due to Source IC supplier is planning to stop producing NT30807BH, ADP will introduce new Source IC NT30808.
- Change
LCD Source IC
- Change Items
Source IC: Novatek NT30807BH → NT30808
- Implement Date
2024/Apr/30
- Implement Method
Running Change

Effective Model List

Models	Verification items	Result
P500QVR01.0	RA, Optical Performance	Pass

RA Test Result

HTO	50°C 500h	No.	T0★	T100★	T200★	T300★	T500★
		#1	OK	OK	OK	OK	OK
		#2	OK	OK	OK	OK	OK
		#3	OK	OK	OK	OK	OK
LTO	-20°C 500h	No.	T0★	T100★	T200★	T300★	T500★
		#4	OK	OK	OK	OK	OK
		#5	OK	OK	OK	OK	OK
		#6	OK	OK	OK	OK	OK
THB	50°C 80% 500h	No.	T0★	T100★	T200★	T300★	T500★
		#7	OK	OK	OK	OK	OK
		#8	OK	OK	OK	OK	OK
		#9	OK	OK	OK	OK	OK
Judgement		PASS					


Optical Performance

Before EC

【 Judgement 】									
PASS									
Test Items	unit	PSS			32c11j3mazzs110032c11j3ubzzs110032c28m1ezzs1100				mean
		min	typ	max					
Center Brightness(Center)	cd/m ²	500			536.0	603.5	574.5		571.3
Cell Transmittance	%	4.32	4.8		4.508	5.100	5.104	4.9	
Contrast Ratio(CR)	---	3200	4000		5382.1	6506.0	5497.6		5795.2
Chromaticity									
	Wx	---	0.279	0.299	0.309	0.290	0.296	0.296	0.294
	Wy	---	0.340	0.357	0.370	0.349	0.355	0.354	0.352
	Rx	---	0.650	0.668	0.680	0.666	0.666	0.667	0.666
	Ry	---	0.313	0.326	0.343	0.327	0.327	0.327	0.327
	Gx	---	0.261	0.276	0.291	0.271	0.275	0.276	0.274
	Gy	---	0.582	0.600	0.612	0.595	0.595	0.593	0.594
	Bx	---	0.119	0.134	0.149	0.134	0.133	0.133	0.133
	By	---	0.098	0.115	0.128	0.111	0.113	0.114	0.113
VT Curve									
	Gamma		2.000	2.200	2.400	2.241	2.230	2.193	2.2
Viewing Angle (Step ±5°)									
	H/-85		10			67.5	74.7	64.6	68.9
	H/+85		10			71.0	70.2	69.8	70.4
	V/-85		10			54.6	64.0	58.3	58.9
	V/+85		10			50.1	66.4	49.2	55.2
GLRT response time									
	Average			8.000	16.000	4.88	4.92	4.42	4.7

After EC

【 Judgement 】									
pass									
Test Items	unit	PSS			33c62t3ybzzs110033c62t3lezzs110133c62s21fzzs1100				mean
		min	typ	max					
Center Brightness(Center)	cd/m ²	500			630.3	626.4	631.1		629.3
Cell Transmittance	%	4.32	4.8		4.938	5.172	5.233	5.1	
Contrast Ratio(CR)	---	3200	4000		3922.8	4347.8	4234.6		4168.4
Chromaticity									
	Wx	---	0.284	0.299	0.314	0.295	0.295	0.295	0.3
	Wy	---	0.342	0.357	0.372	0.355	0.355	0.353	0.4
	Rx	---	0.653	0.668	0.683	0.666	0.666	0.666	0.7
	Ry	---	0.311	0.326	0.341	0.327	0.327	0.327	0.3
	Gx	---	0.261	0.276	0.291	0.274	0.274	0.274	0.3
	Gy	---	0.585	0.600	0.615	0.597	0.596	0.597	0.6
	Bx	---	0.119	0.134	0.149	0.134	0.134	0.134	0.1
	By	---	0.100	0.115	0.130	0.114	0.113	0.113	0.1
VT Curve									
	Gamma		2.000	2.200	2.400	2.312	2.286	2.168	2.3
Viewing Angle (Step ±5°)									
	H/-85		10			68.1	72.7	62.7	67.8
	H/+85		10			70.7	70.0	62.8	67.9
	V/-85		10			67.3	64.4	60.3	64.0
	V/+85		10			63.7	63.6	60.5	62.6
GLRT response time									
	Average			8.000	16.000	5.17	5.07	4.94	5.1

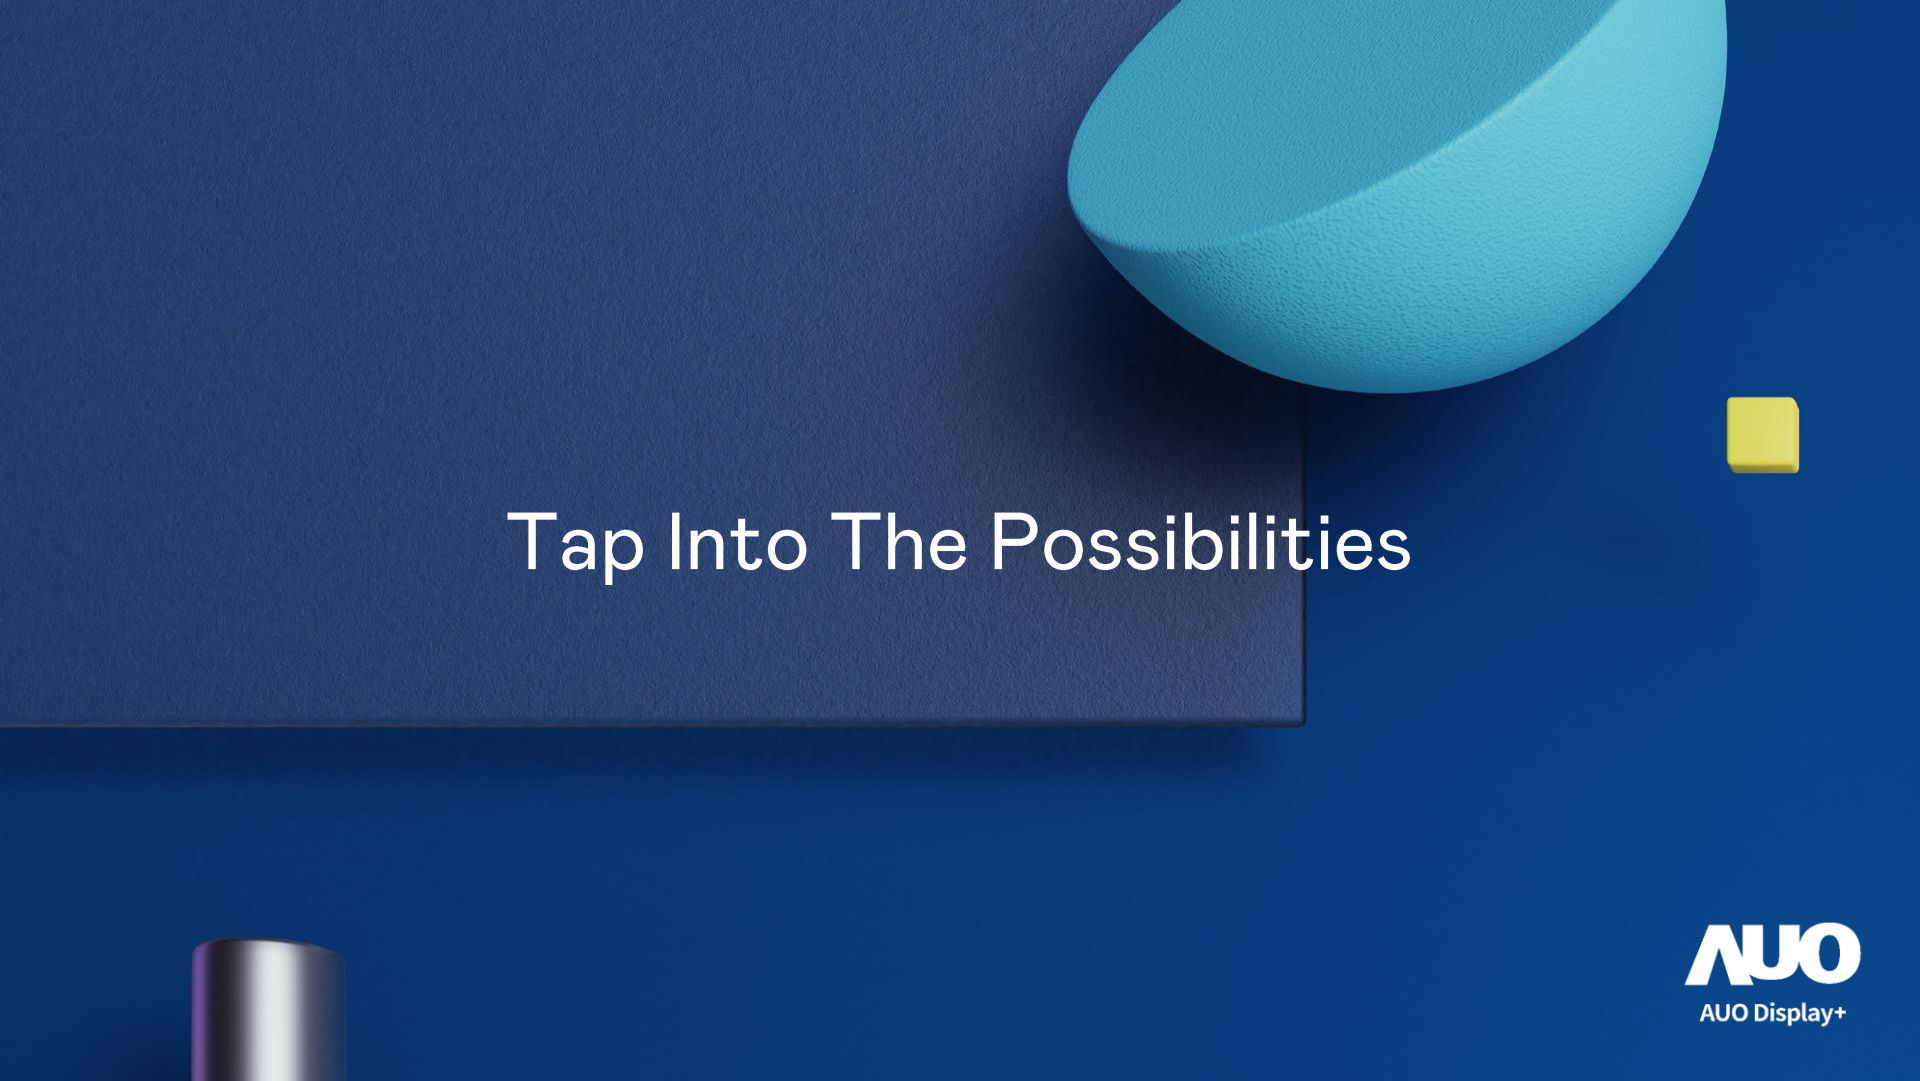

Tap Into The Possibilities