

sprint-check — Local Kanban Dashboard

A browser-based kanban board that reads the current project's tickets, HANDOFF.md, and git history. No cloud, no login, no install beyond canon.

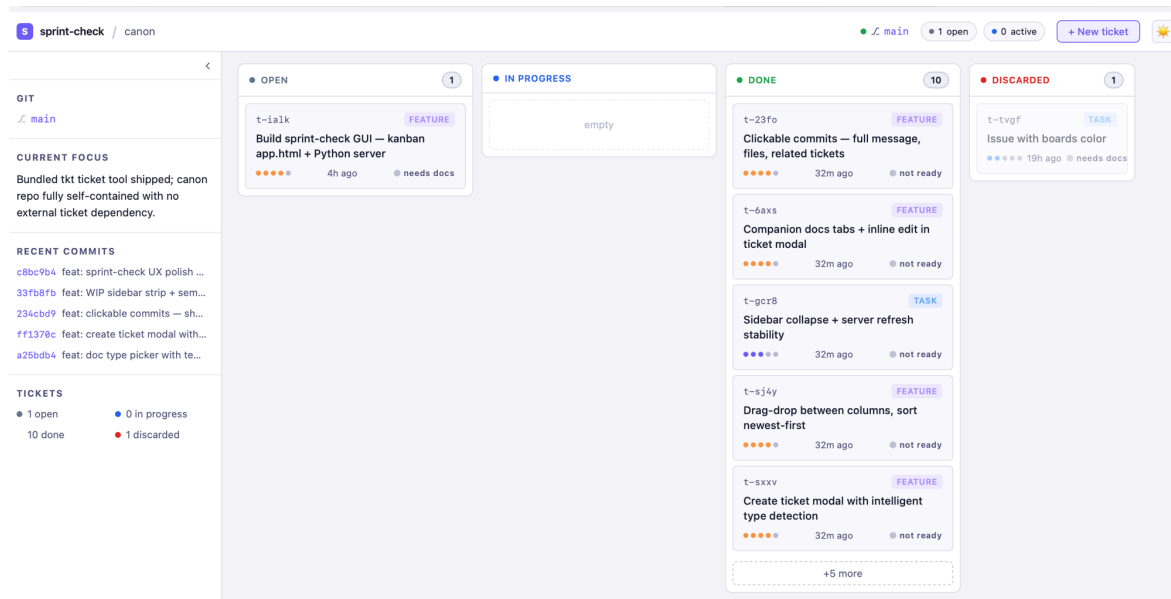


Figure 1: sprint-check board

Getting Started

Step 1 — Register the skill (adds canon/tools to your PATH if needed):

```
<path-to-canon>/skills.sh add sprint-check /path/to/your/project
```

Step 2 — Launch from your project:

```
sprint-check.sh
```

The board opens in your default browser at `http://127.0.0.1:<port>`. Press `Ctrl+C` to stop.

Board

Four columns map directly to tkt statuses:

Column	tkt status
Open	open
In Progress	in_progress
Done	closed
Discarded	cancelled

Cards show ticket ID, type badge, title, priority dots, age, and a readiness indicator: - ● ready (green) — has description + at least one doc - ● needs desc / ● needs docs / ● not ready (gray) — what's missing

Click the readiness indicator for a checklist popover. Click anywhere else on the card to open the full ticket.

Moving tickets: - Drag and drop between columns - Or open the ticket and use ← Back / Forward → buttons - Keyboard: ← / → to move, Esc to close

Column count badge is hidden when a column is empty.

Sidebar

- **Now Working On** — in_progress tickets highlighted in accent color; click to open, or hit copy to copy the commit prefix (t-xxxx:) to clipboard
- **Git** — current branch + modified file count
- **Current Focus** — ## Current Focus section from HANDOFF.md
- **Recent Commits** — last 5 commits (click any to see full message, changed files, and related tickets)
- **Tickets** — count summary by status

Collapse/expand the sidebar with the < toggle. Width is remembered across sessions.

Ticket Modal

Click any card to open its detail view:

- **Meta row** — Status, Type, Priority, Age, Ready indicator
- **Tabs** — Description tab appears only when companion docs exist; otherwise body is shown directly
- **Docs** — Blueprint, Decisions, QA, Notes (or any custom doc) as tabs; click + New doc to create one with a template
- **Edit** — inline edit for the ticket body or any doc; Save / Cancel
- **Footer** — ← Back, Forward →, Discard ×; keyboard hints bottom-right

New Ticket

Click + New ticket in the header. As you type the title, the type (Feature / Task / Bug / etc.) is detected automatically. Select type and priority, write a description, and submit — the ticket lands in Open.

Agent Workflow

- Use sprint-check to get your bearings at session start: “open sprint-check and tell me what's in progress”
- Agents read sprint-check for context; status changes happen via tkt commands

- The **Now Working On** strip + copy button makes it easy to prefix commits with the active ticket ID
- A green readiness dot signals a ticket has enough context for the agent to act on it without asking for clarification

Notes

- Refreshes automatically every 8 seconds
- Dark/light mode toggle in the header — preference persisted in localStorage
- Runs on macOS, Linux, and WSL — Python 3 stdlib only, no pip required
- Port defaults to 8423, increments automatically if busy