

Lu Sun, and many more.

A Notebook on Artificial Intelligence



*To my family, friends and communities members who
have been dedicating to the presentation of this
notebook, and to all students, researchers and faculty
members who might find this notebook helpful.*



Contents

| | |
|---|-------------|
| Foreword | ix |
| Preface | xi |
| List of Figures | xiii |
| List of Tables | xv |
| I Artificial Intelligence | 1 |
| 1 Introduction to Artificial Intelligence | 3 |
| 1.1 Human-Level Artificial Intelligence | 3 |
| 1.1.1 Scope | 3 |
| 1.1.2 Approaches | 4 |
| 1.1.3 Development Trend | 4 |
| 1.2 AI Agent | 4 |
| 1.2.1 Expectation | 4 |
| 1.2.2 Agent Structure | 4 |
| 2 Searching | 5 |
| 3 Knowledge and Logic Reasoning | 7 |
| 4 Decision Making | 9 |
| 4.1 Utility | 9 |
| 4.1.1 Utility Theory | 9 |
| 4.1.2 Utility Function | 13 |
| 4.2 Decision Network | 14 |
| 4.3 Markov Decision Process | 14 |
| 4.3.1 State and Policy | 14 |
| 4.3.2 Value Iteration | 14 |
| 4.3.3 Policy Iteration | 14 |
| 4.4 Partially Observable MDP | 14 |
| 4.5 Game Theory | 15 |
| 5 Regression | 17 |
| II Artificial Neural Networks | 19 |

| | |
|--|-----------|
| 6 Perceptron | 21 |
| 7 Multi-layer Perceptron | 23 |
| III Convolution and Recurrent Networks | 25 |
| 8 Convolutional Neural Network | 27 |
| 8.1 Brief Review of CNN | 27 |
| 9 Recurrent Neural Network | 29 |
| 9.1 Brief Review of RNN | 29 |
| IV Large Language Model | 33 |
| 10 Transformer | 35 |
| 10.1 RNN and Its Limitations | 35 |
| 10.1.1 A Brief Review of RNN | 36 |
| 10.1.2 Limitations of RNN | 36 |
| 10.2 Transformer Framework | 37 |
| 10.2.1 Tokenizer | 37 |
| 10.2.2 Encoder and Decoder | 40 |
| 10.2.3 Attention Mechanism | 40 |
| 10.2.4 Transformer-Based NLP | 40 |
| 10.3 Transformer Development Trend | 41 |
| 10.3.1 Transformer Variants | 41 |
| 10.3.2 Trend | 41 |
| 11 Large Language Model: Theory | 43 |
| 11.1 Introduction to LLM | 44 |
| 11.1.1 Existing NLP Models and Gaps | 44 |
| 11.1.2 LLM Features and Capabilities | 45 |
| 11.1.3 LLM Performing Benchmarks | 47 |
| 11.1.4 LLM Development Timeline | 47 |
| 11.1.5 LLM-Relevant Milestone Technologies | 47 |
| 11.2 Existing LLMs Features | 49 |
| 11.2.1 OpenAI Family | 50 |
| 11.2.2 LLaMA Family | 53 |
| 11.2.3 Other LLMs | 57 |
| 11.3 LLM Development | 57 |
| 11.3.1 Architecture Design | 57 |
| 11.3.2 Training Corpus Preparation | 58 |
| 11.3.3 Pre-training | 58 |
| 11.3.4 Fine-Tuning | 58 |
| 11.3.5 Model Evaluation | 58 |
| 11.4 Multimodal LLM | 58 |

| | |
|--|------------|
| <i>Contents</i> | vii |
| 12 Large Language Model: Practice | 59 |
| 12.1 Python Environment Setup | 59 |
| 12.2 LLM Local Deployment | 61 |
| 12.2.1 Quick LLM Deployment with Ollama | 62 |
| 12.2.2 Interaction with Locally Deployed LLM | 62 |
| 12.2.3 Naive Deployment | 64 |
| 12.3 LLM Cloud Deployment | 64 |
| 12.3.1 Browser-Based Chatbot | 64 |
| 12.3.2 Cloud-Service-Provider-Managed LLM Deployment | 64 |
| 12.3.3 API-Based LLM | 64 |
| 12.3.4 Commonly Seen APIs | 66 |
| 12.4 Model Fine-Tuning | 67 |
| 12.4.1 A Review of Frontier Models | 67 |
| 12.4.2 Proprietary Model Fine-Tuning | 68 |
| 12.4.3 Open-Source Model Fine-Tuning | 68 |
| 12.5 Resource Augmented Generator | 68 |
| 13 Agentic AI | 69 |
| 13.1 Introduction to Agentic AI | 69 |
| 13.1.1 Conventional Intelligent Agent | 70 |
| 13.1.2 Agentic AI in the Context of LLM | 70 |
| 13.2 Agentic AI Framework | 73 |
| 13.2.1 Asynchronous Python | 73 |
| 13.2.2 OpenAI Agents SDK | 75 |
| 13.2.3 CrewAI | 80 |
| 13.2.4 LangGraph | 90 |
| 13.2.5 AutoGen | 97 |
| 13.3 Model Context Protocol | 99 |
| 13.4 Examples | 99 |
| 13.4.1 Manual: Semantic Search RAG | 99 |
| 13.4.2 OpenAI Agents SDK: Semantic Search RAG with On-line Cross Check | 109 |
| 13.4.3 CrewAI: Credit Card Bill Recorder | 115 |
| A Brief Introduction to Python Package Manager | 133 |
| A.1 Conda | 133 |
| A.1.1 Installation | 133 |
| A.1.2 Configuration of Channels | 134 |
| A.1.3 Environment Management | 134 |
| A.1.4 Package Management | 135 |
| A.2 UV | 135 |
| A.2.1 Installation | 136 |
| A.2.2 Python Interpreter Installation | 136 |
| A.2.3 Environment Management | 137 |
| A.2.4 Package Management | 139 |

Foreword

If software and e-books can be made completely open-source, why not a notebook?

This brings me back to the summer of 2009 when I started my third year as a high school student in Harbin No. 3 High School. In the end of August when the results of Gaokao (National College Entrance Examination of China, annually held in July) were released, people from photocopy shops would start selling notebooks photocopies that they claimed to be from the top scorers of the exam. Much curious as I was about what these notebooks look like, never have I expected myself to actually learn anything from them, mainly for the following three reasons.

First of all, some (in fact many) of these notebooks were more difficult to read than the textbooks. I guess we cannot blame the top scorers for being so smart that they sometimes made things extremely brief or overwhelmingly complicated.

Secondly, why would I want to adapt to notebooks of others when I had my own notebooks which in my opinion should be just as good as theirs.

And lastly, as a student in the top-tier high school myself, I knew that the top scorers were probably my schoolmates. Why would I pay money to a stranger in a photocopy shop for my friends' notebooks, rather than requesting a copy from them directly?

However, my mind changed after becoming an undergraduate student in 2010. There were so many modules and materials to learn for a college student, and as an unfortunate result, students were often distracted from digging deeply into a module (and for those who were still able to do so, you have my highest respect). The situation became worse when I started pursuing my Ph.D. in 2014. As I had to focus on specific research areas entirely, I could hardly split enough time on other irrelevant but still important and interesting contents.

To make a difference, I enforced myself reading articles beyond my comfort zone, which ended up motivating me to take notes to consolidate the knowledge. I used to work with hand-written notebooks. My very first notebook was on Numerical Analysis, an entrance-level module for engineering background graduate students. Till today I still have dozens of these notebooks on my bookshelf. Eventually, it came to me: why not digitizing them, making them accessible online and open-source and letting everyone read and edit it?

As most of the open-source software, this notebook does not come with any

“warranty” of any kind, meaning that there is no guarantee that everything in this notebook is correct, and it is not peer reviewed. **Do NOT cite this notebook in your academic research paper or book!** If you find anything helpful here with your research, please trace back to the origin of the knowledge and confirm by yourself.

This notebook is suitable as:

- a quick reference guide;
- a brief introduction for beginners of an area;
- a “cheat sheet” for students to prepare for the exam or for lecturers to prepare the teaching materials.

This notebook is NOT suitable as:

- a direct research reference;
- a replacement of the textbook.

The notebook is NOT peer reviewed, thus is more of a notebook than a book. It is meant to be easy to read, not to be comprehensive and very rigorous.

Although this notebook is open-source, the reference materials of this notebook, including textbooks, journal papers, conference proceedings, etc., may not be open-source. Very likely many of these reference materials are licensed or copyrighted. Please legitimately access these materials and properly use them, should you decided to trace the origin of the knowledge.

Some of the figures in this notebook are plotted using Excalidraw, a very convenient tool to emulate hand drawings. The Excalidraw project can be found on GitHub, [excalidraw/excalidraw](https://github.com/excalidraw/excalidraw). Other figures may come from MATLAB, R, Python, and other computation engines. The source code to reproduce the results are intended to be included in the same repository of the notebook, but there might be exceptions.

This work might have benefited from the assistance of large language models, which are used exclusively for editing purposes such as correcting grammar and rephrasing sentences, without introducing new content, generating novel information, or changing the original intent of the text.

Preface

Artificial Intelligence (AI) was included as part of the control system notebook, as in early ages it was mostly used as a system identification tool in control systems.

With the advent of graphical processing units (GPU) in the 1990th and the Industry 4.0 initiatives in 2000th, deep learning network with massive training data became possible, which significantly boosted the performance of artificial neural network (ANN)-based AI systems. Nowadays, AI has been growing rapidly with successful demonstrations of use cases such as computer vision and natural language processing.

Seeing that trend, AI relevant contents have been separated from the control system notebook and collected here.

Special thanks go to the following materials, all of which have been very useful when drafting this notebook. Notice that the referenced contents from the following materials will not be listed separately in the Reference section in the end of the notebook.

- Russell, Stuart J., and Peter Norvig. Artificial Intelligence: a Modern Approach. Pearson, 2016.
- Lakshmanan, Valliappa, Martin Görner, and Ryan Gillard. Practical Machine Learning for Computer Vision. “O'Reilly Media, Inc.”, 2021.
- Ed Donner, Ligyency Team, LLM Engineering: Master AI, Large Language Models & Agents. Udemy, 2025



List of Figures

| | |
|---|----|
| 4.1 State utility map for in the MEU example. | 11 |
| 8.1 A demonstration of CNN kernel. The input is given by the white box (3D), and the kernel by the red box. | 28 |
| 9.1 An example of RNN. | 30 |
| 10.1 A demonstrative example where a piece of text is tokenized using GPT-4o’s tokenizer. | 39 |
| 11.1 A figure from a GPT when it is asked to generate a car with a license plate that reads “3.14159265358979” | 50 |
| 11.2 A cat with superpower. This picture is generated by DALL·E 3. | 52 |
| 11.3 LLaMA family tree. | 53 |
| 11.4 Alpaca fine-tuning pipeline. | 55 |
| 12.1 An example of running Ollama with LLaMA 3.2. | 62 |
| 13.1 Conventional architecture (a) versus agentic AI architecture (b). | 71 |
| 13.2 Self-evaluative agentic AI architecture. | 71 |
| 13.3 LLM with memory and tool interfaces to databases, web browsers, calculators, sensors and actuators, and other components that can interact with the environment. | 72 |
| 13.4 Manually implemented (a) versus OpenAI Agents SDK-based (b) agentic AI pipelines. Red arrows represent tool calls, and blue arrows represent handoffs. | 76 |
| 13.5 CrewAI framework pipeline, where the user defines agents, tasks and their associations and the crew get things done automatically. | 81 |
| 13.6 A simple demonstration of LangGraph with one LLM and one tool. | 91 |



List of Tables

| | |
|---|----|
| 11.1 LLaMA models. | 54 |
| 12.1 OpenAI's API Calls Pricing as of this writing, in USD per 1M tokens. | 65 |
| 12.2 Frontier LLMs and their accessibility features. | 67 |



Part I

Artificial Intelligence



1

Introduction to Artificial Intelligence

CONTENTS

| | | |
|-------|---|---|
| 1.1 | Human-Level Artificial Intelligence | 3 |
| 1.1.1 | Scope | 3 |
| 1.1.2 | Approaches | 4 |
| 1.1.3 | Development Trend | 4 |
| 1.2 | AI Agent | 4 |
| 1.2.1 | Expectation | 4 |
| 1.2.2 | Agent Structure | 4 |

This chapter discusses the concept and scope of artificial intelligence and gives a brief review of its development trend.

1.1 Human-Level Artificial Intelligence

Artificial intelligence (AI) refers to the trail where we want to understand and build intelligent entities. In this section, the scope of AI is discussed. The different approaches and the development trend are briefly introduced.

1.1.1 Scope

It is sometimes not easy to give a universally consistent definition to AI because our understanding of intelligence is evolving over time. Intuitively, we look at ourselves and try to find out what makes human intelligent. Many concepts, models and even research areas have been proposed to explain how human intelligence is composed. For example, human has **knowledge** which is a mechanism that allows us to remember facts and experience, and human can obtain new knowledge by either **reasoning** which derives new knowledge from existing knowledge, or **learning** which abstracts knowledge from examples or datasets. Human is **rational** when making decisions, which means we do the “right thing” that is most beneficial to individuals or teams. Every-

thing above, and probably many other factors that we are not aware of yet, jointly make human intelligent.

We want to build a system that can mimic human behavior and carry out human jobs. Ideally, the system should have human-level intelligence or even beyond. This level of intelligence is often known as **artificial general intelligence** (AGI).

Turing test, proposed by Alan Turing, is a widely accepted operational definition of (a portion of) AGI. A computer-based system passes the test if a human interrogator, after posing some questions, cannot tell whether the response come from a computer or a human. Obviously, to pass the Turing test, the computer should be able to process natural language, and should have knowledge representation, can do human-level reasoning, can make rational decision, and can learn from the conversation. From industrial perspective, a useful AGI system should be able to process not just writing language, but also audio and video, and to manipulate objects and move about.

As of this writing, we have not yet achieved AGI, although recent advent in large language models (see Part IV of this notebook for more details) has for a short time made us believe that we might be close to it.

1.1.2 Approaches

There are several promising approaches to build AI and hopefully some of them will eventually lead us to AGI. Joint effort of different research subjects and backgrounds is required along the journey.

1.1.3 Development Trend

“nobreak

1.2 AI Agent

“nobreak

1.2.1 Expectation

“nobreak

1.2.2 Agent Structure

2

Searching

CONTENTS



3

Knowledge and Logic Reasoning

CONTENTS



4

Decision Making

CONTENTS

| | | |
|-------|--------------------------------|----|
| 4.1 | Utility | 9 |
| 4.1.1 | Utility Theory | 9 |
| 4.1.2 | Utility Function | 13 |
| 4.2 | Decision Network | 14 |
| 4.3 | Markov Decision Process | 14 |
| 4.3.1 | State and Policy | 14 |
| 4.3.2 | Value Iteration | 14 |
| 4.3.3 | Policy Iteration | 14 |
| 4.4 | Partially Observable MDP | 14 |
| 4.5 | Game Theory | 14 |

An AI agent should be able to make decisions. Based on what it believes and what it wants, it should be able to decide what is the most beneficial action to take. When making such decisions, the AI agent should consider not only the current status, but also the foreseeable future, and consequence of the action, and the stochasticity of the environment.

Different decision making models are studied in this chapter.

4.1 Utility

To formulate decision making into a mathematical problem, the first step is to define the **utility** (often in the form of a function) which quantifies the value of a state or a move. Decision making is essentially about maximizing the utility defined by the agent.

Utility and utility function formulation is introduced in this section.

4.1.1 Utility Theory

Intuitively, a rational AI agent should always choose the action among all the actions it can take to maximize the expected utility. This is known as

the **maximum expected utility** (MEU) principle. In the below, MEU is formulated as an optimization problem. It is then discussed why MEU makes sense most of the time.

Consider a simple scenario where the utility is determined only by the (ultimate) state of the system. In other words, the AI agent does not gain additional utility or penalty by the actions it takes, so long as it eventually lands on the same state. Let a denote an action. When taking the action, the AI agent may land on several different states. The stochasticity comes from incomplete modeling. Let S be the set of probable landing states, and $s_i \in S$ be a probable landing state. Let $P(s_i|a, e)$ be the probability of landing on s_i , given evidence e and taking action a . The evidence is a collection of all the observations about the AI agent status and environment before making the decision. Finally, let $U(s_i)$ be the utility of a state.

The expected utility of the action a , given evidence e , probable landing states $s_i \in S$, utilities $U(s_i)$, is given by

$$EU(a|e) = \sum_S P(s_i|a, e)U(s_i) \quad (4.1)$$

Given the evidence e , an AI agent can take multiple actions $a_i \in A$. MEU suggests that the following action should be taken.

$$a^* = \arg \max_{a_i} EU(a|e) \quad (4.2)$$

An example of MEU is given below. Assume a maze in Fig. 4.1. The AI agent is randomly put into one of the locations (blocks) in the maze. The AI agent staying at each location is defined as a state. The AI agent can move horizontally or vertically one step at a time. The distance from each block to “GOAL” is given in Fig. 4.1 and is used as the utility of the state.

Let evidence e be the current location of the AI agent. In this example, assume that the agent is at the red dot (2, 1). There are 4 actions that the agent can take. They are listed below, together with the landing state and

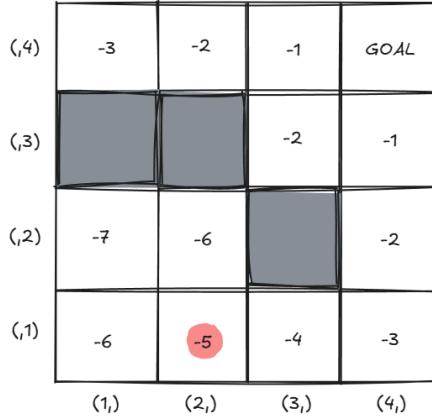


FIGURE 4.1
State utility map for in the MEU example.

their associated probability.

$$\begin{aligned}
 a_1 &= \text{UP} \\
 P((2, 1)|a_1, e) &= 0.2 \\
 P((2, 2)|a_1, e) &= 0.6 \\
 P((1, 1)|a_1, e) &= 0.1 \\
 P((3, 1)|a_1, e) &= 0.1 \\
 a_2 &= \text{LEFT} \\
 P((2, 1)|a_2, e) &= 0.2 \\
 P((2, 2)|a_2, e) &= 0.1 \\
 P((1, 1)|a_2, e) &= 0.6 \\
 P((3, 1)|a_2, e) &= 0.1 \\
 a_3 &= \text{DOWN} \\
 P((2, 1)|a_3, e) &= 0.7 \\
 P((2, 2)|a_3, e) &= 0.1 \\
 P((1, 1)|a_3, e) &= 0.1 \\
 P((3, 1)|a_3, e) &= 0.1 \\
 a_4 &= \text{RIGHT} \\
 P((2, 1)|a_4, e) &= 0.2 \\
 P((2, 2)|a_4, e) &= 0.1 \\
 P((1, 1)|a_4, e) &= 0.1 \\
 P((3, 1)|a_4, e) &= 0.6
 \end{aligned}$$

Notice that the output of an action is not deterministic. In practice, this can happen due to signal transmitting error, etc. Notice that the AI agent cannot move down at its current location. When “DOWN” action a_3 is taken, it will most likely run into the wall and stay where it is currently.

Using (4.1), the expected utility of a_1 can be calculated as follows.

$$\begin{aligned} EU(a_1|e) &= 0.2 \times (-5) + 0.6 \times (-6) + 0.1 \times (-6) + 0.1 \times (-4) \\ &= -5.6 \end{aligned}$$

and similarly, $EU(a_2|e) = -5.6$, $EU(a_3|e) = -5.1$ and $EU(a_4|e) = -4.6$. Using (4.2), action a_4 , i.e, move “RIGHT”, is the rational decision.

The main challenges of the MEU include at least the following.

- The utility of each state, $U(s_i)$, is often not obvious, and needs to be calculated by searching or learning.
- The probabilities $P(s|a_i, e)$ needs to be calibrated.

In the remaining of this chapter, the above two challenges will be addressed with different approaches.

Are there alternative ways to calculate the utility of an action?

The utility of an action is calculated by (4.1) which intuitively makes sense. An AI agent who uses (4.1) and (4.2) to make decisions seems rational.

The question is, are there additional ways to calculate the utility of an action? For example, consider

$$U(a|e) = \min(\{U(s_i)|P(s_i|a, e) > 0\})$$

which counts for the “worst utility” an action may lead to. Can we use this utility instead of (4.1) when evaluating an action?

This essentially addresses what an rational agent is. For that, the following **axioms of utility theory** is defined.

- Orderability. Let there be two actions a_1 and a_2 . Exactly one of the statements “ a_1 is preferred over a_2 ”, “ a_1 and a_2 are indifferent”, “ a_2 is preferred over a_1 ” must be true. In other words, any action can be ranked.
- Transitivity. Let there be three actions a_1 , a_2 and a_3 , if a_1 is preferred over a_2 , and a_2 over a_3 , then a_1 must be preferred over a_3 .
- Continuity. Let there be three actions a_1 , a_2 and a_3 , where a_1 is preferred over a_2 , and a_2 over a_3 . Define a new compound action $a_{1,3,p,1-p}$, which randomly select a_1 with probability p and a_3 with probability $1 - p$. There must be such probability p so that a_2 and $a_{1,3,p,1-p}$ are indifferent.

- Substituability. Let a_1 and a_2 be indifferent actions. Let a_3 be any action. Let $a_{1,3,p,1-p}$, $a_{2,3,p,1-p}$ be two compound actions with p be any probability. Actions $a_{1,3,p,1-p}$ and $a_{2,3,p,1-p}$ must be indifferent.
- Monotonicity. Let a_1 , a_2 be two actions and a_1 be preferred over a_2 . Define two compound actions $a_{1,2,p_1,1-p_1}$, $a_{1,2,p_2,1-p_2}$. If $p_1 > p_2$ then $a_{1,2,p_1,1-p_1}$ is preferred over $a_{1,2,p_2,1-p_2}$.
- Decomposability. Compound actions can be nested or decomposed. For example, consider compound action $a_{1,2,p,1-p}$, where a_2 itself can be a compound action $a_2 = a_{21,22,q,1-q}$. The compound action can be decomposed as follows $a_{1,21,22,p,(1-p)q,(1-p)(1-q)}$ which is indifferent with $a_{1,2,p,1-p}$.

Let $U(a)$ be the utility of an action a which can be any action mentioned in the axioms of utility theory. The utility $U(a)$ must exist for every action, and its value must be able to reflect the preference, i.e., if $U(a_1) > U(a_2)$, it will prefer a_1 over a_2 , and if $U(a_1) = U(a_2)$, it is indifferent between a_1 and a_2 .

It can be proved that for an compound action, its utility is

$$U(a_{1,2,\dots,n,p_1,p_2,\dots,p_n}) = \sum_n p_i U(a_i)$$

It is obvious that utility function is not unique. For example, given utility function $U(a)$,

$$U'(a) = \alpha U(a) + \beta, \alpha > 0$$

is also a valid utility calculation.

4.1.2 Utility Function

The utility of an action $U(a|e)$, for example (4.1), is an example of a **utility function** which maps an action to a real number. Notice that as mentioned earlier, (4.1) is not the unique way of calculating the utility of an action that fulfills the axioms of utility theory. Different utility functions are briefly discussed in this section. The calculation of utility functions for each action at each state is often known as **preference elicitation**.

The utility of a state can be taken as an extension to the utility of an action. For example, in (4.1) the utility of a state $U(s)$ is often calculated as the maximum value of utility functions among all probable actions on that state, i.e.,

$$U(s) = \max_i (EU(a_i|e)) \quad (4.3)$$

where a_i is any probable action that can be taken at state s . Using (4.3), the utility of states can be calculated from the utility of actions.

The calculation of utility functions can be challenging. For example, consider $U(a|e)$ given by (4.1). The transaction probability $P(s|a, e)$ and the state utility $U(s)$ are usually unknown in the beginning and need to be calibrated. There are different ways to calibrate their values. In the later Sections 4.3 and 4.4, the calculation of utility functions in Markov decision process, one of the most widely used decision making model, will be introduced in more details.

4.2 Decision Network

“nobreak

4.3 Markov Decision Process

“nobreak

4.3.1 State and Policy

State.

Policies.

Optimal policy.

Utility of a state.

4.3.2 Value Iteration

Bellman equation and convergence.

4.3.3 Policy Iteration

“nobreak

4.4 Partially Observable MDP

“nobreak

4.5 Game Theory

Multi-agent control system.



5

Regression

CONTENTS



Part II

Artificial Neural Networks



6

Perceptron

CONTENTS



7

Multi-layer Perceptron

CONTENTS



Part III

Convolution and Recurrent Networks



8

Convolutional Neural Network

CONTENTS


| | | |
|-----|---------------------------|----|
| 8.1 | Brief Review of CNN | 27 |
| | “nobreak | |

8.1 Brief Review of CNN

CNN is a type of ANN structure designed to handle grid-like data. It is effective when dealing with spatially correlated data, thus it has become very popular in computer vision. It defines “kernel” that aggregates nearby pixels information before sending it to a dense network.

A CNN kernel, also known as a filter, is a small matrix of weights that slides across the input image or feature map to perform a mathematical operation called convolution. A demonstration of CNN kernel is given in Fig. 8.1. Multiple kernels can be defined on the same layer to handle the same feature map, each kernel associated with an output channel. In practice, each kernel or channel is designed to detect specific features in the feature map. For example, there might be a kernel detecting edges, while a second kernel detects color patterns.

Notice that CNN differs quite largely from transformer in the problems they are expected to address. CNN is more for spatial data processing such as image processing, while transformer targets more on sequential data processing such as natural language processing and machine translation.

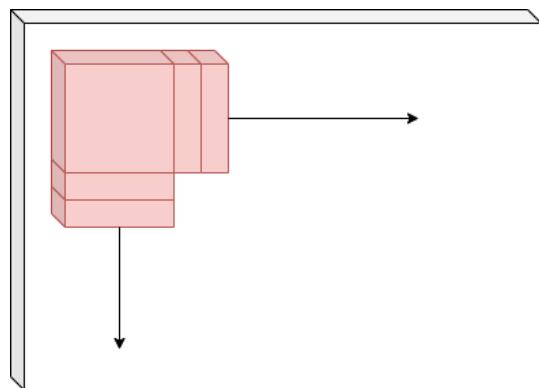**FIGURE 8.1**

A demonstration of CNN kernel. The input is given by the white box (3D), and the kernel by the red box.

9

Recurrent Neural Network

CONTENTS

| | | |
|-----|---------------------------|----|
| 9.1 | Brief Review of RNN | 29 |
|-----|---------------------------|----|

“nobreak

9.1 Brief Review of RNN

RNN is a connectionist model with the ability to selectively pass information across sequence steps [16]. It is good at handling sequence of data such as voice message, text contents, or a flow of images (videos). It is worth mentioning that the “sequence” does not necessarily mean a time sequence. Nevertheless, without losing generality, we will consider time sequence in the review for simplicity and convenience.

Denote inputs $x(1), x(2), \dots, x(k), \dots$ where $x(k)$ is a vector sampled at time instant k . The length of the sequence may be finite or infinite. In the case of finite sequence, its maximum sample index is denoted by T . For example, in the context of natural language processing, each input might be a word in a dictionary. For example, $x(1) = \text{“Pandas”}$, $x(2) = \text{“are”}$, $x(3) = \text{“so”}$, $x(4) = \text{“cute”}$, $x(5) = \text{“!”}$. The corresponding target output sequence is given by $y(1), y(2), \dots, y(k), \dots$, respectively.

RNN differs from the conventional dense ANN by introducing “recurrent edges”, which allows the output of hidden layers at $k-1$ be used as additional inputs to the system at k . This means, at any time k , the input of the system includes both $x(k)$ and also selected $h(k-1)$, where $h(\cdot)$ is the outputs of hidden layers. We can think of the “weights” of a trained RNN the “long-term memory” that does not change with specific sequence of inputs, while the information passing through recurrent edges the “short-term memory” that links previous inputs with future inputs.

A demonstration is given in Fig. 9.1. Notice that each hidden layer is a multi-input-multi-output subsystem containing multiple nodes. Different from a conventional dense ANN, each hidden layer takes additional inputs from its corresponding hidden layer in the previous instant. It is also common to see

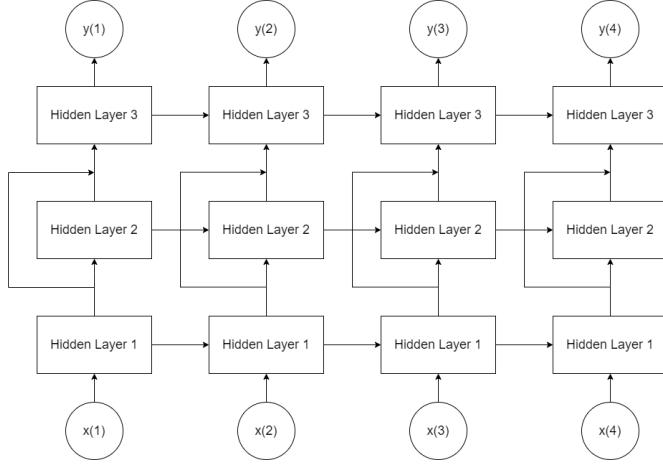


FIGURE 9.1
An example of RNN.

“bypass” (this is widely used in different ANN structures, not unique to RNN) for better performance of the system.

RNN has some limitations. One of the major problem is that it is difficult to train an RNN even for the basic standard feedforward networks. The optimization of RNN is NP-complete. It is especially difficult for RNN to learn long-range dependencies due to the vanishing and exploding gradients problem that could occur when backpropagating errors across many timestamps (long sequence) [16]. This is one of the main challenges why RNN has difficulties building on long-range dependencies. The vanishing and exploding gradient problems are caused by the structure of the system as well as the backpropagation-based training methods.

Different approaches have been proposed to prevent vanishing and exploding gradient problems. Famous ones among these approaches include strategical weight initialization, long short term memory (LSTM), gated recurrent units (GRUs), skip connections, and more. Many of these approaches try to reduce the effect of vanishing and exploding gradient problems by carefully design the ANN structures. For example, both LSTM and GRUs introduce “memory cells” with built-in “gates” that balance and control the flow of information from previous cells versus current inputs. The cells are used to replace the traditional perceptron nodes. These approaches have made the training of RNN a feasible problem. LSTM and GRUs are almost certainly used in modern RNNs.

Bidirectional RNN (BRNN) is proposed at about the same time with LSTM. It allows information to travel not only from previous hidden layers to future layers, but also from future hidden layers to previous layers. LSTM and BRNN can be used together to boost the RNN performance. Notice that

BRNN cannot run continuously as it requires fixed endpoints in both the future and the past. It is useful for prediction over a sequence of fixed length, such as part-of-speech tagging in natural language processing.

Another problem that people have found during the training of RNN is local optima. However, recent studies have shown that local optima is not as serious issue as we might thought when the network is large, since many critical points are actually saddle points rather than local minima.

Successful implementations of the above RNN structures include natural language translation such as [23] where an encoder-decoder structure is used, each is an LSTM. Another example is image captioning, where the AI tries to explain what is in an image using texts. A solution to this is to use CNN to encode the image, and use LSTM to decode to generate texts. Following similar ideas is hand-writing recognition.



Part IV

Large Language Model



10

Transformer

CONTENTS

| | | |
|--------|-------------------------------------|----|
| 10.1 | RNN and Its Limitations | 35 |
| 10.1.1 | A Brief Review of RNN | 35 |
| 10.1.2 | Limitations of RNN | 36 |
| 10.2 | Transformer Framework | 37 |
| 10.2.1 | Tokenizer | 37 |
| 10.2.2 | Encoder and Decoder | 40 |
| 10.2.3 | Attention Mechanism | 40 |
| 10.2.4 | Transformer-Based NLP | 40 |
| 10.3 | Transformer Development Trend | 40 |
| 10.3.1 | Transformer Variants | 41 |
| 10.3.2 | Trend | 41 |

Large language model (LLM) is one of the many solutions to NLP, and NLP is a type of problem under sequential data processing. In the past few years we have seen revolutionary development in LLM, and hence it forms a dedicated part in the notebook. With the introduction of multimodal LLM, the capability of LLM expands beyond language processing towards image and even video processing.

Modern LLM is built on top of Transformer, an AI framework proposed in the landmark paper “Attention Is All You Need” [25]. Transformer is introduced in this chapter.

A brief review of RNN, the state-of-the-art framework prior to Transformer, is given, and its shortages are addressed. Transformer framework and its key components are introduced. Lastly, the development trend of Transformer is discussed.

10.1 RNN and Its Limitations

RNN has been introduced in earlier Chapter 9. A brief review is given in this section, focusing on its shortages in NLP.

10.1.1 A Brief Review of RNN

Compared with a dense ANN, RNN is more efficient in building up correlation between consecutive inputs, and hence it becomes a powerful framework when it comes to sequential data processing.

In a conventional dense ANN, the correlation cannot be captured efficiently. In contrast, a dense ANN would treat all the inputs “equally” in a symmetric manner. To enforce the ANN to “address” the correlation, it would require a lot more layers and nodes (which is often considered low-efficient), and requires more data points during the training. Other problems of conventional dense ANN include, for example, the lack of ability in handling data with arbitrary length.

CNN and RNN try to tackle the above problems by implementing a “pre-processing” stage, where the correlation of the spatial and sequential data is first abstracted using some mechanism, and the correlation information is sent as (additional) inputs to the following dense ANN.

10.1.2 Limitations of RNN

“Attention” was not a new concept invented in [25]. It was proposed a few years earlier than the transformer, and had been integrated into several CNN and RNN models to boost their performances to capture long-range dependencies. In these researches, attention mechanism is more often a supporting role than the main character. It is quite surprising indeed that when getting rid of CNN and RNN and purely relying on attention mechanism, everything gets better: more efficient in training and better in performance.

Does this mean that the RNN, which we had been relying on so much, is in fact the drawback to NLP? The following is the answer of ChatGPT-4 of this question.

Q: By getting rid of RNN and using attention mechanism alone, natural language processing performance gets better. Is this correct? Does this mean that RNN is a drawback to natural language processing?

A: Yes, by getting rid of RNNs and using the attention mechanism alone, the Transformer model demonstrated improved performance in natural language processing tasks. However, it's important to note that RNNs are not inherently a drawback to NLP; they were successfully used for many tasks before the advent of Transformers.

RNNs, particularly LSTM (Long Short-Term Memory) and GRU (Gated Recurrent Unit) variants, were designed to handle sequences and capture dependencies in the data. They have been effective in many NLP tasks, such as language modeling, machine translation, and sentiment analysis. However, RNNs do have certain limitations, such as difficulty in

capturing long-range dependencies and sequential processing, which can lead to slower training and inference times.

The attention mechanism, as employed in the Transformer model, addresses some of these limitations. It enables parallel processing of input sequences, leading to faster training and inference, and effectively captures long-range dependencies without the vanishing gradient problem that can affect RNNs.

While Transformers have shown superior performance in many NLP tasks, RNNs still have their place in certain scenarios, especially when working with resource-constrained environments or smaller datasets. They can be more lightweight and computationally efficient compared to large-scale Transformer models.

In summary, RNNs are not a drawback to NLP per se, but their limitations have been mitigated by the introduction of the attention mechanism in Transformer models, which has led to improved performance in a wide range of NLP tasks.

(April 14, 2023, ChatGPT-4)

10.2 Transformer Framework

A summary of the concepts, components and technologies in [25] is given in this section.

10.2.1 Tokenizer

In most NLP solutions, human language components need to be mapped to numbers before inputting into a model. The outputs of the model must then be mapped back to human-readable components so that a human can interpret them. This is no exception for LLMs. This mapping process is known as **tokenization**.

There are multiple ways to perform tokenization. Different models, and models for different languages, may apply different tokenization schemes. In this section, English is used as an example. Commonly seen tokenization methods are discussed.

Character-Based Tokenization

The most intuitive approach is character-based tokenization. For example, we can use the ASCII standard as the mapping table, where each English character, including spaces and most commonly used special characters, is mapped to an integer.

The benefits of using character-based mapping include:

- Flexibility. Everything can be mapped without exception, including typos or invented words.
- Compact vocabulary. To cover all characters, we need only a few dozen entries in the mapping table.

The main drawback of character-based mapping is inefficiency. For instance, consider the character sequence “t”, “h”, and “e”. When they appear together, they form the word “the” which carries a specific and frequent meaning. Ideally, such frequent patterns should be recognized as a whole. By storing this combination in the token mapping (rather than learning it from model parameters), we can improve modeling efficiency and reduce sequence length.

Word-Based Tokenization

To improve efficiency and reduce the number of input tokens, word-based tokenization was proposed. A dictionary containing around 30,000 to 50,000 words is often used in common applications. Any unrecognized word such as typo or extremely rare word is mapped to a special token that represents an “unknown” word.

The advantages of word-based mapping include:

- Efficiency. Fewer tokens are needed to represent a sentence compared to character-level mapping.
- Better contextual grounding. Each token usually corresponds to a semantically meaningful unit.


However, word-based tokenization sacrifices flexibility. Unseen or misspelled words provide no meaningful signal other than “unknown”.

Additionally, word-based schemes often ignore the semantic structure within a word. For example, consider the word “handcraft”. It is clearly composed of two recognizable words “hand” and “craft”. Semantically, “handcraft” relates to both. Yet, in the word-based mapping, “hand”, “craft” and “handcraft” are treated as entirely unrelated tokens. In such cases, it would be more effective to break the word into meaningful segments and tokenize those instead.

Subword-Based Tokenization

Modern LLMs typically use subword-based tokenization. This approach lies between character-based and word-based methods. It tries to achieve optimum flexibility and efficiency by smartly breaking a word into semantically meaningful chunks known as “subwords”.

An example is given in Fig. 10.1, where a small piece of text is tokenized using a tokenizer. From the example, we can see that while basic and commonly used words such as “I”, “am”, “demonstrating”, “sentence” remain in one

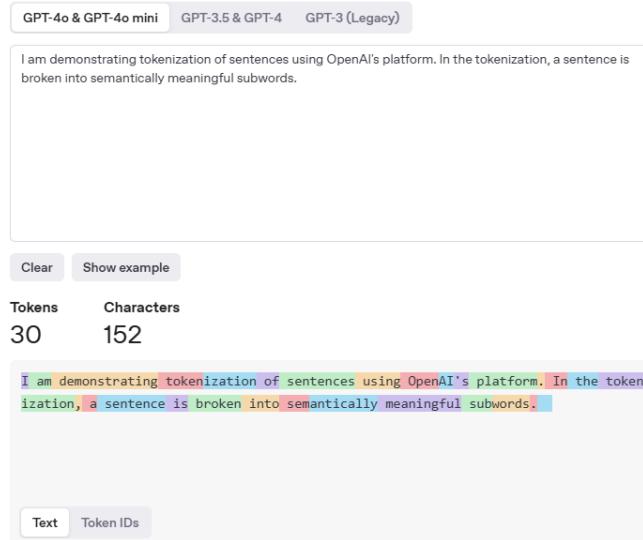**FIGURE 10.1**

A demonstrative example where a piece of text is tokenized using GPT-4o’s tokenizer.

token, the sophisticated words such as “OpenAI”, “tokenization”, “semantically” are broken into subwords. Notice that spaces and special characters such as period “.” are also considered as part of tokens, as they carry meanings.

Each token is then assigned with a token ID. In the example in Fig. 10.1, they are

```
[40, 939, 73405, 6602, 2860, 328, 40536, 2360, 7788, 17527, 885, 6361,
13, 730, 290, 6602, 2860, 11, 261, 21872, 382, 17162, 1511, 2743,
175665, 33329, 1543, 10020, 13, 256]
```

Subword tokenization allows the model to:

- Represent rare or unknown words by combining familiar parts (e.g., prefixes, stems, suffixes).
- Reduce the number of out-of-vocabulary tokens. Even if a new word or typo is detected in the text, it is possible that it still contains meaningful subwords.
- Maintain a compact vocabulary while preserving semantic structure.

Just to put things into perspective, for a typical tokenizer on English writing, 1 token is roughly 4 characters, or 0.75 word, and 1000 tokens are roughly 750 words. Nowadays, math equations, scientific terms and codes are

also used as inputs and outputs to LLMs for domain knowledge related tasks. They usually consumes more tokens than English writings.

Different LLMs may use different tokenizers. Popular subword techniques include Byte Pair Encoding, WordPiece, and Unigram tokenization. The example in Fig. 10.1 demonstrates the tokenizer of OpenAI’s GPT-4o. There are many other tokenizers used by variety of models. At this point, there is not a universally best tokenizer.

The maximum number of tokens an LLM can process, both as input and output, is limited by its **context window**. For example, consider a continuous dialogue with an LLM-based chatbot. Each time the user provides a new input, the entire chat history (including all of the user’s previous inputs and the LLM’s previous responses) is bundled together and sent as a new stateless input to the model. Based on this complete input sequence, the LLM then generates its latest response. This stateless nature means that the LLM does not “remember” anything beyond what is explicitly included in the current input.

As the conversation grows longer, more and more tokens are needed to represent the chat history. For example, GPT-4o model has a context window of $128K$ tokens, roughly one-tenth the length of the complete works of Shakespeare. Once this limit is reached, older parts of the conversation must be truncated or summarized.

In some scenarios, the input cannot be easily compressed or truncated and must be passed to the LLM as a whole. For example, when an LLM is used to troubleshoot a piece of code, the entire code block, possibly including multiple files, configurations, and logs, needs to be input at once to maintain context and correctness. In such cases, the size of the context window becomes a critical constraint. If the total input exceeds the model’s maximum token limit, the model will either fail to process it entirely or may be forced to omit important parts of the input, potentially leading to incorrect or incomplete responses.

10.2.2 Encoder and Decoder

TBA

10.2.3 Attention Mechanism

TBA

10.2.4 Transformer-Based NLP

“nobreak

10.3 Transformer Development Trend

“nobreak

10.3.1 Transformer Variants

“nobreak

10.3.2 Trend

With the sizes and capabilities of the frontier models scaling up over the past years, the models are more and more appear to be intelligent and human-like.

A new job opportunity, “prompt engineer”, has emerged. The workscope of a prompt engineer is to design the appropriate prompt that instructs an LLM to complete certain tasks accurately and efficiently. People starts to take advantage of LLMs in their production.

Today, some most popular LLM applications include at least the following.

- Chatbot and customer service.
- Copilot
- Agentization



11

Large Language Model: Theory

CONTENTS

| | | |
|--------|---|----|
| 11.1 | Introduction to LLM | 44 |
| 11.1.1 | Existing NLP Models and Gaps | 44 |
| 11.1.2 | LLM Features and Capabilities | 45 |
| 11.1.3 | LLM Performing Benchmarks | 47 |
| 11.1.4 | LLM Development Timeline | 47 |
| 11.1.5 | LLM-Relevant Milestone Technologies | 47 |
| 11.2 | Existing LLMs Features | 48 |
| 11.2.1 | OpenAI Family | 50 |
| 11.2.2 | LLaMA Family | 52 |
| 11.2.3 | Other LLMs | 57 |
| 11.3 | LLM Development | 57 |
| 11.3.1 | Architecture Design | 57 |
| 11.3.2 | Training Corpus Preparation | 58 |
| 11.3.3 | Pre-training | 58 |
| 11.3.4 | Fine-Tuning | 58 |
| 11.3.5 | Model Evaluation | 58 |
| 11.4 | Multimodal LLM | 58 |

This chapter serves as an overview of the large language model from the theory and technical perspective. LLM is a successful practice of NLP and beyond. It can not only process human languages but also generate new contents based on human language written requirements. The introduction of multimodal LLM further allows LLM to understand and generate not just writings but also pictures and videos.

Nowadays, it is possible for a regular user to leverage commercialized models to develop their own applications. Given a powerful machine, a user can even deploy LLMs locally in a few steps. Open-source LLMs are available so that the user does not need to train a model from scratch. The deployment of LLMs and the interaction with them are introduced in the next Chapter 12.

Modern LLMs are built on top of Transformer framework which has been introduced in earlier Chapter 10. It is worth emphasizing the relationship between the Transformer and LLM. Transformer is an ANN framework designed for processing any sequential data so long as it can be encoded, and appar-

ently NLP is an important use case of it. LLM is a practice of Transformer on NLP.

11.1 Introduction to LLM

This section reviews existing NLP methods and their limitations, and discusses the gaps that LLM bridges.

11.1.1 Existing NLP Models and Gaps

There have been variety of ways to model natural languages. For example, consider the following sentence:

“I am thirsty. Please give me a bottle of ____.”

It is quite natural that a human would be likely to put “water” or “tea” in the blank. This is obvious because humans have a dictionary of words that they can choose from in their mind, and they have been reinforced by learning the “a bottle of water” expression on many occasions. In addition, it makes sense to a human that when someone is thirsty, they would look for water.

The challenge using AI on the above task is to build the “dictionary” in the machine and quantitatively analyze what word or phrase would make the most sense to be filled into the blank. Many models have been proposed to solve this problem, some of which have been evolving over time in the past decades since the 1990s.

Statistical Language Models

In the early days when AI and ANN were not popular, **statistical language models** (SLM) have been the most popular tool to model natural languages. SLM assumes that a sentence is a Markov process, and the last word depends on the context created by the most recent n words. SLM with a fixed context length of n is also called an n -gram language model.

Conventionally, the pairing information from n words to the next word is obtained from data corpus and stored in a table-like structure. When running the model, it looks up the table for the most probable next word based on the earlier n words. Smoothing technologies are used to handle zeros, i.e., when the record is not found in the table.

An obvious issue of SLM is that the computation and storage of the model increase exponentially with the size of n . This limits the context information that the model can use for prediction, hence setting a low performance ceiling. Not to mention that even with a large data corpus, zeros can still happen and the model performance is always an issue in such occasions.

Neural Language Models

With the introduction of ANN, in particular RNN, **Neural Language Models** (NLM) became popular. RNN-based NLM builds the word prediction function conditioned on the aggregated context features abstracted and passed recurrently from current and previous input sequence. More about RNN has been introduced in Chapter 9.

RNN is not a perfect one-stop solution either. The training of RNN can be difficult due to vanishing and exploding gradient problems. This limits the depth that RNN can go. When handling long sequence of words, the performance of RNN drops significantly because it is weak at building long-term dependencies.

Pre-trained Language Models and Large Language Models

As introduced in details in earlier chapters, attention mechanism has been proposed to tackle the long-term dependency problem of RNN. Transformer architecture, which relies purely on encoder, decoder and attention mechanism without using RNN is then proposed. It has been verified that transformer architecture is good at abstracting information from sequential data, in particular, natural languages. With a transformer, it becomes possible to build very deep neural networks and have it trained efficiently with big-size data corpus. The outcome is known as the **large language model** (LLM).

Language models based on different transformer-based architectures are often called **Pre-trained Language Models** (PLM). LLM can be taken as a subset of PLM. The main difference between an LLM and a regular PLM is the size of the model. The scaling of the model from hundreds of millions of parameters for PLMs to tens or hundreds of billions of parameters for LLMs introduces emergent abilities such as in-context learning to the model, significantly enhancing its capability and intelligence. As of this writing, it is not very clear how these abilities suddenly emerge with the size of the model.

11.1.2 LLM Features and Capabilities

When the size of the model becomes large, usually to the order of at least a few billions parameters, they suddenly gain emergent abilities. Details are discussed as follows.

In-context Learning

In-Context Learning (ICL) allows the behavior of the model to be manipulated via not training or fine-tuning of the parameters, but via instructions and demonstrations given as part of the input.

ICL plays an important part in LLM implementation, as it is the basis of prompt engineering. When the LLM is large, it is possible to use prompt engineering instead of fine-tuning to complete a task following user defined

instructions. This reduces the training cost and makes the implementation more flexible.

Instruction Following

Supervised learning is commonly used in training and fine-tuning a model. In the training set, we need to provide the model “examples”. An example includes the input, some good responses, and some bad responses.

When it comes to LLM, it is possible to fine-tune a model for a specific task without using the aforementioned examples. Instead, just give it step-by-step instructions. LLM is able to perform well with these tasks described only by instructions. This is known as instruction tuning.

It is worth mentioning that instruction following is also possible in ICL. Give the LLM instructions in prompt engineering without examples, and the LLM is likely to be able to finish the tasks.

Step-By-Step Reasoning

When a model is asked to complete a complicated task that involves multiple steps, it may fail to accomplish the task. With a well fine-tuned LLM, the model might be able to break the task into multiple sub-tasks via chain-of-thought (CoT) prompting strategy, and solve them step-by-step till the final result is obtained.

It has been observed that an LLM with at least $100B$ parameters is likely to have good step-by-step reasoning abilities.

The performance of an LLM, usually referring to its capability to accurately and correctly complete a task, is affected by many factors such as the model architecture, model size, training data set size and quality, etc. Though it is clear that with the scaling up of the system the performance is usually improved, there is no analytical expression that gives full insights about how these factors affect the performance quantitatively.

A **scaling law** tries to quantitatively describe the performance of an LLM as a function of model size and other factors. Many scaling laws have been proposed, many of which obtained from empirical experiments and they may work only within a given range of model size.

Just as an example, OpenAI proposed KM scaling law in 2020 that describes LLM cross entropy loss as a function of model size, training data set size and training computation as follows.

$$\begin{aligned} L(N) &= \left(\frac{N_c}{N}\right)^{\alpha_N} \\ L(D) &= \left(\frac{D_c}{D}\right)^{\alpha_D} \\ L(C) &= \left(\frac{C_c}{C}\right)^{\alpha_C} \end{aligned}$$

where N , D and C denote the model size, dataset size and training compu-

tation, respectively. The rests are constants whose value can be obtained via calibration.

This scaling law works for models with $22M$ to $23B$ parameters. It is assumed that the analysis of a factor can be done independently without other parameters being a bottleneck.

11.1.3 LLM Performing Benchmarks

“nobreak

11.1.4 LLM Development Timeline

A brief timeline of the development of LLMs since the publication of [25] is given below.

2017

“Attention Is All You Need” [25] introduced a new type of NLP model called the “Transformer”. Unlike traditional RNN-based models, the Transformer removes all recurrent components and adopts an encoder-decoder architecture that relies entirely on self-attention mechanisms to model dependencies within and across sequences.

2018-2020

OpenAI released the GPT-1, GPT-2, and GPT-3 models in consecutive years from 2018 to 2020, showcasing the scalability of Transformer-based architectures for autoregressive language modeling.

2022

Reinforcement Learning from Human Feedback (RLHF) became a widely adopted training strategy. OpenAI released ChatGPT, a chatbot fine-tuned from the GPT-3.5 model using RLHF. Its human-like conversational abilities captured public attention and spurred a surge of interest and development in LLM-based applications.

2023-2024

GPT-4, GPT-4o are published in 2023 and 2024 respectively, along with many other frontier models are published.

11.1.5 LLM-Relevant Milestone Technologies

This section looks back into the progression tree of LLM, and lists down milestone techniques that make LLM what it is today. It is the breakthrough in these areas that revolutionizes LLM development.

Big Data

The performance of LLM relies on both the modal size and the training data size. It is the advent in internet, Web 3.0, Industry 4.0, IoT and cloud computing/storage that makes collection and aggregation of big data possible.

Almost every large-size enterprise, both IT companies and conventional industrial companies, has its internal databases. The database can be used to train domain-knowledge LLM. Nowadays, there are many open data sources of community LLMs. Such examples include BookCorpus, CommonCrawl, Reddit posts (with high upvotes), Wikipedia, and many more. These open-source datasets make training LLM for community projects possible.

Large Model and Efficient Training

The invention of CPU-based neural networks and transformer architecture making creating and training large scale LLM possible. Both closed and open-source LLMs have been proposed, including GPT series by OpenAI and LLaMA family by Meta AI and the community.

Many libraries have been released to the public to help with building, training and fine-tuning LLMs, such as `transformers`, a Python library for building transformer models. Many such libraries are integrating with PyTorch and TensorFlow to provide LLM-related functions.

More about these models and libraries are introduced in later sections.

Fine-Tuning

Technologies such as LoRA has made fine-tuning easier than before.

Prompt Engineering

There have been a lot of practices on how to make LLM flexible and more efficient in solving particular tasks via prompt engineering.

LLM on Edge Devices

Many efforts have been put into edge-device based LLMs. The target is to develop LLM that consumes less memory, storage and computation while not sacrificing a lot of performance.

API and Interface

Multi-modal LLM has enabled different types of inputs to the LLM, not limited to natural language but also sequential signals and even pictures.

Many tools and software have developed APIs for LLM. These tools enhance computation and online information retrieval capabilities of LLM.

11.2 Existing LLMs Features

As of this writing, there are countless LLMs available on the market or within the open-source community, and the list continues to evolve rapidly.

This section introduces the shared properties and general characteristics of existing LLMs, without delving into detailed performance metrics or task-specific comparisons. The goal here is not to promote one model over another, but rather to provide a broad overview of what defines an LLM in practice.

A more detailed performance review of selected models is provided in Section 12.4.1.

Many LLMs are capable of engaging in human-like conversations and answering questions in depth. Some can even search the internet for the up-to-date relevant information to support their responses. Most well-known LLMs can also follow user instructions to perform specific tasks, such as completing a piece of code, provided the prompts are sufficiently clear and aligned with the model's training data.

That said, many LLMs (unless specifically trained on domain-specific corpora) do not perform as well as experienced professionals in specialized fields. It is often claimed that top-performing LLMs can achieve a level of performance comparable to fresh PhD graduates in certain tasks, although a noticeable gap remains when compared to experienced researchers.

LLMs may generate inaccurate or misleading information while expressing it in a fluent and confident manner. This behavior stems from the their lack of self-awareness and inability to judge the factual correctness of its outputs.

LLMs can also struggle with detailed quantitative tasks. This limitation arises from how they process and generate language: input is tokenized into subword or word-like units, and outputs are generated based on statistical patterns rather than precise symbolic reasoning. For example, an LLM might fail to correctly answer a seemingly simple question like “How many letters ‘a’ are there in this sentence?”, because its training does not emphasize accurate character-level counting.

Multimodal LLMs can generate images or videos based on textual descriptions. However, they often struggle to accurately render fine-grained visual details. For example, if prompted to generate an image of a car with a license plate that reads “3.14159265358979”, the resulting image may omit or distort some of the digits. This limitation stems from the fact that image generation is driven by probabilistic pattern synthesis, not precise symbolic encoding or controlled rendering of visual elements. An example is given in Fig. 11.1.

It is true that each LLM is trained and fine-tuned with different data corpus and may behave differently on different types of tasks. Consider LLMs with the same model structure and training strategy. In such case, models with larger training data sets and more parameters often outperform those with smaller training data sets and less parameters. From application perspective,

**FIGURE 11.1**

A figure from a GPT when it is asked to generate a car with a license plate that reads “3.14159265358979”.

the trend is that the frontier models’ performances are converging for regular tasks, and the costs are going to be the main differentiator.

OpenAI’s GPT models and Meta’s LLaMA models are the first models that gain popularity. A brief review is given in the remaining of the section.

11.2.1 OpenAI Family

OpenAI started investigating language models before the proposition of transformer. In its early days, RNN was explored as the most promising model for natural language. In 2017 when the transformer model was proposed, OpenAI quickly adapted their language model to this new architecture, and as a result generative pre-training (GPT) series has been proposed.

GPT-1

GPT-1, OpenAI’s first transformer based PLM was proposed in 2018. GPT-1 has $117M$ parameters in the model and it adopts a decoder-only architecture, which is different from the original transformer proposal which has a encoder-decoder architecture. GPT-1 was trained via a two-stage procedure, the first stage unsupervised pre-training and the second stage supervised fine-tuning. This two-stage training pipeline, or something of the similar kind, has been adopted by many LLMs coming after.

GPT-2

GPT-2 is an improvement of GPT-1. It uses much larger number of parameters of $1.5B$ in the model, and it was trained on a much larger dataset WebText. With larger model and training data size, GPT-2 is targeted to be a multi-task solver. The model can be formulated by the following probabilistic form

$$\text{Pre-trained LLM} \equiv P(\text{output}|\text{input}, \text{task})$$

In the above formulation, each NLP task can be considered as the word prediction problem based on a subset of the word next, and can be trained during the unsupervised learning stage. Unsupervised pre-training has since then become the most important stage for the LLM to gain knowledge for general tasks.

GPT-3, GPT-3.5 and Chat-GPT

It is clear now that GPT-2 has $1.5B$ parameters which is too few for an LLM to gain emergent abilities. It is GPT-3 with $175B$ parameters trained on $300B$ tokens that made a capability leap and bring LLM to everyone's attention.

It is GPT-3 that for the first time introduces emergent abilities such as ICL. GPT-3 not only accomplishes commonly seen tasks to test LLM capabilities with flying color, but also demonstrates features not shown by other models before, such as reasoning and domain adaption.

OpenAI has developed many task-oriented models that use GPT-3 as the base model. For example, for coding, Codex was introduced. Codex is basically GPT-3 fine-tuned using code database such as GitHub. Comparing with GPT-3, Codex is able to reason and solve complex mathematical problems, and realize them in codes. RL had already been used to fine-tune and improve performance for GPT-2. The same has been applied on GPT-3. Furthermore, reinforcement learning with human feedback (RLHF) is introduced for GPT-3 that allows the model to continue learning from human demonstrations.

With the above enhancements, i.e. code-based fine-tuning, RL and RLHF, GPT-3.5 has been developed. GPT-3.5 is an enhanced version of GPT-3 and it is obtained from GPT-3 via transfer learning. GPT-3.5 is also scaled up in size, with a parameter number of $335B$.

Chat-GPT was developed on top of GPT-3.5 (and later another version was released developed on top of with GPT-4). It is GPT-3.5 fine-tuned specially optimized for dialogue. It demonstrates how LLM can be used in everyone's daily life as an assistant, consultant and a copilot. Chat-GPT demonstrated good performance in communicating of humans than other GPT models. This is because Chat-GPT is trained on human-generated conversations of both human and AI roles. Later on, plug-ins and APIs are enabled on Chat-GPT, to allow it to communicate with other software.

GPT-4

GPT-4 is a multimodal LLM, meaning that it can not only take in natural languages, but also other signals such as images. Comparing with GPT-3.5, GPT-4 demonstrates further enhanced capabilities. It is claimed that GPT-4 is safer to use and is less likely to generate toxic and misleading information.

Just as a quick demonstration of its multimodal feature, pass the following Fig. 11.2 (notice that this figure itself is generated by an AI model) to GPT-4 with instruction "What is in this picture?". GPT-4 is able to response the following:

"The image showcases a majestic cat standing in a fantastical landscape. The cat emits a luminous, ethereal glow, and its fur and tail appear to be infused with swirling, fiery or cosmic energies in brilliant hues of red and gold. These radiant swirls surround the cat, adding to its supernatural aura. Behind the cat, there's a dramatic night sky with clouds illuminated by a hidden light source, possibly lightning or a celestial event. In the foreground, the terrain appears to be a combination of grassy knolls and fiery, ember-lit ground, further emphasizing the magical and otherworldly nature of the scene. The entire setting evokes a sense of wonder and fantasy."



FIGURE 11.2

A cat with superpower. This picture is generated by DALL·E 3.

Other OpenAI Models

DALL·E is the model OpenAI uses to generate images. As of this writing, its latest version, DALL·E 3, has been integrated with the latest ChatGPT. Figure 11.2 gives an example where DALL·E 3 is used to generate a image of a superpower cat.

OpenAI Codex, as introduced earlier, is the GPT model optimized for code generation. As of this writing, Codex has been deprecated because its capability has been integrated into ChatGPT. It is possible to ask ChatGPT to generate a piece of code following user's instruction and description.

OpenAI Codex is the engine that powers GitHub copilot. In this sense, OpenAI Codex remains a live in a different format: not as a standalone software or model, but more as an API.

11.2.2 LLaMA Family

Large Language Model Meta AI (LLaMA) is the LLM model developed by Meta AI. Different from most of the AI models (GPT-3 and onward) developed by OpenAI, LLaMA is open-source hence has a wide availability. Many efforts in the community have made modifications and improvements to LLaMA, making a big family of models with different characteristics.

As of this writing, a family tree of LLaMA is shown in Figure 11.3. The picture is from [26]. The source of the picture is given in the GitHub repository of the paper. Only a small portion of models in the family tree is briefly

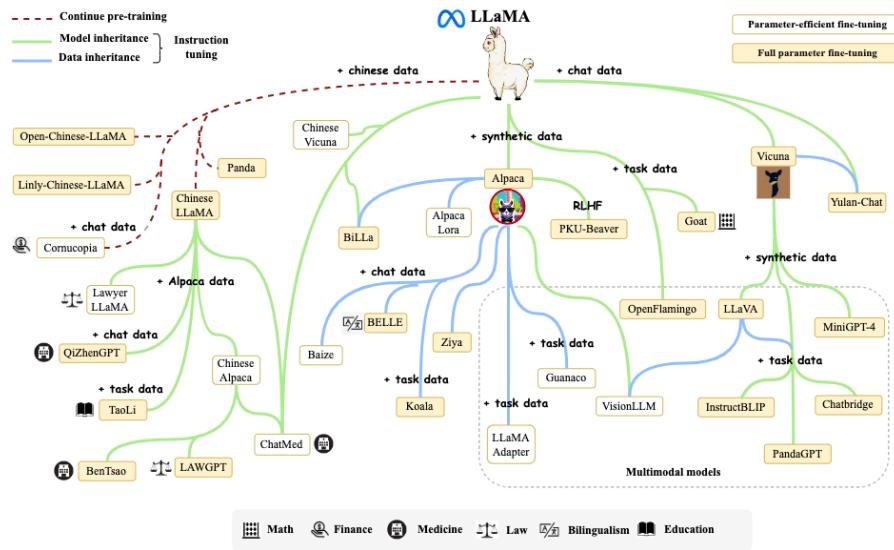


FIGURE 11.3
LLaMA family tree.

introduced here.

LLaMA

LLaMA, comparing with GPT-3 which was used as a benchmark, is smaller in model size (maximum $65B$ parameters VS $175B$ parameters in GPT-3) but larger and better in training data size and quality (maximum $1.4T$ tokens VS $300B$ tokens in GPT-3). As a result, LLaMA is able to achieve generally better performance than GPT-3 with less implementation cost due to the small size. LLaMA demonstrates that training data is equally important as model size. It is possible to reach the same level of performance with a small ($< 100B$ parameters) but well-trained model.

LLaMA's first release includes 4 models of different model and training sizes. Details are summarized in Table 11.1. The training dataset is pure-

TABLE 11.1
LLaMA models.

| Name | Model Size | Training Dataset Size |
|-----------|------------|-----------------------|
| LLaMA 7B | $6.7B$ | $1T$ |
| LLaMA 13B | $13.0B$ | $1T$ |
| LLaMA 33B | $32.5B$ | $1.4T$ |
| LLaMA 65B | $65.2B$ | $1.4T$ |

Model size is given in number of parameters in billion. Training data size is given in number of tokens.

ly open-source, including Common Crawl, C4 Dataset, GitHub, Wikipedia, public domain books, arXiv and Stack Exchange.

Technical wise, LLaMA has some innovations on top of the original transformer proposition [25] in the normalization method, activation function, and embedding methods. More details will be introduced in later sections.

Many open-source tools and packages have been developed to fine-tune LLaMA and its variations. More about fine-tuning, such as LoRA[12] and QLoRA[10], are introduced in more details in later sections. Notice that fine-tuning or re-training of a model often cost a lot of computational power and vector memory.

Stanford Alpaca

Stanford Alpaca 7B is Standford's practice in fine-tuning LLaMA 7B. The running cost of this fine-tuning is impressively small (hundreds of USD), and the resulted model has a performance comparable with GPT-3.5 which has $335B$ parameters. It is impressive to see that a small $7B$ model can compete with a large $335B$ model by careful training and fine-tuning. This might be partially because Alpaca 7B is fine-tuned from LLaMA 7B using knowledge distillation from GPT-3.5 (also known as text-davinci-003).

The details of training Stanford Alpaca can be found in [24]. A brief highlight is given below. The fine-tuning pipeline of Alpaca is shown in Fig. 11.4. It is a 2-stage process as follows.

1. Generating instruction-following examples using GPT-3.5 (text-davinci-003).
2. Fine-tune LLaMA 7B using the examples.

Examples of the generated instruction and response pairs are given below. The full list is available from the GitHub repository.

```
{
    "instruction": "What are the three primary colors?",
    "input": "",
    "output": "The three primary colors are red, blue, and yellow."
```

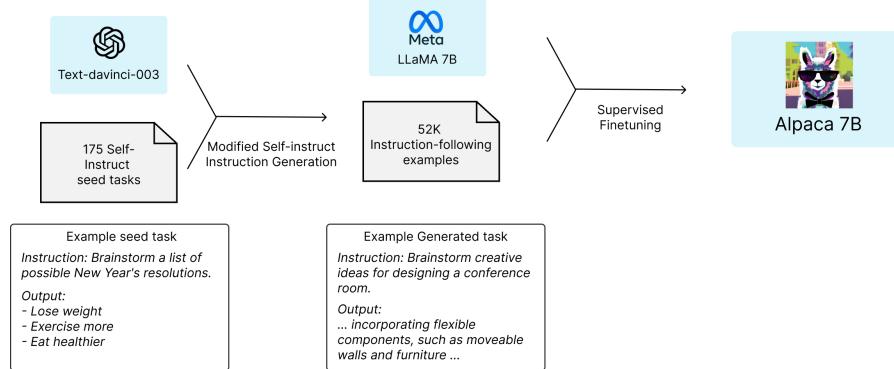


FIGURE 11.4
Alpaca fine-tuning pipeline.

```

},
{
    "instruction": "Give three tips for staying healthy.",
    "input": "",
    "output": "1. Eat a balanced diet and make sure to include plenty
              of fruits and vegetables. \n2. Exercise regularly to keep
              your body active and strong. \n3. Get enough sleep and
              maintain a consistent sleep schedule."
},
{
    "instruction": "Extract the facts from the paragraph.",
    "input": "Online education continues to become more popular for
            schools and students alike. Its advantages are generally
            lower costs, less commitment and the ability to study at a
            time, place and pace that suits the student.",
    "output": "- Online education is becoming increasingly popular.\n- It has several advantages such as lower costs, less
            commitment and the ability to study at one\u2019s own time
            and pace."
},
{
    "instruction": "Arrange the given numbers in ascending order.",
    "input": "2, 4, 0, 8, 3",
    "output": "0, 2, 3, 4, 8"
}
  
```

The fine-tuning code of Alpaca is from Hugging Face. Python packages such as numpy, torch, transformers, etc., are required. Check requirements.txt and train.py in the repository for more details. Call train.py using something like the following

```
torchrun --nproc_per_node=4 --master_port=<your_random_port> train.py \
```

```
--model_name_or_path <
    your_path_to_hf_converted_llama_ckpt_and_tokenizer> \
--data_path ./alpaca_data.json \
--bf16 True \
--output_dir <your_output_dir> \
--num_train_epochs 3 \
--per_device_train_batch_size 4 \
--per_device_eval_batch_size 4 \
--gradient_accumulation_steps 8 \
--evaluation_strategy "no" \
--save_strategy "steps" \
--save_steps 2000 \
--save_total_limit 1 \
--learning_rate 2e-5 \
--weight_decay 0. \
--warmup_ratio 0.03 \
--lr_scheduler_type "cosine" \
--logging_steps 1 \
--fsdp "full_shard auto_wrap" \
--fsdp_transformer_layer_cls_to_wrap 'LlamaDecoderLayer' \
--tf32 True
```

where `./alpaca_data.json` is the JSON file that contains all the instruction and response pairs.

Notice that later on, Stanford Alpaca 13B is also developed based on LLaMA 13B.

Vicuna

Vicuna 13B is an open-source chatbot fine-tuned on top of LLaMA using 70K user-shared conversations collected from ShareGPT (a platform where users share their ChatGPT conversation histories). Its performance is comparable with GPT-3.5 and Bard, and it is slightly better than LLaMA 13B and Alpaca 13B in general.

See [4] for more details.

LLaVA and MiniGPT-4

Large Language and Vision Assistant (LLaVA) is a multimodal LLM that combines a vision encoder and Vicuna for general purpose visual and language understanding. More details are given in [18] and [17]. Similar with GPT-4, its multimodal encoders allows it take both natural language and image as inputs. An example is given below.

Pass the same Fig. 11.2 to LLaVA with the same instruction “What is in this picture?”. LLaVA is able to give the following response:

“The image features a cat standing on a hill, with a fiery background and a cloudy sky. The cat appears to be looking at the viewer, and there is a sense of motion in the scene.”

Similar with LLaVA, MiniGPT-4 is also a multimodal LLM that enhances vision interpretation. More details are given in [27]. It uses different techniques and realizations from LLaVA. Pass the same Fig. 11.2 to MiniGPT-4 with the same instruction “What is in this picture?”. MiniGPT-4 is able to give the following response:

“The image shows a white cat with flames coming out of its fur, standing on a hill at sunset. The cat’s eyes are closed, and it appears to be in a meditative state. The background is a dark sky with clouds and a full moon. The overall mood of the image is peaceful and mystical.”

Notice that both LLaVA and MiniGPT-4 model can be downloaded from their GitHub and HuggingFace repositories. As of this writing, live demos are also available for these models.

Multimodal LLM and “Any-to-Any” LLM are not the main forecast of this chapter. More details will be introduced in later chapters.

LLaMA 2

LLaMA 2 is the next generation open source LLM following the original LLaMA. The model is free for research and commercial use. LLaMA 2 70B has $70B$ parameters and it is pre-trained with $2T$ tokens of training data.

11.2.3 Other LLMs

“nobreak

11.3 LLM Development

This section introduces the basic steps in the LLM development workflow, should the user want to develop an LLM from scratch.

11.3.1 Architecture Design

Encoder and Decoder

Normalization Method

Activation Function

Position Embedding Method

Attention Mechanism**11.3.2 Training Corpus Preparation**

Data corpus is available online for LLM training. Many libraries such as PyTorch compatible Python packages have been developed to automate the training procedures and to convenient the users.

The existing resources and solutions are briefly introduced in this section.

11.3.3 Pre-training

“nobreak

11.3.4 Fine-Tuning

“nobreak

11.3.5 Model Evaluation

“nobreak

11.4 Multimodal LLM

TBA

12

Large Language Model: Practice

CONTENTS

| | | |
|--------|--|----|
| 12.1 | Python Environment Setup | 59 |
| 12.2 | LLM Local Deployment | 61 |
| 12.2.1 | Quick LLM Deployment with Ollama | 61 |
| 12.2.2 | Interaction with Locally Deployed LLM | 62 |
| 12.2.3 | Naive Deployment | 63 |
| 12.3 | LLM Cloud Deployment | 64 |
| 12.3.1 | Browser-Based Chatbot | 64 |
| 12.3.2 | Cloud-Service-Provider-Managed LLM Deployment | 64 |
| 12.3.3 | API-Based LLM | 64 |
| 12.3.4 | Commonly Seen APIs | 66 |
| 12.4 | Model Fine-Tuning | 66 |
| 12.4.1 | A Review of Frontier Models | 67 |
| 12.4.2 | Proprietary Model Fine-Tuning | 68 |
| 12.4.3 | Open-Source Model Fine-Tuning | 68 |
| 12.5 | Resource Augmented Generator | 68 |

This chapter studies the selection, deployment and use of LLMs in production environment for different tasks.

12.1 Python Environment Setup

LLM provides APIs to interact with many different programming languages or platforms such as Python, JavaScript, and many more. In the scope of this chapter, we focus on Python-based LLM interaction, as Python is one of the most widely used languages for ANN and LLM studies and applications development.

It is recommended to collect all the necessary libraries in a file, such as `environment.yml`, and use

```
conda env create -f environment.yml --name <environment name>
```

to create an environment and install the packages all together. Anaconda

shall figure out the dependencies and compatibility of the packages, and have everything installed correctly.

An example of such YAML file is given below. This example is taken from [11].

```
channels:
  - conda-forge
  - defaults
dependencies:
  - python=3.11
  - pip
  - python-dotenv
  - requests
  - numpy
  - pandas
  - scipy
  - pytorch
  - jupyterlab
  - ipywidgets
  - matplotlib
  - scikit-learn
  - chromadb
  - jupyter-dash
  - sentencepiece
  - pyarrow
  - faiss-cpu
  - pip:
      - beautifulsoup4
      - plotly
      - bitsandbytes
      - transformers
      - sentence-transformers
      - datasets
      - accelerate
      - openai
      - anthropic
      - google-generativeai
      - gradio
      - gensim
      - modal
      - ollama
      - psutil
      - setuptools
      - speedtest-cli
      - langchain
      - langchain-core
      - langchain-text-splitters
      - langchain-openai
      - langchain-chroma
```

```
- langchain-community
- faiss-cpu
- feedparser
- twilio
- pydub
```

Among the libraries shown above, some are commonly used across all Python and machine learning projects such as `numpy`, `pandas` and `scikit-learn`, while others are LLM-specific packages such as `transformers`, `ollama` and `langchain`.

Environment Solutions of Anaconda Versus PyPA

Anaconda is a Python distribution developed and maintained by Anaconda Inc. It provides `conda`, a useful tool, to manage packages and environments. Anaconda provides reliable services to professional data scientists, corporations as well as free-of-charge services to the community. Python also has its native packages and environments management tools known as `pip` and `venv` developed and maintained by Python Packaging Authority (PyPA).

Both `conda` and `pip` allow users to create an environment and install packages from a file. The commands are

```
conda env create -f <filename> --name <environment name>
```

and

```
python -m venv <environment name>
pip install -r <filename>
```

respectively.

It is of the user's choice whether to use `conda` (from Anaconda, or its light version, Miniconda) or `pip/venv` to manage the packages. Under the scope of this notebook, both of them should fulfill the needs. As of this writing, the trend seems to be that data scientists, researchers and lecturers would more often use `conda`, while software engineers use `pip/venv`.

12.2 LLM Local Deployment

Ollama and Langflow are introduced. Ollama allows fast deployment of an open-source LLM on a local computer, while Langflow is a low-code tool that allows a developer to easily integrate and test an LLM in a data pipeline.

12.2.1 Quick LLM Deployment with Ollama

Nowadays it is convenient to quickly deploy an open-source LLM on a PC with necessary hardware. One of the simplest ways of doing that is to leverage **Ollama**, an open-source tool that allows the deployment of commonly seen open-source LLMs such as LLaMA, DeepSeek, etc., on a local machine. Notice that the usable LLMs are limited by the hardware power of the machine. During the installation of Ollama, it automatically detects and configures the GPU of the machine accordingly.

Once Ollama is installed, use

```
ollama run <model name>
```

in the terminal to download and start a model. A screenshot is given in Fig. 12.1 as an example that runs LLaMA 3.2 with Ollama on a PC using the above command.

```
C:\Users\sunlu>ollama run llama3.2
>>> Tell me something about llama as in large language model
A Llama is a type of artificial intelligence (AI) designed to process and generate human-like language. It's a part of the Meta AI library, which aims to build conversational AI models that can understand and respond to natural language inputs.

Llama stands for "Large Language Model Meta AI," and it's a transformer-based architecture that uses self-attention mechanisms to process and analyze large amounts of text data. This allows Llama to learn patterns and relationships in language, enabling it to generate coherent and context-specific responses.

The key characteristics of Llama include:
1. **Natural Language Processing (NLP)**: Llama is designed to understand and process human language, allowing it to generate responses that are similar to those produced by humans.
2. **Transformers**: Llama uses transformer architecture, which is a type of neural network specifically designed for NLP tasks. This allows the model to process sequential data, such as text, efficiently.
3. **Self-attention mechanisms**: Llama employs self-attention mechanisms, which enable it to weigh the importance of different parts of the input text and generate responses that take into account the context.
```

FIGURE 12.1

An example of running Ollama with LLaMA 3.2.

The deployed LLM does not come with any fancy graphical interface, but instead with the basic CLI. The user has the freedom to further deploy interfaces for applications on top of the basic interface.

A list of Ollama supported LLMs are given in [21]. As of this writing, famous ones include `deepseek-r1` (1.5B to 671B), `llama3.3` (70B), `llama3.2` (1B, 3B), `gemma3` (1B to 27B), and a lot more.

12.2.2 Interaction with Locally Deployed LLM

In the previous section, we learned that Ollama can be used to conveniently deploy an open-source LLM on the local machine, and it also provides a CLI where the user can chat with the LLM. It is possible to connect a Python program to that LLM using the interface that Ollama provides.

Make sure that the model is running in the backend. Start the model and check the model status using `ollama serve` and `ollama ps` respectively.

Python program can connect to the model either via HTTP request to <http://localhost:11434/api/chat> as follows.

```
import requests

OLLAMA_API = "http://localhost:11434/api/chat"
HEADERS = {"Content-Type": "application/json"}
MODEL = "llama3.2"

messages = [
    {"role": "user", "content": "<content of the message>"}
]
payload = {
    "model": MODEL,
    "messages": messages,
    "stream": False
}
response = requests.post(OLLAMA_API, json=payload, headers=HEADERS)
print(response.json()['message']['content'])
```

Alternatively, use `ollama` package as follows.

```
import ollama

MODEL = "llama3.2"
messages = [
    {"role": "user", "content": "<content of the message>"}
]
response = ollama.chat(model=MODEL, messages=messages)
print(response['message']['content'])
```

OpenAI's Python package also provides tools to connect to local LLMs like what has been deployed via Ollama.

```
from openai import OpenAI

MODEL = "llama3.2"
messages = [
    {"role": "user", "content": "<content of the message>"}
]
ollama_via_openai = OpenAI(base_url='http://localhost:11434/v1',
                           api_key='ollama')
response = ollama_via_openai.chat.completions.create(
    model=MODEL,
    messages=messages
)
print(response.choices[0].message.content)
```

12.2.3 Naive Deployment

Ollama uses C++ to compile an LLM and deploy it on the local machine. The compiled model is easy to use and runs efficiently, but it is generally difficult to modify—such as for fine-tuning or architectural changes.

For users seeking more flexibility, it is possible to download the raw parameters of open-source LLMs and run them independently. Many such models are available from platforms like Hugging Face, allowing users to experiment with customization, fine-tuning, or integration into custom pipelines. But of course, there will be additional steps for the users to execute the models, and they are introduced in this section.

12.3 LLM Cloud Deployment

Many companies provide the user with cloud-based LLMs. These LLMs are often more powerful and robust than locally deployed ones.

12.3.1 Browser-Based Chatbot

Companies such as OpenAI, Google, Microsoft and Deepseek provide web-based chatbot interface where a user can directly chat with the model. Many of these companies also provide APIs that allow user program to connect to models running on the cloud.

12.3.2 Cloud-Service-Provider-Managed LLM Deployment

Nowadays many cloud providers including AWS, Microsoft Azure, Google Cloud Service, etc., that allow the user to deploy LLM models on their servers. For example, AWS provides Amazon Bedrock which is its frontier model that can be easily deployed on AWS. Similar applies to other major cloud service providers.

12.3.3 API-Based LLM

Many LLM service providers, such as OpenAI, allows the user to interact with their cloud-based LLMs using APIs through command lines. Notice that the API-based LLM has a completely different business model compared with the chatbot, and should be treated as different services.

If the user has decided to use a commercialized LLM model via its API key, he needs to register an account with the LLM provider, such as OpenAI, and create a new API key, and added it to the project as an environmental variable.

TABLE 12.1

OpenAI's API Calls Pricing as of this writing, in USD per 1M tokens.

| Model | Input Cost | Output Cost |
|--------------|------------|-------------|
| gpt-5 | 1.25 | 10.00 |
| gpt-5-mini | 0.25 | 2.00 |
| gpt-5-nano | 0.05 | 0.40 |
| gpt-4.1 | 2.00 | 8.00 |
| gpt-4.1-mini | 0.40 | 1.60 |
| gpt-4.1-nano | 0.10 | 0.40 |
| gpt-4o | 2.50 | 10.00 |
| gpt-4o-mini | 0.15 | 0.60 |
| o1 | 15.00 | 60.00 |
| o1-pro | 150.00 | 600.00 |

Notice that the use of the API key often introduces costs to be paid to the LLM provider. The cost depends on the model and the number of input and output tokens in a call. To give a perspective, as of this writing the cost of OpenAI's API calls are given in Table 12.1 as of this writing. Powerful models such as o1 are significantly more expansive than less powerful ones such as gpt-4o-mini. This is different from chatbot service where the user pays a fixed monthly subscription fee and get almost unlimited access to most of the models of his choice.

The details about the registration of the account and the creation of the API key are not included in this notebook.

The Python library `openai` provides a quick way to interact with its models, given that the user has a valid API key. A basic realization looks like the following. An example is given later. The “completions” API is used, which asks the LLM to complete a conversation.

```
from openai import OpenAI

api_key = '<sk-proj-...>' # put api key here

openai = OpenAI(api_key=api_key)
messages = [
    {"role": "system", "content": "<system prompt>"},
    {"role": "user", "content": "<user prompt>"}
]
response = openai.chat.completions.create(model="<model>", messages=
    messages)
```

The format of `message`, originally defined by OpenAI, has now become a convention for LLM API calls. In the message, `<system prompt>` tells LLM the basic setup, such as what role the LLM shall play and what it should do, whereas `user prompt` gives the user specific data that the LLM needs to process.

An example connecting to gpt-4o-mini is given below.

```
import os
from openai import OpenAI
from dotenv import load_dotenv

load_dotenv(override=True) # api key is loaded as an environment
                          variable

openai = OpenAI()
message = "Hello, GPT! I am connecting you via your API. Let's see how
          it works."
response = openai.chat.completions.create(model="gpt-4o-mini", messages
                                           =[{"role": "user", "content": message}])
print(response.choices[0].message.content)
```

For the above code to work, make sure that .env file exists, and environment variable OPENAI_API_KEY has been setup inside.

A response similar to the following can be obtained.

```
Hello! It's great to hear that you're connecting via the API. How can I
assist you today?
```

A typical messages that is passed to OpenAI often looks like the following

```
messages = [
    {"role": "system", "content": "<system prompt>"},
    {"role": "user", "content": "<user prompt>"},
    {"role": "assistant", "content": "<LLM historical response>"},
    {"role": "user", "content": "<user prompt>"},
    {"role": "assistant", "content": "<LLM historical response>"},
    {"role": "user", "content": "<user prompt>"}]
```

where <system prompt> tells LLM the basic setup, such as what role the LLM shall play and what it should do, whereas <user prompt> gives the user specific data that the LLM needs to process. LLM API by itself is stateless. The historical conversations need to be passed to it to retain a long conversation. In that case, **assistant** role is used to store LLM's historical responses, so that it knows which part comes from the user and which part from the historical itself.

OpenAI and other companies such as Google, Deepseek, etc., provide variety of APIs for different functions. More details are introduced in later sections.

12.3.4 Commonly Seen APIs

OpenAI GPT, Anthropic Claude and Google Gemini are used as examples. Their supported commonly used APIs are introduced below, with examples to demonstrate the syntax.

12.4 Model Fine-Tuning

Many LLM service providers such as OpenAI allows a user to fine-tune a clone of their base models using his own data. The user pays the computation resources consumed during the fine tuning, and the fine-tuned model needs to reside at the servers of the service provider. Alternatively, a user can also download open-source models from the community, such as Hugging Face, and fine-tune a model locally.

This section introduces the practices in model fine-tuning. To start, a brief review of some of the frontier models is given as of this writing.

12.4.1 A Review of Frontier Models

Models to be reviewed in this section are summarized in Table 12.2. It is also indicated in the table whether the model is propriety or open-source, whether the corresponding company provides a browser-based chatbot where the user can quickly test its performance, and whether the corresponding company provides API call services where the user can link an application to the LLM running at the company's servers.

TABLE 12.2

Frontier LLMs and their accessibility features.

| Model (Company) | Proprietary / Open-Source ¹ | Chatbot ² | API ³ |
|---------------------|--|----------------------|------------------|
| GPT (OpenAI) | P | Y | Y |
| Claude (Anthropic) | P | Y | Y |
| Gemini (Google) | P | Y | Y |
| LLaMA (Meta) | O | N | N |
| Qwen (Alibaba) | O | Y | Y |
| DeepSeek (DeepSeek) | O | Y | Y |

Note: A model may have multiple versions or variants with different accessibility features. This table reflects the latest version of each model line as of this writing.

¹ Proprietary / Open-Source: Whether the model weights are publicly released and can be deployed locally.

² Chatbot: Whether an official website hosted by the developer allows users to interact with the model. Costs may apply, even for open-source models.

³ API: Whether the developer provides official API access. Costs may apply, even for open-source models.

OpenAI's GPT model is probably the earliest and most well known LLM among the general public. It was also one of the first models to support multi-modal inputs. Today, many third-party applications developed by independent developers default to using GPT when integrating an LLM. The latest version, GPT-4o, is highly capable and performs well across a wide range of general tasks.

Claude is well regarded among data scientists and is considered one of

the most powerful LLMs on the market. Claude models are famous for their capability in mathematics, programming and logic reasoning.

Gemini is Google's flagship LLM family, designed to integrate tightly with its broader ecosystem. The latest versions of Gemini support multimodal inputs—including text, images, audio, and video—and are positioned to compete at the frontier of model capabilities.

Meta's LLaMA series is one of the most influential open-source LLM families. It is commonly used as a foundation for fine-tuned or quantized models in local deployments. Many research institutions, particularly those not training models from scratch, choose LLaMA as their base, making it one of the most popular models in academia.

Qwen is Alibaba's open-source LLM series, notable for its strong multilingual support and solid performance in both base and chat variants. It has achieved top rankings on several Chinese language benchmarks. As of this writing, Alibaba has released multiple specialized versions of Qwen for different downstream tasks.

DeepSeek models are open-source and gaining traction in both research and developer communities due to their strong performance and ease of access. Released under the permissive MIT license, DeepSeek stands out for its efficient architectural design and training strategy, enabling it to compete with top-tier models at a relatively low computational cost.

12.4.2 Proprietary Model Fine-Tuning

“nobreak

12.4.3 Open-Source Model Fine-Tuning

“nobreak

12.5 Resource Augmented Generator

13

Agentic AI

CONTENTS

| | | |
|--------|---|-----|
| 13.1 | Introduction to Agentic AI | 69 |
| 13.1.1 | Conventional Intelligent Agent | 70 |
| 13.1.2 | Agentic AI in the Context of LLM | 70 |
| 13.2 | Agentic AI Framework | 72 |
| 13.2.1 | Asynchronous Python | 73 |
| 13.2.2 | OpenAI Agents SDK | 75 |
| 13.2.3 | CrewAI | 80 |
| 13.2.4 | LangGraph | 90 |
| 13.2.5 | AutoGen | 97 |
| 13.3 | Model Context Protocol | 98 |
| 13.4 | Examples | 99 |
| 13.4.1 | Manual: Semantic Search RAG | 99 |
| 13.4.2 | OpenAI Agents SDK: Semantic Search RAG with Online Cross Check | 109 |
| 13.4.3 | CrewAI: Credit Card Bill Recorder | 115 |

Agentic AI describes a comprehensive AI system that can make decisions and perform actions for either general or specific tasks, with minimal human intervention. It is a fundamental building block of autonomous systems.

The concept of agentic AI is not new. However, in recent years it has drawn increasing attention due to the rapid advancements in LLM. LLMs provide a general-purpose language interface that makes agentic AI significantly more scalable and cost-effective. As a result, agentic AI is included as a key topic in this part of the notebook.

13.1 Introduction to Agentic AI

The term “agent” refers to an entity that acts on behalf of a human. By this definition, agentic AI refers to AI-based systems that can solve complex problems with limited human oversight. This idea predates LLMs. However,

with the rise of LLMs, the term “agentic AI” has been re-contextualized and is experiencing renewed popularity.

We explore agentic AI from two perspectives:

- Conventional intelligent agents. Classical agents developed in traditional AI literature before the rise of LLMs.
- LLM-driven agentic AI. Modern, language-enabled agents powered by large language models.

More details are given in the rest of the section.

13.1.1 Conventional Intelligent Agent

TBA

13.1.2 Agentic AI in the Context of LLM

Agentic AI in the context of LLMs refers to an autonomous system in which LLMs not only perform tasks, but also participate in decision-making and workflow orchestration. In such systems, LLMs serve both as computational units that solve sub-tasks and as the high-level orchestrator that determines how the problem should be approached.


An LLM in an agentic AI system may take on one or more of the following roles:

- Decompose the original problem into smaller sub-problems.
- Assign these sub-problems to LLM instances, either sequentially or in parallel.
- Evaluate the outputs of LLMs and either accept the results or reject them with feedback and revision instructions.
- Integrate the outputs from sub-problems into a final, coherent solution to the original problem.

In contrast, conventional LLM-integrated applications rely on humans or pre-written deterministic code to perform all of the above tasks. From this perspective, agentic AI further reduces human intervention and increases the level of automation.


A comparison is illustrated in Fig. 13.1. In the conventional architecture shown in (a), the workflow is either hard-coded or defined externally, and the LLM merely serves as a problem solver. In the agentic AI architecture shown in (b), the LLM autonomously orchestrates the task, determines the workflow, and governs the solution process.

Figure 13.1 is not the only architectural pattern for agentic AI. Another commonly used architecture is shown in Fig. 13.2. In this design, one LLM

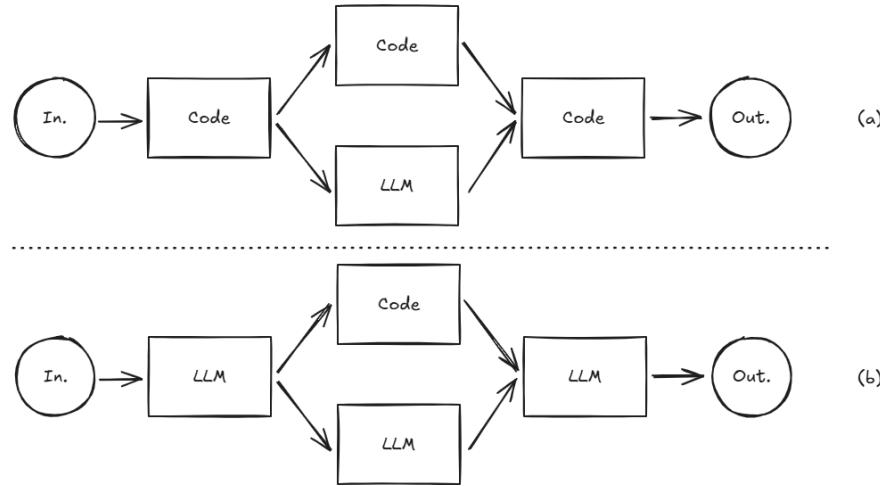**FIGURE 13.1**

Conventional architecture (a) versus agentic AI architecture (b).

generates an output while another LLM evaluates its quality, decides whether to accept or reject it, and provides revision instructions if necessary. The two LLMs collaborate in an iterative loop, refining the solution step by step. This self-evaluative architecture has been shown to significantly reduce the likelihood of low-quality or hallucinated outputs.

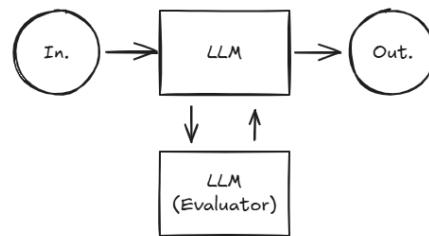**FIGURE 13.2**

Self-evaluative agentic AI architecture.

Another key feature of LLM-based agentic AI is that it does not rely solely on the internal knowledge encoded in the model. Instead, it can be configured to interact with external tools such as databases, web browsers, calculators, etc., to enhance its problem-solving capabilities. This tool-augmented reasoning is essential for tasks that require up-to-date information, precise computation, or direct interaction with external environments. It also helps with reducing hallucination. A representative architecture is given in Fig. 13.3,

where the LLM autonomously decides when to invoke an external tool and generates the appropriate commands using pre-defined protocols known as the Model Context Protocol (MCP). MCP is introduced in Section 13.3.

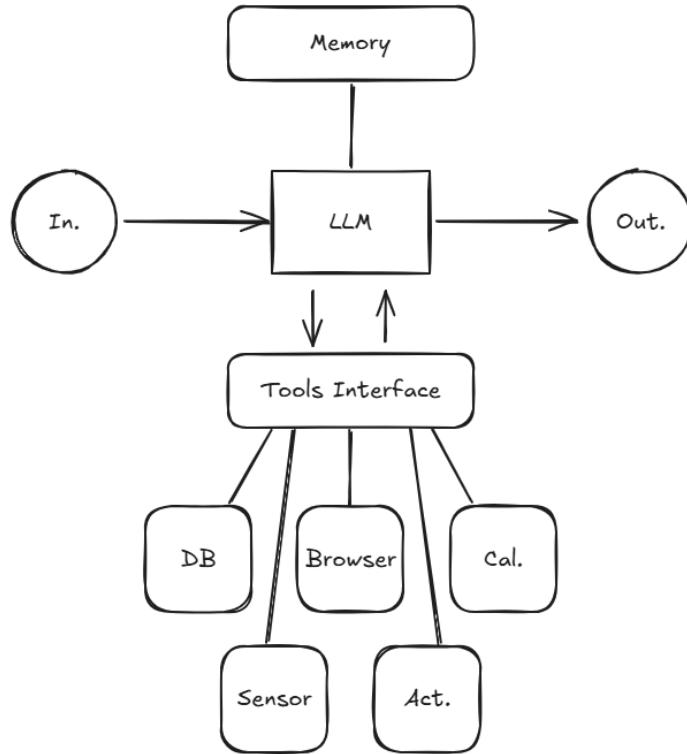


FIGURE 13.3

LLM with memory and tool interfaces to databases, web browsers, calculators, sensors and actuators, and other components that can interact with the environment.

Recall RAG which focuses on database-integrated LLMs to expand knowledge boundaries and suppress hallucinations. A fully developed agentic AI can be taken as an extension of RAG.

In addition, the LLM is equipped with a memory module, which stores historical inputs and outputs to maintain context and support long-term reasoning. This is also shown in Fig. 13.3.

13.2 Agentic AI Framework

Agentic AI can be understood as a form of LLM orchestration. The user specifies the overall task and provides a list of available tools, while the agentic AI system determines how to structure the workflow, which tools to invoke, how to prompt the LLMs, and how to evaluate their outputs.

An **agentic AI framework** refers to the infrastructure that supports the creation, configuration, and execution of such systems. It provides the necessary abstractions and utilities that allow users to define and deploy agentic AI pipelines more easily. While it is always possible to manually coordinate LLMs, prompts, and tool calls, using a mature agentic AI framework significantly simplifies the process of building scalable, multi-agent, or tool-augmented systems. In this sense, an agentic AI framework plays a role analogous to that of Kubernetes in the context of containerized applications. It abstracts away low-level orchestration logic and enables the declarative specification and runtime management of complex, distributed components.

On one hand, agentic AI frameworks simplify the deployment of LLM applications, but on the other hand they add additional layers of abstraction and prompts, thus making the system behavior less controllable and sometimes more difficult to debug. The user should choose whether to use agentic AI frameworks wisely based on the need.

Common examples of agentic AI frameworks include the OpenAI Agents SDK, CrewAI, LangGraph, AutoGen, and many more. Details are introduced in later sections.

13.2.1 Asynchronous Python

Before introducing different agentic AI frameworks, it is worth reviewing asynchronous Python programming, as it is widely used across many agentic AI platforms.

Asynchronous programming (often abbreviated as `async` programming) is a well-established concept that predates agentic AI. In a nutshell, it creates a “multi-thread-like” framework where functions do not necessarily run in the order they are defined, but instead follow a “first-ready, first-served” execution model. In the context of `async` Python programming, an event loop switches between tasks whenever one is waiting (typically due to I/O). It is multi-thread-like in behavior, but there is no true CPU-level parallelism and no true multithreading. By itself, `asyncio` runs on a single thread and a single CPU core; true CPU-bound parallelism requires multiprocessing or native threads.

Even before the emergence of agentic AI frameworks, `async` programming had already proven valuable in many applications, such as web servers handling HTTP requests or user interfaces monitoring human actions on dashboards. By using `async` programming, an application does not need to freeze

while a task is waiting for inputs—usually from a user or over the internet—and can continue executing other tasks in the meantime.

The `asyncio` library is the standard Python library for writing concurrent code using the `async/await` syntax, and many other async libraries are built on top of it. A detailed introduction to `asyncio` can be found at [22]. A brief review of the basic syntax is given below.

The basic syntax to define and run a Python **coroutine function** is as follows:

```
import asyncio

async def <coroutine_function_name>(input) -> output:
    <do something; can contain nested coroutines>
    [return <something>]

[result = ]asyncio.run(<coroutine_function_name>(input))
```

Here, `async def` defines a coroutine function, and calling it returns a coroutine object. The function `asyncio.run()` runs the given coroutine object as the main entry point of the program. It creates and manages the event loop, runs the coroutine until it is complete, and then closes the loop. This approach is particularly useful when multiple coroutines are executed inside the main coroutine.

Calling a coroutine function directly, as in the example below, does not run it immediately; instead, it returns a coroutine object:

```
[<coroutine_object> = ]<coroutine_function_name>(input) # does not
execute
```

In this case, the result is a coroutine object rather than the calculation's output. This coroutine object can then be scheduled and executed as follows:

```
[result = ]asyncio.run(<coroutine_object>)
```

When executing a coroutine object like this, there is no need to pass its input arguments again. A coroutine object can be awaited only once.

Another way to execute a coroutine is with the `await` expression:

```
[result = ]await <coroutine_function_name>(input)
```

However, this syntax can only be used inside another coroutine. It cannot be used at the top level, because `await` requires an already running event loop. What it does is suspend the current coroutine until the awaited coroutine completes, allowing the event loop to run other tasks in the meantime.

The `asyncio.gather()` function is another way to schedule multiple coroutines concurrently on the same event loop. For example:

```
x = await cx()
y = await cy()

x, y = await asyncio.gather(
```

```
    cx(),
    cy()
)
```

In the first approach, `cx` and `cy` are executed sequentially. If `cx` is delayed due to I/O, `cy` must wait until `cx` finishes. During this time, the event loop may run other ready-to-execute tasks. In the second approach, `cx` and `cy` are scheduled concurrently. While `cx` is waiting for inputs, `cy` can still execute. If both are waiting, `asyncio.gather` pauses, and the event loop switches to other tasks.

The same principle applies to the entire event loop. If the whole event loop is paused (its ready queue is empty), it uses the OS-level selector to wait for I/O readiness, and the operating system schedules other work until new events are ready.

13.2.2 OpenAI Agents SDK

The OpenAI Agents SDK simplifies the deployment of an agentic AI system without sacrificing flexibility. In fact, it enables more versatile agentic AI pipelines, such as chaining multiple AI agents using handoffs and nesting AI agents within tools-capabilities that would be almost impossible to implement manually due to the complexity of such systems.

The OpenAI Agents SDK offers at least the following features:

- Simplified deployment of a single AI agent or tool.

For example, when defining a tool manually, the user must create a detailed “user manual” in JSON object format and pass it to the LLM. This JSON must include the tool’s name, description, and input arguments with their types—carefully specified to ensure correct behavior. With the OpenAI Agents SDK, the user can simply add a decorator to a Python function to turn it into a tool, without needing to write a separate descriptive JSON object.

- Easy conversion of AI agents into tools.

A single-line command can convert an AI agent into a tool, enabling nested structures. This significantly increases the capabilities of higher-level AI agents that use these tools.

- Chaining AI agents using handoffs.

Information processed by an upstream AI agent can be passed to a downstream agent easily via **handoffs**, a mechanism for explicitly transferring control and data between agents during execution. The upstream agent decides when and where to pass the data. This allows true cooperation between AI agents and enables highly flexible agentic AI pipelines.

Figure 13.4 illustrates the key features of the OpenAI Agents SDK compared with a manual implementation. As shown, in the SDK-based pipeline, an

AI agent can be converted into a tool and respond to tool calls (red arrows). Multiple AI agents can also be chained to form an upstream-downstream pipeline via handoffs (blue arrows). When an AI agent has multiple possible downstream agents, it can decide at runtime which one to hand over data and control to.

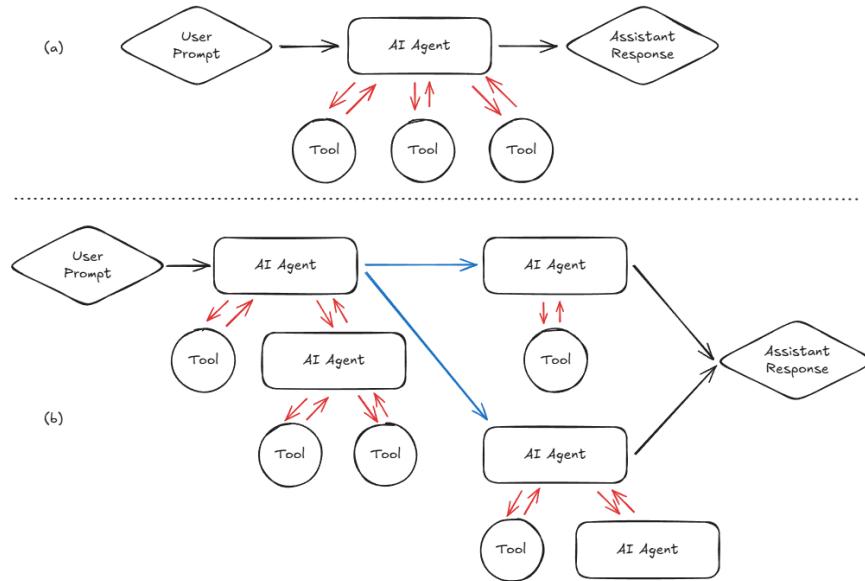


FIGURE 13.4

Manually implemented (a) versus OpenAI Agents SDK-based (b) agentic AI pipelines. Red arrows represent tool calls, and blue arrows represent handoffs.

The basic syntax of creating an OpenAI Agents SDK framework based agentic AI system is introduced in the rest of this section. All code examples are assumed to be executed in an environment with a running event loop. One can assume a wrapper as follows. Note that OPENAI_API_KEY is also assumed to be loaded as an environment variable.

```
import asyncio
from dotenv import load_dotenv

async def main():
    load_dotenv(override=True)

    <the code to be introduced>

if __name__ == "__main__":
    asyncio.run(main())
```

Agent

The following example demonstrates how to create an agent with a system prompt and a user prompt.

```
from agents import Agent, Runner, trace, function_tool

system_prompt = "<system prompt>"

agent_instance = Agent(
    name=<agent name>,
    instructions=system_prompt,
    model=<model>"
)
response = Runner.run(<agent name>, "<user prompt>")
output = response.final_output
```

The following code is useful when running multiple agents concurrently:

```
with trace("<trace name>"):
    results = await asyncio.gather(
        Runner.run(<agent name 1>, "user prompt 1"),
        Runner.run(<agent name 2>, "user prompt 2"),
        Runner.run(<agent name 3>, "user prompt 3"),
    )
outputs = [result.final_output for result in results]
```

The call to `await asyncio.gather()` works here because an event loop wrapper is already assumed. The function `asyncio.gather()` schedules all provided coroutines to run concurrently. Notice that the results will be returned in the same order as the input arguments regardless of which coroutine completes first.

The `trace()` context manager allows the user to monitor all LLM-related calls made to OpenAI, and these traces can be viewed on the OpenAI dashboard.

Tool

There are at least two ways to define a tool for an agent, as shown below.

```
@function_tool
def <tool 1>(<input 1>: <input type 1>, <input 2>: <input type 2>, ...):
    :
    """<description>"""
    <do something>
    return {"status": "success", <other returns>}

<tool 2> = <low tier agent name>.as_tool(
    tool_name=<tool name>,
    tool_description="tool description"
)
```

```

tools = [<tool 1>, <tool 2>]

agent = Agent(
    name=<high tier agent name>,
    instructions=<system prompt>",
    tools=tools,
    model=<model>
)

```

The first method uses the `@function_tool` decorator and is intended for precise tools such as calculators or database query functions. It requires an explicit list of typed input arguments and returns well-defined, structured results.

The second method uses another low-tier agent as a smart tool via `as_tool`. The input to this tool is simply a string, which is treated as the user prompt for the low-tier agent. This creates a nested structure. The low-tier agent can call its own precise or smart tools, enabling more flexible and modular agentic AI pipelines.

Handoff

Handoffs are used to transfer data between agents. In this context, a handoff allows data generated (as well as the entire context to generate the content) by an upstream agent to be passed to a downstream agent. Downstream agents are registered as available handoffs, and the upstream agent can decide when and where to pass the data.

For a downstream agent, use `handoff_description` as a “self introduction” which will be presented to the upstream agent. An example is shown below:

```

downstream_agent = Agent(
    name=<name>",
    instructions=<instructions>",
    tools=[<tool 1>, <tool 2>, ...],
    model=<model>",
    handoff_description=<handoff description>
)

```

List all available downstream agents and provide this list to an upstream agent. The upstream agent can then decide at runtime when to pass data and which downstream agent to use.

```

handoffs = [<downstream_agent 1>, <downstream_agent 2>, ...]
upstream_agent = Agent(
    name=<name>",
    instructions=<instructions>",
    tools=[<tool 1>, <tool 2>, ...],
    model=<model>",
    handoffs=handoffs
)

```

```
)
```

It is recommended to include clear instructions in the `instructions` (system prompt) of the upstream agent on how and when to use the downstream agents.

Run the upstream agent, and it will automatically trigger the downstream agents if, based on its instructions and reasoning, it decides to do so. The return value will be the final result of the entire pipeline. Note that handoffs do not force an upstream agent to pass data. It is possible for the upstream agent to return its response directly to the user, completely bypassing the downstream pipeline. In this sense, an upstream agent determines the execution path of the pipeline from itself onward.

Guardrail

It is recommended to double-check both the initial user input and the final output of an agentic AI system to ensure that the input meets the required criteria or contains the necessary information, and that the output does not include harmful content.

There are several ways to achieve this. For example, OpenAI provides a moderation API that checks whether a piece of multimodal content contains material related to sexual content, hate, self-harm, and other restricted categories. More about this API will be introduced later in this section, and it will be tested in the project examples.

Within the OpenAI Agents SDK, guardrails can be implemented by defining dedicated AI agents to check the input and output of the agentic AI system according to customized requirements. Such guardrail agents return a boolean flag indicating whether the guardrail was triggered, along with details about what content caused the trigger. If a guardrail is triggered, it will raise an exception.

The following syntax demonstrates the minimum implementation of a guardrail. It involves the following steps.

1. Define a class to hold the return value of the guardrail agent.
2. Define the guardrail agent itself.
3. Define a coroutine function, decorated with `@input_guardrail` or `@output_guardrail`, that triggers the guardrail agent.

```
from pydantic import BaseModel
from openai_agents import Agent, Runner, input_guardrail,
    output_guardrail, GuardrailFunctionOutput

class <guardrail return class>(BaseModel):
    <is_triggered>: bool
    <reason or content>: str
```

```

guardrail_agent = Agent(
    name=<guardrail check agent name>,
    instructions=<instructions, often the things to check>,
    output_type=<guardrail return class>,
)

@output_guardrail
async def <guardrail coroutine name>(ctx: RunContextWrapper, agent:
    Agent, output: MessageOutput) -> GuardrailFunctionOutput:
    result = await Runner.run(guardrail_agent, output.response,
        context=ctx.context)
    return GuardrailFunctionOutput(output_info=result.final_output,
        tripwire_triggered=result.final_output.<is_triggered>)

```

When defining an agent in the pipeline, include the above coroutine function as a guardrail:

```

agent = Agent(
    name="Customer support agent",
    instructions=<instructions>,
    output_guardrails=[<guardrail coroutine name>],
)

```

The above example defines an output guardrail. An input guardrail can be defined in a similar way.

Notice that in OpenAI Agents SDK, `input_guardrails` only run when attached to the *first* agent in a chain (on the initial user input), and `output_guardrails` only run when attached to the *last* agent (on the final agent output). Guardrails attached to intermediate agents do not trigger.

Recall that OpenAI provides moderate API to check whether a content contains harmful information. It can be used as the output guardrail as follows.

```

@output_guardrail
async def moderation_guardrail(ctx, agent: Agent, message):
    response = client.moderations.create(
        model="omni-moderation-latest",
        input=message.response
    )
    flagged = response.results[0].flagged
    return GuardrailFunctionOutput(output_info=response.results[0],
        tripwire_triggered=flagged)

```

An example using OpenAI Agents ADK is given in Section 13.4.2.

13.2.3 CrewAI

CrewAI is not just a framework but also a company and an ecosystem. Depending on the context, CrewAI can refer to the following:

- A company that develops and provides agentic AI solutions.

- A platform offered by CrewAI to deploy agentic AI systems on the cloud.
- An application with a graphical interface that allows users to design and deploy agentic AI pipelines with minimal coding.
- An open-source agentic AI framework.

In this notebook, we will focus on the CrewAI framework.

Recall the OpenAI Agents SDK introduced in Section 13.2.2 and Fig. 13.4, where the user defines agents, tools, and handoffs, and links them together, while the agents decide which tools and handoffs to use. The CrewAI framework follows a very different philosophy. A “Crew” in this context is a team (e.g., engineering, data science, or marketing), where each AI agent acts as an employee. A job is assigned to the team, with specified context, inputs, and outputs. The user plays the role of a “hiring manager”, defining the roles and characteristics of each AI agent, the context and goals of each task, and assembling the team from scratch. Once all agents and tasks are defined, the team completes the job. This is demonstrated by Fig. 13.5. Notice that a “manager” agent can be assigned to a crew to determine the pipeline flow.

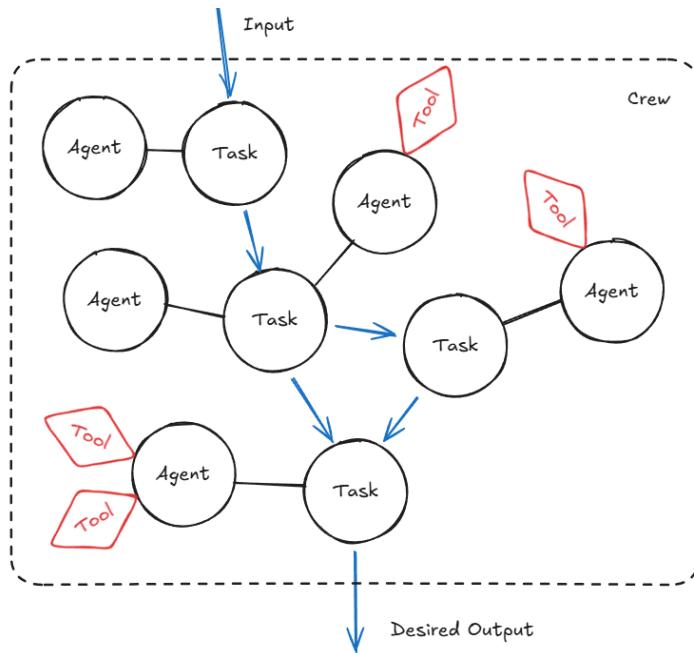


FIGURE 13.5

CrewAI framework pipeline, where the user defines agents, tasks and their associations and the crew get things done automatically.

In this sense, while the OpenAI Agents SDK requires the user to micro-manage pipeline details, CrewAI emphasizes macro-management by defining

context, inputs and outputs, and assigning agents to tasks. The OpenAI Agents SDK is more flexible and feel more under control, but when a job aligns well with CrewAI's philosophy, implementing it in CrewAI is often much easier. Another interpretation is that CrewAI can be used to build up complicated applications in an easier manner, but it may lack precision.

CrewAI Installation as a UV Tool

CrewAI provides both Python libraries and CLI tools. It is recommended to install both when working with CrewAI. The CLI tool simplifies project setup by generating a directory tree with template Python scripts that can be adapted for specific applications. Manually creating such a structure from scratch would be tedious.

To install or update CrewAI as a tool with uv, use:

```
uv tool install crewai
uv tool install crewai --upgrade
```

Once CrewAI is installed, a new project can be created with:

```
crewai create crew <project_name>
```

This command generates a project root folder containing a hello-world-style template. During creation, the user is prompted to select a default LLM service provider and model, and to provide an API key. These choices are used in generating the template but can be modified later.

An example of the template directory structure is shown below [6]:

```
my_project/
|-- .gitignore
|-- knowledge/
|-- pyproject.toml
|-- README.md
|-- tests/
|-- .env
\-- src/
  \-- my_project/
    |-- __init__.py
    |-- main.py
    |-- crew.py
    |-- tools/
      | \-- custom_tool.py
      | \-- __init__.py
    \-- config/
      |-- agents.yaml
      \-- tasks.yaml
```

Agents and Tasks Definition

In the project template, `agents.yaml` and `tasks.yaml` are configuration files that specify the properties of agents and tasks. An agent refers to an LLM

with defined capabilities and tools, while a task represents a workflow step with input, desired output, and context. These configuration files may include prompts, parameters, and other metadata that shape the agent's behavior and the execution of tasks.

For example, in a document-refinement workflow, the agent might be a “publication editor,” and the task could be “correct-grammar-error.” The input would be text containing grammatical mistakes, and the output would be error-free text that preserves the original meaning with minimal changes.

Below is an example of `agents.yaml` created during project initialization:

```
researcher:
  role: >
    {topic} Senior Data Researcher
  goal: >
    Uncover cutting-edge developments in {topic}
  backstory: >
    You're a seasoned researcher with a knack for uncovering the latest
    developments in {topic}. Known for your ability to find the
    most relevant information and present it in a clear and concise
    manner.

reporting_analyst:
  role: >
    {topic} Reporting Analyst
  goal: >
    Create detailed reports based on {topic} data analysis and research
    findings
  backstory: >
    You're a meticulous analyst with a keen eye for detail. You're
    known for your ability to turn complex data into clear and
    concise reports, making it easy for others to understand and
    act on the information you provide.
```

Here, two agents, “researcher” and “reporting analyst,” are defined. Each agent has three key components: `role`, `goal`, and `backstory`. Together, these specify the agent’s intended capabilities and behavior. The symbol `>` in YAML indicates a folded block scalar, meaning that multi-line text is treated as a single string with line breaks converted to spaces. The placeholder `{topic}` in the example will be filled dynamically by the higher-level script.

In addition to the compulsory `role`, `goal`, and `backstory` fields, other optional fields may be included. A commonly used one is `llm`, which lets the user specify an LLM model other than the default. For example:

```
<agent_name>:
  role: <something>
  goal: <something>
  backstory: <something>
  llm: openai/gpt-5-mini
```

A full list of allowed fields can be found at [7], including tools, delegation, maximum iteration count, rate limits, and others.

Below is an example of `tasks.yaml` created during project initialization:

```
research_task:
  description: >
    Conduct thorough research about {topic}. Make sure you find any
    interesting and relevant information given the current year is
    {current_year}.
  expected_output: >
    A list with 10 bullet points of the most relevant information about
    {topic}
  agent: researcher

reporting_task:
  description: >
    Review the context you got and expand each topic into a full
    section for a report. Make sure the report is detailed and
    contains all relevant information.
  expected_output: >
    A fully fledged report with the main topics, each with a full
    section of information. Formatted as markdown without '``',
  agent: reporting_analyst
```

Here, two tasks are defined, each assigned to an agent. The user provides a description and expected output for each task. In addition to `description` and `expected_output`, other optional fields can also be specified. A full list can be found at [9], including settings that limit the tools available for a task, enforce output formats, and define guardrails.

Crew Definition

A crew is an integration of agents and tasks defined in the YAML files. The configuration files define the “class” of different types of agents and tasks, while the crew Python script reads these configurations and instantiates them. An example is given below. Notice that different decorators are used.

```
from crewai import Agent, Crew, Task
from crewai.project import CrewBase, agent, crew, task
from crewai.agents.agent_builder.base_agent import BaseAgent
from typing import List

@CrewBase
class <crew class name>():
    """<description of the crew>"""

    agents: List[BaseAgent]
    tasks: List[Task]

    @agent
```

```

def researcher(self) -> Agent:
    return Agent(
        config=self.agents_config['researcher'],
        verbose=True
    )

@agent
def reporting_analyst(self) -> Agent:
    return Agent(
        config=self.agents_config['reporting_analyst'],
        verbose=True
    )

@task
def research_task(self) -> Task:
    return Task(
        config=self.tasks_config['research_task'],
    )

@task
def reporting_task(self) -> Task:
    return Task(
        config=self.tasks_config['reporting_task'],
        output_file='report.md'
    )

@crew
def crew(self) -> Crew:
    """<description>"""
    return Crew(
        agents=self.agents,
        tasks=self.tasks,
        process=Process.sequential,
        verbose=True,
    )

```

When using the `agent` and `task` decorators, the defined components are automatically added to the `self.agents` and `self.tasks` lists in their defined order. Notice that in this example `Process.sequential` is used. In this case, the sequence of tasks in `self.tasks` matters, as this will be the task pipeline of the crew. In this sense, the user defines the pipeline.

It is possible to assign a **manager agent** to supervise the crew and ensure the quality of generations. In this setup, the manager oversees the behavior of each agent and task, and can determine the crew's execution flow. A manager agent can be assigned in the `@crew` definition as follows:

```

@crew
def crew(self) -> Crew:
    """<description>"""

```

```

manager = Agent(
    config=self.agents_config['manager'],
    allow_delegation=True
)

return Crew(
    agents=self.agents,
    tasks=self.tasks,
    process=Process.hierarchical,
    verbose=True,
    manager_agent=manager,
)

```

Here, a manager is defined, assuming its role description is provided in the `agents` configuration file. It is then assigned to the crew via a `manager_agent`. The process is changed from `Process.sequential` to `Process.hierarchical`, allowing the manager to supervise the crew above other agents. The manager can dynamically re-order, route, or request follow-ups across tasks and agents. In hierarchical mode, the pipeline is determined not by the sequence of task definitions but by the manager agent.

It is also possible to assign an LLM model directly as the manager without creating an agent instance or defining it in the `agents` configuration file. However, it has been reported that a properly defined manager agent may outperform a bare model assignment.

It is possible to enforce structured output for a task. This can be done in a manner similar to the OpenAI Agents SDK. A Pydantic model inheriting from `BaseModel` is defined with the desired output structure. An example is shown below:

```

class <ModelName>(BaseModel):
    """ <description> """
    <field>: <type> = Field(description="<description>")
    <field>: <type> = Field(description="<description>")
    <field>: <type> = Field(description="<description>")

```

When defining a task, the model is specified via the `output_pydantic` argument:

```

@task
def <task_name>(self) -> Task:
    return Task(
        config=self.tasks_config['<task name in configuration>'],
        output_pydantic=<ModelName>,
    )

```

Notice that Pydantic models can be nested. For example, one can define a model with a field that is a list of another Pydantic model.

It is not required but can become helpful sometimes to also remind CrewAI of the required structured output in the configuration files for tasks and agents.

Execution

Finally, the crew can be executed as follows:

```
def run():
    """
    Run the crew.
    """
    inputs = {
        'topic': 'AI LLMs',
        'current_year': str(datetime.now().year)
    }

    try:
        DocumentRefiner().crew().kickoff(inputs=inputs)
    except Exception as e:
        raise Exception(f"An error occurred while running the crew: {e}")

if __name__ == "__main__":
    run()
```

The above summarizes the basic usage of the CrewAI framework. More advanced materials are introduced in the following sections.

Tool

Tools are one of the most important features of an agentic AI system, as they significantly extend its capabilities. Recall that the OpenAI Agents SDK provides several ways for a user to define tools, including at least the following:

- Using tools from a library, for example, `WebSearchTool` provided by OpenAI, which allows an LLM to query information from the web.
- Defining a custom function tool with the `@function_tool` decorator.
- Supplying a JSON-formatted descriptive tool.
- Using an agent as a tool.

CrewAI likewise provides multiple methods for calling tools from libraries or defining customized tools. More details are given below.

User defined tools need to be saved under the folder `tools` as a function. An example is given below.

```
@tool("<tool name>")
def <tool function name>(<input>) -> str:
    <do something>
    ...
    try:
        <do something>
        return "Tool executed successfully"
    except Exception as e:
        return f"An error occurred: {e}"
```

In the `crew.py` file, import tools as follows.

```
from crewai_tools import <tool function name> # official tool
from <project name>.tools.<tool file name> import <tool function name>
    # user-defined tool
```

When defining an agent, assign tools to it as follows.

```
@agent
def <agent name>(self) -> Agent:
    return Agent(
        config=self.agents_config['<agent name>'],
        tools=[<tool function name>, <tool function name>],
        verbose=True,
        allow_delegation=True
    )
```

Do not forget to introduce the tool to the agent in `agents.yaml`. When introducing the tool, use `<tool name>` in the decorator.

Memory

LLMs are inherently stateless. In an LLM-based chatbot application, the conversation between the user and the model is typically stored and then reused as context whenever the LLM is triggered. Conventionally, the conversation is saved in a JSON file, for example `history.json`, which may look like:

```
[{"role": "user", "message": "<something>"}, {"role": "assistant", "message": "<something>"}, ...]
```

When the conversation history grows long, feeding the entire record to the LLM for every call is problematic for at least the following reasons.

- Much of the historical dialogue may be irrelevant to the current query, making it wasteful to process.
- The total token count of the history may exceed the LLM's input limit.

This naturally motivates several strategies as follows.

- Query only for relevant past information before sending it as context to the LLM, rather than including the full history.
- Periodically prune older conversations, as they tend to become less relevant over time.
- Selectively preserve information likely to be useful in the future by tagging it so that it is not removed.

These ideas form the foundation of memory management in CrewAI.

As an agentic AI framework, CrewAI involves multiple LLM agents. Memory is managed at the agent level, the task level and the crew level, and memory sharing across agents can be enabled if desired. CrewAI defines several memory types, such as short-term memory, long-term memory, and entity memory, and each can be activated independently. When a memory type is enabled, CrewAI automatically promotes selected conversations into that memory category. Unlike conventional conversation logs stored solely in JSON format, CrewAI combines JSON (for raw text), embedded vectors (for semantic retrieval), and SQLite (for efficient tagging and metadata queries) to store memory. The storage medium depends on the memory type.

The commonly used memory types and their features are introduced below.

Short-term memory. Short-term memory stores the recent inputs and outputs of an AI agent using embedded vectors. It relies on ChromaDB [5], an open-source, file-based embedding database.

Long-term memory. Long-term memory stores important task results that can be reused across sessions. Both ChromaDB and SQLite are employed for this purpose.

Entity memory. Entity memory tracks entities such as names, places, and concepts. It also uses ChromaDB for storage.

The above three memory types are collectively referred to as the basic memory system, and they can be enabled by:

```
crew = Crew(
    agents=[...],
    tasks=[...],
    process=Process.sequential,
    memory=True, # Enables short-term, long-term, and entity memory
    verbose=True
)
```

The user can choose the storage location and the vector embedding tool. If not specified, a default location inside the project folder is used, and the OpenAI embedding API is applied. The behavior of the embedding tool can also be configured. More details are given at [8].

Once memory is properly enabled, the overall performance of the agentic system is improved. In general, it becomes more efficient, potentially cheaper—since semantic search is used instead of retrieving the entire chat history as context—and it remembers important concepts more accurately and consistently. Applications benefit from these improvements naturally, without needing to manage the internal details of the memory system.

Coder Agent

On a machine where containerization tools are installed, an agent can trigger the execution of a code that it generates, and it refines the code based on the error message or output or several times. This improves the stability and performance of a coder agent.

The user is able to setup maximum trail number and maximum waiting time for the trail code execution.

13.2.4 LangGraph

It is worth mentioning the differences between LangChain and LangGraph. They are two distinct products from the same company, LangChain. A brief explanation is given below.

LangChain is an open-source, composable framework that provides a standard interface for LLM models and APIs to databases and a variety of tools [13]. Suppose that an agentic AI system with multiple components has been defined. If LangChain is used to connect and integrate these components, the user can switch underlying models (for example, from OpenAI to Anthropic) and tools (for example, from MySQL to PostgreSQL) with relatively little code change. This greatly enhances the portability and robustness of the agentic AI solution.

LangGraph, on the other hand, is an agentic AI framework, broadly comparable to the OpenAI Agents SDK and CrewAI. It focuses on coordinating AI agents and reliably handling complex tasks by representing applications as stateful graphs [14]. It is sufficient to use only LangChain to build an LLM application with deterministic pipeline. LangGraph, on the other hand, can be taken as an abstraction layer built on top of LangChain that provides orchestration intelligence, enriching the system with agentic AI capability.

This section focuses on LangGraph, the agentic AI framework. Technologies offered by LangChain will also be introduced and used. After all, LangGraph uses LangChain under the hood.

Install LangGraph as a Python package as follows.

```
uv pip install -U langgraph
```

LangGraph introduces the concepts of states, nodes and edges to visualize the workflow as a graph. A **LangGraph state** represents a snapshot of the application. The state is immutable, meaning that each update of any kind creates a new state derived from the old one. In this way, LangGraph maintains a full history of the system status and supports time-travel debugging and replay. A **LangGraph node** typically represents an atomic unit of computation, such as a function, tool, or an agent call. It receives the current state as input and produces a new state derived from it, with some data processed. Finally, a **LangGraph edge** represents a directed route that connects nodes, thereby defining the pipeline of the data flow.

An example is given in Fig. 13.6 to demonstrate the concept of nodes and edges. In the figure, apart from the start and end nodes, two nodes are defined, namely the LLM chatbot node and the tool node, likely for resource augmentation. The arrows are edges, where the solid arrows represent deterministic paths, and the dashed arrows, conditional paths. When the LLM chatbot node decides to use a tool call, tool node is executed. The result is returned to

the LLM chatbot node. This process is iteratively carried out until the LLM node decides to proceed without tool calls. Along the edges, states are passed from one node to the other.

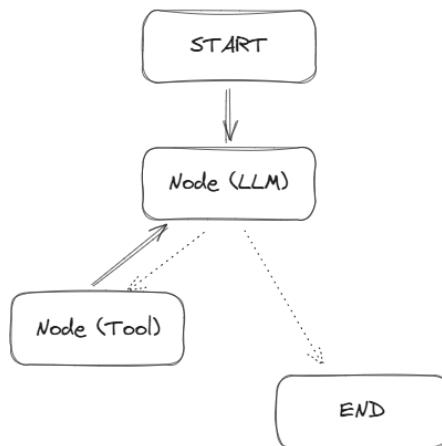


FIGURE 13.6

A simple demonstration of LangGraph with one LLM and one tool.

The following steps are typically required to define a LangGraph-based application.

- Define the state class, often in the form of a Python dataclass or Pydantic model.
- Create a state graph builder with the defined state class.
- Create nodes and add nodes to the graph builder.
- Create edges and add edges to the graph builder.
- Compile the graph builder to obtain the graph.
- Invoke the graph with the initial state.

Detailed introduction is given below.

State Definition

As explained earlier, the state class is essentially a data structure, such as a Pydantic model or a `TypedDict`. The following is an example from the official documentation.

```

from typing import Annotated
from typing_extensions import TypedDict
from operator import add
  
```

```
class State(TypedDict):
    foo: int
    bar: Annotated[list[str], add]
```

Here, `TypedDict` is used as the basis of the state class. Pydantic `BaseModel` is also supported, but it is generally less performant than `TypedDict` [15]. In the rest of this chapter, `TypedDict` will be used for LangGraph.

It is worth mentioning the **reducer function**, which can be defined in a state. As noted earlier, a node creates and outputs a new state based on the existing state it receives as input. By default, a node may overwrite fields in the new state with fresh values, discarding the previous contents of those fields. This does not affect the connectivity of the graph itself, but it may result in the loss of useful historical information.

A reducer function provides a mechanism to preserve such information. If a field in the state is associated with a reducer function, the node must update the field through that function. The reducer function specifies how new values should be merged with existing ones, ensuring that past information is retained. For example, a common reducer function appends new values to a list so that all historical entries for the field are preserved.

There are different ways to define a reducer, one of which is through `Annotated`. **Python Annotated** allows the programmer to attach metadata to a variable, often specifying its data type and usage. In the example above, `add` from the `operator` library is used as the annotation. This reducer function specifies how `bar` should be updated. In this case, new values should be concatenated to the list.

LangGraph provides commonly used state classes and reducer functions that can be imported and used directly, many of which in `langgraph.graph`.

Once the state is defined, a **state graph builder** can be declared as follows. All the nodes and edges what will be added to this graph later will use the defined state in the data pipeline.

```
class State(TypedDict):
    <defined earlier>

from langgraph.graph import StateGraph

builder = StateGraph(State)
```

Node Definition

A node is a function that consumes the current state and produces a new state. For example, assume the state is defined as follows.

```
from typing import Annotated
from typing_extensions import TypedDict
from operator import add
```

```
class State(TypedDict):
    foo: int
    bar: Annotated[list[str], add]

from langgraph.graph import StateGraph
builder = StateGraph(State)
```

A node can then be defined as:

```
def update_state(state: State) -> State:
    return {
        "foo": state["foo"] + 1,
        "bar": ["new item"] # appears as an overwrite
    }
```

In this example, the node outputs a dictionary. The update to the `bar` field appears to be an overwrite. However, since a reducer is defined for `bar`, Lang-Graph intercepts the update and applies the reducer instead, resulting in concatenation of the old and new values.

The node can be added to the graph as follows. The function name is passed directly into the `add_node` method without requiring an additional decorator:

```
<builder name>.add_node("<node name>", <node function name>)
```

For the earlier example:

```
builder.add_node("first_node", update_state)
```

In practice, a node may contain an LLM call. An example is shown below:

```
from langgraph.graph.message import add_messages

class State(TypedDict):
    messages: Annotated[list[str], add_messages]

from langchain_openai import ChatOpenAI

llm = ChatOpenAI(model="<model name>")

def update_state(state: State) -> State:
    response = llm.invoke(state["messages"])
    new_state = {
        "messages": [response]
    }
    return new_state
```

Edge (and Handoff) Definition

Edges can be either deterministic or optional.

To add a deterministic edge that connects two nodes, use:

```
<builder name>.add_edge("<upstream node name>", "<downstream node name>")
```

In the earlier example, the following edges can be added:

```
from langgraph.graph import START, END

<builder name>.add_edge(START, "first_node")
<builder name>.add_edge("first_node", END)
```

Here, START and END represent the default entry and exit points of the graph.

For optional edges, a routing function is used to decide which edge to select.

```
<builder name>.add_conditional_edges("<upstream node>", <routing
    function>)
```

where the return of the routing function needs to be a string of the name of the desired downstream node. Boolean routing function can be used as well, in which case the syntax is given below.

```
<builder name>.add_conditional_edges("<upstream node>", <routing
    boolean function>, {True: "<downstream node 1>", False: "<
    downstream node 2>"})
```

Graph Compiling and Invoking

Once all nodes and edges have been added, the graph must be compiled before it can be executed:

```
<graph name> = <builder name>.compile()
```

After compilation, the graph can be visualized as a Mermaid diagram in a Jupyter notebook:

```
from IPython.display import Image, display

display(Image(<graph name>.get_graph().draw_mermaid_png()))
```

To invoke a graph once with an initial state, use the following. This will trigger a **super step** which is the execution of the whole graph.

```
<graph name>.invoke(<initial state>)
```

It is also possible to run a invoke a graph in asynchronous mode as follows.

```
<graph name>.ainvoke(<initial state>)
```

Alternatively, the graph can be executed step by step using `.stream()`, which yields intermediate states and outputs at each stage of the execution.

Does LangGraph necessarily involve LLM?

No. LangGraph and LangChain can be used to develop applications that have nothing to do with LLMs. Data processing is handled by the

nodes. Technically, it is possible to build an application in which all nodes perform conventional computations without involving any LLM.

In an LLM-based application, the state class often contains text, and LLMs are introduced in the nodes to process that text.

Note that memory are not automatically synchronized between different super steps. As a result, the user must either use a global parameter to save the chat history and supply it as the initial state for each super step, or persist the information in a database and let the node retrieve it via tools.

Tool

LangGraph allows packaging a function into a tool conveniently. First, define the function you want to package. Then wrap the function with `Tool`. A simple example is shown below:

```
def <function name>(input) -> <output type>:
    <do something>
    return <output>

from langchain.agents import Tool
<tool> = Tool(
    name=<tool name>,
    func=<function name>,
    description=<description>
)
```

To test the tool, use

```
result = <tool>.invoke(<input>)
```

which should directly triggers the function defined in the tool.

To run a tool in AI agents, use either

```
result = <tool>.run(<input>)
```

or

```
result = await <tool>.arun(<input>)
```

to execute it in synchronous or asynchronous mode respectively.

The LangChain community provides a variety of tools out of the box. An example is shown below:

```
from langchain_community.utilities import GoogleSerperAPIWrapper

serper = GoogleSerperAPIWrapper()

tool_search = Tool(
    name="tool_search",
    func=serper.run, # serper.run() triggers the function
    description="useful for making online queries for additional
                information"
)
```

Recall that a node is essentially a user-defined function. To use tools in a node, simply call the tool functions within the node's source code.

In an agentic AI application, a node is often an LLM, and it decides what tools to trigger in a dynamic manner. In this case, consider binding the tools to the LLM as follows.

```
from langgraph.graph.message import add_messages

class State(TypedDict):
    messages: Annotated[list[str], add_messages]

from langchain_openai import ChatOpenAI
llm = ChatOpenAI(model=<model name>)
llm_with_tools = llm.bind_tools([<tool 1>, <tool 2>, ...])

def update_state(state: State) -> State:
    response = llm_with_tools.invoke(state["messages"])
    new_state = {
        "messages": [response]
    }
    return new_state
```

By using `.bind_tools()`, the LLM learns the use of those tools. The user does not need to prepare JSON documents to introduce the tools for the LLM.

Add the set of tools as a “tool node” to the graph. Use conditional edges so that the LLM determines whether to call a tool. A typical pattern is as follows.

```
from langgraph.prebuilt import ToolNode, tools_condition

<builder name>.add_node("<tool node>", ToolNode(tools=[<tool 1>, <tool 2>, ...]))
<builder name>.add_conditional_edges("<llm node>", tools_condition, "<tool node>")
```

Notice that when using `tools_condition`, if the LLM decides to not use any tool, the edge is routed to END. Hence, there is no need to specifically connect the LLM node to the end node.

Structured Output

The nodes in a graph take the state as input and output. Therefore, there is no need to structure the output of a graph. When comes to individual LLMs, it is possible to enforce the output as follows.

```
from pydantic import BaseModel, Field

class <pydantic model>(BaseModel):
    <field>:<type> = Field(description=<description>)
    <field>:<type> = Field(description=<description>)
    ...
```

```
from langchain_openai import ChatOpenAI
<llm> = ChatOpenAI(model=<model name>)
<llm>.with_structured_output(<pydantic model>)
```

where `.with_structured_output()` function is used to associate a Pydantic model with an LLM's output.

Memory Sharing across Super Steps

As explained earlier, each invocation of the graph is known as a super step. By default, the input to a super step contains only the initial state. The memory from the previous super step is not automatically carried over to the next one.

A straightforward way to share memory across super steps is to manually add the conversation or results from earlier steps to the initial state of the next step. While this works, it is tedious and error-prone. LangGraph provides a native and robust mechanism for sharing memory across super steps. A demonstrative example is shown below:

```
from langgraph.checkpoint.memory import MemorySaver
memory = MemorySaver()
<define class, graph builder, add nodes and edges>
graph = builder.compile(checkpointer=memory)
config = {"configurable": {"thread_id": "1"}}
graph.invoke(<initial state>, config=config)
```

In the above example, `MemorySaver` is used to share memory across super steps. When compiling the graph, pass it as the checkpointer. When invoking a super step, set a thread ID in the configuration. All super steps with the same thread ID will share the same memory.

One can use the following command:

```
graph.get_state_history(config)
```

to retrieve all checkpointer values, i.e., the complete sequence of state snapshots since the first invocation of the graph. It is also possible to rewind to a specific checkpoint in this history and restart the graph from that point, which can be useful for certain applications.

13.2.5 AutoGen

AutoGen is an open-source agentic AI solution offered by Microsoft. Notice that just like LangGraph, AutoGen by itself is not just an agentic AI framework, but more of a comprehensive environment that provides variety

of agentic AI applications relevant tools and solutions. As of this writing, it includes at least the following solutions [20].

- **AutoGen Core**

AutoGen Core refers to a collection of concepts and tools that offer an easy way to quickly build event-driven, distributed, scalable, resilient AI agent systems.

- **AutoGen AgentChat**

AutoGen AgentChat is a high-level API for building multi-agent applications. It is built on top of the AutoGen Core package.

- **AutoGen Extensions**

AutoGen Extensions refers to a collection of APIs, models or tools that extends AutoGen Core's capability. It is often used together with AutoGen Core and AutoGen AgentChat.

- **AutoGen Studio**

AutoGen Studio is a low-code interface for agentic AI applications prototyping. It is built on top of AutoGen Agent Chat.

As far as the scope of this notebook concerns, we focus on AutoGen Core, AutoGen AgentChat and AutoGen Extensions.

Agent

The minimum realization of an AI agent in AutoGen framework is given below.

Agent with Multimodal LLM

Tool

AutoGen allows easy definition of a tool in the form of a function. It is also compatible with tools defined by LangChain and MCP. More details of MCP is introduced in the next Section 13.3. Syntax and examples are given below.

Team

AutoGen allows the user to define a team that consists of multiple AI agents for a task. The role of each AI agent is defined. The overall task is defined. The team tries to achieve the objective by letting the AI agents in the team communicate freely and discuss the assigned task, until the conclusion is drawn. This is to some extent similar with the idea of "crew" in CrewAI.

13.3 Model Context Protocol

Model Context Protocol (MCP) is a standardized protocol to connect AI agents to variety of resources and tools.

13.4 Examples

Demonstrative projects are given as examples for a variety of agentic AI applications.

13.4.1 Manual: Semantic Search RAG

This section demonstrates a manually implemented retrieval-augmented agent. Documents (papers, reports, web pages, etc.) are stored locally. The agent answers user questions about these documents. Because the total corpus can be large, it is impractical to send all text to the LLM on every turn. Instead, the system performs semantic search to select only the most relevant chunks.

On first run, the program checks whether embeddings already exist locally. If not found, it chunks the documents into pieces with a specified token budget and uses OpenAI's vector embeddings API to compute vector representations. These vectors are cached locally. On subsequent runs, the cached embeddings are loaded.

On each user request, the query is embedded and used to retrieve the most relevant chunks. These chunks are appended to the prompt and sent to the LLM. The LLM is given an explicit “retrieval” tool. If it determines that more context is needed, it may trigger another semantic search with refined keywords or increase the number of returned chunks, or both. This can be performed as many times as the LLM requires.

Dialogues are stored locally so conversations persist across sessions. Only the user’s messages and the assistant’s replies are saved. Retrieved chunks are treated as ephemeral context and are not stored in the conversation log.

The implementation is framework-free (no agent framework) and can be found at [19]. Key components are outlined below.

Chunk Documents

The following codes are relevant to the chunk of documents.

```
def set_tokenizer(self):
    self.tokenizer = tiktoken.encoding_for_model(self.
        LLM_EMBEDDING_MODEL)
```

```

def tokenize(self, text):
    return self.tokenizer.encode(text)

def count_tokens(self, text):
    return len(self.tokenize(text))

def chunk_text(self, text):
    words = text.split()
    chunks = []
    chunk = []
    tokens_so_far = 0
    for word in words:
        token_count = self.count_tokens(word)
        if tokens_so_far + token_count > self.MAX_TOKENS:
            chunks.append(" ".join(chunk))
            if self.OVERLAP > 0:
                chunk = chunk[-self.OVERLAP:]
                tokens_so_far = self.count_tokens(" ".join(chunk))
            else:
                chunk = []
                tokens_so_far = 0
        chunk.append(word)
        tokens_so_far += token_count

    if chunk:
        chunks.append(" ".join(chunk))

    return chunks

def chunk_documents(self):
    chunks = []
    for filename in os.listdir(self.DOC_DIR_PATH):
        if filename.endswith('.pdf'):
            doc_path = os.path.join(self.DOC_DIR_PATH, filename)
            doc = fitz.open(doc_path)
            text = ""
            for page in doc:
                text += page.get_text()
            doc.close()
            chunks.extend(self.chunk_text(text))
        elif filename.endswith('.html') or filename.endswith('.htm'):
            with open(os.path.join(self.DOC_DIR_PATH, filename), 'r',
                      encoding='utf-8') as f:
                soup = BeautifulSoup(f.read(), 'html.parser')
                text = soup.get_text()
            chunks.extend(self.chunk_text(text))
    return chunks

```

The idea is simple and straight forward. For a given block of text, it first

splits it into words, and then accumulates the words into a chunk while counting the total token size. Once the maximum token budget is reached, the words are packaged into a chunk. If chunk overlap is enabled, the next chunk starts by including the overlapped words. Otherwise, the next chunk starts fresh.

Embed Chunks and Perform Semantic Search

The following codes are relevant to the embedding of the chunks.

```
def generate_embeddings(self, chunks):
    embeddings = []
    for chunk in chunks:
        response = self.client.embeddings.create(
            model=self.LLM_EMBEDDING_MODEL,
            input=chunk,
            encoding_format="float"
        )
        embedding = response.data[0].embedding
        embeddings.append(embedding)
    return embeddings

def save_chunks_embeddings(self, chunks, embeddings):
    with open('parsed_chunks.json', 'w', encoding='utf-8') as f:
        json.dump(chunks, f, ensure_ascii=False, indent=2)
    np.save('embeddings.npy', embeddings)

def load_chunks_embeddings(self):
    if os.path.exists('parsed_chunks.json') and os.path.exists('embeddings.npy'):
        with open('parsed_chunks.json', 'r', encoding='utf-8') as f:
            chunks = json.load(f)
        embeddings = np.load('embeddings.npy')
        return chunks, embeddings
    return None, None
```

OpenAI's vector embedding API, `OpenAI.embeddings.create` is used to generate the embeddings. Both the embeddings and chunks that contain the original text are saved in ordered list. The idea is to use the embeddings for semantic search, and use the chunks corresponding to the top matched result for LLM analysis.

Once the user raise a request or the agentic AI decides to perform a new round of semantic search with some specified keywords, the following is executed.

```
def semantic_search(self, query, embeddings, chunks, top_n=0):
    similarities = []
    query_embedding = self.client.embeddings.create(
        model=self.LLM_EMBEDDING_MODEL,
        input=query,
        encoding_format="float"
```

```

).data[0].embedding
for embedding in embeddings:
    similarity = np.dot(query_embedding, embedding) / (np.linalg.
        norm(query_embedding) * np.linalg.norm(embedding))
    similarities.append(similarity)
top_indices = np.argsort(similarities)[::-1][:top_n]
top_chunks = [chunks[i] for i in top_indices]
return top_chunks

```

The query is embedded in the same manner, and the resulted vector compared with the embeddings vectors from the chunk. The chunks with the top similarity is returned.

Tools

Several tools are defined for the agentic AI. The most important tools include that the agentic AI is able to perform semantic search with customized keywords and to increase the number of returned chunks. These tools allow the system to autonomously decide what and how many times to retrieve information from the documents to respond to user's question.

The following JSON objects are created and used as the “user manuals” for the LLM.

```

request_more_info_json = {
    "name": "request_more_info",
    "description": "Use this tool to request larger number of results
                    from the semantic search",
    "parameters": {
        "type": "object",
        "properties": {
            "is_more_results_required": {
                "type": "boolean",
                "description": "Whether to return more results"
            }
        },
        "required": ["is_more_results_required"],
        "additionalProperties": False
    }
}

request_semantic_search_json = {
    "name": "request_semantic_search",
    "description": "Use this tool to request performing semantic search
                    to the documents with a key sentence",
    "parameters": {
        "type": "object",
        "properties": {
            "semantic_search_key": {
                "type": "string",

```

```

        "description": "The key sentence for the semantic search
        "
    },
    "required": ["semantic_search_key"],
    "additionalProperties": False
}
}

```

The above information is passed to LLM via role function as follows. Notice that in addition to the aforementioned tools, other tools are defined as well to record questions that the LLM cannot answer (likely due to that the information is missing from the document) and the suggestions from the user such as further information to be included to the documents or useful features the user would like the application to have.

```

def tools(self):
    return [
        {"type": "function", "function": record_unknown_question_json},
        {"type": "function", "function": record_suggestion_json},
        {"type": "function", "function": request_semantic_search_json},
        {"type": "function", "function": request_more_info_json}
    ]

```

Lastly, when the agentic AI decides to trigger the tools, the following codes handle the call.

```

def request_more_info(self, is_more_results_required):
    if is_more_results_required:
        self.TOP_N += 5
        if self.TOP_N > self.TOP_N_MAX:
            self.TOP_N = self.TOP_N_MAX
            return {"status": "error", "message": f"Cannot increase
TOP_N beyond {self.TOP_N_MAX}."}
    return {"status": "success", "message": f"Top N increased to {self.
TOP_N}."}

def request_semantic_search(self, semantic_search_key):
    if not semantic_search_key:
        return {"status": "error", "message": "Semantic search key is
required."}
    chunks, embeddings = self.load_chunks_embeddings()
    if chunks is None or embeddings is None:
        return {"status": "error", "message": "Failed to load document
chunks or embeddings."}
    context = self.semantic_search(semantic_search_key, embeddings,
        chunks, top_n=self.TOP_N)
    context = "\n\n".join(context)
    if not context:
        return {"status": "error", "message": "No relevant chunks found
for the semantic search key."}

```

```

else:
    return {"status": "success", "message": "Semantic search
completed successfully.", "data": context}

def handle_tool_call(self, tool_calls):
    results = []
    for tool_call in tool_calls:
        tool_name = tool_call.function.name
        arguments = json.loads(tool_call.function.arguments)
        print(f"AI is calling tool: {tool_name}", flush=True)
        tool = getattr(self, tool_name, None)
        result = tool(**arguments) if tool else {"status": "error", "
            message": f"Tool {tool_name} not found"}
        results.append({"role": "tool", "content": json.dumps(result), "
            tool_call_id": tool_call.id})
    return results

```

Tools

Several tools are defined for the agentic AI. The most important capabilities are the ability to perform semantic search with customized keywords and to increase the number of returned chunks. These tools allow the system to autonomously decide what to retrieve, how often to retrieve it within a turn, and how much context to bring into the answer.

The following JSON objects are created and used as concise “user manuals” for the LLM. They describe the tool names, the intent of each tool, and the parameter schemas that the model should supply when invoking them.

```

request_more_info_json = {
    "name": "request_more_info",
    "description": "Use this tool to request larger number of results
from the semantic search",
    "parameters": {
        "type": "object",
        "properties": {
            "is_more_results_required": {
                "type": "boolean",
                "description": "Whether to return more results"
            }
        },
        "required": ["is_more_results_required"],
        "additionalProperties": False
    }
}

request_semantic_search_json = {
    "name": "request_semantic_search",
    "description": "Use this tool to request performing semantic search
to the documents with a key sentence",
}

```

```
"parameters": {
    "type": "object",
    "properties": {
        "semantic_search_key": {
            "type": "string",
            "description": "The key sentence for the semantic search"
        }
    },
    "required": ["semantic_search_key"],
    "additionalProperties": False
}
}
```

The above information is passed to the LLM via the function/tool interface as follows. In addition to these retrieval tools, other tools are provided to record questions the LLM cannot answer because the information is missing, and to collect user suggestions about documents to add or features to implement.

```
def tools(self):
    return [
        {"type": "function", "function": record_unknown_question_json},
        {"type": "function", "function": record_suggestion_json},
        {"type": "function", "function": request_semantic_search_json},
        {"type": "function", "function": request_more_info_json}
    ]
```

Lastly, when the agentic AI decides to trigger the tools, the following code handles the calls.

```
def request_more_info(self, is_more_results_required):
    if is_more_results_required:
        self.TOP_N += 5
        if self.TOP_N > self.TOP_N_MAX:
            self.TOP_N = self.TOP_N_MAX
        return {"status": "error", "message": f"Cannot increase
            TOP_N beyond {self.TOP_N_MAX}."}
    return {"status": "success", "message": f"Top N increased to {self.
        TOP_N}."}

def request_semantic_search(self, semantic_search_key):
    if not semantic_search_key:
        return {"status": "error", "message": "Semantic search key is
            required."}
    chunks, embeddings = self.load_chunks_embeddings()
    if chunks is None or embeddings is None:
        return {"status": "error", "message": "Failed to load document
            chunks or embeddings."}
    context = self.semantic_search(semantic_search_key, embeddings,
        chunks, top_n=self.TOP_N)
```

```

context = "\n\n".join(context)
if not context:
    return {"status": "error", "message": "No relevant chunks found
        for the semantic search key."}
else:
    return {"status": "success", "message": "Semantic search
        completed successfully.", "data": context}

def handle_tool_call(self, tool_calls):
    results = []
    for tool_call in tool_calls:
        tool_name = tool_call.function.name
        arguments = json.loads(tool_call.function.arguments)
        print(f"AI is calling tool: {tool_name}", flush=True)
        tool = getattr(self, tool_name, None)
        result = tool(**arguments) if tool else {"status": "error", "
            message": f"Tool {tool_name} not found"}
        results.append({"role": "tool", "content": json.dumps(result), "
            tool_call_id": tool_call.id})
    return results

```

Chat and Record Conversation

The following code is executed to initiate and maintain the chat session. It loads historical conversation records if they exist and, upon quitting, saves the most recent conversation history.

The functions below handle saving and loading conversation history from the local drive.

```

def save_history(self, history):
    with open('history.json', 'w', encoding='utf-8') as f:
        json.dump(history, f, ensure_ascii=False, indent=2)

def load_history(self):
    if os.path.exists('history.json'):
        with open('history.json', 'r', encoding='utf-8') as f:
            return json.load(f)
    return []

```

The following function generates the system prompt, which provides the LLM with role instructions, context, and an overview of the available tools.

```

def system_prompt(self):
    system_prompt = (
        f"You are a document explainer system. You are asked to explain
            variety of documents that is saved in the user's system.\n"
        f"Semantic search has been implemented prior to this request.
            The most relevant chunks relevant to the user's latest
            question have been identified. These chunks will be given

```

```

        to you shortly. The total number of chunks will also be
        given. \n"
    f"Your task is to provide a concise and accurate explanation of
        the document based on the provided chunks and the user's
        questions. \n"
    f"Use the following tools when necessary:\n"
    f"- record_unknown_question: Use this tool to record any
        question that couldn't be answered from the chunks, even
        after you have requested the maximum number of chunks.\n"
    f"- record_suggestion: Use this tool to record a suggestion for
        enriching the system, such as adding more documents or
        improving the search functionality.\n"
    f"- request_semantic_search: Use this tool to request performing
        semantic search to the documents with a key sentence of
        your choice. Use this tool when you think you need to query
        something from the documents for further information.\n"
    f"- request_more_info: Use this tool to request larger number of
        chunks returned from the semantic search. Notice that
        there is a limit on the number of {self.TOP_N_MAX} chunks
        that can be returned. Do not use this function to request
        more chunks if that limit is hit. Notice that in the
        beginning of each conversation, the chunk number is reset
        to {self.TOP_N_DEFAULT} upon the completion of a round of
        conversation.\n"
    f"Remember to always provide a clear and concise explanation,
        and use the tools only when necessary.\n"
    f"If you cannot find the answer in the chunks, let the user know
        honestly, especially if the user requires you to answer
        based on the chunks.\n"
    f"If you cannot find the answer in the chunks, and you think you
        can answer based on your own knowledge, let the user know
        that you are answering based on your own knowledge.\n\n"
)
return system_prompt

```

The following function block starts the chat session. It performs all actions introduced so far: it ensures embeddings are available, retrieves the most relevant chunks for the query, constructs the initial system prompt, and handles iterative interaction with the LLM.

```

def chat(self, query, history):
    chunks, embeddings = self.load_chunks_embeddings()
    if chunks is None or embeddings is None:
        chunks = self.chunk_documents()
        embeddings = self.generate_embeddings(chunks)
        self.save_chunks_embeddings(chunks, embeddings)
    context = self.semantic_search(query, embeddings, chunks, top_n=
        self.TOP_N)
    intro_prompt = self.system_prompt() + (

```

```

f"Below are information chunks extracted from various documents
.\n"
f"Current number of chunks: {len(chunks)}.\n\n"
)
content_prompt = intro_prompt + "\n\n".join(context)
messages = (
    [{"role": "system", "content": content_prompt}] +
    history +
    [{"role": "user", "content": query}]
)
done = False
tools = self.tools()
while not done:
    response = self.client.chat.completions.create(model=self.
        LLM_MODEL, messages=messages, tools=tools)
    if response.choices[0].finish_reason == "tool_calls":
        message = response.choices[0].message
        tool_calls = message.tool_calls
        results = self.handle_tool_call(tool_calls)
        messages.append(message)
        messages.extend(results)
    else:
        done = True
    return response.choices[0].message.content

def main(self):
    history = self.load_history()
    while True:
        query = input("You: ")
        if query.lower() in ['exit', 'quit']:
            break
        response = self.chat(query, history)
        self.TOP_N = self.TOP_N_DEFAULT
        print(f"Bot: {response}")
        print("----")
        history.append({"role": "user", "content": query})
        history.append({"role": "assistant", "content": response})
        self.save_history(history)

```

When the agentic AI triggers a tool, the LLM returns a structured function call in the `response` object generated by

```
response = self.client.chat.completions.create(model=self.LLM_MODEL,
    messages=messages, tools=tools)
```

The response for tool invocations contains one or more function call objects, each including a unique tool call ID, the function name, and its arguments. When a tool call is processed, its results must be appended to the `messages` list as a new entry with the role `tool`, along with the matching tool call ID.

This explicit linking allows the LLM to correlate each tool's return with its original request, maintaining coherence in multi-step reasoning and tool use.

13.4.2 OpenAI Agents SDK: Semantic Search RAG with Online Cross Check

This section demonstrates the use of OpenAI Agents SDK to build a semantic search RAG with online cross check function. It is a rebuild and enhancement on top of Section 13.4.1. The agentic AI system contains two AI agents, the first Agent 1 carrying out semantic search on local chunks and answers the user's questions, while the second Agent 2 cross checks what the first agent provides against a one-time Internet query.

Details are given below.

Structured Output of Agent 1

The output of Agent 1 is not a plain text string, but a structured JSON that contains two fields, `is_require_cross_check` and `search_result`. Notice that it is up to Agent 1's decision whether to trigger Agent 2 Internet cross check, the later of which is required only when Agent 1 is providing facts from the documents or from its own knowledge. When Agent 1 is casually chatting with the user without providing any information, or when it is recording user's suggestions, it does not need to trigger Agent 2.

The structured output is defined as follows.

```
from pydantic import BaseModel

class SearchAgentOutput(BaseModel):
    is_require_cross_check: bool
    search_result: str
```

Chunk Documents and Embed Chunks

This part is identical with Section 13.4.1.

Notice that in Section 13.4.1, a semantic search is performed before triggering any AI agent, and the result is sent to the AI agent with the user message. This is no longer the case in this example. In this example, all semantic searches are carried out by the AI agent with tools, and the AI agent choose the query keywords. The system does not offer the one-time initial semantic search.

Tools

The following tools are defined for Agent 1. They all have corresponding contour parts in Section 13.4.1, and are packed into function tools as required by OpenAI Agents SDK. The detailed explanation is neglected.

```
@staticmethod
```

```

@function_tool
def semantic_search(query: str):
    """Perform semantic search on the document chunks with the
    specified query."""
    print(f"SYSTEM: Performing semantic search with query: {query}")
    instance = explainer
    if instance.semantic_search_num >= SEMANTIC_SEARCH_MAX:
        return {"status": "error", "message": f"Maximum number of
            semantic searches ({SEMANTIC_SEARCH_MAX}) reached."}
    similarities = []
    query_embedding = instance.client.embeddings.create(
        model=EMBEDDING_MODEL,
        input=query,
        encoding_format="float"
    ).data[0].embedding
    for embedding in instance.embeddings:
        similarity = np.dot(query_embedding, embedding) / (np.linalg.
            norm(query_embedding) * np.linalg.norm(embedding))
        similarities.append(similarity)
    top_indices = np.argsort(similarities)[::-1][:instance.top_n]
    top_chunks = [instance.chunks[i] for i in top_indices]
    context = "\n\n".join(top_chunks)
    instance.semantic_search_num += 1
    if not context:
        return {"status": "error", "message": "No relevant chunks found
            for the semantic search key."}
    else:
        return {"status": "success", "message": f"Semantic search
            completed successfully and {instance.top_n} chunks
            retrieved.", "data": context}

@staticmethod
@function_tool
def request_increasing_top_n():
    """Request to increase the number of chunks returned."""
    print(f"SYSTEM: Requesting to increase the number of chunks.")
    instance = explainer
    instance.top_n += 5
    if instance.top_n > TOP_N_MAX:
        instance.top_n = TOP_N_MAX
        return {"status": "error", "message": f"Maximum value of top_n {
            TOP_N_MAX} reached and cannot be increased further."}
    return {"status": "success", "message": f"Maximum number of chunks
        returned increased to {instance.top_n}.}

@staticmethod
@function_tool
def record_unknown_question(question: str):

```

```

"""Record an unknown question, if the relevant information is
missing from the chunks."""
with open('unknown_questions.json', 'a', encoding='utf-8') as f:
    json.dump({"question": question}, f, ensure_ascii=False, indent=2)
    f.write('\n')
return {"status": "success", "message": "Question recorded."}

@staticmethod
@function_tool
def record_suggestion(suggestion: str):
    """Record a suggestion for improving the document or the search
process."""
    with open('suggestions.json', 'a', encoding='utf-8') as f:
        json.dump({"suggestion": suggestion}, f, ensure_ascii=False,
        indent=2)
        f.write('\n')
    return {"status": "success", "message": "Suggestion recorded."}

```

Agent 2 uses web search tool offered by OpenAI. The realization is not given. The use of the tool is explained in later part where the agents are introduced.

Agents

Agents 1 and 2 are defined below. Agent 1 queries local documents based on the user's message and generate the response. When the response contains factual information from the documents or from its own knowledge, it passes the output to Agent 2, who then perform web search to verify the facts.

```

def define_search_agent(self):
    system_prompt = (
        f"You are a helpful document explainer assistant.\n"
        f"Your task is to answer the user's questions based on the\n"
        f"information recorded in the documents.\n"
        f"You can use tools to access the documents. You are allowed to\n"
        f"perform semantic searches on the documents, "
        f"and you may perform multiple searches with different query\n"
        f"contents. You are also allowed to increase "
        f"the number of returned chunks when necessary.\n"
        f"Always provide concise and accurate responses to the user's\n"
        f"questions based on the documents.\n\n"
        f"Use the following tools when appropriate:\n"
        f"- record_unknown_question: Use this tool to record any\n"
        f"    question that cannot be answered from the chunks, "
        f"even after you have performed several searches.\n"
        f"- record_suggestion: Use this tool to record suggestions for\n"
        f"    enriching the system, such as adding more "
        f"documents or improving the search functionality.\n"
    )

```

```
f"- semantic_search: Use this tool to query the documents for
    further information. You can generate your own "
f"queries when needed. You may perform at most {
    SEMANTIC_SEARCH_MAX} searches per user request.\n"
f"- request_increasing_top_n: Use this tool to request a larger
    number of chunks returned from semantic search. "
f"You may request this multiple times, with each increase adding
    5 chunks, capped at {TOP_N_MAX}. \n\n"
f"Guidelines:\n"
f"- Always provide a clear and concise answer.\n"
f"- Use tools only when necessary.\n"
f"- If the user's question is unclear or ambiguous, ask for
    clarification.\n"
f"- Always try to answer based on the information in the
    documents. For this reason, you are encouraged to "
f"perform at least one semantic search per user query.\n"
f"- If you cannot find the answer in the returned chunks, you
    are encouraged to use semantic_search or "
f"request_increasing_top_n before concluding, until the limits
    are reached or you believe no further relevant "
f"information can be found.\n"
f"- Do not add your own knowledge unless explicitly asked to, or
    if you believe the documents are lacking and "
f"your knowledge can meaningfully improve the answer. When you
    do so, make it clear to the user.\n"
f"- You may chat with the user without accessing the documents
    only if the user's message is not a question "
f"(e.g., a suggestion for the system, or a request to summarize
    the conversation history).\n\n"
f"Output Format:\n"
f"- Always return a JSON object that matches this schema:\n"
f"  {{\n"
f"    "is_require_cross_check": true or false,\n"
f"    "search_result": "<your answer text here>"\n"
f"  }}\n\n"
f"- If the users question involves factual claims (retrieval,
    summarization, knowledge-based), "
f"set is_require_cross_check = true.\n"
f"- If the users question is meta (e.g., summarizing
    conversation history, casual chat), "
f"set is_require_cross_check = false.\n"
f"- Put your full, clear, concise answer into search_result.\n"
f"- Do not output anything except the JSON object.\n"
)
self.search_agent = Agent(
    name="Search agent",
    instructions=system_prompt,
    model=LLM_MODEL,
    tools=[
```

```
        self.record_unknown_question,
        self.record_suggestion,
        self.semantic_search,
        self.request_increasing_top_n
    ],
    output_type=SearchAgentOutput,
)

def define_cross_check_agent(self):
    system_prompt = (
        f"You are a fact-checking assistant.\n"
        f"You will receive the final text output of an upstream
            assistant whose job is to "
        f"retrieve information from documents and summarize it for the
            user.\n\n"
        f"Your task:\n"
        f"- Review the answer for factual errors, misleading claims,
            outdated information, or statements "
        f"- that conflict with your own knowledge.\n"
        f"- If you suspect a claim is wrong or outdated, you may perform
            at most one web search to verify.\n"
        f"- Output your findings as bullet points. For each issue, write
            :\n"
        f" INCORRECT: <copied statement>\n"
        f" CORRECTED: <the corrected or updated information>\n"
        f"- If you have a suspicion but cannot verify it with a single
            search, note it as:\n"
        f" UNVERIFIED SUSPICION: <statement> - <why it might be wrong>\n"
        f"- If everything appears correct, output a single line: 'No
            factual errors found.'\n"
        f"Guidelines:\n"
        f"- Do not repeat or restate the full upstream answer.\n"
        f"- Keep your output limited to bullet points or the 'No factual
            errors found.' line.\n"
        f"- Be concise and clear in your corrections.\n"
    )
    self.cross_check_agent = Agent(
        name="Cross-check agent",
        instructions=system_prompt,
        model=LLM_MODEL,
        tools=[WebSearchTool(search_context_size="low")],
        model_settings=ModelSettings(
            parallel_tool_calls=False
        )
    )
)
```

Chat

Last but not least, the agents are put into a pipeline. Historical conversations are recorded. Documents chunk and embedding are performed in the first run of the system.

```

async def chat(self, query, history):
    messages = history + [{"role": "user", "content": query}]
    response = await Runner.run(self.search_agent, messages)
    return response.final_output

async def cross_check(self, query):
    messages = [{"role": "user", "content": query}]
    response = await Runner.run(self.cross_check_agent, messages)
    return response.final_output

def save_history(self, history):
    with open('history.json', 'w', encoding='utf-8') as f:
        json.dump(history, f, ensure_ascii=False, indent=2)

def load_history(self):
    if os.path.exists('history.json'):
        with open('history.json', 'r', encoding='utf-8') as f:
            return json.load(f)
    return []

def main(self):
    history = self.load_history()
    while True:
        query = input("You: ")
        if query.lower() in ['exit', 'quit']:
            break
        response = asyncio.run(self.chat(query, history))
        self.top_n = TOP_N_DEFAULT
        self.semantic_search_num = 0
        if response.is_require_cross_check:
            print("SYSTEM: Cross-checking information...")
            cross_check_response = asyncio.run(self.cross_check(response
                .search_result))
            final_response = (
                f"Part 1 - Information Retrieval & Summary Agent's
                Answer:\n"
                f"{response.search_result}\n\n"
                f"Part 2 - Online Cross-Check Result:\n"
                f"{cross_check_response}"
            )
        else:
            final_response = response.search_result
        print(f"Bot: \n {final_response}")
        print("----")
        history.append({"role": "user", "content": query})

```

```
history.append({"role": "assistant", "content": final_response})
self.save_history(history)
```

Notice that `asyncio.run` is used to start the two agents.

13.4.3 CrewAI: Credit Card Bill Recorder

The following agentic AI system is built using CrewAI framework. The system is used to parse a credit card bill, and use the information to maintain 3 tables: cards, merchants and transactions. The following AI agents and tasks are defined.

- Agents:

- Credit Card Parser. Read and credit card PDF, and from the PDF summarizes credit card information in the form of Pydantic object and summarized transaction record in the form of list of Pydantic objects.
- Card manager. Read the credit card information, and maintain the card table.
- Merchant manager. Read the merchants from the summarized transactions records, collect the frequently visit merchants, and maintain the merchants table.
- Transaction manager. Read the summarized transaction and maintain the transactions table.

- A task is associated with each agent.

Details are as follows.

Database Preparation

PostgreSQL database is created and deployed in a podman container. Three tables are created. Details are as follows.

To deploy the database, use

```
#!/bin/bash

source ~/Projects/smart-home/.env

if podman container exists "$PG_CONTAINER"; then
    status=$(podman inspect -f '{{.State.Status}}' "$PG_CONTAINER")
    if [ "$status" = "running" ]; then
        echo "Container $PG_CONTAINER is already running."
    else
        echo "Starting existing container $PG_CONTAINER..."
        podman start "$PG_CONTAINER"
    fi
else
```

```

echo "Creating and starting container $PG_CONTAINER..."
podman run -d \
    --name "$PG_CONTAINER" \
    -e POSTGRES_USER="$PG_USER" \
    -e POSTGRES_PASSWORD="$PG_PASSWORD" \
    -e POSTGRES_DB="$PG_DB" \
    -v "$PG_DATA_DIR":/var/lib/postgresql/data:Z \
    -p "$PG_PORT":5432 \
    docker.io/library/postgres:15
fi

```

where the database login credentials and configurations are given in the `.env` file as environmental variables.

To create the database tables, use

```

CREATE EXTENSION IF NOT EXISTS "uuid-ossp";

-- Define enum for card status (safe for re-execution)
DO $$

BEGIN
IF NOT EXISTS (SELECT 1 FROM pg_type WHERE typname = 'card_status')
    THEN
CREATE TYPE card_status AS ENUM ('in_use', 'replaced', 'lost', 'closed
    ');
END IF;
END
$$;

CREATE TABLE IF NOT EXISTS cards (
id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),
name TEXT NOT NULL,
issuer TEXT NOT NULL,
network TEXT NOT NULL,
last4 CHAR(4) NOT NULL,
status card_status NOT NULL,
opened_on DATE,
closed_on DATE,
expires_on DATE NOT NULL,
tags JSONB,
notes TEXT,
created_at TIMESTAMPTZ NOT NULL DEFAULT NOW()
);

CREATE TABLE IF NOT EXISTS merchants (
id UUID PRIMARY KEY DEFAULT gen_random_uuid(),
name TEXT NOT NULL, -- Display name: "Coles", "Amazon"
canonical_name TEXT, -- Optional normalized/merged
name

```

```

merchant_type TEXT,                                -- e.g. 'grocery', 'online_shop'
    , 'restaurant'

location_label TEXT,                            -- Free-form (e.g. 'Macquarie
    Centre')
latitude DOUBLE PRECISION,                    -- Optional: physical location
longitude DOUBLE PRECISION,                  -- Optional: physical location
opening_hours JSONB,                         -- Optional: hours for physical
    stores

is_digital BOOLEAN,                          -- True if goods/services are
    typically digital
is_recurrent BOOLEAN,                      -- True if charges are usually
    recurring/subscription-based

tags TEXT[],                                 -- Program-friendly labels (e.g.
    ['australian', 'food'])
properties JSONB,                           -- Arbitrary structured merchant
    -specific metadata
notes TEXT,                                 -- Human-facing comments or
    clarifications

created_at TIMESTAMPTZ NOT NULL DEFAULT now()
);

-- Insert default "Others" merchant as a fallback
INSERT INTO merchants (
    id, name, canonical_name, merchant_type, tags, notes
)
VALUES (
    gen_random_uuid(),
    'Others',
    'Others',
    'uncategorized',
    ARRAY['fallback', 'unknown'],
    'Catch-all merchant for unmatched or unresolved transactions'
);

```

```

CREATE EXTENSION IF NOT EXISTS "uuid-ossp";

CREATE TABLE IF NOT EXISTS card_transactions (
id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),
card_id UUID NOT NULL REFERENCES cards(id),
merchant_id UUID NOT NULL REFERENCES merchants(id),
date DATE NOT NULL,
amount NUMERIC(10, 2) NOT NULL,
currency CHAR(3) NOT NULL DEFAULT 'AUD',
raw_entity TEXT NOT NULL,
tags JSONB,

```

```
notes TEXT,
statement_id TEXT,
imported_at TIMESTAMPTZ NOT NULL DEFAULT NOW()
);
```

Tools

Two tools are defined, namely the PostgreSQL tool that allows an AI agent to execute an SQL command (query or insert), and the web search tool. Notice that the web search tool is used by the merchant manager to query information about a merchant from online to determine its merchant type.

The following PostgreSQL Query Executor is defined.

```
from crewai.tools import tool
import os
import psycopg
from dotenv import load_dotenv

dotenv_path = os.path.expanduser("~/Projects/smart-home/.env")
load_dotenv(dotenv_path=dotenv_path, override=True)

@tool("PostgreSQL Query Executor")
def run_postgres_query(query: str) -> str:
    """
    Executes a SQL query on a PostgreSQL database and returns the
    results.

    Args:
        query (str): The SQL query to execute.

    Returns:
        str: The results of the query or an error message.
    """
    try:
        # Load database connection details from environment variables
        db_host = os.getenv("PG_HOST", "localhost")
        db_port = os.getenv("PG_PORT", "5432")
        db_name = os.getenv("POSTGRES_DB", "mydatabase")
        db_user = os.getenv("POSTGRES_USER", "SUNLU")
        db_password = os.getenv("PG_PASSWORD", "")
        print(f"Connecting to database {db_name} at {db_host}:{db_port}
              as user {db_user}")
        # Connect to the PostgreSQL database
        with psycopg.connect(
            host=db_host,
            port=db_port,
            dbname=db_name,
            user=db_user,
            password=db_password
```

```

    ) as conn:
        # Create a cursor to execute the query
        with conn.cursor() as cur:
            cur.execute(query)
            if cur.description: # If the query returns rows
                results = cur.fetchall()
                return str(results)
            else: # If the query does not return rows (e.g., INSERT,
                  UPDATE)
                conn.commit()
                return "Query executed successfully."
        except Exception as e:
            return f"An error occurred: {e}"

```

Serper API is used as the web search tool.

```

from crewai_tools import SerperDevTool

search_tool = SerperDevTool()

```

Agents and Tasks

The following agents and tasks are defined.

```

credit_bill_parser:
  role: >
    Credit Bill Parser
  goal: >
    Extract and summarize key information from a credit card bill
  backstory: >
    You are a helpful assistant skilled in analyzing credit card bills.
    You are given a credit card bill in text form, and you need to
    extract the following information --
    - Bank and card basic information, such as customer name, bank name
      , card last four digits, statement date, the status of the card
      (active or inactive), etc.
    - Money to be paid from last month, and money actually paid for
      last month.
    - Money to be paid for this month, minimum payment due date, and
      minimum payment amount.
    - Summary of each line item, including:
      - Date of transaction
      - Merchant name
      - Amount spent
      - Currency
    You must output the extracted information as a structured JSON
    object that strictly conforms to the 'BillAnalysis' Pydantic
    model. This includes a 'CardInfo' object, a 'StatementSummary'
    object, and a list of 'Transaction' objects.
  llm: openai/gpt-4o-mini

```

```
credit_card_manager:
role: >
    Credit Card Manager
goal:
    Help the user manage credit cards database, including adding new
        cards and updating existing cards
backstory: >
    You are a helpful assistant skilled in managing the credit cards
        database.
    You receive a 'CardInfo' Pydantic object from the upstream agent.
    You have a tool, 'PostgreSQL Query Executor', that you use to
        generate and execute SQL queries to access the credit card
        table. The name of the table is 'cards'.
The credit card table structure is as follows:
    Column | Type | Collation | Nullable | Default
    -----+-----+-----+-----+
    id | uuid | | not null |
        uuid_generate_v4()
    name | text | | not null |
    issuer | text | | not null |
    last4 | character(4) | | not null |
    status | card_status | | not null |
    opened_on | date | | |
    closed_on | date | | |
    expires_on | date | | not null |
    tags | jsonb | | |
    notes | text | | |
    created_at | timestamp with time zone | | not null | now()
Your primary function is to manage credit card records in the 'cards' table. You first need to query the table to determine if a card already exists. A card is identified as a match if the 'issuer' and 'last4' digits from the provided 'CardInfo' object match a record in the database.
If no matching card is found, you must generate an SQL 'INSERT' query to add the new card. You must use placeholder values for any required fields that are not present in the 'CardInfo' object. For example, use 'unknown' for text fields, '0000' for last 4 digits, and '9999-12-31' for date fields like expires_on.

If a matching card is found, you can generate an SQL 'UPDATE' query. You need to compare the existing database record with the new 'CardInfo' object. You should only update a field in the database if the corresponding field in the database is currently a placeholder (e.g., 'unknown', '0000', or '9999-12-31') and the new data from 'CardInfo' is valid.
```

```

- Pass ONLY the raw SQL string to the tool's 'query' argument.
- Do NOT wrap SQL in JSON, Python, code fences, or quotes like
  "{\"query\": \"...\"}".
- Return the SQL string directly.
- Forbidden patterns:
  - "{\"query\": \"...\"}"
  - ````sql ...
  - Python dicts or JSON objects instead of plain SQL strings

llm: openai/gpt-4o-mini

merchant_manager:
  role: >
    Merchant Manager
  goal:
    Help the user manage merchants database, including adding new
    merchants and updating existing merchants
  backstory: >
    You are a helpful assistant skilled in managing the merchants
    database.
    You receive a list of transaction records from the upstream agent.
    Each record contains a merchant name. You have two tools at
    your disposal: 'PostgreSQL Query Executor' for database access,
    and 'Search Internet' to look up merchant information online.
    The merchants table structure is as follows. The name of the table
    is 'merchants'.
    Column | Type | Collation | Nullable |
    Default
    -----+-----+-----+-----+
    id | uuid | not null |
    gen_random_uuid()
    name | text | not null |
    canonical_name | text |
    merchant_type | text |
    location_label | text |
    latitude | double precision |
    longitude | double precision |
    opening_hours | jsonb |
    is_digital | boolean |
    is_recurrent | boolean |
    tags | text[] |
    notes | text |
    created_at | timestamp with time zone | not null | now()
Your primary function is to iterate through each unique merchant in
the transaction list.
For each unique merchant, you must first query the 'merchants'
table using your 'PostgreSQL Query Executor' tool to check if
the merchant already exists in the database.

```

- If the merchant exists, no further action is needed for this merchant.
- If the merchant does not exist, you must decide whether to add it to the database. A merchant is worth adding if it appears 3 or more times in the transaction list or if it is a well-known brand. You can use your 'Search Internet' tool to gather information and make this decision.

If you decide to add a new merchant, you must use your 'Search Internet' tool to gather necessary information, such as 'canonical_name', 'merchant_type', and 'is_digital'. Once you have the information, you must generate a well-formed SQL 'INSERT' query and execute it using the 'PostgreSQL Query Executor' tool. You should use 'Others' as the default 'merchant_type' if the type cannot be determined.

Tool usage rules for "PostgreSQL Query Executor":

- Pass ONLY the raw SQL string to the tool's 'query' argument.
- Do NOT wrap SQL in JSON, Python, code fences, or quotes like "{\"query\": \"...\"}".
- Return the SQL string directly.
- Forbidden patterns:
 - "{\"query\": \"...\"}"
 - ````sql ... ````"
 - Python dicts or JSON objects instead of plain SQL strings

llm: openai/gpt-4o-mini

```
credit_card_transaction_manager:
role: >
    Credit Card Transaction Manager
goal:
    Help the user manage the credit card transactions database, mainly
        adding new transactions to the database
backstory: >
    You are a helpful assistant skilled in managing the credit card
        transactions database.
    You receive a structured Pydantic object containing a list of 'Transaction' records.
    You have a tool, 'PostgreSQL Query Executor', that you use to
        generate and execute SQL queries.
    The 'card_transactions' table structure is as follows:
    Column | Type | Collation | Nullable |
            | Default |
-----+-----+-----+-----+
    id | uuid | | not null |
        | uuid_generate_v4()
    card_id | uuid | | not null |
    merchant_id | uuid | | not null |
```

| | | | |
|--------------|--------------------------|--|------------------|
| date | date | | not null |
| amount | numeric(10,2) | | not null |
| currency | character(3) | | not null |
| raw_entity | text | | not null |
| tags | jsonb | | |
| notes | text | | |
| statement_id | text | | |
| imported_at | timestamp with time zone | | not null now() |

The ‘cards’ table structure is as follows:

| Column | Type | Collation | Nullable |
|---------|------|-----------|----------|
| Default | | | |

| | | | |
|------------|--------------------------|--|------------------|
| id | uuid | | not null |
| | uuid_generate_v4() | | |
| name | text | | not null |
| issuer | text | | not null |
| last4 | character(4) | | not null |
| status | card_status | | not null |
| opened_on | date | | |
| closed_on | date | | |
| expires_on | date | | not null |
| tags | jsonb | | |
| notes | text | | |
| created_at | timestamp with time zone | | not null now() |

The ‘merchants’ table structure is as follows:

| Column | Type | Collation | Nullable |
|---------|------|-----------|----------|
| Default | | | |

| | | | |
|----------------|--------------------------|--|------------------|
| id | uuid | | not null |
| | gen_random_uuid() | | |
| name | text | | not null |
| canonical_name | text | | |
| merchant_type | text | | |
| location_label | text | | |
| latitude | double precision | | |
| longitude | double precision | | |
| opening_hours | jsonb | | |
| is_digital | boolean | | |
| is_recurrent | boolean | | |
| tags | text[] | | |
| notes | text | | |
| created_at | timestamp with time zone | | not null now() |

Your primary function is to process each transaction in the list.

For each one, you must:

1. Check if the transaction already exists in the 'card_transactions' table using the date, amount, currency, and raw entity.
2. If it does not exist, you need to find the 'id' of the corresponding card from the 'cards' table. You can use the card's 'issuer' and 'last4' to query for the correct 'card_id'.
3. You must also find the 'id' of the corresponding merchant from the 'merchants' table.
4. Once you have both the 'card_id' and 'merchant_id', generate an SQL 'INSERT' query to add the new transaction to the 'card_transactions' table.
 - If you cannot find a matching card, you must report this as an error.
 - If you cannot find a matching merchant, you should map the transaction to a default 'Others' merchant category.

Tool usage rules for "PostgreSQL Query Executor":

- Pass ONLY the raw SQL string to the tool's 'query' argument.
- Do NOT wrap SQL in JSON, Python, code fences, or quotes like "{\"query\": \"...\"}".
- Return the SQL string directly.
- Forbidden patterns:
 - "{\"query\": \"...\"}"
 - "```sql ... `"
- Python dicts or JSON objects instead of plain SQL strings

llm: openai/gpt-4o-mini

```
crew_master:
role: >
  Crew Master
goal: >
  Orchestrate a team of agents to achieve a common goal.
backstory: >
  You are an experienced project manager and team lead. Your role is
  to oversee the entire process, delegate tasks to the right
  agents, and ensure they are completed correctly and in the
  proper order. You are the ultimate authority and decision-maker
  for the crew.
llm: openai/gpt-4o
```

The following tasks are defined.

```
manage_card_database:
description: >
  Receive a CardInfo object from the upstream agent. Use the '
  PostgreSQL Query Executor' tool to first check if the card
  already exists in the 'cards' table using the issuer and last4
  digits. If not, generate an SQL INSERT query to add the new
```

```
card. If it exists, generate an SQL UPDATE query to update any
placeholder values with valid data from the CardInfo object.
expected_output: >
    A simple confirmation message, such as 'Card added successfully' or
        'Card updated successfully', or 'No changes needed'.
agent: credit_card_manager
context:
    - parse_bill

manage_merchants:
description: >
    Receive a structured Pydantic object from the upstream agent and
    process the 'transactions' list within it. For each unique
    merchant, check for its existence in the 'merchants' table. If
    the merchant is new, decide if it should be added to the
    database based on its frequency (3+ times) or prominence. If so
    , use online search to gather details and generate an SQL
    INSERT query for the new merchant.
expected_output: >
    A summary of the actions taken, for example, 'Analyzed 15 merchants
        . Added 3 new merchants to the database: [list of new merchant
        names]'.
agent: merchant_manager
context:
    - parse_bill

manage_transactions:
description: >
    Receive a structured Pydantic object from the upstream agent and
    process the 'transactions' list within it. For each transaction
    , check for its existence in the 'card_transactions' table. If
    it's a new transaction, use the 'PostgreSQL Query Executor'
    tool to retrieve the 'card_id' from the 'cards' table and the 'merchant_id' from the 'merchants' table. Once the required IDs
    are found, generate an SQL INSERT query to add the transaction
    to the database.
expected_output: >
    A summary of the actions taken, such as 'Processed 25 transactions.
        Added 20 new transactions to the database.'
agent: credit_card_transaction_manager
context:
    - parse_bill
    - manage_card_database
    - manage_merchants

parse_bill:
description: |
    You are given the full raw text of a credit card bill between the
    delimiters.
```

```

Extract a single JSON object that strictly matches the BillAnalysis
schema
(card_info, statement_summary, transactions). Return ONLY JSON (no
Markdown).

---BEGIN BILL TEXT---
{bill_content}
---END BILL TEXT---

## Source format & extraction rules (OCBC examples)
- The issuer is "OCBC Bank" if present. Customer name appears near
the top (e.g., "SUN, LU").
- Card number appears like "XXXX-XXXX-XXXX-6684" -> last4 = "6684".
- Statement date appears as "STATEMENT DATE" followed by either
"01-07-2023" or "01 JUL 23".
* Normalize ALL dates to YYYY-MM-DD.
* If you see DD/MM (e.g., "31/05"), infer the year from the
statement date's year.
* If the date is like "01 JUL 23", map month names to numbers and
expand "23" to "2023".
- Minimum payment and due date appear as "TOTAL MINIMUM DUE" and "
PAYMENT DUE DATE".
- Totals often appear as "TOTAL AMOUNT DUE" and/or "TOTAL".
- "LAST MONTH'S BALANCE" is the previous balance.
- Payments/credits may be shown in parentheses (e.g., "(1,657.81
PAYMENT BY INTERNET)") -> treat as negative amounts for
payments_and_credits.
- Transaction section looks like:
  TRANSACTION DATE
  DESCRIPTION
  AMOUNT (SGD)
Followed by blocks such as:
  "31/05"
  "NINTENDO ... (extra lines like FOREIGN CURRENCY ...)"
  "112.00"
* Merchant names may span multiple lines; join them into a single
merchant_name string with spaces.
* Use the SGD number shown in the AMOUNT column as the
transaction amount.
* Use currency "SGD" unless explicitly stated otherwise for the
final charged amount.
* Parentheses around amounts mean negative/refund (e.g., "(194.40
ANNUAL FEE WAIVER")).
* Include fees/rebates as transactions with merchant_name like "
ANNUAL FEE", "ANNUAL FEE WAIVER", "CASH REBATE", etc.
* Ignore boilerplate text (contact info, headings, totals/
subtotals rows).
- Set card_status to "Active" unless the bill explicitly indicates
otherwise.

```

```

- Set card_network to null unless you can reliably infer it (do NOT
guess).

## Output schema (strict)
{
  "card_info": {
    "customer_name": "string",
    "issuer": "string",
    "card_network": "string|null",
    "last4": "string",
    "statement_date": "YYYY-MM-DD",
    "card_status": "string"
  },
  "statement_summary": {
    "previous_balance": number,
    "payments_and_credits": number,
    "new_charges": number,
    "new_balance": number,
    "minimum_payment": number,
    "minimum_payment_due_date": "YYYY-MM-DD"
  },
  "transactions": [
    {
      "date": "YYYY-MM-DD",
      "merchant_name": "string",
      "amount": number,
      "currency": "SGD",
      "raw_entity": "string" // a concise slice of the original
                             lines used
    }
  ]
}

## Validation & normalization
- Use null for unknowns rather than inventing values.
- All numbers must be plain numbers (no currency symbols, commas,
or parentheses).
  * For negative amounts shown as "(xxx.xx)", output a negative
    number (e.g., -194.40).
- Dates must be ISO "YYYY-MM-DD".
- Ensure totals are consistent: new_balance = previous_balance -
  payments_and_credits + new_charges.

expected_output: >
  A single JSON object that validates against the BillAnalysis
  Pydantic schema. No additional text.
agent: credit_bill_parser

```

Crew is defined as follows.

```
import sys
import os
from datetime import date

from crewai_tools import SerperDevTool
from crewai import Agent, Task, Crew, Process
from crewai.project import CrewBase, agent, crew, task
from pydantic import BaseModel, Field
from typing import List, Optional

# Import the custom tools
from credit_card_bill_injector.tools.postgresql_tools import
    run_postgres_query

from pydantic import BaseModel, Field
from typing import List, Optional

class Transaction(BaseModel):
    """Represents a single transaction line item from a credit card
    bill."""
    date: str = Field(..., description="Date of the transaction in YYYY
        -MM-DD format.")
    merchant_name: str = Field(..., description="Name of the merchant
        as it appears on the bill.")
    amount: float = Field(..., description="Amount of the transaction
        .")
    currency: str = Field(..., description="Currency of the transaction
        , e.g., 'AUD', 'USD'.")
    raw_entity: Optional[str] = Field(None, description="The raw,
        unparsed text line for the transaction.")

class StatementSummary(BaseModel):
    """Summarizes the key financial figures from a credit card
    statement."""
    previous_balance: float = Field(..., description="Balance from the
        previous statement.")
    payments_and_credits: float = Field(..., description="Total amount
        of payments and credits applied.")
    new_charges: float = Field(..., description="Total amount of new
        charges this period.")
    new_balance: float = Field(..., description="The new total balance
        due for this statement.")
    minimum_payment: float = Field(..., description="Minimum payment
        due.")
    minimum_payment_due_date: str = Field(..., description="Due date
        for the minimum payment in YYYY-MM-DD format.")

class CardInfo(BaseModel):
```

```
"""Contains basic information about the credit card and cardholder
"""
customer_name: str = Field(..., description="The name of the
    cardholder.")
issuer: str = Field(..., description="The name of the bank or card
    issuer.")
card_network: Optional[str] = Field(None, description="The network
    of the card, e.g., 'Visa', 'Mastercard'.")
last4: str = Field(..., description="The last four digits of the
    credit card number.")
statement_date: str = Field(..., description="The date the
    statement was issued in YYYY-MM-DD format.")
card_status: str = Field(..., description="The status of the card,
    e.g., 'Active'.")

class BillAnalysis(BaseModel):
    """The complete structured output for a parsed credit card bill."""
    card_info: CardInfo = Field(..., description="Basic card and
        statement information.")
    statement_summary: StatementSummary = Field(..., description="
        Summary of statement balances and payments.")
    transactions: List[Transaction] = Field(..., description="A list of
        all transactions for this statement.")

search_tool = SerperDevTool()

@CrewBase
class CreditCardBillInjector():
    """CreditCardBillInjector crew"""

    agents_config = 'config/agents.yaml'
    tasks_config = 'config/tasks.yaml'

    @agent
    def credit_bill_parser(self) -> Agent:
        return Agent(
            config=self.agents_config['credit_bill_parser'],
            verbose=True,
            allow_delegation=False
        )

    @agent
    def credit_card_manager(self) -> Agent:
        return Agent(
            config=self.agents_config['credit_card_manager'],
            tools=[run_postgres_query],
            verbose=True,
            allow_delegation=True
```

```
)\n\n@agent\ndef merchant_manager(self) -> Agent:\n    return Agent(\n        config=self.agents_config['merchant_manager'],\n        tools=[run_postgres_query, search_tool],\n        verbose=True,\n        allow_delegation=True\n    )\n\n@agent\ndef credit_card_transaction_manager(self) -> Agent:\n    return Agent(\n        config=self.agents_config['credit_card_transaction_manager'],\n        tools=[run_postgres_query],\n        verbose=True,\n        allow_delegation=True\n    )\n\n@task\ndef parse_bill(self) -> Task:\n    return Task(\n        config=self.tasks_config['parse_bill'],\n        agent=self.credit_bill_parser(),\n        output_pydantic=BillAnalysis\n    )\n\n@task\ndef manage_card_database(self) -> Task:\n    return Task(\n        config=self.tasks_config['manage_card_database'],\n        agent=self.credit_card_manager(),\n        context=[self.parse_bill()]\n    )\n\n@task\ndef manage_merchants(self) -> Task:\n    return Task(\n        config=self.tasks_config['manage_merchants'],\n        agent=self.merchant_manager(),\n        context=[self.parse_bill()]\n    )\n\n@task\ndef manage_transactions(self) -> Task:\n    return Task(\n
```

```

        config=self.tasks_config['manage_transactions'],
        agent=self.credit_card_transaction_manager(),
        context=[self.parse_bill(), self.manage_card_database(),
                 self.manage_merchants()]
    )

@crew
def crew(self) -> Crew:
    #manager = Agent(
    #    config=self.agents_config['crew_master'],
    #    allow_delegation=True
    #)
    return Crew(
        agents = self.agents,
        tasks = self.tasks,
        verbose=True,
        process=Process.sequential,
    )

```

And finally, in the main program,

```

import sys
import warnings

from datetime import datetime

from credit_card_bill_injector.crew import CreditCardBillInjector

warnings.filterwarnings("ignore", category=SyntaxWarning, module="pysbd")

from dotenv import load_dotenv
import os

import fitz

def run():
    """
    This function sets up the environment and runs the CrewAI process.
    """
    sys.path.append(os.path.abspath(os.path.join(os.path.dirname(
        __file__), '..', '..')))
    dotenv_path = os.path.expanduser('~/Projects/smart-home/.env')
    load_dotenv(dotenv_path=dotenv_path, override=True)

    doc = fitz.open('/data/Projects/smart-home/input-document/
                    credit_card_bill.pdf')
    bill_content = ""
    for page in doc:
        bill_content += page.get_text()

```

```
doc.close()

injector_crew = CreditCardBillInjector()

result = injector_crew.crew().kickoff(
    inputs={
        'bill_content': bill_content
    }
)

print("\n\n#####\n")
print("## Here is your Crew's result:")
print("#####\n")
print(result)

if __name__ == '__main__':
    run()
```

A

Brief Introduction to Python Package Manager

CONTENTS

| | | |
|-------|---------------------------------------|-----|
| A.1 | Conda | 133 |
| A.1.1 | Installation | 133 |
| A.1.2 | Configuration of Channels | 134 |
| A.1.3 | Environment Management | 134 |
| A.1.4 | Package Management | 135 |
| A.2 | UV | 135 |
| A.2.1 | Installation | 136 |
| A.2.2 | Python Interpreter Installation | 136 |
| A.2.3 | Environment Management | 137 |
| A.2.4 | Package Management | 138 |

Two package managers, `conda` and `uv`, are introduced.

A.1 Conda

Developed and maintained by Anaconda Inc., `conda` is a free and open-source program for package and environment management. When installing and updating packages with `conda`, it automatically detects the hardware of the machine and the dependencies of packages, and applies the latest compatible versions.

The purpose of this chapter is not to give a detailed introduction to `conda` which can be found at [1]. This chapter is merely a summary of commonly used configurations and commands. Majority of contents in this chapter come from [2].

A.1.1 Installation

It is recommended that the user install Miniconda, a variation of Anaconda distribution, to use `conda`.

Miniconda is a lightweight version of Anaconda distribution. The former contains only `conda`, `python` and a small number of other packages, while the latter contains more than three hundred packages, some of which are proprietary to Anaconda and may require a license for use in production environments.

A.1.2 Configuration of Channels

Channels refer to the cloud archive from where `conda` downloads and upgrades packages. There are default channels coming with `conda` installation, and the user can add channels or change their priorities in the list.

The channels are stored in file `.condarc`, which is usually stored in the user's directory. The user can add or remove channels by directly editing that file. Alternatively, there are commands to add channels or to check channel status.

To list all channels, use

```
conda config --show channels
```

Commonly seen channels include `defaults` and `conda-forge`. Notice that `defaults` is a collection of three Anaconda-defined channels, and it contains proprietary packages developed by Anaconda, and it may require licensing to be used in commercial environments.

To add a channel, either use

```
conda config --add channels <new channel>
```

to add a new channel to the top (highest priority) of the channel list, or

```
conda config --append channels <new channel>
```

to append a new channel to the end (lowest priority) of the channel list.

A.1.3 Environment Management

To list all environments, use

```
conda info --envs
```

To activate or deactivate an environment, use

```
conda activate <env name>
conda deactivate
```

respectively.

To list all packages and their source channels, use

```
conda list --name <env name> --show-channel-urls
```

where notice that the additional `--show-channel-urls` displays where each package come from.

To create an environment, use

```
conda create --name <env name> [python=<version>]
```

where additional `--file` followed by the list of packages in TXT or YAML file can be used to create an environment and install required packages. In this case, `conda` automatically checks and configures the machine setup and handles package dependencies.

To clone an environment, use

```
conda create --clone <source env name> --name <env name>
```

To remove an environment, use

```
conda remove --name <env name> --all
```

The environment, including the platform, packages and channels information can be exported as a plain text file, usually either a YAML file or a TXT file. This file can be used to quickly setup an identical environment in a later stage.

It is recommended to name the file after the environment name so that the name is preserved.

To export the environment, use

```
conda export --from-history><env name>.yml
```

A.1.4 Package Management

To install a package in specified environment, use

```
conda install --name <environment name> <package name>
```

To update all packages in an environment, use

```
conda update --all --name <environment name>
```

To remove a package from specific environment, use

```
conda uninstall --name <environment name> <package name>
```

If no environment name is specified in the above commands, current environment will be used.

A.2 UV

uv is another open-source Python package manager that has gained increasing popularity recently. Compared with `conda`, it has the following features:

- Fast. This is because it is implemented in Rust, a programming language whose performance characteristics are comparable to C/C++, whereas many other Python package managers such as `conda` are implemented in

the much slower languages such as Python. It is said that `uv` is typically 10 to 100 times faster than `conda` when comes to massive library installation.

- Git-style management. The user can use `uv` to initialize a Python project and create a virtual environment. Unlike `venv` or `conda` which store virtual environments and associated packages in a dedicated location outside the project folder, `uv` stores all virtual environment data inside the project root folder by default, typically in the `.venv` directory.

Details of `uv` can be found at [3]. A brief is given in the remaining of this section.

A.2.1 Installation

To install `uv`, follow the instructions in [3]. Installation is performed with a single-line PowerShell or Bash command on both Windows and Linux/macOS, which downloads the installation script and installs `uv` on the system.

For Linux and macOS:

```
$ curl -LsSf https://astral.sh/uv/install.sh | sh
```

For Windows:

```
> powershell -ExecutionPolicy ByPass -c "irm https://astral.sh/uv/
    install.ps1 | iex"
```

A.2.2 Python Interpreter Installation

Once `uv` is installed, the user may want to install a Python runtime interpreter for basic script execution.

Unlike `conda`, where each virtual environment is self-contained and includes its own `python.exe` (on Windows) or `python` binary (on Linux/macOS), `uv` manages Python interpreters in a centralized manner. In `uv`, the Python runtime is downloaded once and stored in a global cache directory, shared by all projects.

Project folders do not contain the interpreter itself. Instead, they include a `.python-version` file, which specifies the version of Python required for that project. When a virtual environment is created, it links to the corresponding cached interpreter.

To install the latest Python interpreter and make it available as `python3.<minor>` on your PATH, run:

```
uv python install
```

To install a specific version:

```
uv python install <version>
```

To also make this version the default `python` and `python3` executable in your shell, use:

```
uv python install <version> --default
```

With the above steps completed, the user can run basic Python scripts without creating a project or a virtual environment by using:

```
uv run <script>.py
```

In addition to the Python interpreter itself, similar commands can be used to install Python-related standalone executables such as `ruff`. These are not Python libraries, but tools that developers commonly use when developing Python applications. To install such tools, use:

```
uv tool install <tool>
```

The tool will be installed in a centralized cache.

Python interpreters and tools can be upgraded or removed using similar commands.

A.2.3 Environment Management

While both Python interpreters and standalone executable tools are installed in a centralized manner, Python libraries are installed within their corresponding projects. Each project defines its own environment, and the libraries and dependencies are managed by files stored locally inside the project root folder. This is where the package management becomes Git-style.

To initiate a new project, use

```
uv init <project name>
```

which will create a new directory with the project name, and inside the project, a demo “hello-world” python script. If the project folder already exists, set it as the current working directory and use

```
uv init
```

Once a project is initiated, uv automatically applies the following file system

```
|- .gitignore  
|- .python-version  
|- README.md  
|- main.py  
|- pyproject.toml
```

Notice that though `.gitignore` is automatically created and caches used by uv added, the user still needs to use `git init` should he wants to make it a git repository.

With Python interpreter installed, the user can run the script, by default “hello-world”, using

```
uv run main.py
```

Once done, a `.venv` should be created as follows.

```
.
|-- .venv
|   |-- bin
|   |-- lib
|   \-- pyvenv.cfg
|-- .python-version
|-- README.md
|-- main.py
|-- pyproject.toml
\-- uv.lock
```

Important files and subdirectories are explained below.

- **.venv** contains the actual code and binaries of the Python libraries installed for the project, along with scripts and environment-specific configuration.
- **uv.lock** is a human-readable lockfile that lists the fully resolved dependency graph for the project, including the exact names, versions, sources, and hashes of all libraries.
- **pyproject.toml** declares the minimum set of required libraries and dependencies for the project, without necessarily specifying exact versions or the complete dependency tree.
- **.python-version** specifies the required Python interpreter version for the project, which **uv** uses to select the appropriate cached runtime.

The **uv.lock** file contains libraries and dependencies information. It is automatically created and updated when the user runs the program or update the libraries. Share the project with **uv.lock** so that the receiver can re-create the environment. There is no need to specifically export a **requirements.txt** file so long as the receiver also uses **uv**.

While the lockfile is created automatically, the lockfile may also be explicitly created or updated using

```
uv lock
```

While the lockfile is automatically updated. the user can check whether it is up to date by

```
uv lock --check
```

The user can export **requirements.txt** specifically if it needs to be shared with someone with **conda**. To do that, use

```
uv export --format requirements.txt
```

To install files from **uv.lock** simply run the script and **uv** will automatically update the installed libraries. Alternatively, use

```
uv sync
```

to manually trigger an installation.

A.2.4 Package Management

By default, `uv` uses the Python Package Index (PyPI) for dependency resolution and package installation. However, `uv` can be configured to use other package indexes; details are not given here.

To install all packages specified in the `uv.lock` file, use `uv sync` as explained earlier.

To install one or more specific packages, use:

```
uv add <package>
```

This command not only downloads and installs the package(s) into the project's virtual environment, but also updates the `pyproject.toml` and `uv.lock` files accordingly.

Similarly, use:

```
uv remove <package>
```

to remove a package from the environment and update the dependency files.

Use:

```
uv tree
```

to display the project's dependency tree.

In addition to `uv add`, `uv` provides:

```
uv pip install <package>
```

which behaves like `pip install` inside the project virtual environment, and adds libraries to `.venv`. Unlike `uv add`, it does not modify the `pyproject.toml` or `uv.lock` files. This makes `uv pip install` suitable for local (usually experimental) installations that should not be traced as part of the project permanent dependencies. (Notice that `.venv` is in `.gitignore` by default, and it is not meant to share across platforms.) For reproducible dependencies, `uv add` is the recommended command.



Bibliography

- [1] Inc. Anaconda. Anaconda org. <https://anaconda.org/>. Accessed: 2025-07-15.
- [2] Inc. Anaconda. Cheatsheet. <https://docs.conda.io/projects/conda/en/stable/user-guide/cheatsheet.html>. Accessed: 2025-07-15.
- [3] Astral. Uv. <https://docs.astral.sh/uv/>. Accessed: 2025-08-14.
- [4] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality, March 2023.
- [5] chroma-core. chroma-core/chroma: Open-source search and retrieval database for ai applications. <https://github.com/chroma-core/chroma>. Accessed: 2025-08-25.
- [6] CrewAI. Installation. <https://docs.crewai.com/en/installation/>. Accessed: 2025-08-21.
- [7] CrewAI Documentation. Agents – crewai concepts. <https://docs.crewai.com/en/concepts/agents>. Accessed: 2025-08-21.
- [8] CrewAI Documentation. Memory – crewai core concepts. <https://docs.crewai.com/en/concepts/memory>. Accessed: 2025-08-25.
- [9] CrewAI Documentation. Tasks – crewai core concepts. <https://docs.crewai.com/en/concepts/tasks>. Accessed: 2025-08-22.
- [10] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. Qlora: Efficient finetuning of quantized llms. *arXiv preprint arXiv:2305.14314*, 2023.
- [11] Ed Donner. LLM engineering (ed donner). https://github.com/ed-donner/llm_engineering. Accessed: 2025-04-15.
- [12] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models, 2021.
- [13] LangChain. Langchain. <https://www.langchain.com/langchain>. Accessed: 2025-09-09.

- [14] LangChain. Langgraph. <https://www.langchain.com/langgraph>. Accessed: 2025-09-09.
- [15] LangGraph Documentation. Compiling your graph – langgraph guides: Low-level graph api concepts. https://langchain-ai.github.io/langgraph/concepts/low_level/#compiling-your-graph. Accessed: 2025-09-14.
- [16] Zachary C. Lipton, John Berkowitz, and Charles Elkan. A critical review of recurrent neural networks for sequence learning, 2015.
- [17] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning, 2023.
- [18] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *NeurIPS*, 2023.
- [19] Sun Lu. Document explainer. <https://github.com/sunluelectric/document-explainer>. Accessed: 2025-08-11.
- [20] Microsoft. Autogen: A framework for building ai agents and applications. <https://microsoft.github.io/autogen/dev/index.html>. Accessed: 2025-10-07.
- [21] Ollama. Ollama library. <https://ollama.com/library>. Accessed: 2025-04-14.
- [22] Python Org. asyncio — asynchronous i/o. <https://docs.python.org/3/library/asyncio.html>. Accessed: 2025-08-11.
- [23] Ilya Sutskever, Oriol Vinyals, and Quoc V Le. Sequence to sequence learning with neural networks. *Advances in neural information processing systems*, 27, 2014.
- [24] Rohan Taori, Ishaaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca, 2023.
- [25] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need, 2017.
- [26] Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yuheng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, et al. A survey of large language models. *arXiv preprint arXiv:2303.18223*, 2023.
- [27] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*, 2023.