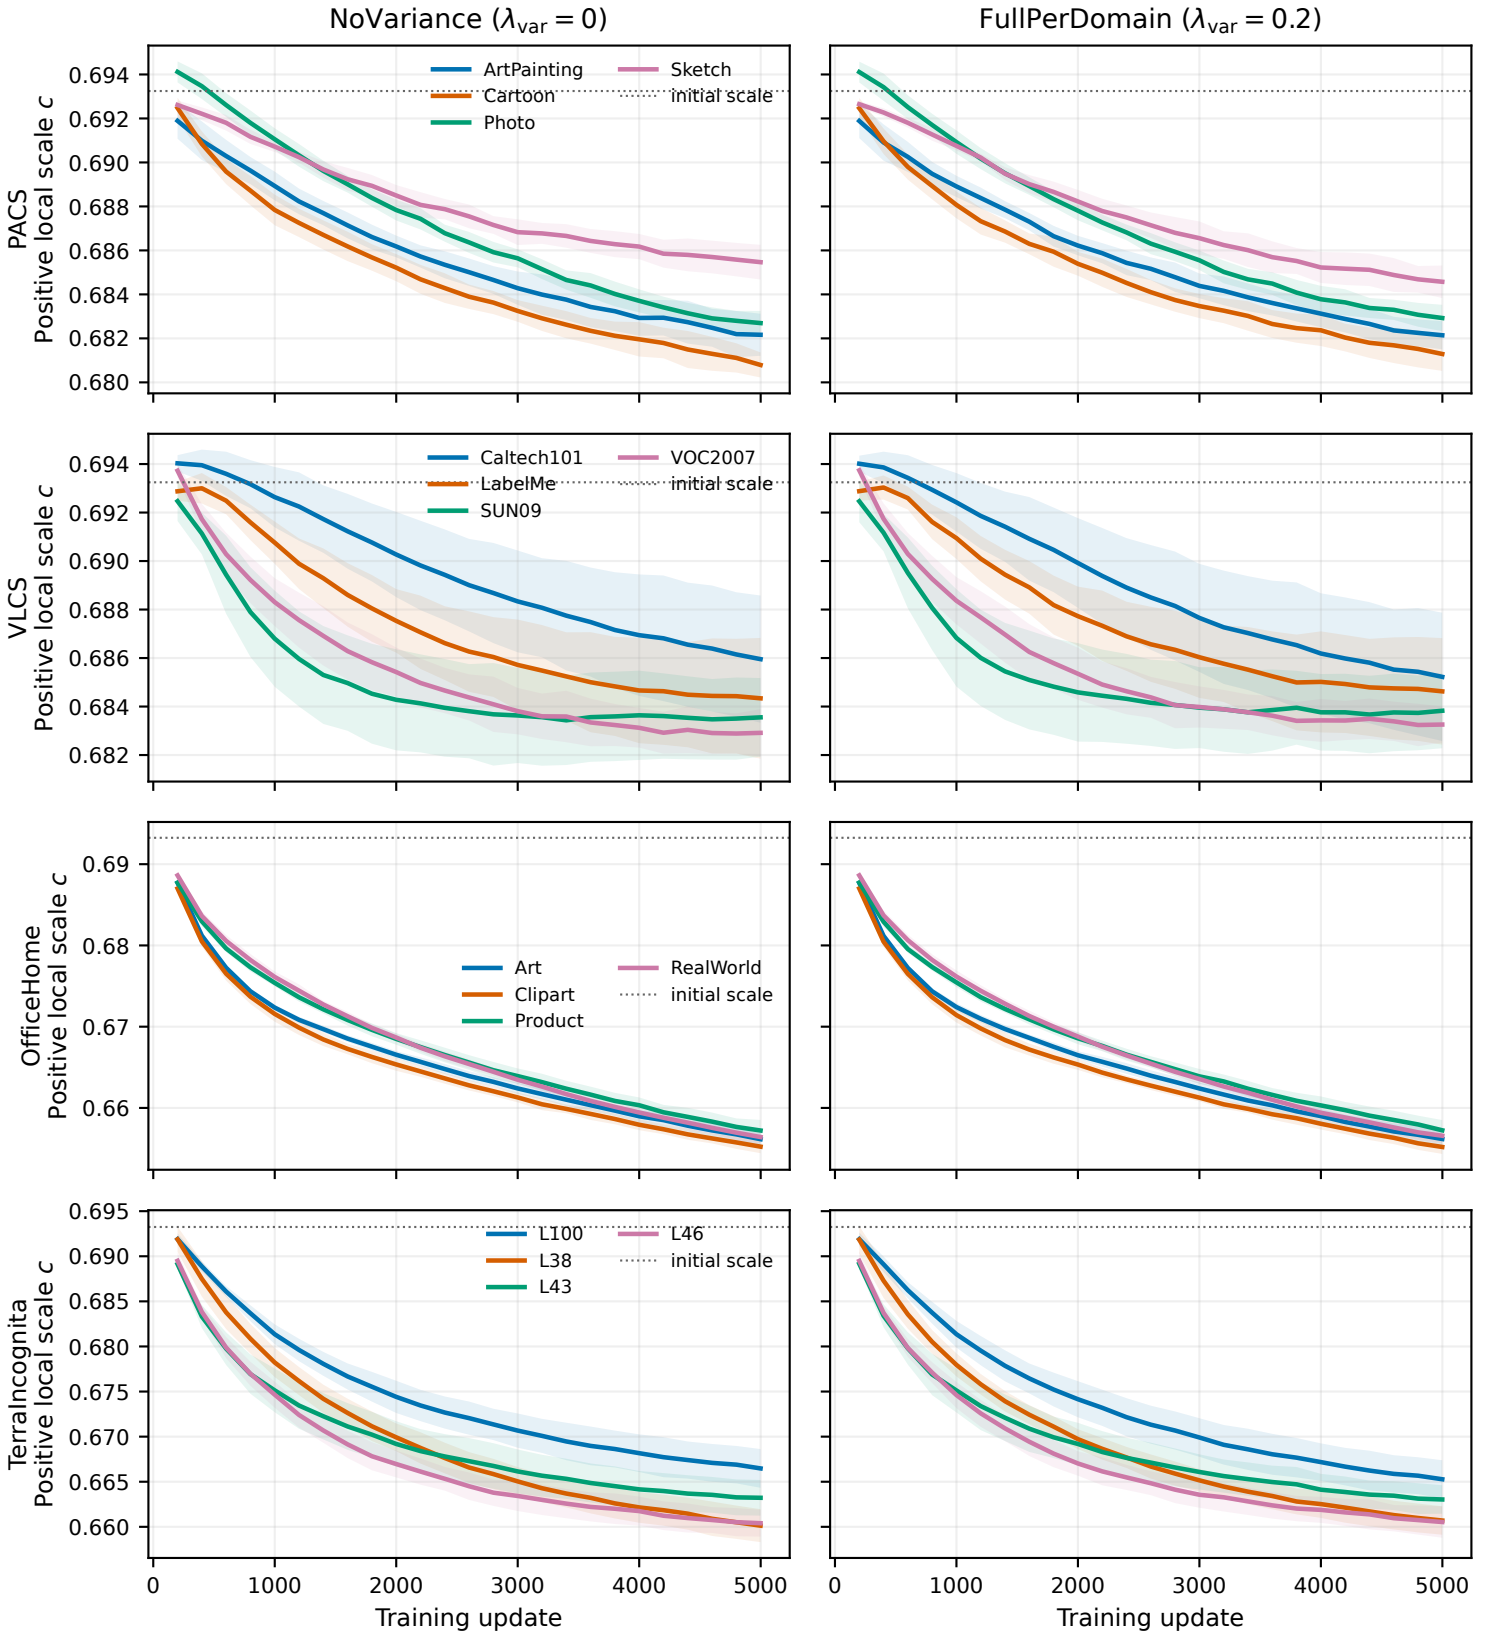

Loader slot j is remapped to the j-th original environment after removing the held-out target. Lines and bands are descriptive mean ± SD over 3 target contexts × 4 seeds (n=12; overlapping source data).