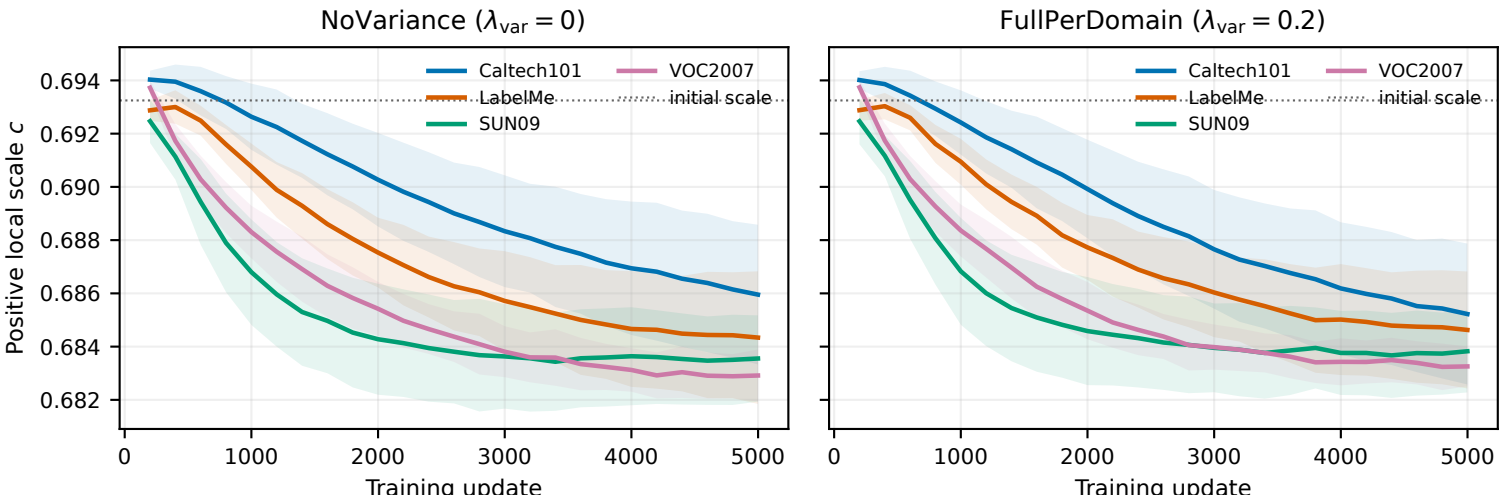

Semantic source names are reconstructed from loader slots; mean ± SD over 3 target contexts × 4 seeds (n=12; descriptive, overlapping).