


Moss MCP Transaction Preflight

Moss MCP 交易安全预检

Agentic pre-sign protection on Monad
Monad 上的智能体签名前安全层

Preview. Verify. Sign with confidence.
先预览，再验证，安心签名。

Luyao Zhang · Sunshine One-Person Builder Lab

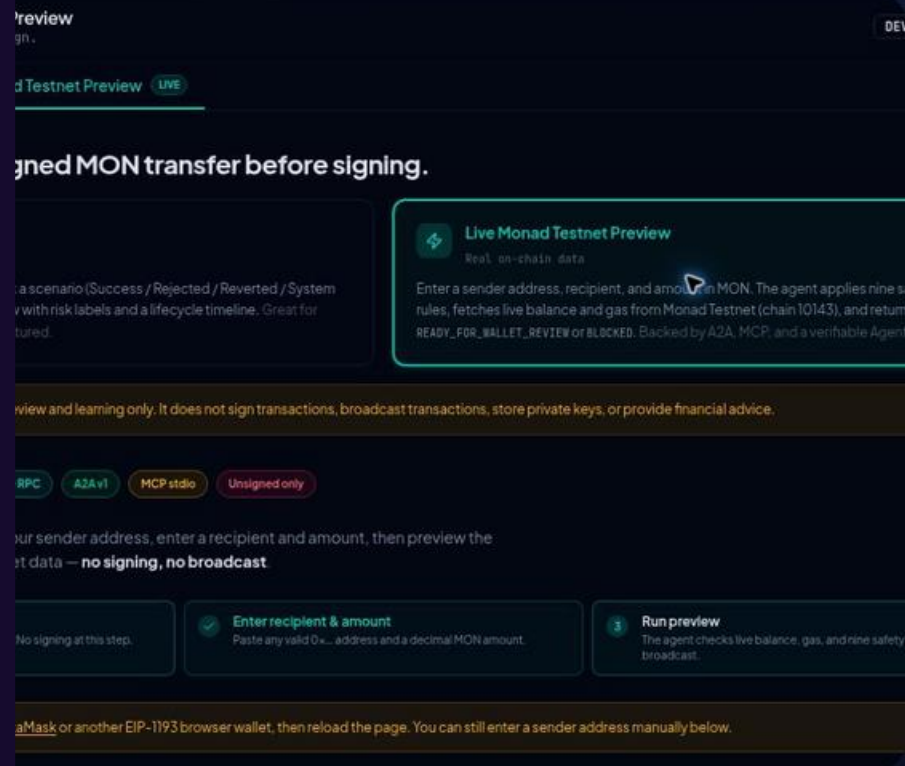

READY FOR REVIEW OR SAFELY BLOCKED

通过后交给钱包审核，任一警告立即阻断

AI makes opaque signing riskier

AI 让“不透明签名”风险进一步放大

Natural-language intent can jump too quickly into execution.

自然语言意图可能过快进入链上执行。

NETWORK

Which chain?
到底在哪条链？

VALUE

How much + gas?
金额与 Gas？

CONTROL

Who decides?
谁做最终决定？

Users need an understandable checkpoint before signing. | 用户需要一个签名前、可阅读、可核查的安全检查点

A live preflight—before the wallet

先预检，再进入钱包

**Live Monad Testnet Preview**
真实线上界面 · 输入意图 → 运行预检 → 查看证据

CHAIN 10143 · LIVE UI

PREVIEW PIPELINE

Intent Recorded

Skill Applied

A2A Task Created

MCP Tools Called

Testnet Check

PREVIEW PARAMETERS

Sender address

Auto-filled when you connect your wallet above. You can also paste any 0x... address — no private key needed.

Recipient address

Default: WMON — Wrapped MON contract on Monad Testnet. Replace with any address.

What does sending MON to WMON do?

Amount (MON)

Decimal string. Whole amounts like "1" are fine.

Preview on Monad Testnet

Fill in the form and click **Preview on M**

Live results from the Monad Testnet RPC will

One clear user action

一个清晰的核心动作

1 Enter intent
填写 sender、recipient、MON amount

2 Run agent preflight
A2A 编排 · MCP 工具 · Skill 规则

3 Review the decision
查看 READY 或 BLOCKED 与证据

No key requested

不请求私钥或助记词

Fail closed on warning

出现任一警告，立即停止

Deployed front-end captured 2026-08-08

One focused action

Unsigned MON transfer

未签名 MON 转账

- Sender / 发送地址
- Recipient / 接收地址
- MON amount / 转账金额
- No private key / 无需私钥

HUMAN-IN-THE-LOOP

Wallet review stays separate.

钱包确认始终由用户控制。

How it works: one traceable safety path

工作原理：一条可追踪的安全路径



READY_FOR_WALLET_REVIEW or BLOCKED

A2A provides traceability · MCP isolates tools · Agent Skill makes policy verifiable
A2A 保留任务轨迹 · MCP 解耦工具 · Agent Skill 让规则可验证

05

When evidence fails, execution stops

证据不足，流程立即阻断

OBSERVED RESULT · 已观测结果

Fail-closed in a real Testnet run

真实测试网运行：安全阻断，而不是带错执行

Captured 2026-08-08 09:14:57 UTC

evidence/demo-run.json

✕

BLOCKED

Any warning stops the flow

Reason / 原因

eth_estimateGas

insufficient balance · 余额不足

No transaction was submitted / 未提交交易

Traceable MCP execution / 可追踪 MCP 执行

A2A task 03260844... · artifact 50bb3a06...

preview_discover

List action / 发现动作

5 ms · success

preview_load

Load schema / 加载规则

1 ms · success

preview_action

Build unsigned tx / 构建交易

4 ms · success

preview_simulate

RPC preflight / 链上预检

312 ms · warning

Transaction intent / 交易意图

Amount / 金额

0.01 MON

Unsigned chain ID

10143

Gas limit

21000

Network evidence

null → required evidence missing

Outcome / 结果

STOP; do not proceed / 停止

RPC target: Monad Testnet · Warning returned before full evidence could be assembled

Nine-rule policy state / 九条规则状态

8 satisfied · 1 unmet

✓ RECORD_INTENT

✓ TESTNET_ONLY

✓ DECIMAL_STRINGS

✓ NO_PRIVATE_KEYS

✓ NO_SIGNING

✓ NO_BROADCAST

✕ SIMULATION_REQUIRED

✓ STOP_ON_WARNING

✓ PRESENT_BEFORE_SIGNING

Missing evidence is itself a reason to block.

证据不完整本身就是阻断条件。

Observed artifact · no private key · no signature · no broadcast · source preserved in the submission package

LATEST PUBLIC RUN

BLOCKED

MCP connection closed before simulation completed.

MCP 在模拟完成前关闭连接。

A2A identifiers recorded

0 signatures


0 broadcasts

Fail-closed is a feature—and the deployment issue is disclosed.
安全阻断是功能；部署限制也被如实披露。

06

Open protocols, verifiable policy

开放协议栈，可验证安全策略

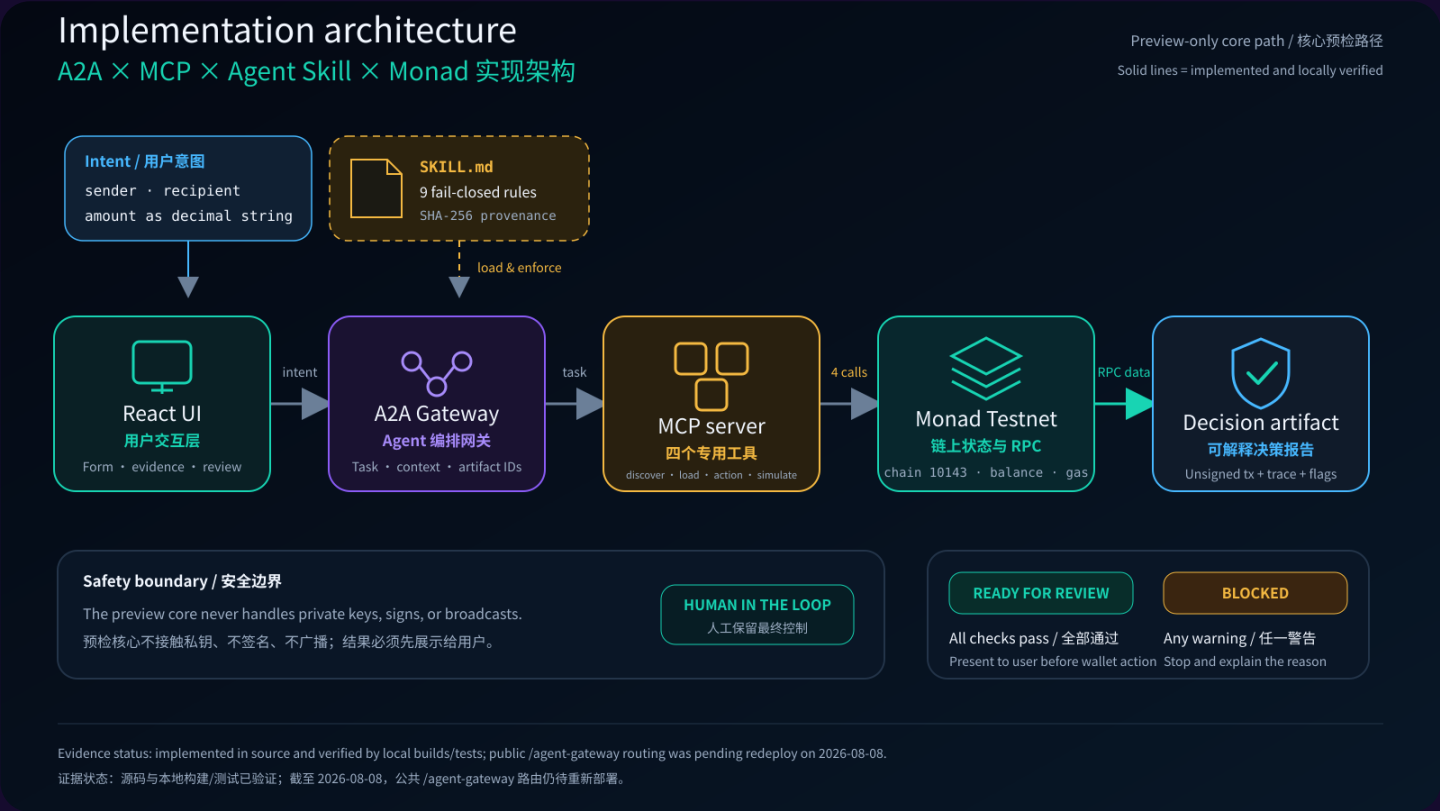

A2A

Task + context + artifact

任务与结果可追踪

MCP

4-tool preflight lifecycle

四阶段预检工具

SKILL.md

9 rules + SHA-256 hash

规则版本可验证

MONAD

Testnet chain ID 10143

实时链上状态

discover → load → action → simulate

Built, tested, and honest about the boundary

已构建、已验证，也坦诚说明边界

91/91

automated tests

自动化测试

4

MCP tools

MCP 工具

9

fail-closed rules

安全规则

0

private keys

私钥接触

Safety boundary | 安全边界

Testnet + education only · No agent-side signing · Any warning stops the flow

仅限测试网与教育 · Agent 不签名 · 任一警告都会阻断

Current limitation: MCP stdio may close on Replit.

当前限制：Replit 上的 MCP stdio 连接仍可能关闭。

AI should create a safer moment for humans to decide.

AI 应该为人类创建一个看懂、验证并自主决定的安全时刻。

Understand before you sign.
签名前，先看懂。

LIVE DEMO

moss-mcp-transaction.replit.app

OPEN SOURCE

github.com/sunshineluyao/Moss-Mcp-Transaction

DOI

[10.5281/zenodo.21539761](https://doi.org/10.5281/zenodo.21539761)