A³-CodGen: A Repository-Level Code Generation Framework for Code Reuse with Local-<u>A</u>ware, Global-<u>A</u>ware, and Third-Party-Library-<u>A</u>ware

Dianshu Liao, Shidong Pan, Xiaoyu Sun, Xiaoxue Ren, Qing Huang, Zhenchang Xing, Huan Jin, Qinying Li

Abstract—Code generation tools are essential to help developers in the software development process. Existing tools often disconnect with the working context, i.e., the code repository, causing the generated code to be not similar to human developers. In this paper, we propose a novel code generation framework, dubbed A^3 -CodGen, to harness information within the code repository to generate code with fewer potential logical errors, code redundancy, and library-induced compatibility issues. We identify three categories of representative information for the code repository: local-aware information from current code file, global-aware information from other code files, and third-partylibrary information. Results demonstrate that by adopting the A^3 -CodGen framework, we successfully extract, fuse, and feed code repository information into the LLM, generating more accurate, efficient, and highly reusable code. The effectiveness of our framework is further underscored by generating code with a higher reuse rate, compared to human developers. This research contributes significantly to the field of code generation, providing developers with a more powerful tool to address the evolving demands in software development in practice.

Index Terms—Code Reuse, Code Generation, Code Repository Knowledge Mining, Prompt Engineering

I. INTRODUCTION

N the realm of Software Engineering, the advent of Large Language Models (LLMs) has revolutionized various tasks, including code generation [1], [2], [3], [4], [5]. The automatic generation of code by these models significantly reduces development time and effort [6]. Specifically, in the process of evolving software projects, software engineering developers are frequently tasked to add new features and functionality [7]. LLMs such as ChatGPT [8], GitHub Copilot [9], Codex [10] are capable of automatically generating code based on the developers' requirements (e.g., natural language descriptions of functions and function definitions).

A significant gap still persists between the code generated by LLMs and that crafted by human developers. When adding new functionality to a specific module, developers already had sufficient knowledge about the current task and the entire code repository. Also, according to a previous study [11], developers

- D. Liao, X. Sun are with School of Computing, Australian National University, Australia.
- Q. Huang, the corresponding author, is with the School of Computer Information Engineering at Jiangxi Normal University, China (e-mail: qh@jxnu.edu.cn).
- S. Pan, Z. Xing are with the CSIRO's Data61 & School of Computing, Australian National University, Australia.
- X. Ren is with the School of Software Technology, Zhejiang University, China.
 - H. Jin, Q. Li are with the Jiangxi University of Technology, China.

often expect that code generation tools could be aware of more context/knowledge by using specific frameworks/libraries [12]. In addition, they hope the generated code maximum utilizes specific third-party libraries (e.g., invocation of an API in a library) [13], [14], [15]. Above all, in contrast to straightforward LLM-based code generation, developers especially consider three primary categories of information:

■ Local Information: This category encompasses information within the current working context, including defined function signatures and variables. It also covers the relative file paths of the module within the project, such as the module's Fully Qualified Names (FQNs), like *unstructured.documents.html*. Local information is crucial to ensuring the generated code utilizes accurate variables and operates harmoniously with the other functions in the project.

Q Global Information: This category involves functions from other code files within the same repository, accessible via fully qualified import API names. A previous research highlighted that only around 30% of methods operate independently in open-source projects [16]. Hence, these external functions are essential for implementing new functions without duplicating code. For example, developers import functions "from *unstructured.partition.text_type* import *is_bulleted_text*" from other modules, instead of writing a function to judge "bulleted text" from scratch.

3 Third-Party-Library Information: This category includes third-party libraries pre-installed in the code repository's environment. These libraries can be accessed directly through import statements, enhancing functionality without extra dependencies.

Unfortunately, none of existing code generation methods take above three information into consideration simultaneously. As the most common code generation tool, ChatGPT [8] demonstrates commendable coding ability [17] but relies solely on user input. GitHub Copilot [9], which explicitly utilizes local information spanning the current working context, often struggles to harness the full potential of global information presented in the entire code repository¹. When these methods disregard local and global module information, they risk omitting crucial logic during code generation [18]. For instance, they might forget to extract text from a tag before attempting to identify it as a bullet point (*is_bulleted_text*). Furthermore, neglecting third-party library information may cause the LLMs to randomly select third-party libraries and

¹https://githubnext.com/projects/copilot-view/

generate code based on them. If the selected libraries thirdparty are unsupported under the given environment, it can lead to compatibility issues, such as "ModuleNotFoundError: No module named xxx."

Therefore, to encounter the insufficient information awareness issue in code generation tasks, we introduce novel A^3 -CodGen (Local <u>A</u>ware, Global <u>A</u>ware, and Third-Party-Library Aware). This framework systematically mines and utilizes external knowledge from the local module, global module, and third-party libraries. First, our framework begins by acquiring foundational information about functions and third-party libraries within the code repository. This initial step provides a solid function base and a third-party-library base that supports subsequent information retrieval processes. Next, it conducts knowledge retrieval from the function base, the third-party library base, and the current file. These retrieved insights are systematically organized into three distinct categories of code repository-aware knowledge. Subsequently, the framework seamlessly fuses these three types of code repository-aware knowledge into a cohesive prompt. This prompt serves as the input to the foundational LLM, enabling the model to generate code that closely resembles the work of human developers.

Our experiments are driven by two primary objectives: 1) To investigate the effectiveness of three distinct types of code repository information in assisting the model with code generation for specific code repositories. 2) To assess whether our framework can efficiently extract and utilize these three types of information. We crawl and filter 29 representative Python code repositories from PyPI, assembling 13,784 functions. To ensure a diverse benchmark dataset, we conduct a sampling process, selecting representative functions from each repository to total 383 functions. We subsequently label these benchmarks and the 3,830 model outputs generated under different configurations to evaluate the performance of A^3 -CodGen. Our experimental results confirm the efficacy of incorporating three types of code repository-awareness knowledge in aiding the foundational model to reuse code repository knowledge. The A^3 -CodeGen framework excels in recognizing and utilizing these three types of code repository knowledge, leading to exceptional performance metrics in terms of local reuse, global reuse, and third-party library reuse. Thanks to its outstanding code reuse capabilities, our framework is capable of generating concise code that seamlessly integrates with the code repository's working environment. Furthermore, we identify optimal configurations for local and global information, enabling the model to effectively leverage essential knowledge while avoiding the potential pitfalls of information overload.

The main contributions of this paper are as follows.

- To the best of our knowledge, we are the first to conduct an extensive empirical study, systematically investigating the usefulness of local information, global information, and third-party-library information in code generation tasks.
- We introduce a novel framework, dubbed A³-CodGen Framework, effectively knowledge mining and knowledge utilization, aiding models in better understanding and fully utilizing the knowledge within code repositories.

- We construct a new benchmark dataset, namely RepoEval, to reflect the effectiveness on code-repository-aware code generation. Results demonstrate the validity of the three types of code repository information and show that our framework can effectively mine and utilize this knowledge.
- We open-source our replication package [19], including the dataset, source code, and experimental results, for follow-up research.

II. MOTIVATION

A. Limitation of Existing Code Generation Approaches

Benefiting from the rapid development of Transformer structures and pre-trained LLMs in the early 2020s, code-LLMs experienced significant growth. Transformer code models, exemplified by milestone works such as CodeT5 [20], CodeBERT [21], and GraphCodeBERT [22], dominated the scene. More recently, decoder-only Transformer models have become the mainstream in generative models. Represented by Codex [23], CodeGen [24], and others like [25], [26], [27], [28], [29].

Nowadays, to Software Engineering developers, LLM-empowered code generation has become an irreplaceable assistant tool in their development cycle [30], [31]. Although the code-LLM has been developed for years, those code generation tools still play a supporting role in the actual SE development. Essentially, there are significant differences between the code generated by LLMs and that crafted by human developers. Specifically, we conclude the phenomenon in the following threefold:

 Observation 1: Followed by the innate features of LLMs, the content and quality of generated codes heavily depend on the human-crafted prompts.

Discussion 1: Providing longer prompts with richer content seems a plausible solution. With the growth of LLM size, the maximum input length increases from 512 tokens for the early models [32] to 32,000 tokens for the extended GPT-4 models [33]. However, it is still impossible to feed the entire code repository and all other relevant information into the LLMs. Furthermore, studies have demonstrated that irrelevant context in prompts not only affects model efficiency and increases expenses, but also potentially compromises the model performance [34]. Therefore, to maintain the practicability and effectiveness simultaneously for code generation tasks, external context information should be extracted and selectively fed into LLMs.

Observation 2: Existing methods focus on generating independent and often small-scale code units [35], [16]. According to a previous study [35], the code generated by LLMs shows lower method-level correctness. Although various benchmarks have been proposed (Details are discussed in the Related Work (Section VII)), newly generated code still remains questionable.

Discussion 2: The correctness relates to many factors, and evaluation of correctness is already challenging enough. Studies have shown that larger and more powerful foundation LLMs lead to better code generation correctness. Additionally, retrieving and reusing existing functions or APIs

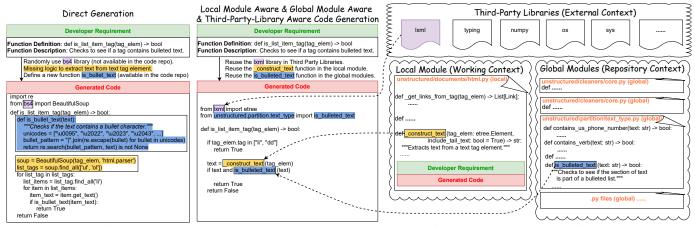


Fig. 1: Knowledge-Starved Code Generation vs. Code Repository Aware Code Generation.

(which are usually verified by other human developers), as the skeleton for code generation, could also fundamentally improve the correctness. This is also the strategy that human developers commonly apply in practice.

Observation 3: Some code-LLMs (e.g., GPT-4) have developed superior skills in simple algorithms such as greedy algorithm and searching strategies, but they perform poorly in complicated data structures such as tree structure and graph theory [36].

Discussion 3: Similarly, instead of generating complex code snippets from scratch, importing functions that are already implemented can mitigate the shortcomings of advanced-level programming challenges. For example, Python developers are likely to import functions from networkx package to build a graph, not building graphs by the dictionary-like data structure.

B. Code Generation in Code Repository

During software development, programmers typically work within a specific code environment, essentially a designated code repository. This repository encompasses all project modules, functions in these modules, and third-party libraries, serving as the foundational framework for building and expanding software applications. In this context, developers, especially experienced ones, must thoroughly navigate and understand this code repository environment to ensure seamless integration of newly added code with the existing one. When it comes to LLM-based code generation techniques, solely relying on inputting developer requirements to these models fails to fully utilize the potential of LLMs in interacting with existing code repository environments. Specifically, these techniques are blind to the repository's unique naming conventions and programming styles, particularly when the completion target is relevant to cross-file context [37], [38], [39]. Instead of using a single code file, well-designed programs emphasize separating complicated functionality into independent modules, each implementing only one aspect of the desired functionality [40], [41].

As illustrated in Fig. 1, in the *Direct Generation* method, developers input their requirements directly into ChatGPT, expecting to receive code for a function that executes the task

of "checking to see if a tag contains bulleted text". However, the generated code, due to its lack of knowledge about local modules, fails to adequately consider a crucial factor: before determining whether a tag contains bulleted text, it's essential to first extract the text content from the provided tag_elem , which is a vital prerequisite. As a result, the generated code (highlighted in the yellow box) simply searches for content within the and tags. If bullet text exists outside these tags, for example, in the input " u0095 This is a list item.<ldiv>", the generated code will be unable to extract text content, thus preventing accurate detection.

Furthermore, since the model is unaware of the existence of the "check text for bullet characters" function in the global module, it defines a new function is_bullet_text (highlighted in blue) in the generated code. A large part of this code duplicates the function is_bullet_text in the global module unstructured/partition/text_type.py, resulting in code redundancy. It also brings additional concerns about the correctness of the newly generated function.

Additionally, since the model is unaware of which third-party libraries are available, it arbitrarily imports and uses the bs4 (BeautifulSoup4) library. This can result in the generated code that refers to a library that is not available, leading to the bug "ModuleNotFoundError: No module named ***".

These knowledge gaps highlight the limitations of existing code generation approaches, highlighting the need for more context-aware methods that can effectively interact with the code repository environment. In summary, a lack of knowledge about local and global modules can result in models generating code lacking functional constraints or containing redundancies. A lack of knowledge about third-party libraries in the code repository can lead to models using arbitrary third-party libraries, causing problems with the generated code not working. As a result, generating code in specific modules of the code repository is more than just meeting functional requirements. To generate code similar to human developers, the approach must fully understand and effectively utilize this diverse contextual knowledge to ensure that newly introduced code seamlessly coordinates with the existing code repository.

C. Bridging the Gap: Making LLMs Aware of Three Types of Repository Knowledge

Above all, in order to enable LLMs to fully utilize information spanning over the code repository environment for code generation, it is essential to provide the model with three types of knowledge: local modules, global modules, and third-party library information.

As shown in Fig. 1 Local Module Aware & Global Module Aware & Third-Party Library Aware Code Generation, when the developer requirement is entered, since the model is aware of the knowledge of the local module, the generated code reuses the _construct_text function (highlighted in yellow) in the local module to extract the text content in the text label element. In addition, because the model is aware of knowledge of the global module, the generated code reuses the is_bulleted_text function (highlighted in blue) from the global module unstructured/partition/text_type.py, thus reducing redundant code definitions. In addition, the model is aware of the existence of third-party libraries and therefore reuses the lxml library to ensure its availability.

In the next section, we provide a comprehensive description of how to extract, structure, and utilize local aware, global aware, and third-party library aware information from code repositories.

III. A^3 CODGEN FRAMEWORK

In this section, we elaborate on our novel A^3 -CodGen Framework to harness the full potential of code repository knowledge for assisting LLMs in code generation. As depicted in Fig. 2, the A^3 -CodGen Framework comprises three essential phases. First, we obtain the function base and third-party library base (Section III-A), providing sufficient knowledge to support subsequent retrieval. Then, we retrieve the code repository knowledge from other code files, the third-party library repository, and the current file. After that, we organize them into 3 types of code repository aware knowledge (Section III-B). Finally, the three code repository-aware knowledge are fused into a prompt (Section III-C), serving as input to the foundation LLM, to ultimately generate codes with three essential awareness.

A. Repository Knowledge Base Construction

Code repositories contain a wealth of knowledge to exploit, but this knowledge usually exists in an unstructured form and cannot be directly utilized effectively, scattering in the code repository. Therefore, we need to perform systematic knowledge extraction to transform and compress this knowledge into a structured form in order to build a knowledge base to support subsequent knowledge utilization, such as knowledge retrieval. Thus, we perform **code repository information extraction** (Section III-A1) and **third-party library extraction** (Section III-A2) to obtain the function base and third-party-library base, respectively.

1) Code Repository Information Extraction: For a code repository, we can effortlessly obtain all code files in the repository's root folder. Then, for each file, we extract all included functions, gathering both basic code information and

semantic code knowledge. This process snowballs to extract all essential repository information.

Basic Code Knowledge Extraction. Abstract Syntax Tree (AST) is a tree representation of the source code, and studies have demonstrated its usefulness on various SE tasks [42]. In this study, we employ the Python library ast to analyze the AST for each source code file in the code repository. From the AST, we extract six essential types of basic information: 1) Comment. 2) Signature. This knowledge illustrates the parameters and returns of a function. For example, the signature of the function _construct_text is def _construct_text(tag_elem, include_tail_text)->str. 3) Function Source code. 4) Class associated with the function (if a function is a member of a class). 5) Is Empty tag. True means empty function, False means empty label. For example, function *construct text* has is Empty value False. 6) The file path of the function. This reflects the relative location of the current function in the entire code repository.

Semantic Code Knowledge Extraction. AST is criticized for its prone to long-term dependency problems. Also, simply employing AST potential weakens the capability to capture real and complex semantics [42]. Thus, we extract three types of semantic code knowledge to enhance the basic code knowledge, as follows:

- 1) Fully Qualified Name (FQN) of Functions. FQN indicates the function's origin in the code repository and, if applicable, the specific class within the module. For example, in the local module of the Fig. 1, the function _construct_text (highlighted in yellow) has the FQN unstructured.documents.html._construct_text.
- 2) Function Summary. Not every function is elaborated by comments. Even though the comments may exist, their quality varies distinctly. Therefore, we generate the function summary to precisely describe the purpose and functionality.

Function Summarizer Unit. To generate natural language semantic information for a function, we design a prompt as the core of the Function Summarizer unit. This prompt creates summaries for each function. Our Function Summarizer prompt consists of a task description, five demonstration examples, and the input template. The input to this unit is the function's code, and the output is the model-generated summarization for that function.

- 3) Vector Representations. In the previous two steps, we underlined explictly select information. To ensure efficient retrieval of global functions later on, having an effective code representation that faithfully captures function semantics is essential. Hence, we employ a dual-pronged approach, conducting separate embeddings for both the source code and the function summaries. This results in the creation of *code vector* and *summary vector*, respectively.
- 2) Third-Party Library Extraction: Third-party libraries often appear in code files, and when specific libraries are provided to a model, it likely has learned how to use them during training [43], [44]. Therefore, supplying just the library name allows the model to automatically understand how to use it for a given task. For example, we can ask the model to use the NumPy library to compute the cosine similarity, given the input vector_a and vector_b. In this case, the model

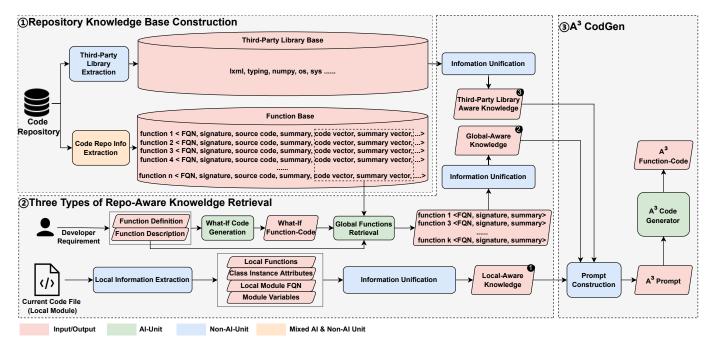


Fig. 2: A^3 -CodGen Framework.

can directly call functions in the NumPy library, such as *numpy.dot* and *numpy.linalg.norm*, to perform the required computations. The pre-trained model's prior knowledge and extensive large-scale training enable them to effectively utilize third-party libraries, improving the efficiency and accuracy of code generation. Therefore, we extract the import statements of third-party libraries directly from all code files via AST and saved their library names to construct the third-party library base.

B. Three Types of Repo-Aware Knowledge Retrieval

As we discussed in Section II-A, although the maximum input length grows greatly, it is still impossible to feed the entire code repo and third-party library information to LLMs. Furthermore, irrelevant context not only affects model efficiency and increases expenses, but also potentially compromises the model performance [34].

To enable the model to fully utilize the three types of information extracted from the code repository, we conduct comprehensive knowledge mining: extracting four types of **local information** (Section III-B1), retrieving global functions from the function base using developer requirements to obtain **global-aware information** (Section III-B2), and structuring third-party library information from the **third-party library base** (Section III-B3).

- 1) Local-Module Knowledge Mining: Within the user's working context, referred to as the local module, four types of local-module information can be encountered:
- Local functions. Local functions encompass all functions that are defined and implemented within the local module. We extract these local functions and represent them in the form of <Fully Qualified Name (FQN), Function Summary, Function Signature>. The FQN provides details about

- the function's location within the module, the Function Summary reflects the natural language description of the function's purpose, and the Function Signature reveals its input and output specifications.
- Class Instance Attributes. Class instance attributes (or instance variables) are variables defined within a class's constructor function (__init__ in Python). These variables are specific to instances of the class and store instance-specific attributes or state information. Some local functions may be defined within a class might involve interactions with class instance attributes, accessing or modifying them to achieve specific functionality.
- Local Module FQN. Local Module FQN partially reflects the structural information of the working context (local module) within the entire code repository. It helps the model understand the context of how local functions, class instance attributes, and variables within this module are used.
- Module variables. Local modules may define variables, some of which can directly interact with local functions, potentially supporting the functionality of newly added functions. We unify the declarations of these variables. However, if there are no variables defined within the module, we indicate this with *None*.
- 2) Global-Module Knowledge Mining: In addition to using local module knowledge, global module knowledge also plays a significant role in code generation. Instead of letting the model implement complicated logic steps from scratch, we expect the model can directly call functions if they are already present in other code files. To help models realize that global functions can be reused, we retrieve global functions in the code repository and organize them in a structured way. The global module knowledge mining process is divided into three phases: what-if code generation, global function retrieval, and information unification.

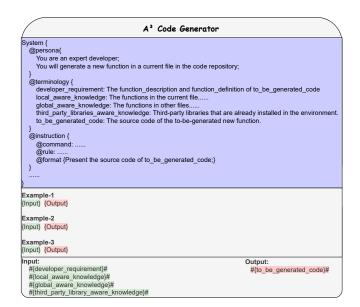


Fig. 3: A^3 Code Generator Unit

- What-If Code Generator Unit: To retrieve global functions from the function base, we consider textual and code semantic similarity. For code semantic similarity matching, we utilize the code generation capability of the LLM, inputting user requirements to generate a *what-if code*, which encapsulates the logic to fulfill those requirements and serves as input for code similarity matching in the Global Function Retrieval Unit. For in-context learning, we provide three representative examples. Notably, the generated code is only used for retrieving the global function, so completeness is not required, as it is not the final code.
- Global Function Retrieval Unit: This unit uses function descriptions and the what-if function-code as input to retrieve reusable global functions from the function base. Specifically, we first embed $function_description$ into $vector_{des}$ and compute the cosine similarity between this vector and the summary vectors of all functions in the function base. Thus, we can rank and obtain the top k $RetrievedFun_{des}$. Second, we embed the what-if function-code as a $vector_f$ and compute the cosine similarity between this vector and the code vectors of all the functions in the function base, so we can rank and obtain the top k $RetrievedFun_{code}$. Finally, we merge the sets of $RetrievedFun_{des}$ and $RetrievedFun_{des}$ to obtain the global function that is most relevant to the provided input, which is denoted as RetrievedFun.
- **Information Unification Unit**: For each *RetrievedFun*, we organize and display the retrieved information as <FQN, function signature, summary> in a structured format.
- 3) Third-Party Library Knowledge Mining: In the process of code generation, to behavior similar to human developers, it's crucial for the LLM to be aware of the third-party libraries pre-installed in the current code repository environment. Without this awareness, there's a risk of generating code that relies on third-party libraries unsupported by the current environment, rendering the code non-functional. To

ensure that, we create a comprehensive list of all the third-party libraries found in the third-party library base, as extracted in section III-A2. It's important to note that we extract only the names of these libraries and do not include any of their code. Third-party libraries are publicly accessible and widely applied, so according to our empirical observation, we found that the model has already encountered and learned most of the libraries during its training process. Thus, we only extract the names of these libraries without any of their code. By constructing this list of third-party libraries, we empower the LLM to generate code that aligns with the available environment and utilizes the appropriate libraries effectively, reducing the risk of non-executable code.

C. A³Code Generation

After section III-B, we obtain structured local-aware knowledge, global-aware knowledge, and third-party-library-aware knowledge. To ensure the model's full awareness of these three types of knowledge, we design an ${\bf A^3}$ Code Generation Unit that seamlessly integrates user requirements with the three knowledge sources to generate A^3 functional code.

The A^3 Code Generation Unit, as depicted in Fig. 3, consists of four key components: task description, examples, input, and output. In the task description (purple part), we employ a structured prompt to delineate the repository-aware code generation task. Key components of the prompt include: 1) @persona: Guiding the model to assume the role of an expert developer, providing clarity on the task. 2) @terminology: Defining crucial information in a keyword format. 3) @instruction: This section furnishes explicit instructions for executing the task:

- @command: Offering an overarching strategy for the model to follow during the task.
- @rule: Outlining the basic limitations and considerations to be observed during code generation.
- @format: Detailing the expected presentation format for the source code generated for the new function.

In the @command, we guide the model through the code generation process step by step by employing chain-of-thought [45], [46], [47].

- Firstly, in @command1, we prompt the model to contemplate the logic and steps required to fulfill the developer's request.
- Next, in @command2, we encourage the model to consider whether there is any reusable information within the localaware knowledge and utilize it if available.
- Following that, in @command3, we guide the model to think about whether there are any reusable global functions within the global-aware knowledge and utilize them if present.
- Subsequently, in @command4, we prompt the model to explore how to leverage the third-party library-aware knowledge to interact with libraries effectively.
- Finally, in @command5, if the model cannot leverage any information, it is instructed to generate code directly based on the logic and steps it has formulated.
- Additionally, we include an @command that reiterates the importance of strictly following the steps from 1 to 5.

In the @rule, we establish three rules to govern the code generated by the model, including calling import FQN, restricting the use of specified third-party libraries, and ensuring that the generated code is not empty (as the model may occasionally generate abstract functions). We then provide three representative examples. Finally, we input the developer requirement and our 3 knowledge into Unit to get the A^3 function code (i.e., _to_be_generated_code in Fig. 3 (b)). Notably, developers only needs to input requirements, and all 3 types of repo-aware knowledge are obtained automatically.

Due to the page limitation, we have organized all prompts for our AI units (e.g., Code Summarizer, and A^3 Code Generator) in the "prompts/" folder of our artifact [19].

IV. EXPERIMENT SETTING

In this section, we outline the default foundation models, dataset, and evaluation metrics for assessing our framework. We introduce four Research Questions (RQs):

- RQ1: Does Local Module Aware Knowledge indeed help LLMs fully utilize local module knowledge during code generation, and which types are most effective in improving local awareness?
- RQ2: Is Global Module Aware Knowledge effective in assisting LLMs to utilize global module knowledge during code generation, and what is the optimal "k" value for retrieving global functions?
- RQ3: Does Third-Party Library Aware Knowledge significantly impact LLMs' awareness of available third-party libraries during code generation?
- RQ4: What is the performance of our A³-CodGen framework?

A. Foundation Models

We select GPT-3.5-Turbo-16k [48] as the default foundation LLM for this study due to its excellent performance in various SE tasks, along with its popularity and cost-efficiency. As for the embedding model, we use the *ada-embedding-002* model [49], which has the capability of generating high-quality sentence embeddings, enabling us to perform effective similarity computation and retrieval operations. Similar to other LLM-empowered frameworks in SE domain, the more powerful model is selected, the better performance can be achieved, generally.

B. Dataset Collection

While there exist some benchmark datasets designed for code generation, such as [50], [51], [35], [52], [16], they suffer from the following issues: 1) some of the existing datasets contain code repositories that are already present in the training corpora of popular LLMs, leading to an overestimation of the code repository-aware code generation capabilities. 2) existing benchmarks only evaluate class-level or small unit test cases, which is not suitable for our research goals. 3) Based on our literature review, none of existing code generation benchmark datasets can evaluate whether a^3 CodGen can effectively obtain, understand, and correctly reuse

three distinct types of code repository information. Therefore, to address the potential risk of data leakage and accurately reflect the capability of A^3 - CodGen, we created a new benchmark dataset, dubbed **RepoEval**. This decision stems from our intention to verify that the model truly grasp A^3 code generation after receiving information we provide.

1) Code Repository Collection: According to OpenAI's official website, the training data for GPT-3.5-Turbo-16k is cut off as of September 2021. To ensure that our benchmark dataset contains code repositories that have not been seen during model training, we select projects with the earliest release date after October 1, 2021 on PyPI. We further filter the GitHub repositories by choosing those with more than 100 stars and 100 branches, as these metrics indicate repository quality. Ultimately, we identify 29 code repositories to construct our benchmark, each averaging 82.517 code files.

Then, we create 29 function bases and 29 third-party library bases for the corresponding code repositories, following the method outlined in Section III-A. The function bases from these 29 code repositories encompass a total of 13,784 functions. Out of these, 10,077 are class member functions, leaving 3,707 as module functions. Since class member functions often involve complex relationships related to inheritance and other classes, it becomes highly labor-intensive to analyze the code invocation relationships to construct the benchmark. Therefore, our benchmark dataset focuses solely on module functions. From these 3,707 module functions, we filter out functions that had comments and were non-empty, and finally, we obtain 1,533 functions.

2) Benchmark Construction: Given the comments and the definition of a function, the corresponding source code for that function serves as the standard answer to be generated. Simultaneously, we extract call information for the function to determine the extent of code reuse within it, because a higher extent of function reuse reflects the framework learns better from three awareness.

Given a function, code reuse falls into one of the three categories: 1) It could be part of locally defined functions within the local module; 2) belong to a global module; or 3) belong to a third-party library. To obtain this reuse information, we need to analyze the call relationships between functions among codes. However, existing code analysis tools like pycallgraph [53] require code compilability to accurately generate call graphs for functions. Considering that it is impractical to set up running environments for all these code repositories due to diverse requirements and potential conflicts, and given that static analysis tools like pyan [54] have relatively lower accuracy and cannot meet our needs, we resort to manual annotation to extract the call information between functions.

Manual annotation for each function is resource-intensive and time-consuming. To ensure experiment efficiency, we employ a statistical sampling method [55]. Specifically, we perform sampling on the 1,533 module functions obtained in Section IV-B1. We ensure that the estimated accuracy within the sample remains within a 0.05 error range at a 95% confidence level while ensuring functions from each code repository are included in the sample. Finally, we acquire 383 functions for subsequent experiments.

C. Metrics

To comprehensively evaluate whether the three awareness are effective, we employ the following metrics:

- Reuse Awareness: To assess the model's ability to correctly reuse local, global, and third-party library information when necessary and avoid reuse when unnecessary, we computed the following awareness metrics:
 - True Positive (TP): The model-generated code correctly reuses local, global, or third-party library information, consistent with the benchmark code. For instance, if the model-generated code reuses local functions and the benchmark code also reuses local functions, it is considered TP in the case of local reuse, as well as in the case of global reuse and third-party library reuse.
 - False Positive (FP): The model-generated code incorrectly reuses local, global, or third-party library information, where no reuse occurs in the benchmark code.
 - False Negative (FN): The model-generated code fails to reuse local, global, or third-party library information, but reuse occurs in the benchmark code.
 - True Negative (TN): The model-generated code correctly does not reuse local, global, or third-party library information, consistent with the benchmark code.
 - **Precision**: Calculated as TP/(TP+FP), indicating the proportion of the model-generated code that is correctly reused.
 - **Recall**: Calculated as TP/(TP + FN), indicating the proportion of the code that actually needed to be reused and is correctly reused by the model.
 - **F1**: The harmonic mean of Precision and Recall, providing an overall measure of the model's effectiveness in reusing code, calculated as 2 * (Precision * Recall)/(Precision + Recall).
 - Accuracy: Calculated as (TP+TN)/(TP+FP+TN+FN), representing the percentage of cases where the model is correctly aware or unaware.
- Reuse Correctness: After identifying local/global/third-party library information, we assess the correctness of reuse. The metric is determined by the number of exact matches between the functions/libraries reused by the model and those in the benchmark, divided by the total number of functions/libraries reused by the model. For instance, in local reuse, if the model reuses functions $local_a$, $local_b$, and $local_c$, and the benchmark reuses functions $local_b$, $local_c$, and $local_d$, there are 2 exact matches, resulting in a correctness score of 2/3 = 0.667.
- Library Coverage: This metric represents the proportion of libraries used in the generated code that are already preinstalled in the code repository's environment.
- Lines of Code (LOC): This metric reflects code conciseness, determined by counting lines after removing comments. Lower LOC indicates more concise code.

Subsequently, we enlist two developers with more than five years of experience in Python programming to conduct independent evaluations. For each generated result, they assess whether the function utilizes local functions, assigning a score of 1 if it does and 0 if it doesn't. This score contributes

TABLE I: Comparison of the Local Reuse Awareness results obtained with different Local Information. And find the best configuration for Local Information Extraction.

Variant	Precision	Recall	F1	Accuracy
Vallina ChatGPT	N/A	N/A	N/A	0.715
ChatGPT	0.667	0.514	0.580	0.789
+Local Functions	0.007	0.514	0.360	0.769
ChatGPT				
+Local Functions	0.742	0.633	0.683	0.833
+Class Instance Attributes				
ChatGPT				
+Local Functions	0.704	0.523	0.600	0.802
+Class Instance Attributes	0.704			
+Module Variables				
ChatGPT				
+Local Functions				
+Class Instance Attributes	0.747	0.541	0.628	0.817
+Module Variables				
+Local Module FQN				

to the calculation of reuse awareness. In instances of local function reuse, they identify all the reused functions, forming the basis for calculating reuse correctness. The same process applies to global functions and third-party libraries. After completing their evaluations, they discuss any discrepancies and reach a consensus. In all upcoming experiments, we employ this benchmark for evaluation and annotate the model-generated code using the same method. The Cohen's Kappa coefficient [56] for annotated data across research questions ranges from 86% to 95%, showing high agreement among assessments.

V. EVALUATION

A. The Effectiveness of Local-Aware Knowledge (RQ1)

Local information aids LLMs in code generation by offering awareness of local contextual details. We extract and organize four types of Local-Aware Knowledge from the local module: local functions, class instance attributes, local module FQNs, and module variables. These knowledge types offer diverse perspectives on the context of the local module. Our goal is to assess whether local-aware knowledge genuinely enhances LLMs' ability to reuse local functions in code generation. Additionally, we aim to identify the optimal configuration, determining whether all four knowledge categories should be available to the model's awareness or only specific ones.

We use vanilla ChatGPT as a baseline, which does not have any local information in its input. We define four variants of local-aware methods, as shown in Table I.

- +Local Functions signifies the use of Local Functions knowledge from the current file context.
- +Class Instance Attributes indicates the use of Class Instance Attributes Knoweldge
- +Module Variables involves using the module Variables knowledge in the current file context.
- +Local Module FQN employs the fully qualified name corresponding to the current file.

We run these five different configurations on the benchmark to obtain code generation results. 1) Result Analysis: Table I shows the reuse awareness results for code generation using vanilla ChatGPT and four types of Local-Aware Knowledge Configurations. Vanilla ChatGPT exhibits a precision and recall of 0 as it does not recognize any local functions. Consequently, in its generated code, new functions are often defined to complete certain logic, resulting in code redundancy.

When given knowledge of Local Functions, the model gains the ability to utilize them, resulting in a Precision of 0.667, Recall of 0.514, F1 score of 0.580, and accuracy of 0.789. This is because knowledge of Local Functions enables the model to directly invoke local functions. Upon additionally providing knowledge of Class Instance Attributes, the model's Precision, Recall, and F1 score improve by 11.24%, 23.15%, and 17.76%, respectively, compared to providing only knowledge of Local Functions. This improvement is attributed to the provision of Class Instance Attributes, which enables the model to better understand how local functions interact with class variables in the project, leading to more accurate application of local functions.

However, when we introduce the Module Variables, the model's performance drastically declines, particularly with a 17.38% drop in Recall. This may be due to the increased information load resulting from knowledge of Module Variables, which impacts performance. Nevertheless, the model's performance is restored and approaches the capabilities of providing knowledge of Local Functions and Class Instance Attributes when we subsequently add knowledge of Local Module FQN. This suggests the existence of subtle interactions within the knowledge configuration. When the model receives only one or two key knowledge types, its performance may be superior to when it receives more information. However, as the volume of knowledge increases to a certain extent, the model's capabilities strengthen, resulting in improved performance.

Finding 1: The Local-Aware Knowledge significantly enhances the model's ability to reuse local functions, thereby reducing code redundancy. The best configuration is the combination of *Local Functions* and *Class Instance Attributes*.

B. The effectiveness of Global-Module-Aware Knowledge (RQ2)

In this RQ, our goal is to explore the effectiveness of global-aware information in aiding LLMs to reuse global functions in code generation. We aim to identify the optimal top-k value for retrieving candidate functions to achieve the best global-aware configuration.

Specifically, we employ *No Global-Aware* as the baseline and this involves providing only Local-Aware Knowledge without Global-Aware Knowledge input. Furthermore, to determine the optimal top-k value, we define four variants, namely, k=1, 5, 10, and 15. We run the total five different configurations on the benchmark to obtain code generation results. Subsequently, we assess the generated code using the same method as in section V-A, where each result is evaluated for whether it uses global functions.

TABLE II: Comparison of the Global Reuse Awareness results obtained for different Top k numbers of retrieved functions to find the best k value.

Global Functions of Different Top k	Avg. Retrieved Functions	Precision	Recall	F1	Accuracy
No Global-Aware (k = 0)	N/A	N/A	N/A	N/A	0.833
k=1	1.757	0.384	0.516	0.440	0.781
k=5	8.154	0.542	0.703	0.612	0.851
k=10	16.031	0.493	0.562	0.526	0.830
k=15	23.592	0.395	0.531	0.453	0.786

1) Result Analysis: Table II presents the results obtained using "No Global-Aware" and four different top-k values for retrieving global functions. The No Global-Aware has both precision and recall as 0 because of lacking of global-aware information as we expected. Consequently, the generated code only utilizes local functions to accomplish tasks, and it resorts to defining new functions for specific logic if local functions are insufficient. When k=1, the model shows some awareness of global functions to a certain extent, underlined by the precision and recall as 0.384 and 0.516, respectively. At k=5, the model's performance significantly improves, indicating that the model now has a more comprehensive understanding of global-aware information. However, when k=10, the model's F1 score drops by 14.05%, indicating a substantial reduction in the model's ability to reuse global functions. As k rises to 15, the effectiveness of the model decreases further. This is because the overdosed amount (between 10 to 20 functions) of functions is retrieved, introducing excessive interference and hindering accurate reusing.

To further assess the impact of the number of global functions presented to the model, we compute the average number of retrieved functions, denoted as *Avg. Retrieved Functions*. We find that providing the model with around 8 functions yields the best performance in terms of code reuse, striking a subtle balance. Thus, we select k=5 as optimal configuration for subsequent experiments.

Finding 2: Global-Aware Information significantly enhances the model's ability to reuse functions in other code files in the repository. The optimal configuration for retrieving global functions is k=5.

C. The effectiveness of Third-Party-Library-Aware Knowledge (RQ3)

In section III-B3, we delve into Third-Party-Library Aware information, which helps the model recognize pre-installed third-party libraries in the code repository. To validate that point, we compare code generation between with and without Third-Party-Library Aware information. Only Local-Aware and Global-Aware information is fed into the model. Then, we run these two different configurations on the benchmark to obtain code generation results. Notably, we introduce the *Library Coverage*, the percentage of third-party libraries used

TABLE III: Compare the difference between having Third-Party-Library Aware and not having it on Third-Party Library Reuse Awareness and Library Coverage.

3rd-Party-Lib	Precision	Recall	F1	Accuracy	Library
Awareness	1 Iccision	Recall	1 1		Coverage
No	0.727	0.427	0.538	0.713	0.875
Yes	0.957	0.587	0.727	0.828	0.940

in the generated code in the third-part-library base, to further elaborate the extent of reusing.

1) Result Analysis: Table III demonstrates that after incorporating Third-Party-Library Aware Knowledge, the model exhibits significant improvements in precision, recall, F1 score, and accuracy, with increases of 31.64%, 37.47%, 35.13%, and 16.13%, respectively. This enhancement can be attributed to the fact that, with Third-Party-Library Aware information, the model is suggested to use a specific subset of libraries, narrowing down its choice range and making it more likely to generate desired code. Our finding is further proven by that methods with Third-Party-Library Aware information outperform those without such knowledge in the Library Coverage metric by 7.43%. However, library coverage does not reach 100% due to occasional instances where the model obstinately believes that there are no viable libraries in the third-party repository to implement the code, which could be attributed to model hallucinations [57], [58], [59].

Finding 3: Third-Party-Library Aware information significantly improves the model's ability to utilize available third-party libraries, reducing risk of potential compatibility issue.

D. The Effectiveness of A^3 CodGen Framework (RQ4)

In previous sections, we have individually verified the effectiveness of Local-Aware, Global-Aware, and Third-Party-Library-Aware information. We also explored the optimal configurations. In this section, we aim to integrally validate the effectiveness of our A^3 -CodGen Framework from various perspectives. We compare our A^3 -CodGen with three baselines: vanilla ChatGPT, A^1 Generation (Local-Aware), and A^2 Generation (Local-Aware and Global-Aware). We evaluate our framework using four metrics: reuse awareness, reuse correctness, library coverage, and lines of code (LOC). The F1 score serves as a comprehensive measure of reuse awareness. Notably, a lower LOC signifies more concise code.

1) Result Analysis: Upon evaluating the awareness aspect, as shown in Table IV, A^3 -CodGen demonstrates excellence in local reuse, global reuse, and third-party library reuse. This underscores the effective assistance provided by the three categories of repository-aware knowledge in enabling the model to be cognizant of repository information during code generation.

In terms of correctness, we observe that Local Reuse Correctness is optimal for A^1 Generation (Local-Aware), Global Reuse Correctness is best for A^2 Generation (Local-Aware and Global-Aware), and Third-Party Library Reuse Correctness is

TABLE IV: Comparison of the overall effect of Framework with Ablation Baselines

M	etrics	Vanilla ChatGPT	Local-Aware	Local-Aware +Global-Aware	Local-Aware +Global-Aware +3rd-Party-Lib-Aware
Local Reuse	Awareness (F1)	N/A	0.683	0.664	0.693
	Correctness	N/A	0.648	0.646	0.633
Global Reuse	Awareness (F1)	N/A	N/A	0.612	0.632
	Correctness	N/A	N/A	0.604	0.601
3rd-Party Library Reuse	Awareness (F1)	0.640	0.659	0.538	0.727
	Correctness	0.640	0.742	0.743	0.850
	Library Coverage	0.786	0.863	0.875	0.940
-	ne of Code OC)	16.308	16.507	12.598	12.804

highest for A^3 -CodGen. This suggests that increasing input knowledge may influence the model's performance in specific reuse scenarios. Nevertheless, A^3 -CodGen exhibits only a slight difference from the baseline in local reuse and global reuse correctness (0.003-0.015). Despite this minor difference in correctness metrics and its superior performance in other aspects, A^3 -CodGen demonstrates robust overall performance in local reuse, global reuse, and third-party library reuse.

Looking at the Library Coverage, A^3 -CodGen achieves near-perfect performance with a score of 0.940, signifying its ability to effectively reuse pre-installed libraries and avoid compatibility issues such as "ModuleNotFoundError: No module named xxx." Furthermore, the framework consistently generates code with an optimal number of lines (LOC), indicating its capability to produce concise and efficient code.

Finding 4: A^3 -CodeGen framework excels in awaring three types of code repository knowledge, resulting in an excellent performance in terms of local reuse, global reuse, and third-party library reuse. Thanks to its outstanding reuse capabilities, our framework can generate concise code that aligns with the code repository's working environment.

VI. DISCUSSION

New Paradigm for Code Generation Tasks. Code generation tasks have traditionally focused on automating code production for specific requirements, with advancements like GitHub CoPilot and ChatGPT mastering this task. However, real-world code generation extends beyond meeting requirements; it requires generating code aligned with project-specific needs and leveraging existing knowledge for improved readability, maintainability, and practicability. Therefore, we hope this work sheds a light on this emerging but significant code generation topic: generating context-aware code that is compatible with the working environment.

Knowledge Engineering for Code Generation. LLMs are sensitive to prompts and well-designed prompts are decisive in obtaining high-quality results [60], [61], [62]. Either unorganized or too lengthy prompts are impractical. Instead, it is advisable to extract semantic-enriched knowledge from the code repository to guide the model to directional generate code.

However, how to selectively fuse the different types of knowledge presents a challenge, potentially impacting the model's awareness of different knowledge types. In Section V-A1, we find that providing diverse information does not necessarily improve model performance. Meanwhile, in section V-D, we find that providing the model with global awareness and third-party library information unexpectedly enhances its ability to reuse native functions. This underscores the interaction of diverse code knowledge types and stresses the significance of efficiently mining and utilizing code knowledge in future studies.

Threats to Validity. The threats to validity of this paper lies in two aspects: 1) Subjective Labeling. Our study involves manual labeling, introducing subjectivity in annotations. We mitigate this by engaging two professional developers for labeling, resolving any instances with ambiguous labels to establish a reliable ground truth. The dataset is public for community validation [19]. 2) Limited Dataset Selection. Experiments use 29 meticulously selected Python code repositories, emphasizing high quality indicated by stars and forks, while avoiding data leaks. These repositories collectively represent the Python programming ecosystem. Rigorous sampling ensures a confidence level of 95% or higher, ensuring the credibility of the ground truth. In the future, we'll maintain this dataset, providing the community with a valuable resource for evaluating repository-aware code generation.

VII. RELATED WORK

Code generation tasks is about creating source code from provided natural language descriptions or requirements, which has been a longstanding focal point in software engineering research.

Repository-Level Code Completion. Repository-level code completion is gaining traction over traditional function-level completion [63], [39], [37], [64]. Shrivastava et al. generated example-specific prompts using a prompt proposal classifier [63] and further proposed *RepoFusion* to incorporate relevant repository context by training code models [39]. In addition, Ding et al. [37] proposed a cross-file context finder tool, named *CCFinder*, which constructs a project context graph and retrieves the most relevant cross-file context based on local import statements. *RepoCoder* [64] retrieved similar code snippets from the repository as part of a prompt and proposes an iterative retrieval-generation paradigm. This novel strategy bridged the gap between the retrieved context and the intended target through an interactive process.

Retrieval Augmented Code Generation. Retrieval Augmented Code Generation (RACG) [65], [62], [66], [67] represents an emerging and promising area of research that combines the strengths of retrieval-based methods with code generation techniques. Hayati et al. [62] introduced the *RECODE* model, which is the first to incorporate information retrieval techniques into the code generation task. Parvez et al. [66] proposed the *REDCODER*, which utilizes retrieval to enhance the input of the generation model, aiming to maximize the utilization of additional information. Drain et al. [65] retrieve template functions from GitHub and relevant answers from

Stack Overflow to improve code generation. Zhou et al. [67] proposed Docprompting, which retrieve relevant APIs from documents and add them into prompts to improve code generation. Zan et al. [68] proposed CodeGenAPI, which retrieve private APIs from documents to improve code generation. the APIRetriever module of CodeGenAPI and our approach both focus on private API recommendation. However, CodeGenAPI directly retrieves APIs from documentation and cannot effectively handle high-level tasks that require combinations of APIs.

Code Completion Evaluation. LLM-based code completion and program synthesis methods provide unprecedented convenience, however researcher also question the actual performance under the mirage from different perspectives [50], [51], [35], [52], [16]. Yuan et al. evaluated 10 open-source instructed LLMs on four representative code comprehension and generation tasks [50]. Liu et al. proposed EvalPlus, a code synthesis benchmarking framework, to rigorously evaluate the functional correctness of LLM-synthesized code in function level [51]. In a more challenging code generation scenario, i.e., class-level code generation, Du et al. manually constructed the first class-level code generation benchmark ClassEval of 100 class-level Python code generation tasks [35]. In addition, Ouyang et al. conducted an empirical study to demonstrate that non-determinism in code generation tasks [52]. Yu et al. proposed a benchmark named *CoderEval*, which can be used to assess the performance of models against pragmatic code generation beyond just generating standalone functions [16].

VIII. CONCLUSION AND FUTURE WORK

Code generation within code repositories often necessitates comprehensive knowledge of the entire repository context. Existing techniques often lack such a holistic understanding of code repository knowledge, which is crucial for effective code generation. In this paper, we introduce the A^3 -CodGen framework, which is designed to construct, mine, and unify three essential types of code repository knowledge: localaware, global-aware, and third-party-library-aware knowledge. To validate the effectiveness of these knowledge types, we conducted benchmark experiments and identified optimal configurations for their utilization. The results demonstrate that the A^3 -CodGen framework significantly enhances the ability of Language Model Models (LLMs) to fully utilize local, global, and third-party library information. This results in the generation of concise, high-quality code. In the future, we plan to expand the applicability of our framework to multiple programming languages. Furthermore, we aim to enhance our knowledge utilization methods to enable LLMs to become more aware of various types of code knowledge within code repositories.

REFERENCES

[1] Alexey Svyatkovskiy, Shao Kun Deng, Shengyu Fu, and Neel Sundaresan. Intellicode compose: Code generation using transformer. In Proceedings of the 28th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering, pages 1433–1443, 2020.

- [2] Yujia Li, David Choi, Junyoung Chung, Nate Kushman, Julian Schrittwieser, Rémi Leblond, Tom Eccles, James Keeling, Felix Gimeno, Agustin Dal Lago, et al. Competition-level code generation with alphacode. Science, 378(6624):1092–1097, 2022.
- [3] Markus Puschel, José MF Moura, Jeremy R Johnson, David Padua, Manuela M Veloso, Bryan W Singer, Jianxin Xiong, Franz Franchetti, Aca Gacic, Yevgen Voronenko, et al. Spiral: Code generation for dsp transforms. *Proceedings of the IEEE*, 93(2):232–275, 2005.
- [4] Bei Chen, Fengji Zhang, Anh Nguyen, Daoguang Zan, Zeqi Lin, Jian-Guang Lou, and Weizhu Chen. Codet: Code generation with generated tests. arXiv preprint arXiv:2207.10397, 2022.
- [5] Zeyu Sun, Qihao Zhu, Yingfei Xiong, Yican Sun, Lili Mou, and Lu Zhang. Treegen: A tree-based transformer architecture for code generation. In Proceedings of the AAAI Conference on Artificial Intelligence, 2020.
- [6] María N Moreno García, Isabel Ramos Román, Francisco J García Peñalvo, and Miguel Toro Bonilla. An association rule mining method for estimating the impact of project management policies on software quality, development time and effort. Expert Systems with Applications, 34(1):522–529, 2008.
- [7] Michael A Cusumano and David B Yoffie. Software development on internet time. *Computer*, 32(10):60–69, 1999.
- [8] Available:https://chat.openai.com/. Chatgpt. [Online], 2022.
- [9] Available:https://copilot.github.com/. "github copilot. your ai pair programmer". [Online], 2021.
- [10] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. arXiv preprint arXiv:2107.03374, 2021.
- [11] Matteo Ciniselli, Luca Pascarella, Emad Aghajani, Simone Scalabrino, Rocco Oliveto, and Gabriele Bavota. Source code recommender systems: The practitioners' perspective. arXiv preprint arXiv:2302.04098, 2023.
- [12] Mingwei Liu, Tianyong Yang, Yiling Lou, Xueying Du, Ying Wang, and Xin Peng. Codegen4libs: A two-stage approach for library-oriented code generation. 2023 38th IEEE/ACM International Conference on Automated Software Engineering (ASE), pages 434–445, 2023.
- [13] Daoguang Zan, Bei Chen, Dejian Yang, Zeqi Lin, Minsu Kim, Bei Guan, Yongji Wang, Weizhu Chen, and Jian-Guang Lou. Cert: Continual pretraining on sketches for library-oriented code generation. arXiv preprint arXiv:2206.06888, 2022.
- [14] Tianshi Li, Elijah B Neundorfer, Yuvraj Agarwal, and Jason I Hong. Honeysuckle: Annotation-guided code generation of in-app privacy notices. Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies, 5(3):1–27, 2021.
- [15] Daoguang Zan, Bei Chen, Yongshun Gong, Junzhi Cao, Fengji Zhang, Bingchao Wu, Bei Guan, Yilong Yin, and Yongji Wang. Private-libraryoriented code generation with large language models. arXiv preprint arXiv:2307.15370, 2023.
- [16] Hao Yu, Bo Shen, Dezhi Ran, Jiaxin Zhang, Qi Zhang, Yuchi Ma, Guangtai Liang, Ying Li, Tao Xie, and Qianxiang Wang. Codereval: A benchmark of pragmatic code generation with generative pre-trained models. arXiv preprint arXiv:2302.00288, 2023.
- [17] Yan Zhuang, Qi Liu, Yuting Ning, Weizhe Huang, Rui Lv, Zhenya Huang, Guanhao Zhao, Zheng Zhang, Qingyang Mao, Shijin Wang, et al. Efficiently measuring the cognitive ability of llms: An adaptive testing perspective. arXiv preprint arXiv:2306.10512, 2023.
- [18] D Gifany, IS Amiri, M Ranjbar, and J Ali. Logic codes generation and transmission using an encoding-decoding system. *International Journal* of Advances in Engineering & Technology, 5(2):37, 2013.
- [19] Our dataset and repository. https://github.com/Dianshu-Liao/AAA-Code-Generation-Framework-for-Code-Repository-Local-Aware-Global-Aware-Third-Party-Aware.
- [20] Yue Wang, Weishi Wang, Shafiq Joty, and Steven CH Hoi. Codet5: Identifier-aware unified pre-trained encoder-decoder models for code understanding and generation. arXiv preprint arXiv:2109.00859, 2021.
- [21] Zhangyin Feng, Daya Guo, Duyu Tang, Nan Duan, Xiaocheng Feng, Ming Gong, Linjun Shou, Bing Qin, Ting Liu, Daxin Jiang, et al. Codebert: A pre-trained model for programming and natural languages. arXiv preprint arXiv:2002.08155, 2020.
- [22] Daya Guo, Shuo Ren, Shuai Lu, Zhangyin Feng, Duyu Tang, Shujie Liu, Long Zhou, Nan Duan, Alexey Svyatkovskiy, Shengyu Fu, et al. Graphcodebert: Pre-training code representations with data flow. arXiv preprint arXiv:2009.08366, 2020.
- [23] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde, Jared Kaplan, Harrison Edwards, Yura Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott

- Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, David W. Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William H. Guss, Alex Nichol, Igor Babuschkin, S. Arun Balaji, Shantanu Jain, Andrew Carr, Jan Leike, Joshua Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew M. Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code. *ArXiv*, abs/2107.03374, 2021.
- [24] Erik Nijkamp, Bo Pang, Hiroaki Hayashi, Lifu Tu, Haiquan Wang, Yingbo Zhou, Silvio Savarese, and Caiming Xiong. Codegen: An open large language model for code with multi-turn program synthesis. In International Conference on Learning Representations, 2022.
- [25] Daniel Fried, Armen Aghajanyan, Jessy Lin, Sida I. Wang, Eric Wallace, Freda Shi, Ruiqi Zhong, Wen tau Yih, Luke Zettlemoyer, and Mike Lewis. Incoder: A generative model for code infilling and synthesis. ArXiv, abs/2204.05999, 2022.
- [26] Shuai Lu, Daya Guo, Shuo Ren, Junjie Huang, Alexey Svyatkovskiy, Ambrosio Blanco, Colin B. Clement, Dawn Drain, Daxin Jiang, Duyu Tang, Ge Li, Lidong Zhou, Linjun Shou, Long Zhou, Michele Tufano, Ming Gong, Ming Zhou, Nan Duan, Neel Sundaresan, Shao Kun Deng, Shengyu Fu, and Shujie Liu. Codexglue: A machine learning benchmark dataset for code understanding and generation. ArXiv, abs/2102.04664, 2021
- [27] Wannita Takerngsaksiri, Chakkrit Kla Tantithamthavorn, and Yuankui Li. Syntax-aware on-the-fly code completion. ArXiv, abs/2211.04673, 2022
- [28] Frank F. Xu, Uri Alon, Graham Neubig, and Vincent J. Hellendoorn. A systematic evaluation of large language models of code. Proceedings of the 6th ACM SIGPLAN International Symposium on Machine Programming, 2022.
- [29] Qinkai Zheng, Xiao Xia, Xu Zou, Yuxiao Dong, Shanshan Wang, Yufei Xue, Zi-Yuan Wang, Lei Shen, Andi Wang, Yang Li, Teng Su, Zhilin Yang, and Jie Tang. Codegeex: A pre-trained model for code generation with multilingual evaluations on humaneval-x. ArXiv, abs/2303.17568, 2023.
- [30] Priyan Vaithilingam, Tianyi Zhang, and Elena L Glassman. Expectation vs. experience: Evaluating the usability of code generation tools powered by large language models. In *Chi conference on human factors in computing systems extended abstracts*, pages 1–7, 2022.
- [31] JetBrains. Code completion in pycharm. https://www.jetbrains.com/help/pycharm/auto-completing-code.html, 2023
- [32] Yue Wang, Weishi Wang, Shafiq R. Joty, and Steven C. H. Hoi. Codet5: Identifier-aware unified pre-trained encoder-decoder models for code understanding and generation. ArXiv, abs/2109.00859, 2021.
- [33] OpenAI. Gpt-4 technical report. ArXiv, 2023.
- [34] Freda Shi, Xinyun Chen, Kanishka Misra, Nathan Scales, David Dohan, Ed Huai hsin Chi, Nathanael Scharli, and Denny Zhou. Large language models can be easily distracted by irrelevant context. ArXiv, abs/2302.00093, 2023.
- [35] Xueying Du, Mingwei Liu, Kaixin Wang, Hanlin Wang, Junwei Liu, Yixuan Chen, Jiayi Feng, Chaofeng Sha, Xin Peng, and Yiling Lou. Classeval: A manually-crafted benchmark for evaluating llms on classlevel code generation. arXiv preprint arXiv:2308.01861, 2023.
- [36] Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Kaijie Zhu, Hao Chen, Linyi Yang, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, et al. A survey on evaluation of large language models. arXiv preprint arXiv:2307.03109, 2023.
- [37] Yangruibo Ding, Zijian Wang, Wasi Uddin Ahmad, Murali Krishna Ramanathan, Ramesh Nallapati, Parminder Bhatia, Dan Roth, and Bing Xiang. Cocomic: Code completion by jointly modeling in-file and crossfile context. ArXiv, abs/2212.10007, 2022.
- [38] Hengzhi Pei, Jinman Zhao, Leonard Lausen, Sheng Zha, and George Karypis. Better context makes better code language models: A case study on function call argument completion. ArXiv, abs/2306.00381, 2023.
- [39] Disha Shrivastava, Denis Kocetkov, Harm de Vries, Dzmitry Bahdanau, and Torsten Scholak. Repofusion: Training code models to understand your repository. ArXiv, abs/2306.10998, 2023.
- [40] Erin M. Quist, Shambhunath Choudhary, Richard Lang, Debra A. Tokarz, Mark James Hoenerhoff, Jonathan Nagel, and Jeffrey I. Everitt. Proceedings of the 2022 national toxicology program satellite symposium. *Toxicologic Pathology*, 50:836 – 857, 2022.
- [41] Joshua Turner. The structure of modular program. Commun. ACM, 23:272–277, 1980.

- [42] Jian Zhang, Xu Wang, Hongyu Zhang, Hailong Sun, Kaixuan Wang, and Xudong Liu. A novel neural source code representation based on abstract syntax tree. In 2019 IEEE/ACM 41st International Conference on Software Engineering (ICSE), pages 783–794. IEEE, 2019.
- [43] Qing Huang, Yanbang Sun, Zhenchang Xing, Mingming Yu, Xiwei Xu, and Qinghua Lu. Api entity and relation joint extraction from text via dynamic prompt-tuned language model. ACM Transactions on Software Engineering and Methodology, 2023.
- [44] Qing Huang, Zhiqiang Yuan, Zhenchang Xing, Xiwei Xu, Liming Zhu, and Qinghua Lu. Prompt-tuned code language model as a neural knowledge base for type inference in statically-typed partial code. Proceedings of the 37th IEEE/ACM International Conference on Automated Software Engineering, 2022.
- [45] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. Advances in Neural Information Processing Systems, 35:24824–24837, 2022.
- [46] Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. arXiv preprint arXiv:2203.11171, 2022.
- [47] Qing Lyu, Shreya Havaldar, Adam Stein, Li Zhang, Delip Rao, Eric Wong, Marianna Apidianaki, and Chris Callison-Burch. Faithful chainof-thought reasoning. arXiv preprint arXiv:2301.13379, 2023.
- [48] OpenAI. Gpt-3.5-turbo-16k. https://platform.openai.com/docs/models/ gpt-3-5, note = Accessed: 2023.9, 2023.
- [49] OpenAI. https://platform.openai.com/docs/guides/embeddings/ what-are-embeddings, note = Accessed: 2023.9, 2023.
- [50] Zhiqiang Yuan, Junwei Liu, Qiancheng Zi, Mingwei Liu, Xin Peng, and Yiling Lou. Evaluating instruction-tuned large language models on code comprehension and generation. arXiv preprint arXiv:2308.01240, 2023.
- [51] Jiawei Liu, Chunqiu Steven Xia, Yuyao Wang, and Lingming Zhang. Is your code generated by chatgpt really correct? rigorous evaluation of large language models for code generation. *arXiv preprint arXiv:2305.01210*, 2023.
- [52] Shuyin Ouyang, Jie M Zhang, Mark Harman, and Meng Wang. Llm is like a box of chocolates: the non-determinism of chatgpt in code generation. arXiv preprint arXiv:2308.02828, 2023.
- [53] Pycallgraph. https://github.com/gak/pycallgraph, note = Accessed: 2023.9, 2023.
- [54] Pyan. https://github.com/davidfraser/pyan, note = Accessed: 2023.9, 2023.
- [55] Ravindra Pal Singh and Naurang Singh Mangat. Elements of survey sampling. Available:https://api.semanticscholar.org/CorpusID:117789735, 1996.

- [56] J Richard Landis and Gary G. Koch. An application of hierarchical kappa-type statistics in the assessment of majority agreement among multiple observers. *Biometrics*, 33 2:363–74, 1977.
- [57] Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Ye Jin Bang, Andrea Madotto, and Pascale Fung. Survey of hallucination in natural language generation. ACM Computing Surveys, 55(12):1–38, 2023.
- [58] Muru Zhang, Ofir Press, William Merrill, Alisa Liu, and Noah A Smith. How language model hallucinations can snowball. arXiv preprint arXiv:2305.13534, 2023.
- [59] Stephen Roller, Emily Dinan, Naman Goyal, Da Ju, Mary Williamson, Yinhan Liu, Jing Xu, Myle Ott, Eric Michael Smith, Y-Lan Boureau, and Jason Weston. Recipes for building an open-domain chatbot. In Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume, pages 300– 325, Online, April 2021. Association for Computational Linguistics.
- [60] Chen Yang, Yan Liu, and Changqing Yin. Recent advances in intelligent source code generation: A survey on natural language based studies. *Entropy*, 23, 2021.
- [61] Jiho Shin and Jaechang Nam. A survey of automatic code generation fromnatural language. J. Inf. Process. Syst., 17:537–555, 2021.
- [62] Shirley Anugrah Hayati, Raphaël Olivier, Pravalika Avvaru, Pengcheng Yin, Anthony Tomasic, and Graham Neubig. Retrieval-based neural code generation. ArXiv, abs/1808.10025, 2018.
- [63] Disha Shrivastava, H. Larochelle, and Daniel Tarlow. Repositorylevel prompt generation for large language models of code. ArXiv, abs/2206.12839, 2022.
- [64] Fengji Zhang, B. Chen, Yue Zhang, Jin Liu, Daoguang Zan, Yi Mao, Jian-Guang Lou, and Weizhu Chen. Repocoder: Repository-level code completion through iterative retrieval and generation. ArXiv, abs/2303.12570, 2023.
- [65] Dawn Drain, Changran Hu, Chen Wu, Mikhail Breslav, and Neel Sundaresan. Generating code with the help of retrieved template functions and stack overflow answers. ArXiv, abs/2104.05310, 2021.
- [66] Md. Rizwan Parvez, Wasi Uddin Ahmad, Saikat Chakraborty, Baishakhi Ray, and Kai-Wei Chang. Retrieval augmented code generation and summarization. ArXiv, abs/2108.11601, 2021.
- [67] Shuyan Zhou, Uri Alon, Frank F. Xu, Zhiruo Wang, Zhengbao Jiang, and Graham Neubig. Docprompting: Generating code by retrieving the docs. In *International Conference on Learning Representations*, 2022.
- [68] Daoguang Zan, Bei Chen, Zeqi Lin, Bei Guan, Yongji Wang, and Jian-Guang Lou. When language model meets private library. In Conference on Empirical Methods in Natural Language Processing, 2022.