

# ChemWorld: Composable Chemical Worlds for Controlled and Replayable Agent Experimentation

Jiangjie Qiu<sup>1</sup>, Yijun Li<sup>1</sup>, Xiaonan Wang<sup>1,\*</sup>

<sup>1</sup>Beijing Key Laboratory of Artificial Intelligence for Advanced Chemical Engineering Materials, State Key Laboratory of Chemical Engineering and Low-Carbon Technology, Department of Chemical Engineering, Tsinghua University, Beijing 100084, China

\*Correspondence: wangxiaonan@tsinghua.edu.cn

## Abstract

Autonomous chemistry needs both real-material execution and a software-scale experimental medium in which worlds can be reset exactly, repeated safely, observed completely and changed under controlled laws. ChemWorld provides this second capability as a composable executable chemical-world substrate and programmable virtual instrument. Reusable physical and transactional components compile into worlds, while one public task contract joins initial state, typed operations, instruments, observations, resources, failure semantics, termination and evaluation. Researchers can therefore create matched worlds, branch one private law at a time and audit every simulator-side state and resource event without directly consuming physical reagents or creating wet-laboratory chemical exposure. The 15 registered tasks serve as reference examples for a broader construction surface. Full-census qualification covered every registered world unit and complete reference recipe, plus 52 coverage-generated compositions, including eight protocol-frozen non-reference reaction-distillation compositions. Invalid-action, module, interface and declaration probes produced their registered outcomes, with zero missing receipts or public/private leakage. Across eight deterministic use cases and six controlled private-law fork pairs, every committed lifecycle and environment-replay gate passed, and one complete complete-agent run closed a non-reference world through the same instrument interface. Together, these results show that compositional expansion can preserve executable semantics and turn simulated chemistry from a fixed task collection into a controlled, observable and replayable experimental medium. The released instrument spans nine declared component families and defines extension points for future alternative or empirically calibrated formulations.

## 1. Introduction

Self-driving laboratories (SDLs) and chemistry agents have demonstrated that algorithms can plan, execute and revise workflows on real materials. A second experimental regime is needed for questions that depend on exact reset, matched counterfactuals, repeated failure injection, complete process observation and direct control over the laws of the world. These operations are difficult to obtain from physical matter and are usually absent when a digital experiment is represented only as an objective-function query. A programmable virtual instrument can make them routine at software scale.

ChemWorld treats a chemical world as an explicit executable object rather than an opaque task label. Its declared vocabulary contains reaction, thermal, phase, separation, crystallization, distillation, continuous-flow, electrochemical and observation components. A world is a compatible selection of these components, their parameters and private laws. A task contract is  $T = (W, S_0, A, I, O, R, \tau, E)$ : the world, initial state, operations, instruments, observations, resources, termination rule and evaluation surface. A scenario instantiates the contract; a trajectory records the resulting operation-observation sequence; and a controlled fork changes one private component while preserving the public contract.

This architecture creates controlled experimental freedom. ChemWorld can run wherever the software and compute environment are available. The software itself

consumes no physical reagents and creates no direct wet-laboratory chemical exposure. World state can be reset exactly, repeated to a planned study denominator under explicit compute and storage budgets, and forked at a named private law. The evaluator can inspect every hidden state transition and resource event while the agent remains restricted to the public instrument contract. These properties make high-observability counterfactual experimentation available before, alongside or between physical campaigns (Fig. 1).

The central question is whether a chemical environment can expand beyond a fixed task list without losing the semantics that make experiments interpretable. We address it through four linked contributions:

1. **Composable executable worlds.** A public component vocabulary, compatibility compiler and unified task contract convert component selections and private laws into executable, reader-auditable instruments.
2. **Coverage-guided expansion.** Pairwise discrete coverage, seeded space-filling continuous designs and ordered workflow interactions extend qualification beyond the reference task identities.
3. **Process-complete semantics.** Atomic transactions, explicit failure and termination, multi-resource ledgers, public/private observation boundaries and exact environment replay make each trajectory an inspectable experimental record.

#### 4. Controlled intervention and agent access.

Single-private-law forks isolate trace-level world changes under an invariant public contract, fixed typed actions and bound randomness, while deterministic policies and a complete-agent run use the same instrument surface.

This paper qualifies the executable semantics of the declared component and compatibility domain as a software experimental substrate. Its modular interfaces separate experimental semantics from model choice and define extension points through which future implementations may introduce additional constitutive laws, calibrated process models or alternative agents.

## 2. Relation to existing experimental systems

### 2.1 Real-material execution and software-scale control

Physical autonomous laboratories provide the decisive evidence of execution on real materials with real sensors, actuators and hardware. Coscientist and ChemCrow connect language-model planning to chemistry tools and robotic or cloud-laboratory execution [1, 2]. A-Lab and mobile robot systems demonstrate closed-loop synthesis and characterization [3, 4], while ORGANA, ChemAgents and newer instrument-facing systems extend this line toward visual feedback, long workflows, modular automation and teachable operation [5–9].

ChemWorld supplies the complementary evidence available from a fully controlled software world: exact matched replication, counterfactual private laws, evaluator-complete state access, deterministic reset and repeatable failure injection. Its marginal resources are compute and software rather than reagent, instrument and human-safety capacity. This division enables large controlled studies in software and focused real-material validation where physical evidence is decisive.

### 2.2 Digital optimization, virtual laboratories and discovery worlds

Reaction-optimization and experiment-planning suites such as Summit and Olympus provide scalable, repeatable comparisons over objective functions, while PC-Gym provides nonlinear process-control environments with constraints and disturbances [10–12]. ChemGymRL already establishes a customizable, fine-grained virtual chemistry laboratory for reinforcement learning [13]. Closed-loop materials environments further couple candidate generation, budgeted oracle feedback and multi-objective search [14, 15]. These systems establish the value of inexpensive repeatability, interactive chemistry and controlled algorithm comparison.

Interactive scientific worlds broaden evaluation toward hypothesis formation, experiment selection and law recovery. DiscoveryWorld, BoxingGym, SciGym, SciExplorer and NewtonBench represent complementary approaches

to long-horizon discovery and initially unknown systems [16–20]. Laboratory simulators such as LabUtopia and Labimus emphasize embodied procedure and manipulation [21, 22]. ChemWorld adds a distinct systems layer: world composition, instrumentation, private-law intervention and replay are governed by one executable contract. Typed operations change sample state, instruments consume explicit resources, invalid actions have transactional consequences, termination is explicit, and the complete world transition can be rebuilt from the released record. This combination supports experiments about both the agent and the world it inhabits.

The construction and record layers also connect to established software-systems ideas. Pairwise covering rows follow combinatorial interaction testing, which selects compact test suites that cover registered parameter interactions [23]. The immutable record specializes computational provenance—entities, activities, derivations and responsible agents—to executable chemical-world transitions, resources and lineage [24]. ChemWorld joins these ideas to a stateful scientific instrument rather than treating them as release metadata alone.

### 2.3 A distinct operating regime: programmable experimental freedom


The defining ChemWorld advantage is the conjunction of composition, controlled intervention and process-complete observation. Researchers can instantiate new component topologies, vary continuous conditions, substitute a private constitutive or material law, repeat matched world identities and inspect every simulator-side consequence. The same contract also preserves the agent-facing boundary, so counterfactual worlds remain comparable without exposing their hidden differences. Table 1 positions this capability alongside the strongest use of adjacent experimental systems. The comparison is functional rather than performance-based: it focuses on reset and repetition, intervention surface, public/private observability and record scope.

## 3. Composing executable worlds beyond a fixed task catalogue

### 3.1 One contract from world construction to experiment

Each component declares the state it owns, the interfaces it consumes or produces, its parameter domains and its contribution to the public operating surface. Reaction and electrochemical components transform material state; thermal, phase, separation, crystallization, distillation and continuous-flow components supply process-specific state transitions; the observation component attaches synthetic instruments. Public operations are typed actions rather than free-form simulator mutations.

The compiler first normalizes the declaration and then checks compatibility. It fails closed on missing dependencies, multiple owners of the same state surface, unit incompatibility, unsupported parameters, impossible resource

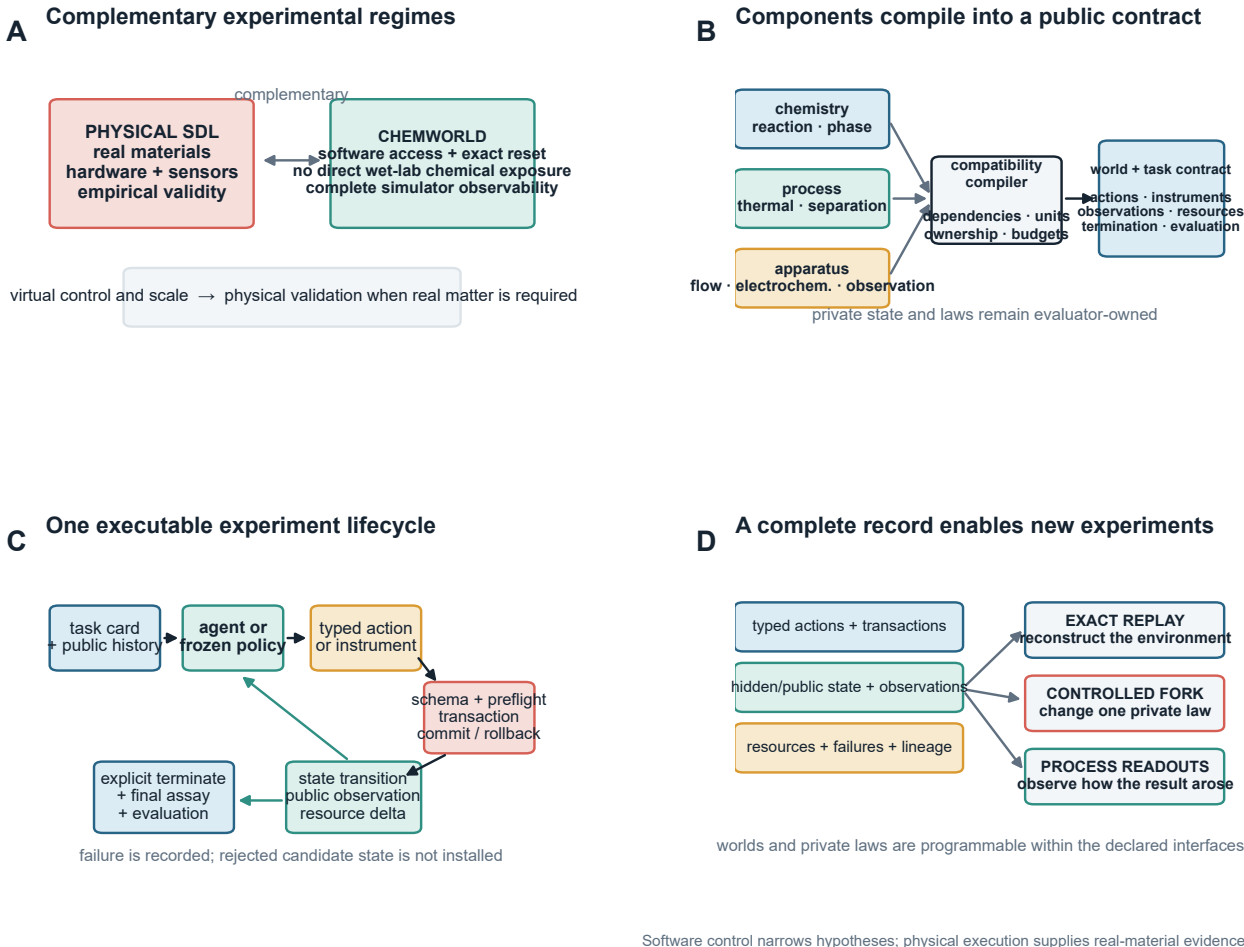

**Figure 1. ChemWorld turns composable chemical worlds into controlled, auditable experiments.** **A**, Physical SDLs provide real-material execution; the virtual substrate adds software access, exact reset, repetition without direct wet-lab exposure, matched counterfactuals and complete simulator observability. **B**, Reusable components and private laws compile through compatibility checks into a world and public task contract. **C**, An agent or deterministic policy acts only through typed operations and instruments until explicit termination and final assay. **D**, The immutable record joins state transitions, observations, resources, failures and lineage, enabling exact environment replay and controlled private-law forks.

declarations and workflows that cannot reach termination. A successful compile returns both an executable task and a reader-auditable public surface: allowed operations, instruments, observations, resources, termination and evaluation. Private laws and hidden state remain outside that surface.

For a bound mechanism  $\theta$ , resource ledger  $R_t$  and recorded random stream  $\xi_t$ , the runtime applies a preflight predicate  $P(s_t, a_t, R_t)$  before installing a candidate transition. A passing action produces  $(\tilde{s}_{t+1}, e_{t+1}) = F_\theta(s_t, a_t, \xi_t)$  and commits  $s_{t+1} = \tilde{s}_{t+1}$ ; a rejected action leaves  $s_{t+1} = s_t$  while recording a structured rejection event and ledger consequence. Public and evaluator views are separate projections,

$$o_{t+1} = \pi_{\text{pub}}(s_{t+1}, e_{t+1}), \quad \hat{o}_{t+1} = \pi_{\text{eval}}(s_{t+1}, e_{t+1}).$$

Here  $e_{t+1}$  denotes structured event and transaction meta-data rather than the complete hidden state.  $R_t$  is a sepa-

ately recorded resource ledger. A rejected action leaves the committed physical state unchanged while recording its rejection event and declared ledger consequence. The evaluator projection is evaluator-defined and is not equivalent to exposing all hidden state to the agent.

Replay equivalence therefore binds the normalized contract, runtime and mechanism identities, scoring identity, seeds and intervention record, then compares the committed action trace, public observations, transaction outcomes, resource deltas and terminal flags.

The public capability map contains 15 registered reference tasks, 28 typed operation kinds, five synthetic instrument contracts and 62 ordered task-by-metric bindings. The reference tasks anchor interpretable examples across the declared surface, while component composition supplies the expansion mechanism. This separates the size of the executable world space from the number of curated task identities.

**Table 1. Complementary operating regimes for autonomous chemical experimentation.** ChemWorld combines software-scale repetition with explicit world composition, private-law intervention and process-complete replay.

| System class                              | Strongest use                                            | Replication regime                                                                                    |          | Experimental intervention                                                                       | Observable record                                                                                                                    |
|-------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Physical SDL / chemistry robot            | real-material execution and hardware integration         | apparatus-, material- and time-bound physical repeats                                                 |          | protocol, material and hardware changes                                                         | sensor, automation and sample records                                                                                                |
| Optimization or control suite             | rapid algorithm comparison over objectives or dynamics   | software-scale repeated queries or control episodes                                                   |          | configurable objectives, datasets or process models                                             | objective histories or controller traces                                                                                             |
| Interactive virtual lab / discovery world | sequential discovery or embodied procedure               | resettable episodes                                                                                   | software | task-specific objects, procedures and latent rules                                              | action histories, observations and task state                                                                                        |
| ChemWorld                                 | controlled experiments over composable executable worlds | exact reset, matched repetition and version-bound replay without direct wet-laboratory consumable use |          | declared component composition plus single-private-law forks under an invariant public contract | typed actions, evaluator-complete state, public observations, failures, resources, termination, lineage and exact environment replay |

### 3.2 Coverage-guided expansion

Composition generation is driven by coverage targets rather than by a desired number of examples. Discrete component and instrument choices are arranged with pairwise covering rows. Continuous temperature, time, flow, volume, potential, current, reflux and transfer axes are sampled with seeded Latin hypercube designs. Ordered workflows separately require critical interactions such as reaction before separation, quench before downstream transfer and fraction collection before final measurement.

The protocol-frozen design contains eight component patterns and generated 52 compositions. Comparison of exact component sets against the reference registry separates two forms of expansion. Three patterns—phase-observation, phase-separation-observation and reaction-thermal-continuous-flow-observation—are absent from the reference topologies and contribute 18/52 generated cases. Five patterns reuse a registered component topology. Within the latter group, the eight reaction-thermal-distillation-observation rows have zero exact task-world identity overlap with the frozen registry. We call these *protocol-frozen non-reference compositions*: their topology is registered, but their bound task and world identities are not. The first row of this eight-case block was fixed before authoritative execution as the complete-agent target, linking agent use to the same coverage design rather than to a separately selected example.

Every registered coverage target was attained. Across the eight patterns, the generated suite covered 60/60 discrete levels, 180/180 compatible discrete pairs, 212/212 continuous strata and 84/84 ordered workflow interactions. These are finite registered targets within the authored domains, and their covered and required counts are retained pattern by pattern in the machine-readable coverage record.

Pairwise rows qualify declared component and instrument interfaces, while seeded continuous designs and ordered workflows target authored bounds and critical process orderings. They are therefore construction-coverage targets, not a claim of semantic completeness over all higher-order chemistry. Higher-order behavior is addressed where it is explicitly present in a workflow, module probe or interface path.

## 4. Composition preserves executable and declared process semantics

### 4.1 Reference and generated full censuses

The reference qualification treats a world unit as a task-world pairing rather than a single task label. All 64/64 reference units passed. Boundary and categorical recipes produced 1,786/1,786 complete executions. The generated block passed for all 52/52 compositions, including all eight non-reference reaction-distillation rows. There were no failure classes, missing receipts or public/private leakage findings.

Compilation success alone was not a pass condition. Each generated composition had to execute its complete workflow, close exactly once, reconcile declared and observed resources and replay exactly. Seven deliberately broken declarations tested missing dependencies, conflicting state ownership, unit mismatches, invalid domains, resource impossibility and lifecycle gaps; all seven were rejected before environment construction.

### 4.2 Module and cross-module process checks

Thirty-two module probes exercise zero input, declared boundaries, monotonic directions, conservation and model-specific invariants. The seven cross-module paths then check that material amount, unit, identity and state mean-



ing survive transfer between modules. When applicable, the checks also include charge, energy, phase balance and event propagation. All 32 module probes and seven interface paths passed.

These results establish each formulation as an internally coherent executable module within its declared model-card domain. Every module enters through declared interfaces that define where future implementations may supply alternative or empirically calibrated formulations while retaining the task contract, transaction layer and replay machinery.

#### 4.3 Transactions, resources, observations and replay

Every submitted action first passes schema, compatibility and resource preflight. A valid action commits atomically. A rejected action records its attempt and declared penalty but does not install candidate physical state. The 192 negative probes cover invalid schema, preconditions, resource exhaustion, terminal closure and other fail-closed paths; all 192 produced the registered rejection and preserved state as required.

Resource accounting separates material, sample, instrument use, process time, operation count and terminal assay. Observation checks ensure that public packets contain only task-declared fields. Exact replay reconstructs the same compiled world from its bound contract and seeds, resubmits the committed typed actions, and compares rewards, observations, termination flags, transaction metadata, state-delta summaries, resource events and constitution checks with zero numerical tolerance. This version-bound guarantee makes the full environment transition, rather than only the endpoint or action list, the reproducible unit.

### 5. Process-complete execution across diverse chemical workflows

Eight frozen use cases test the recording surface with deterministic policies. They cover a reaction-to-crystallization workflow, resource-limited equilibrium characterization, an intentional failure followed by recovery, continuous flow, electrochemistry, distillation, partition and a second crystallization world. The cases are independent qualification units, with every submitted action audited inside its complete lifecycle.

Across the eight cases, all 89 submitted actions have complete schema, transaction, constitution, event, resource and public-observation receipts. Eighty-eight actions committed. The first action of the failure-recovery case deliberately attempted phase separation before its preconditions were satisfied. It rolled back, preserving physical state and observation random-number state while reconciling the declared attempt consequences. The following 18 actions completed the recovery path. Every case committed one final assay, closed its lifecycle, reconciled resources and replayed exactly with zero numerical error.

The generated reaction-distillation world also has a

12-action deterministic reference path. This creates two independent execution units on the same world: a fixed path that qualifies construction and replay, and a complete-agent lifecycle that tests access through the public instrument contract.

### 6. Controlled single-component forks

General composition and controlled attribution are different operations. Composition assembles multiple declared components subject to compatibility rules. A world fork holds the public task contract and action sequence fixed while changing one protocol-frozen private component.


The fork qualification contains six parent-child pairs: two intervention classes across three seeds. Each pair preserved nine versioned public-contract components: task, actions, instruments, observations, resources, failures, scoring, material catalogue and constitution/safety. These fork-certificate fields refine the public boundary of the task contract rather than redefining its mathematical tuple. Parent and child executed the same fixed typed sequence with bound randomness. Repeating both variants produced 24 deterministic fork traces. All pairs passed lineage, single-target, public-invariance, same-sequence executability, expected state and observation divergence, and exact replay gates. The measured divergence is therefore a trace-level effect of one private-law intervention under fixed actions and noise identity.

### 7. Agent experimentation with evaluator-complete observability

An endpoint cannot reconstruct how it was reached. ChemWorld therefore keeps terminal commitment, evidence acquisition, continued process investment, resource deployment, failure and outcome trajectory as separate coordinates. Nineteen registered process dimensions remain separate, preserving the experimental structure that a scalar score would discard. The evaluator can inspect complete simulator state and resource consequences while the agent remains restricted to its public task contract.

Two agent-facing interaction examples show what this contract exposes without turning the paper into an agent benchmark. In a resource-limited phase-observation world, an agent can choose whether to spend scarce sample and instrument uses on pH or UV-visible measurements, then terminate explicitly when the evidence is sufficient. In a failure-recovery workflow, a premature phase-separation request returns a structured rollback while preserving the last committed state, allowing the agent to revise its next typed action rather than restart the experiment. The deterministic reference traces qualify both interaction patterns; comparative agent behavior remains a separate study.

The complete-agent demonstration used the first protocol-frozen non-reference reaction-distillation world. A provider-driven language-model agent completed one lifecycle through the public instrument contract. The fixed scaffold supplied the public task card, typed tool schemas, resource contract and explicit termination/final-assay re-

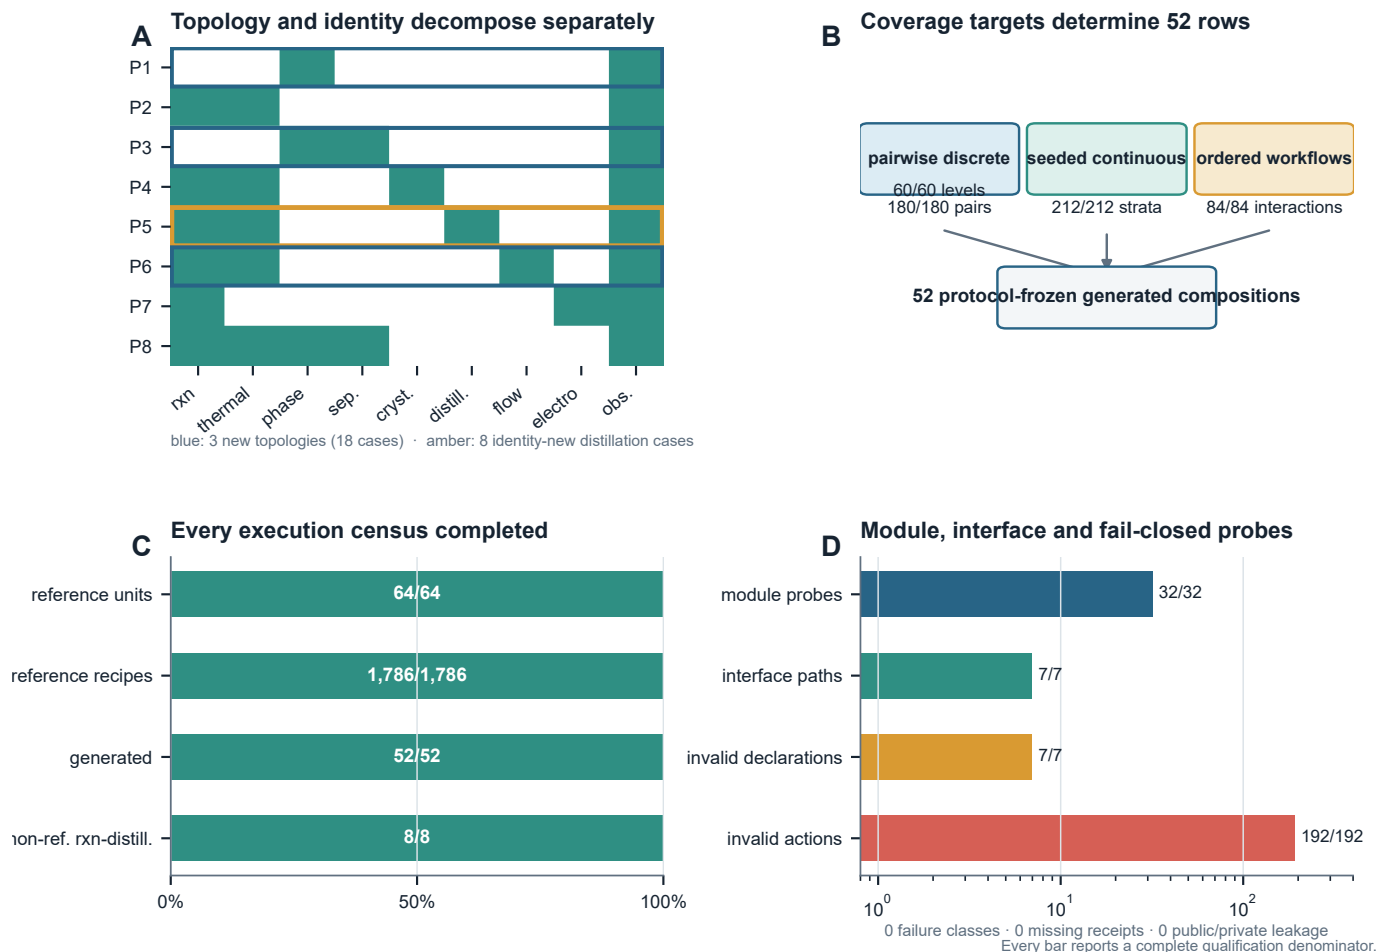

**Figure 2. Coverage-guided construction and full-census qualification.** **A**, Three of eight component patterns, representing 18/52 cases, add topologies absent from the reference registry; the eight reaction–distillation rows instead reuse a registered topology while having zero exact task–world identity overlap. **B**, The 52 protocol-frozen rows attain 60/60 registered discrete levels, 180/180 compatible pairs, 212/212 continuous strata and 84/84 ordered workflow interactions. **C**, All reference units, reference recipes, generated compositions and non-reference compositions completed and replayed. **D**, Module, interface, invalid-declaration and invalid-action probes all produced their registered outcomes, with zero missing receipts or public/private leakage. Counts report complete qualification denominators.

quirement. The agent received only this public surface and issued every operation, including termination and final assay. One uninterrupted session submitted 15 actions under one fixed model/provider configuration. All 15 committed and closed the lifecycle, with zero rollback, right-censoring or public/private leakage.

The environment used 8,158.454 of 10,440 simulated process seconds, four of four instrument uses and 0.00085 of 0.001 L sample. The complete record links each decision to its public observation, hidden simulator consequence, transaction result and resource debit. The recorded 15-step committed-action trace then replayed with zero numerical mismatch, showing that a provider-driven experiment can enter the same auditable record as deterministic use cases.

## 8. Discussion

### 8.1 Controlled experimental freedom at software scale

ChemWorld turns world construction into an experimental variable. Declared components compile through explicit compatibility rules; coverage-guided rows extend beyond curated task identities; and reference, generated and non-reference compositions preserve executable, transactional, resource, observation and replay semantics. The result is a construction surface rather than a catalogue of isolated environments.

Six capabilities become available together: qualified new component topologies, continuous condition variation, private-law intervention, exact reset, matched repetition and evaluator-complete process inspection. Researchers can exercise them without booking physical hardware or



**Figure 3. Process-complete cases preserve lifecycle, resource and failure semantics.** **A**, Eight frozen cases span single-process, multistage and reference-library workflows. **B**, Eighty-eight of 89 submitted actions committed; one planned precondition failure rolled back. **C**, The rollback preserved physical state and allowed the remaining 18-step recovery path to close. **D**, All eight final assays, resource ledgers and exact replays passed.

creating direct wet-laboratory chemical exposure, and can repeat an experiment to its planned denominator under explicit compute and storage budgets. This makes large controlled studies, diagnostic stress tests and counterfactual designs economically accessible at software scale.

The full-census qualification is central to this advantage. Every registered unit carries an exact denominator and every unexpected outcome remains visible. Coherent semantics are therefore established across the declared construction domain before a policy comparison, controlled intervention study or scientific application is layered on top.

## 8.2 From endpoint benchmarks to controlled counterfactual process analysis


An endpoint reports what was achieved; a process-complete record reveals how evidence, resources, failures and terminal commitment produced it. ChemWorld retains these signals as 19 separate coordinates and binds them to replayable state transitions. This supports questions about

measurement strategy, recovery after invalid actions, resource deployment and decision timing that disappear when an experiment is reduced to one score.

Controlled private-law forks add a counterfactual dimension. Parent and child worlds expose the same actions, instruments and resources while one hidden law changes under the same typed sequence and bound randomness. Outcome and observation differences in the reported traces can therefore be assigned to that simulator intervention. The same construction surface can support future policy-robustness, adaptation, measurement-value, curriculum and failure-recovery studies through separately frozen randomized or matched protocols.

## 8.3 An extensible bridge to physical experimentation

The released qualification applies to the declared component vocabulary and authored model domains. Those boundaries expose explicit extension points rather than fixed task walls. Future implementations may introduce

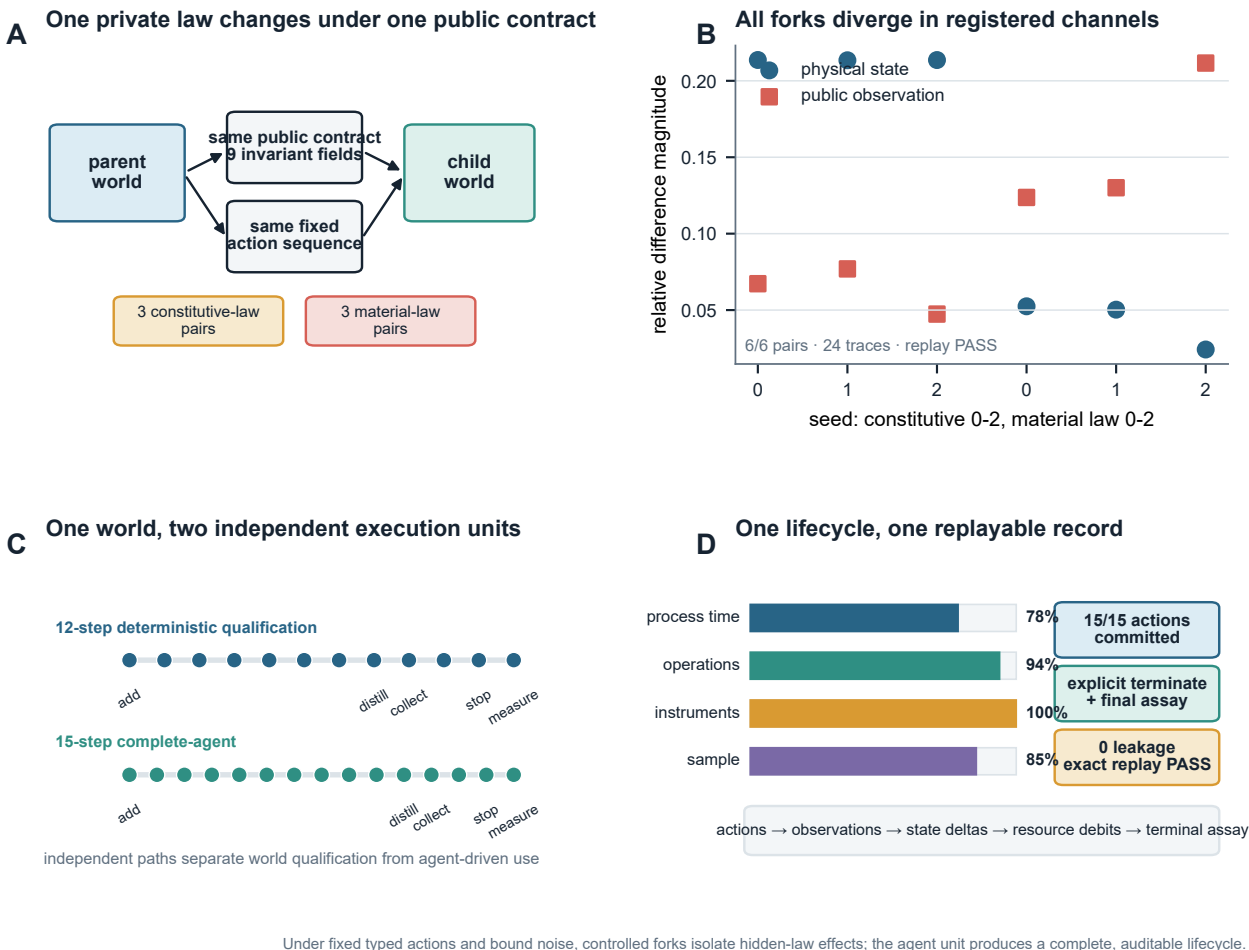

**Figure 4. Controlled private-law interventions and complete-agent use of the same instrument surface.** **A**, Parent and child worlds share the public contract and action sequence while one private constitutive or material law changes. **B**, Six pairs and 24 deterministic traces pass lineage, public-invariance, divergence and exact-replay gates; relative-difference magnitude is shown, while direction is checked separately by the frozen divergence oracle. **C**, The fixed non-reference reaction–distillation world has an independent 12-step deterministic qualification path and a separate 15-step complete-agent lifecycle. **D**, The agent closes the lifecycle within environment resources through explicit termination and final assay; every state transition and resource event enters the replayable record.

additional constitutive laws, calibrated unit operations, empirical instrument models and new agents through the same task contract. The complete-agent unit demonstrates that provider-driven action selection already uses this common surface, while comparative agent studies can retain the same environment, resource and replay guarantees.

ChemWorld and physical SDLs therefore form a productive sequence. Software worlds provide cheap repetition, controlled counterfactuals, complete observability and rapid hypothesis narrowing; physical systems provide real-material execution and calibration. The shared experimental logic allows software-scale evidence to focus subsequent laboratory work on the conditions and mechanisms that matter most.

#### 8.4 Qualification scope

The qualification reported here establishes executable semantics and authored-model coherence for the declared component vocabulary and compatibility domain. The synthetic instruments are software observation models: they provide a controlled, inspectable interface, not a claim of calibration to a particular physical device. Empirical calibration can be added as an extension layer without changing the task contract or transaction semantics. Coverage is a frozen construction design over authored discrete and continuous axes, not an exhaustive enumeration of chemical space. The fork experiments show that a declared single-private-law intervention can produce the expected trace-level effect; they do not establish every possible intervention type. The complete-agent run demonstrates interface integration, not agent capability; exact replay is limited to the bound environment/action trace.



## 9. Methods

### 9.1 Construction and compatibility

A composition declaration specifies component roles and parameters plus the public task surface. Normalization is deterministic. Compatibility checks cover dependencies, state ownership, unit agreement, parameter domains, resource feasibility, operation exposure, instrument availability and the existence of a closed lifecycle. A rejected declaration returns structured diagnostics and does not construct an environment.

The task contract is the authoritative public boundary. Runtime validation is restricted to the declared operations and instruments. Private constitutive laws, material identities and hidden simulator state remain evaluator-owned. The 15 registered tasks are mapped into the same component and contract representation used by generated compositions.

### 9.2 Coverage design

The authoritative qualification protocol was frozen before execution. The frozen object includes eight component patterns, their discrete axes and compatible pairs, continuous bounds, seeds, ordered workflows, pass/failure rules and the first reaction-distillation row selected for complete-agent use. Discrete axes use pairwise covering rows. Continuous axes use seeded Latin hypercube samples inside the authored bounds. Each pattern contains one or two ordered workflows. The denominator is 52 generated cases, including 18 cases across three topologies absent from the reference registry and eight registered-topology reaction-distillation cases with zero exact task-world identity overlap.

The coverage selection and pass rules are fixed before the reported qualification run and remain invariant across all outcomes. The reader-facing result is the complete frozen census defined by that design.

### 9.3 Qualification measurements

For each case, the report records normalized construction input, compile diagnostics, public contract, action sequence, schema and transaction status, constitution checks, events, resource preflight and outcome, public observation, termination, trajectory size and exact replay. Missing receipts, non-finite quantities, unexpected commits or rollbacks, leakage, denominator drift and replay mismatch fail the case.

Reference qualification covers 64 task-world units and 1,786 complete recipes. Generated qualification covers 52 compositions. Negative qualification covers 192 invalid probes. Module and interface qualification use 32 and seven units, respectively. Compile mutation uses seven invalid declarations. Counts are exact qualification denominators.

The 32 physical-module probes form an  $8 \times 4$  design: each of reaction, thermal, phase, separation, crystallization, distillation, continuous flow and electrochemistry contributes one zero-input bounded-runtime probe, one legal low/high probe, one directionality probe and one

runtime-constitution probe. Legal low/high checks use numerical reference fixtures for seven modules and a declared conceptual/synthetic fixture for crystallization; directionality checks are declared conceptual/synthetic oracles. Every numerical fixture records its own tolerance. Observation is qualified separately through instrument, sample-accounting, bounded-signal and public/private-boundary checks. The seven compile mutants comprise two missing-dependency cases and one case each for conflicting state ownership, unit mismatch, invalid parameter domain, lifecycle hole and resource impossibility.

### 9.4 Process-time envelopes

Environment process time is derived by pattern rather than assigned as an arbitrary common cap. For each pattern,

$$t_{\max} = t_{\text{required stages}} + t_{\text{implicit reserve}} + t_{\text{allowed repeats}}.$$

The required term sums the upper bounds of necessary timed stages. The implicit reserve covers authored quench and transfer operations. Repeat allowance is tied to explicit per-operation repeat limits. The resulting limits are 0 s for phase observation; 3,600 s for reaction-thermal observation; 1,860 s for phase separation; 11,100 s for reaction crystallization; 10,440 s for reaction distillation; 7,200 s for continuous flow; 5,400 s for electrochemistry; and 7,500 s for reaction-phase separation. A proposed action is rejected before runtime if either cumulative process time or a repeat limit would be exceeded.

### 9.5 Deterministic use cases

The eight cases, seeds and action lists were protocol-frozen before execution. Their total expected census was 89 submitted actions, 88 commits, one rollback and eight final assays. The failure-recovery case specified the failing action and rollback class in advance. All submitted actions were inspected as one deterministic census, isolating instrument qualification from provider variance.

### 9.6 Controlled forks

Each fork declares a parent, a child, one protocol-frozen private intervention target, an invariant public contract and expected divergence channels. Parent and child execute the same typed action sequence. Gates require lineage validity, exactly one changed private target, invariant public contract, executable sequence on both variants, expected physical and observation divergence and exact replay under deterministic execution.

For an aligned checkpoint value  $p$  in the parent and  $c$  in the child, the oracle records the signed change  $\delta = c - p$ , its magnitude  $\Delta = |\delta|$ , and the relative difference  $\Delta/\max(|p|, |c|, s_0)$ , where  $s_0$  is the declared positive scale floor. A magnitude passes only when both the absolute and relative thresholds for that expectation are met; the direction oracle is checked separately from the magnitude.

### 9.7 Complete-agent non-reference-world protocol

The formal unit is one complete lifecycle on the first protocol-frozen non-reference reaction-distillation compo-

sition. The protocol binds one uninterrupted agent session, one model/provider/scaffold configuration and at most 16 submitted actions through the public instrument interface. Termination and final assay must be agent-issued. The action count, tool calls and trajectory records must agree exactly; every action must commit; the lifecycle must contain one termination and exactly one final assay; resources, public boundary and exact replay must pass.

The reported unit ran on 5 August 2026 with OpenAI GPT-5.6-sol at medium reasoning effort through the Codex subscription provider. This model, provider and scaffold binding applies only to the interface-integration demonstration.

Provider accounting distinguishes one provider session, one logical agent turn, 15 action calls and two read-only calls. The model, provider, reasoning effort, scaffold constraints, public prompt template and execution date are bound before the run. Cumulative input is separated into cached and uncached input; cached context is reused input, not repeated output. The formal limits are 640,000 cumulative input tokens, 192,000 uncached input tokens and 64,000 output tokens. Per-action wait is capped at 600 s, finalization at 300 s and runner reserve at 600 s, giving a conservative method wall limit of 10,500 s. These method resources are separate from the simulated process-time ledger.

### 9.8 Process readouts

The process profile retains 19 dimensions in five groups: terminal commitment, evidence acquisition, evidence-conditioned action, resource deployment and outcome trajectory. Undefined conditional quantities remain null rather than being set to zero. The resulting coordinate vector preserves process structure for subsequent agent studies and supports dimension-level comparison without a composite score. The released process-coordinate contract supplies each dimension’s numerator, denominator, value range, null condition and boundary-case rule together with the computation binding used by the reports.

### 9.9 Public boundary and exact replay

The evaluator owns hidden simulator identity and private state. Agent-facing task cards, observations and histories are checked for hidden fields and absolute private paths. Replay reconstructs the bound world from the same normalized contract, runtime, mechanism, observation and scoring identities plus the recorded seeds and interventions. It then resubmits every committed typed action and compares rewards, every public observation, termination and truncation flags, operation types, transaction status, rollback reason, events, state-delta summaries, constitution checks and resource consequences. The reported qualification uses numerical tolerance zero and observed a maximum absolute error of zero. We use exact replay narrowly for environment/action-trace reconstruction under the bound software identities. Policy re-execution, cross-platform numerical reproduction and cross-version archival replay are separate reproducibility questions and are not

inferred from a zero-error environment replay. The public release contains the environment evidence needed for this reconstruction while keeping authentication data, private reasoning and unrestricted provider payloads outside the research artifact.

## 10. Data and code availability

Code, configuration, processed reports, figure source data and release tooling are available in the MIT-licensed ChemWorld repository at [github.com/sunyrain/ChemWorld](https://github.com/sunyrain/ChemWorld). The tracked materials regenerate the tables and figures and replay released simulator transitions and resource changes. The public submission tag **first-paper-arxiv-final-2026-08-06** binds the manuscript source, dependency lock, processed evidence, figure data, coverage records and release metadata used for this version. Provider authentication, unrestricted response bodies, private reasoning and hidden evaluator identities are excluded.

The release supports three complementary reproducibility layers. Processed evidence regenerates the reported counts and figures. Released trajectories reconstruct environment transitions, public observations and ledgers. Provider provenance binds the model, configuration and call accounting for the complete-agent unit. Exact replay refers to the executable world and its complete experimental record. In this paper, environment/action-trace replay is distinct from policy re-execution, cross-platform numerical reproduction and cross-version archival replay. Provider provenance supports audit of the complete-agent unit but does not imply that a later model call will regenerate the same actions.

## 11. Conclusion

ChemWorld turns simulated chemistry from a fixed task collection into a programmable experimental medium. Reusable components compile into executable worlds; one public contract joins operations, instruments, observations, resources, failures, termination and evaluation; and every committed transition enters a version-bound replayable record. The 15 reference tasks anchor the public surface, while coverage-guided construction expands it to new world identities without changing the runtime contract.

The resulting advantage is controlled experimental freedom at software scale. Researchers can reset worlds exactly, repeat matched experiments without physical consumables or chemical hazard, inspect complete simulator-side consequences and change one private law under an invariant agent interface. Full-census qualification, process-complete use cases, controlled forks and a complete-agent lifecycle show that these capabilities operate together across the declared construction domain. ChemWorld therefore provides an efficient and extensible substrate for controlled counterfactual agent studies, resource-aware experimentation and focused translation into physical laboratories.

## Appendix A. Reader-facing capability map

A reference identity is a registered task identity paired with one of its declared public world seeds. The 15 task identities below expand to 64 task-world units. A generated row is counted as overlapping the reference set only when both its task identity and compiled world identity match a registered unit; the eight protocol-frozen non-reference rows have zero such overlap.

## Appendix B. Coverage reconstruction and qualification census

The coverage design below fixes the pattern, seed, continuous domain, workflow count and generated denominator. Discrete factors include component-specific family or profile choices and instrument profiles; the released machine-readable coverage records map every discrete level, compatible pair, continuous stratum and ordered interaction to the rows that cover it. Covered and required counts are identical for all four target classes: 60/60 levels, 180/180 compatible pairs, 212/212 continuous strata and 84/84 ordered interactions.

## Appendix C. Instrument-use case library

## Appendix D. Process-coordinate dictionary

**Terminal commitment:** closed-lifecycle fraction, assay fraction and discard fraction.

**Evidence acquisition:** measured-lifecycle fraction, non-final instrument uses per closed lifecycle and normalized first-measurement position.

**Evidence-conditioned action:** continued-after-measurement fraction, post-measure operations per closed lifecycle, threshold-eligible fraction and threshold-decision concordance.

**Resource deployment:** attempted and committed operations per closed lifecycle, cost per closed lifecycle and risk per closed lifecycle.

**Outcome trajectory:** timing, retention, draw-down/recovery and terminal-to-best ratio.

**Table 2. Complete reference-task registry.** Seed counts define the public world identities exercised for each task.

| Reference task identity        | Component topology                                    | World seeds | Public operation / instrument summary            |
|--------------------------------|-------------------------------------------------------|-------------|--------------------------------------------------|
| electrochemical-conversion     | reaction + electrochemistry + observation             | 5           | 6 operations; pH, UV-visible, final assay        |
| equilibrium-characterization   | reaction + thermal + observation                      | 5           | 9 operations; pH, UV-visible, final assay        |
| flow-reaction-optimization     | reaction + continuous flow + observation              | 5           | 7 operations; HPLC, GC, UV-visible, final assay  |
| low-budget-characterization    | reaction + thermal + observation                      | 3           | 9 operations; HPLC, GC, UV-visible, final assay  |
| partition-discovery            | reaction + phase + separation + observation           | 5           | 9 operations; HPLC, GC, UV-visible, final assay  |
| public-private-generalization  | reaction + thermal + observation                      | 5           | 9 operations; HPLC, GC, UV-visible, final assay  |
| purity-yield-tradeoff          | reaction + thermal + phase + separation + observation | 5           | 18 operations; HPLC, GC, UV-visible, final assay |
| reaction-mechanism-explanation | reaction + thermal + observation                      | 3           | 9 operations; HPLC, GC, UV-visible, final assay  |
| reaction-optimization-standard | reaction + thermal + observation                      | 5           | 9 operations; HPLC, GC, UV-visible, final assay  |
| reaction-safety-constrained    | reaction + thermal + observation                      | 5           | 9 operations; HPLC, GC, UV-visible, final assay  |
| reaction-to-assay              | reaction + thermal + observation                      | 1           | 9 operations; HPLC, GC, UV-visible, final assay  |
| reaction-to-crystallization    | reaction + thermal + crystallization + observation    | 5           | 12 operations; HPLC, final assay                 |
| reaction-to-distillation       | reaction + thermal + distillation + observation       | 5           | 12 operations; HPLC, GC, UV-visible, final assay |
| reaction-to-purification       | reaction + thermal + phase + separation + observation | 5           | 18 operations; HPLC, GC, UV-visible, final assay |
| tool-agent-planning            | reaction + thermal + phase + separation + observation | 2           | 18 operations; HPLC, GC, UV-visible, final assay |

| Component pattern                                     | Principal state or process              | Representative public operations                     | Representative instruments         |
|-------------------------------------------------------|-----------------------------------------|------------------------------------------------------|------------------------------------|
| Phase + observation                                   | bounded phase/equilibrium state         | add solvent, add reagent, measure, terminate         | pH, UV-visible, final assay        |
| Reaction + thermal + observation                      | batch reaction and temperature history  | add, heat, quench, sample                            | HPLC, GC, final assay              |
| Phase + separation + observation                      | phase formation and transfer            | mix, settle, separate, wash, transfer                | HPLC, final assay                  |
| Reaction + thermal + crystallization + observation    | reaction followed by solid formation    | heat, seed, cool, filter                             | HPLC, particle sizing, final assay |
| Reaction + thermal + distillation + observation       | reaction, evaporation and fractionation | heat, quench, evaporate, distil, collect             | HPLC, GC, final assay              |
| Reaction + thermal + continuous flow + observation    | flow, residence time and conversion     | set flow, set temperature, run, sample               | HPLC, GC, final assay              |
| Reaction + electrochemistry + observation             | potential/current-driven conversion     | set potential/current, electrolyse, sample           | voltammetry, HPLC, final assay     |
| Reaction + thermal + phase + separation + observation | multistage reaction and purification    | react, quench, separate, wash, concentrate, transfer | HPLC, GC, final assay              |

**Table 3. Topology and identity decomposition of the generated block.** Topology novelty compares exact component sets with the 15-task reference registry; task-world novelty uses exact registered identities.

| Generated group                              | Cases | Topology relation              | Exact task-world relation                                                      |
|----------------------------------------------|-------|--------------------------------|--------------------------------------------------------------------------------|
| phase-observation                            | 6     | absent from reference registry | zero overlap implied by component-set difference                               |
| phase-separation-observation                 | 6     | absent from reference registry | zero overlap implied by component-set difference                               |
| reaction-thermal-continuous-flow-observation | 6     | absent from reference registry | zero overlap implied by component-set difference                               |
| reaction-thermal-distillation-observation    | 8     | registered topology            | zero exact overlap in the protocol-frozen non-reference block                  |
| four remaining generated patterns            | 26    | registered topologies          | used for reference-topology coverage; no separate non-reference identity claim |

**Table 4. Protocol-frozen coverage design.** Bounds are inclusive authored domains; “none” denotes a purely discrete design.

| Pattern                                       | Seed | Continuous axes and bounds                                                                                                                                                 | Workflows | Cases |
|-----------------------------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|
| phase-observation                             | 101  | none                                                                                                                                                                       | 1         | 6     |
| reaction-thermal-observation                  | 102  | heat 350–390 K; duration 600–1,800 s                                                                                                                                       | 2         | 6     |
| phase-separation-observation                  | 103  | phase 0.010–0.020 L; extractant 0.010–0.025 L; mix 60–300 s; settle 120–600 s                                                                                              | 2         | 6     |
| reaction-thermal-crystallization-observation  | 104  | reaction 350–390 K, 600–1,800 s; seed 0.002–0.010 g; cooling 275–305 K, 900–3,600 s                                                                                        | 2         | 6     |
| reaction-thermal-distillation-observation     | 105  | reaction 350–390 K, 600–1,800 s; evaporation 325–345 K, 300–900 s; distillation 350–390 K, 900–2,400 s; reflux 1.0–3.0; transfer 0.65–0.95                                 | 2         | 8     |
| reaction-thermal-continuous-flow-observation  | 106  | flow 0.5–5.0 mL min <sup>−1</sup> ; residence 60–600 s; temperature 330–390 K                                                                                              | 2         | 6     |
| reaction-electrochemistry-observation         | 107  | potential 0.5–1.8 V; current 25–150 mA; electrolysis 300–1,800 s                                                                                                           | 2         | 7     |
| reaction-thermal-phase-separation-observation | 108  | reaction 350–390 K, 600–1,800 s; phase/extractant 0.010–0.020/0.010–0.025 L; mix 60–300 s; settle 120–600 s; wash 0.003–0.010 L; concentrate 300–900 s; transfer 0.65–0.95 | 2         | 7     |

| Qualification unit                                               | Passed | Denominator | Failure classes            |
|------------------------------------------------------------------|--------|-------------|----------------------------|
| Reference task-world units                                       | 64     | 64          | 0                          |
| Complete reference recipes                                       | 1,786  | 1,786       | 0                          |
| Coverage-generated compositions                                  | 52     | 52          | 0                          |
| Protocol-frozen non-reference reaction-distillation compositions | 8      | 8           | 0                          |
| Invalid action probes                                            | 192    | 192         | 0 unexpected outcomes      |
| Module probes                                                    | 32     | 32          | 0                          |
| Cross-module interface paths                                     | 7      | 7           | 0                          |
| Invalid compile mutants                                          | 7      | 7           | 0 unexpected constructions |
| Deterministic use cases                                          | 8      | 8           | 0                          |
| Deterministic submitted actions                                  | 89     | 89          | 0 missing receipts         |
| Controlled fork pairs                                            | 6      | 6           | 0                          |
| Controlled fork traces                                           | 24     | 24          | 0                          |

| Scientific use                     | Components                                                       | What the record demonstrates                                                                                                      |
|------------------------------------|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Reaction to crystallization        | reaction, thermal, crystallization, observation                  | propagation from reaction through seeding, cooling, filtration and final assay                                                    |
| Resource-limited characterization  | phase, observation                                               | measurement choice, sample consumption and explicit stopping under a small budget                                                 |
| Failure and recovery               | reaction, thermal, phase, separation, observation                | atomic rollback, attempt consequences and continuation from committed state                                                       |
| Controlled private-law fork        | one registered component changed privately                       | invariant public contract with protocol-specified state/observation divergence                                                    |
| Generated reaction to distillation | reaction, thermal, distillation, observation                     | construction and replay outside the reference task identities; one complete-agent lifecycle closed under the same public contract |
| Reference library                  | flow, electrochemistry, distillation, partition, crystallization | breadth of reusable task recipes without a cross-task performance score                                                           |



**Table 5. Appendix E. Component model cards and extension points.** Each module declares its virtual-instrument domain, runtime formulation, authored domain, qualification oracle and interface location for future alternative or empirically calibrated implementations.

| Component        | Runtime formulation                                                                                     | Principal authored domain                                                     | Qualification oracle                                                                          | Intended use and extension path                                                       |
|------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Reaction         | stoichiometric mass-action network with Arrhenius temperature dependence                                | authored reaction families and bounded batch temperature/time                 | exact amount fixtures, monotonic response, material closure and runtime constitution          | reaction-law extension point for future named-reaction calibration                    |
| Thermal          | dynamic batch heat-release and jacket-energy balance                                                    | bounded temperature, duration, vessel pressure and volume                     | temperature/energy finiteness, bounds, event propagation and ledger reconciliation            | thermal-contract extension point for future equipment-specific coefficients           |
| Phase            | stability-gated, activity-corrected liquid-liquid equilibrium with TPD-style diagnostics                | declared phase identities, volumes and composition ranges                     | phase/material balance, directional partition response and state identity                     | activity-model extension point for future compound-specific thermodynamics            |
| Separation       | settling, entrainment, wash and transfer coupled to the phase model                                     | bounded mix/settle time, extractant/wash volume and transfer fraction         | amount/unit conservation, transfer identity and expected directional response                 | separation-interface extension point for future hardware-scale transport              |
| Crystallization  | van't Hoff solubility with seed, nucleation/growth cohorts, impurity occlusion and CSD summaries        | bounded seed mass, cooling temperature and cooling time                       | material closure, solubility-direction checks, CSD and runtime-constitution receipts          | law extension point for future calibrated nucleation and growth models                |
| Distillation     | bubble-gated, duty-limited VLE/Fenske fractionation with material and energy ledgers                    | bounded temperature/time, reflux ratio, fraction count and collected fraction | mass/energy closure, fraction identity, recovery/purity directions and equipment limits       | operation-contract extension point for future compound and column models              |
| Continuous flow  | geometry-resolved plug-flow reactor with residence time, distributed thermal boundary and pressure drop | bounded flow, residence time and temperature                                  | conversion direction, mass closure, pressure/geometry and solver diagnostics                  | runtime extension point for future reactor-specific transport or control models       |
| Electrochemistry | Nernst potential, Butler-Volmer kinetics, limiting current, Randles transient and Faraday accounting    | bounded potential, current and electrolysis time                              | charge/material closure, signed work, selectivity and limiting-current checks                 | electrochemical-law extension point for future material- and cell-specific parameters |
| Observation      | state-coupled synthetic pH, UV-visible, HPLC, GC and final-assay contracts                              | task-declared instruments, sample and use budgets                             | instrument availability, sample consumption, finite/bounded signal and non-omniscience checks | instrument-schema extension point for future empirical response models                |

## References

- [1] Daniil A. Boiko, Robert MacKnight, Ben Kline, and Gabe Gomes. Autonomous chemical research with large language models. *Nature*, 624:570–578, 2023. doi: 10.1038/s41586-023-06792-0.
- [2] Andres M. Bran, Sam Cox, Oliver Schilter, Carlo Baldassari, Andrew D. White, and Philippe Schwaller. Augmenting large language models with chemistry tools. *Nature Machine Intelligence*, 6:525–535, 2024. doi: 10.1038/s42256-024-00832-8.
- [3] Nathan J. Szymanski et al. An autonomous laboratory for the accelerated synthesis of inorganic materials. *Nature*, 624:86–91, 2023. doi: 10.1038/s41586-023-06734-w.
- [4] Tianyi Dai, Sriram Vijayakrishnan, Filip T. Szczyp-  
iński, et al. Autonomous mobile robots for exploratory synthetic chemistry. *Nature*, 635:890–897, 2024. doi: 10.1038/s41586-024-08173-7.
- [5] Kourosh Darvish, Marta Skreta, Yuchi Zhao, et al. OR-GANA: A robotic assistant for automated chemistry experimentation and characterization. *Matter*, 8(2), 2025. doi: 10.1016/j.matt.2024.10.015.
- [6] Tao Song, Man Luo, Xiaolong Zhang, et al. A multiagent-driven robotic AI chemist enabling autonomous chemical research on demand. *Journal of the American Chemical Society*, 147(15):12534–12545, 2025. doi: 10.1021/jacs.4c17738.
- [7] Gihan Panapitiya, Emily Saldanha, Heather Job, et al. AutoLabs: cognitive multi-agent systems with self-correction for autonomous chemical experimentation. *Scientific Reports*, 16:19554, 2026. doi: 10.1038/s41598-026-45593-z.
- [8] Simone Pilon, Elia Savino, Oliver M. Bayley, et al. A flexible and affordable self-driving laboratory for automated reaction optimization. *Nature Synthesis*, 2026. doi: 10.1038/s44160-026-01053-0.
- [9] Aikaterini Vriza, Michael H. Prince, Tao Zhou, Henry Chan, and Mathew J. Cherukara. Operating advanced scientific instruments with AI agents that learn on the job. *npj Computational Materials*, 12:160, 2026. doi: 10.1038/s41524-026-02005-0.
- [10] Kobi C. Felton, Jan G. Rittig, and Alexei A. Lapkin. Summit: Benchmarking machine learning methods for reaction optimisation. *Chemistry–Methods*, 1:116–122, 2021. doi: 10.1002/cmt.202000051.
- [11] Florian Häse, Matteo Aldeghi, Riley J. Hickman, Loïc M. Roch, Melodie Christensen, Elena Liles, Jason E. Hein, and Alán Aspuru-Guzik. Olympus: a benchmarking framework for noisy optimization and experiment planning. *Machine Learning: Science and Technology*, 2:035021, 2021. doi: 10.1088/2632-2153/abedc8.
- [12] Maximilian Bloor, José Torracca, Ilya Orson Sandoval, et al. PC-Gym: Benchmark environments for process control problems, 2024. Preprint, arXiv:2410.22093.
- [13] Chris Beeler, Sriram Ganapathi Subramanian, Kyle Sprague, et al. ChemGymRL: A customizable interactive framework for reinforcement learning for digital chemistry. *Digital Discovery*, 3:742–758, 2024. doi: 10.1039/D3DD000183K.
- [14] Shreshth A. Malik, Tiarnan Doherty, Panagiotis Tigas, Muhammed Razzak, Stephen J. Roberts, Aron Walsh, and Yarin Gal. MADE: Benchmark environments for closed-loop materials discovery. In *International Conference on Machine Learning*, 2026.
- [15] Nikhil Abhyankar, Sanchit Kabra, Saaketh Desai, and Chandan K. Reddy. LLEMA: Evolutionary search with LLMs for multi-objective materials discovery. In *International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=TIqzhBvCNB>.
- [16] Peter Jansen, Marc-Alexandre Côté, Tushar Khot, Erin Bransom, Bhavana Dalvi Mishra, Bodhisattwa Prasad Majumder, Oyvind Tafjord, and Peter Clark. DiscoveryWorld: A virtual environment for developing and evaluating automated scientific discovery agents. In *Advances in Neural Information Processing Systems*, volume 37, 2024. doi: 10.52202/079017-0324.
- [17] Kanishk Gandhi, Michael Y. Li, Lyle Goodyear, Agam Bhatia, Louise Li, Aditi Bhaskar, Mohammed Zaman, and Noah D. Goodman. BoxingGym: Benchmarking progress in automated experimental design and model discovery, 2025. Preprint, arXiv:2501.01540.
- [18] Haonan Duan, Stephen Zhewen Lu, Caitlin Fiona Harri-  
gan, Nishkrit Desai, Jiarui Lu, Michał Koziarski, Leonardo Cotta, and Chris J. Maddison. Measuring scientific capabilities of language models with a systems biology dry lab, 2025. Preprint, arXiv:2507.02083.
- [19] Maximilian Nägele and Florian Marquardt. Agentic exploration of physics models. *Physical Review X*, 16:031002, 2026. doi: 10.1103/xnqc-q6nt.
- [20] Tianshi Zheng, Kelvin Kiu-Wai Tam, Newt Hue-Nam K. Nguyen, et al. NewtonBench: Benchmarking generalizable scientific law discovery in llm agents. In *International Conference on Learning Representations*, 2026.
- [21] Rui Li, Zixuan Hu, Wenxi Qu, et al. LabUtopia: High-fidelity simulation and hierarchical benchmark for scientific embodied agents. In *Advances in Neural Information Processing Systems, Datasets and Benchmarks Track*, 2025.
- [22] Yuhan Wu, Zhao Jin, Tao Li, et al. Labimus: A simulation and benchmark for humanoid dexterous manipulation in chemical laboratory, 2026. Preprint.
- [23] David M. Cohen, Siddhartha R. Dalal, Michael L. Fredman, and Gardner C. Patton. The AETG system: An approach to testing based on combinatorial design. *IEEE Transactions on Software Engineering*, 23(7):437–444, 1997. doi: 10.1109/32.605761.
- [24] Luc Moreau and Paolo Missier. PROV-DM: The PROV data model. W3C Recommendation, April 2013. URL <https://www.w3.org/TR/prov-dm/>.