


Matched prior interventions preserve the world-level denominator


a Five heterogeneous task families define the public cohort



b One independent world cluster

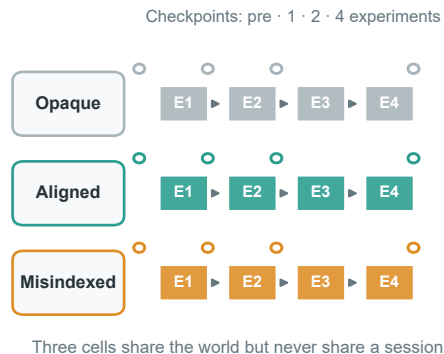

c Evidence remains partitioned

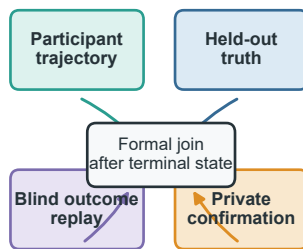

No evaluator feedback enters the participant session

d Frozen public denominators

- 25 Independent clusters
 - 75 Participant cells
 - 300 Complete experiments
 - 100 Held-out truth runs
 - 450 Blind executions
- Operations, checkpoints and repeats remain nested—not extra samples

The formal design contains 25 independent task × world clusters; all participant, held-out and blind observations are nested within those clusters.