


A sparse programme intervenes on the initial world model one locus at a time

a A-E: five task families form the entity / ontology backbone




b Study A: sparse locus-specific blocks

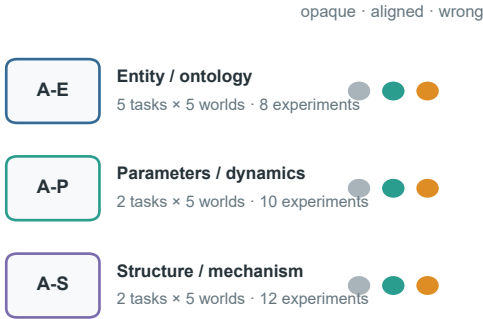

A-O requires a separate admission; scope is tested only after context reset

c Evidence partitions

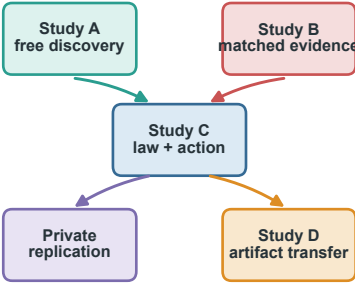

No evaluator feedback enters the participant session

d Planned block denominators

A-E public	25 · 75 · 600
A-P	10 · 30 · 300
A-S	10 · 30 · 360
A-E private	25 · 75 · 600

clusters · sessions · experiments
Final evaluator counts follow the resource/design freeze

World programmability defines the intervention space; qualification, matched arms and separate denominators preserve causal interpretability.