

ChemWorld: Programmable Chemical Worlds for Controlled and Replayable Agent Experimentation

Jiangjie Qiu¹, Yijun Li¹, Xiaonan Wang^{1,*}

¹Beijing Key Laboratory of Artificial Intelligence for Advanced Chemical Engineering Materials, State Key Laboratory of Chemical Engineering and Low-Carbon Technology, Department of Chemical Engineering, Tsinghua University, Beijing 100084, China

*Correspondence: wangxiaonan@tsinghua.edu.cn

Abstract

Autonomous chemistry needs an experimental regime in which researchers can control not only an agent or task but also the world that generates evidence. Physical laboratories provide real-material execution but rarely allow exact reset, matched counterfactuals or complete process observation; many digital environments organize interaction around fixed tasks, dynamics or objective queries. ChemWorld provides a complementary software-scale medium in which chemical worlds are explicit executable objects. Reusable process-model and transactional components compile into public world structures, while evaluator-owned constitutive and material laws remain private. One instrument contract joins initial state, typed operations, instruments, observations, resources, failure semantics, termination and evaluation. Researchers can therefore compose world topologies, vary continuous conditions, branch one private law at a time, repeat matched world identities and audit every simulator-side state and resource event without exposing private state to the agent. The 15 registered tasks anchor interpretable examples but do not bound the construction surface. Full-census qualification covered every registered world unit and complete reference recipe, plus 52 coverage-generated compositions, including eight protocol-frozen non-reference reaction–distillation compositions. Invalid-action, module, interface and declaration probes produced their registered outcomes, with zero missing receipts or undeclared private-field exposure. Across eight deterministic use cases and six controlled private-law fork pairs, all qualified lifecycles closed and replayed exactly; a separate agent completed one lifecycle in a non-reference world through the same public instrument contract. Within the declared component and compatibility domain, these results establish that world construction can serve as a controlled experimental variable while agent-facing interaction remains stable and process evidence remains attributable and replayable. ChemWorld thereby turns simulated chemistry from a fixed task collection into a programmable experimental medium for controlled counterfactual agent studies, complementary to real-material evidence and calibration.

1. Introduction

Self-driving laboratories (SDLs) and chemistry agents have demonstrated that algorithms can plan, execute and revise workflows on real materials [1–4]. These campaigns also consume reagents and instrument time, require safety infrastructure, depend on access to particular facilities and samples, and do not generally offer exact reset or matched replay. Software environments provide inexpensive repetition, but they commonly hold world dynamics fixed while varying tasks, conditions, objectives or agents. The world that produces the evidence is therefore treated as background rather than as a first-class experimental factor. A complementary regime is needed for questions that require exact reset, matched counterfactuals, repeated failure injection, complete process observation and direct intervention on the laws of the world. A programmable virtual instrument can make these operations routine at software scale.

ChemWorld treats a chemical world as an explicit executable object rather than an opaque task label. Its declared vocabulary contains reaction, thermal, phase, separation, crystallization, distillation, continuous-flow, electrochemical and observation components. We separate the complete simulated world $\mathcal{W} = (W_{\text{pub}}, \theta)$ from its public task contract. W_{pub} contains the public component topology, public parameter domains and interfaces; θ

contains evaluator-owned constitutive and material laws, hidden parameters and private initialization. The public task contract is $T = (W_{\text{pub}}, S_{0,\text{pub}}, A, I, O, R, \tau, E)$: the public world description, public initial-state projection, operations, instruments, observations, resources, termination rule and evaluation surface. A scenario binds this contract to a concrete private mechanism and seeds; a trajectory records the resulting operation–observation sequence; and a controlled fork replaces one element of θ while preserving T .

This architecture creates a new locus of experimental control. ChemWorld can run wherever the software and compute environment are available. World state can be reset exactly, repeated to a planned denominator under explicit compute and storage budgets, and forked at a named private law. The evaluator can inspect every hidden state transition and resource event while the agent remains restricted to the public instrument contract. These properties make high-observability counterfactual experimentation available before, alongside or between physical campaigns without consuming physical reagents or creating direct wet-laboratory exposure (Fig. 1).

The central question is whether simulated chemistry can become a programmable experimental medium in which researchers control the world itself—not merely the task or agent—while preserving the stable interactions and process-

complete evidence required for matched, replayable and attributable experiments. We address it through four linked contributions:

1. **World construction as an intervention surface.** A public component vocabulary and compatibility compiler turn world topology, continuous conditions, instrument configurations and evaluator-owned private mechanisms into explicit experimental choices.
2. **Stable experimental contracts across an expanding construction space.** One public task contract preserves typed operations, instruments, observations, resources, failures, termination and evaluation across reference and coverage-generated worlds. Pairwise discrete coverage, seeded space-filling continuous designs and ordered workflow interactions qualify this invariance without treating the reference tasks as a closed list.
3. **Process-complete evidence for replay and intervention attribution.** Atomic transactions, explicit failure and recovery, multi-resource ledgers and exact environment replay make each trajectory inspectable, while single-private-law forks isolate trace-level changes under an invariant public contract.
4. **Agent access through the same experimental medium.** Deterministic policies and a complete-agent run use the same public instrument contract, while 19 evaluator-visible process dimensions preserve evidence acquisition, resource deployment, failure and terminal commitment without exposing private state.

The original systems question—whether compositional expansion preserves executable semantics—is therefore a qualification question rather than the scientific endpoint. This paper establishes that qualification within the declared component and compatibility domain; it does not compare agent capabilities or claim universal chemical fidelity. Modular interfaces separate experimental semantics from model choice and provide extension points for additional constitutive laws, calibrated process models and alternative agents.

2. Relation to existing experimental systems

2.1 Real-material execution and software-scale control

Physical autonomous laboratories provide the decisive evidence of execution on real materials with real sensors, actuators and hardware. Coscientist and ChemCrow connect language-model planning to chemistry tools and robotic or cloud-laboratory execution [1, 2]. A-Lab and mobile robot systems demonstrate closed-loop synthesis and characterization [3, 4], while ORGANA, ChemAgents and newer instrument-facing systems extend this line toward visual feedback, long workflows, modular automation and teachable operation [5–9].

ChemWorld supplies the complementary evidence available from a fully controlled software world: exact matched

replication, counterfactual private laws, evaluator-complete state access, deterministic reset and repeatable failure injection. Its marginal resources are compute and software rather than reagents, instrument time and wet-laboratory safety oversight. This division enables large controlled studies in software and focused real-material validation where physical evidence is decisive.

2.2 Digital optimization, virtual laboratories and discovery worlds

Reaction-optimization and experiment-planning suites such as Summit and Olympus provide scalable, repeatable comparisons over objective functions, while PC-Gym provides nonlinear process-control environments with constraints and disturbances [10–12]. ChemGymRL is one of the closest prior virtual-chemistry environments to ChemWorld: an open, Gym-compatible laboratory organized around vessels, shelves and modular reaction, extraction, distillation and characterization benches [13]. Its benches expose continuous or discrete action spaces, support partial observations and chemical-outcome rewards, and admit new reactions, actions, observations and bench implementations while retaining a stable agent interface. It is therefore a flexible testbed for reinforcement-learning training and comparison. Closed-loop materials environments further couple candidate generation, budgeted oracle feedback and multi-objective search [14, 15]. These systems establish the value of inexpensive repeatability, interactive chemistry and controlled algorithm comparison.

ChemWorld builds on this modular virtual-experimentation idea but changes the unit of abstraction from a bench to a compiled experimental world. Components declare their state ownership, dependencies, parameter domains and public interfaces; a compatibility compiler assembles valid selections into a common task contract spanning typed operations, instruments, observations, resources, failure semantics, termination and evaluation. ChemGymRL makes chemical benches customizable; ChemWorld makes chemical worlds experimentally controllable. The former is well suited to rapid reinforcement-learning training and bench-specific policy comparison; the latter targets matched world identities, atomic action semantics, explicit multi-resource ledgers, evaluator-owned private state, single-private-law forks and exact environment/action-trace reconstruction. This environment-level replay is distinct from RL experience replay, and the comparison concerns experimental control and auditability rather than replacement of the standard RL ecosystem.

Interactive scientific worlds broaden evaluation toward hypothesis formation, experiment selection and law recovery. DiscoveryWorld, BoxingGym, SciGym, SciExplorer and NewtonBench represent complementary approaches to long-horizon discovery and initially unknown systems [16–20]. Laboratory simulators such as LabUtopia and Labimus emphasize embodied procedure and manipulation [21, 22]. ChemWorld adds a distinct systems layer: world composition, instrumentation, private-law intervention and

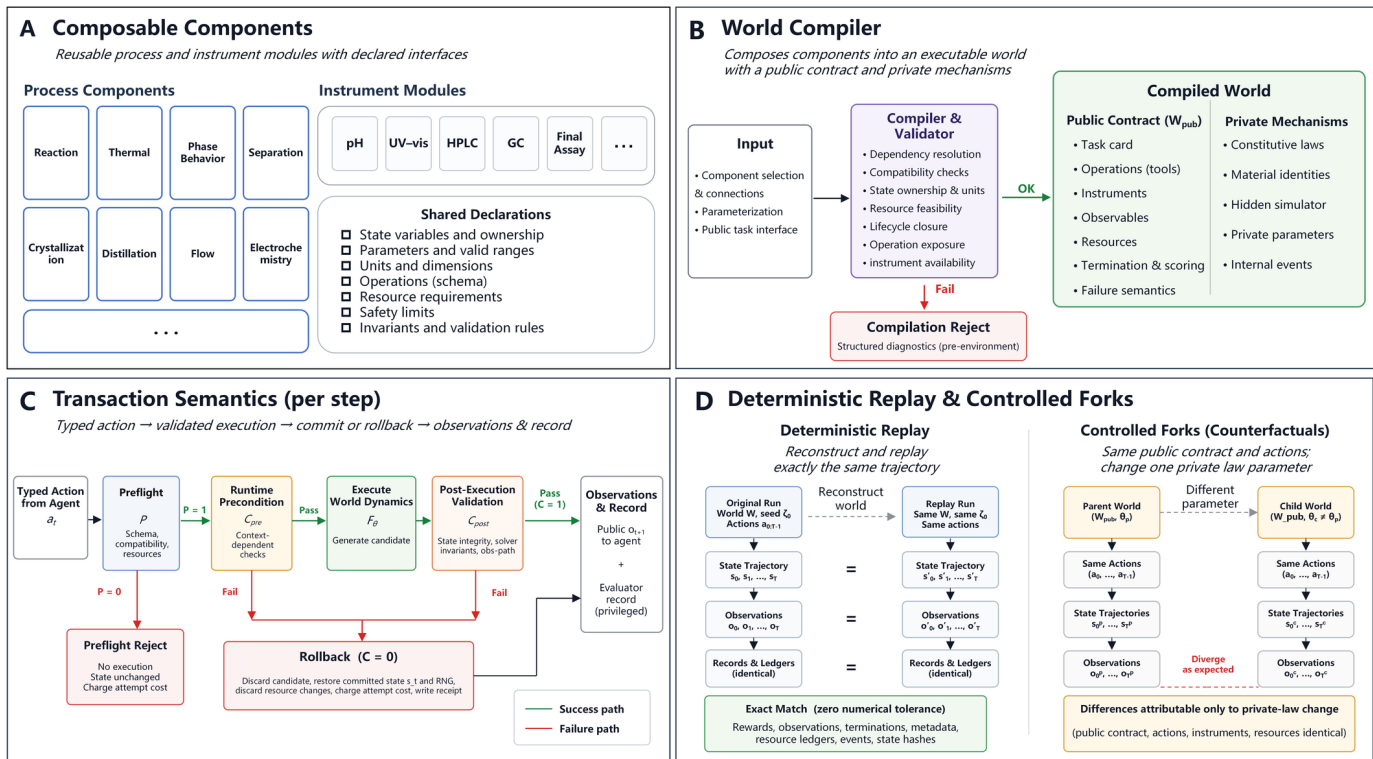


Figure 1. ChemWorld composes declared modules into executable worlds with transactional semantics, deterministic replay and controlled forks. **A**, Reusable process and instrument modules expose shared declarations. **B**, The compiler either produces a public contract W_{pub} with evaluator-owned private mechanisms or rejects an invalid composition before construction. **C**, Typed actions traverse preflight, runtime-precondition, candidate-execution and post-execution validation gates; non-commit branches preserve committed state and record declared attempt consequences. **D**, Replay reconstructs the bound world and submitted action trace, while controlled forks hold the public contract and actions fixed and change one private law.

replay are governed by one executable contract. Typed operations change sample state, instruments consume explicit resources, invalid actions have transactional consequences, termination is explicit, and the complete world transition can be rebuilt from the released record. This combination supports experiments about both the agent and the world it inhabits.

The construction and record layers also connect to established software-systems ideas. Pairwise covering rows follow combinatorial interaction testing, which selects compact test suites that cover registered parameter interactions [23]. The immutable record specializes computational provenance—entities, activities, derivations and responsible agents—to executable chemical-world transitions, resources and lineage [24]. ChemWorld joins these ideas to a stateful scientific substrate rather than treating them as release metadata alone.

2.3 World construction as a locus of experimental control

ChemWorld’s defining contribution is the conjunction of programmable construction, controlled intervention and process-complete observation. Researchers can instantiate new component topologies, vary continuous conditions, substitute a private constitutive or material law, repeat matched world identities and inspect every simulator-side consequence. The world is therefore no longer only the

fixed background against which a task is solved; it becomes part of the experimental design. The same contract preserves the agent-facing boundary, so counterfactual worlds remain comparable without exposing their hidden differences. Table 1 positions this operating regime alongside the representative emphasis of adjacent experimental systems. The comparison is functional rather than performance-based: it focuses on reset and repetition, intervention surface, public/private observability and record scope.

3. Programmable world construction under a stable experimental contract

3.1 Declarative world construction and compatibility compilation

ChemWorld separates world construction from task-specific environment implementation. Rather than encoding each experimental scenario as an independent environment, researchers declare reusable components, their parameter domains, dependencies, owned state and public interfaces. A component topology specifies which component families are connected. A composition binds that topology to public parameters and instruments, while the evaluator binds the private mechanism. Formally,

$$\mathcal{W} = (W_{pub}, \theta), \quad T = (W_{pub}, S_{0,pub}, A, I, O, R, \tau, E).$$

Table 1. Complementary operating regimes for autonomous chemical experimentation. ChemWorld combines software-scale repetition with explicit world composition, private-law intervention and process-complete replay.

System class	Representative emphasis	Replication regime	Experimental intervention	Observable record
Physical SDL / chemistry robot	real-material execution and hardware integration	apparatus-, material- and time-bound physical repeats	protocol, material and hardware changes	sensor, automation and sample records
Optimization or control suite	rapid algorithm comparison over objectives or dynamics	software-scale repeated queries or control episodes	configurable objectives, datasets or process models	objective histories or controller traces
Interactive virtual lab / discovery world	sequential discovery or embodied procedure	resettable software episodes	task-specific objects, procedures and latent rules	action histories, observations and task state
ChemWorld	controlled experiments over composable executable worlds	exact reset, matched repetition and version-bound replay without direct wet-laboratory consumable use	declared component composition plus single-private-law forks under an invariant public contract	typed actions, evaluator-complete state, public observations, failures, resources, termination, lineage and exact environment replay

The complete world identity binds both W_{pub} and θ , whereas the task identity specifies the public experimental objective and operating contract. To keep seeds from silently serving several identity roles, we distinguish a world-specification identity, scenario identity and task-world unit:

$$\begin{aligned}
 \text{world-spec ID} &= \text{id}(W_{\text{pub}}, \theta), \\
 \text{scenario ID} &= \text{id}(W_{\text{pub}}, \theta, \zeta_{\text{init}}, \zeta_{\text{dyn}}, \zeta_{\text{obs}}), \\
 \text{task-world unit} &= (\text{task ID}, \text{scenario ID}).
 \end{aligned}$$

Here id denotes the deterministic identity construction over the listed inputs; release-manifest content hashes are separate provenance objects.

The task-world overlap tests below use the last identity level: a generated row overlaps the reference registry only when both its task identity and scenario identity match a registered unit. This distinction keeps evaluator-owned laws and hidden initialization outside the agent-facing runtime surface without treating them as part of the public contract.

The declared vocabulary contains reaction, thermal, phase, separation, crystallization, distillation, continuous-flow, electrochemical and observation components. Reaction and electrochemical components transform material state; thermal, phase, separation, crystallization, distillation and continuous-flow components supply process-specific state transitions; the observation component attaches synthetic instruments. Public operations are typed actions rather than free-form simulator mutations.

The compatibility compiler first normalizes the declaration and then checks dependencies, state ownership, unit agreement, supported parameter domains, resource feasibility, instrument availability and the existence of a closed lifecycle. It fails closed on an invalid declaration and

returns structured diagnostics without constructing an environment. A successful compile returns both an executable world and a public surface with auditable contracts and records: allowed operations, instruments, observations, resources, termination and evaluation. Private laws and hidden state remain outside that surface. The common interfaces are designed to admit additional or empirically calibrated formulations without redesigning the runtime, transaction layer or agent-facing contract.

3.2 Contract-bound transactional execution

Once a world is compiled, every submitted operation enters the same contract-bound runtime. For a bound mechanism θ , resource ledger R_t and recorded random stream ξ_t , the runtime applies a schema, compatibility and resource preflight predicate $P(s_t, a_t, R_t)$ before candidate execution. A passing action first produces

$$(\tilde{s}_{t+1}, \tilde{R}_{t+1}, \tilde{e}_{t+1}) = F_{\theta}(s_t, R_t, a_t, \xi_t).$$

The committed runtime state includes the observation-RNG state ρ_t ; ξ_t denotes the random variates addressed from that state. A non-commit branch restores ρ_t , so rejected candidate execution does not advance future observation noise. A runtime commit-gate predicate $C \in \{0, 1\}$ may reject either a dispatchable action at a declared runtime-precondition check or a generated candidate at subsequent state-integrity, solver, runtime-invariant or observation-path validation. For the latter, the gate is written $C(\tilde{s}_{t+1}, \tilde{R}_{t+1}, \tilde{e}_{t+1})$. The transaction commits only when both predicates pass:

$$\begin{aligned}
 P = 1, C = 1 &\implies \\
 (s_{t+1}, R_{t+1}, e_{t+1}^*) &= (\tilde{s}_{t+1}, \tilde{R}_{t+1}, \tilde{e}_{t+1}^{\text{acc}}).
 \end{aligned}$$

The two non-commit branches are recorded separately. If $P = 0$, the runtime emits a preflight-rejection event

e_{t+1}^{pre} without candidate execution. If $P = 1$ but $C = 0$, it emits a runtime-rollback event e_{t+1}^{roll} and restores the committed physical and observation-random-number state. For $b \in \{\text{pre}, \text{roll}\}$,

$$s_{t+1} = s_t, \quad R_{t+1} = G_b(R_t, a_t, e_{t+1}^b), \quad e_{t+1}^* = e_{t+1}^b.$$

The planned failure–recovery case exercises a $C = 0$ receipt before candidate-state generation at a declared runtime-precondition check. The qualification campaign did not assign separate denominators to solver-diagnostic or candidate-observation fault injections.

The branch-specific ledger function installs only the protocol-declared attempt cost or penalty. Candidate physical, observation and uncommitted resource effects are discarded. Thus the record distinguishes a preflight rejection from a runtime rollback while preserving the same atomic boundary around committed state. Public and evaluator views are separate projections of the realized branch,

$$o_{t+1} = \pi_{\text{pub}}(s_{t+1}, e_{t+1}^*), \quad \hat{o}_{t+1} = \pi_{\text{eval}}(s_{t+1}, e_{t+1}^*).$$

The event term denotes structured transaction meta-data rather than the complete hidden state. R_t is part of the transaction record even when the public agent surface exposes only declared resource fields. The evaluator projection is evaluator-defined and is not equivalent to exposing all hidden state to the agent.

Replay equivalence binds the normalized contract, runtime and mechanism identities, scoring identity, seeds and intervention record, then compares the full submitted action/transaction trace—including committed actions, preflight rejections and rollbacks—against public observations, transaction outcomes, affected-ledger declarations, world events and terminal flags. Case qualification separately reconciles the corresponding resource deltas and rollback receipts. The complete record therefore captures a full environment/action trace rather than an endpoint or an RL-training replay buffer.

3.3 Expanding the construction surface under frozen qualification

The reference tasks anchor interpretable examples but do not define the boundary of the executable world space. Because valid component selections compile to the same task contract, ChemWorld can instantiate families of worlds that vary in component topology, continuous operating conditions, instrument configuration, workflow ordering and private laws. Compositional expansion is not the scientific endpoint; it is a stress test of whether the experimental medium remains well defined as the world-construction space grows. The same runtime, transaction, resource and observation semantics must therefore hold across these compositions, separating the construction surface from the number of manually curated task identities.

The public capability map contains 15 registered reference tasks, 28 typed operation kinds, five synthetic instrument contracts and 62 ordered task-by-metric bindings. These tasks anchor examples across the declared surface, while component composition supplies the expansion mechanism. We use a protocol-frozen coverage design to sample and qualify this expanding construction space systematically. Pairwise rows cover registered discrete component and instrument interactions; seeded Latin hypercube designs sample authored continuous domains; and ordered-workflow targets exercise critical process sequences. These mechanisms determine which generated compositions enter qualification, rather than defining the extent of the world space itself.

The protocol-frozen design contains eight component patterns and generated 52 compositions. Comparison of exact component sets against the reference registry separates two forms of expansion. Three patterns—phase-observation, phase-separation-observation and reaction-thermal-continuous-flow-observation—are absent from the reference topologies and contribute 18/52 generated cases. Five patterns reuse a registered component topology. Within the latter group, the eight reaction-thermal-distillation-observation rows have zero exact task-world identity overlap with the frozen registry. We call these *protocol-frozen non-reference compositions*: their topology is registered, but their bound task and world identities are not. The first row of this eight-case block was fixed before authoritative execution as the complete-agent target, linking agent use to the same coverage design rather than to a separately selected example.

Every registered coverage target was attained. Across the eight patterns, the generated suite covered 60/60 discrete levels, 180/180 compatible discrete pairs, 212/212 continuous strata and 84/84 ordered workflow interactions. These are finite registered targets within the authored domains, and their covered and required counts are retained pattern by pattern in the machine-readable coverage record.

Pairwise rows qualify declared component and instrument interfaces, while seeded continuous designs and ordered workflows target authored bounds and critical process orderings. They are therefore construction-coverage targets, not a claim of semantic completeness over all higher-order chemistry. Higher-order behavior is addressed where it is explicitly present in a workflow, module probe or interface path.

4. Qualifying experimental invariance across composed worlds

4.1 Qualification across reference and generated worlds

We first tested the lower-level qualification question: whether an expanding construction surface preserves the executable contract required for controlled experiments. Qualification therefore treated each task-world pairing as an independent unit and required successful compilation,

Figure 2. Compositional world design space beyond a fixed task catalogue

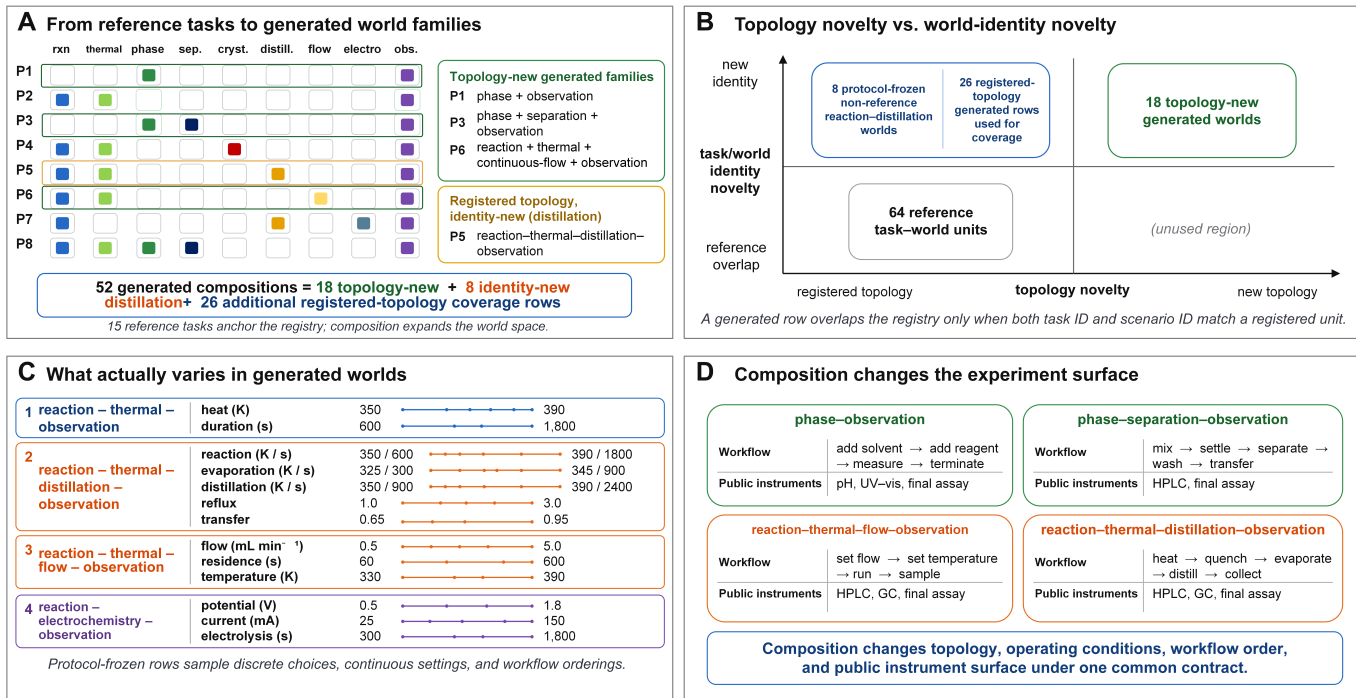


Figure 2. **A**, The 52 generated compositions separate into 18 topology-new worlds, eight identity-new reaction-distillation worlds that reuse a registered topology, and 26 additional registered-topology coverage rows. **B**, Topology novelty and exact task-world identity novelty are independent coordinates relative to the 64 reference task-world units. **C**, Protocol-frozen rows vary discrete component patterns, authored continuous operating conditions and ordered workflows. **D**, Composition changes topology, operating conditions, workflow ordering and the public instrument surface while preserving one common world contract. Coverage defines a finite construction sample rather than the extent of the world-design space; qualification outcomes are reported in Section 4 and Appendix Table 8.

complete lifecycle execution, resource reconciliation and exact replay. All 64/64 reference units passed, and boundary and categorical recipes produced 1,786/1,786 complete executions. The generated block passed for all 52/52 compositions, including all eight non-reference reaction-distillation worlds. There were no failure classes, missing receipts or undeclared private-field-exposure findings.

Compilation success alone was not a pass condition. Each generated composition had to execute its complete workflow, close exactly once, reconcile declared and observed resources and replay exactly. Seven deliberately broken declarations tested missing dependencies, conflicting state ownership, unit mismatches, invalid domains, resource impossibility and lifecycle gaps; all seven were rejected before environment construction. The census therefore tests contract preservation after expansion, rather than merely the ability to instantiate additional configurations.

4.2 Module and interface semantics

World-level success also depends on the internal and cross-component meaning of each transition. Thirty-two module probes exercise zero input, declared boundaries, monotonic directions, conservation and model-specific invariants. Seven cross-module paths then check that material amount, unit, identity and state meaning survive transfer between modules. When applicable, the checks also in-

clude charge, energy, phase balance and event propagation. All 32 module probes and seven interface paths passed.

These results establish each formulation as an internally coherent executable module within its declared model-card domain. The numerical fixtures and directional oracles are internal qualification checks; they do not by themselves constitute an independent implementation or external physical validation. Every module enters through declared interfaces that define where future implementations may supply alternative or empirically calibrated formulations while retaining the task contract, transaction layer and replay machinery. Together, the module and interface checks establish the semantic conditions under which independently authored components can participate in larger executable worlds.

4.3 Fail-closed transactions, resources and replay

Contract preservation also requires a common response to invalid operations. Every submitted action first passes schema, compatibility and resource admission. An admitted action commits only after runtime-precondition and candidate-invariant validation; a non-committed action records its attempt and declared penalty but does not install candidate physical state. The 192 negative probes contain 64 invalid-schema/unknown-operation probes, 64 campaign-resource-exhaustion probes and 64 runtime-

precondition probes. All produced the registered outcome and preserved committed state as required. The evidence therefore qualifies 128 $P = 0$ admission rejects and 64 $P = 1, C = 0$ runtime-precondition rollbacks. Solver-diagnostic and candidate-observation fault paths remain fail-closed implementation semantics, but this campaign did not assign them separate qualification denominators.

Resource accounting separates material, sample, instrument use, process time, operation count and terminal assay. Observation checks ensure that public packets contain only task-declared fields. Exact replay reconstructs the same compiled world from its bound contract and seeds, re-submits the full recorded sequence of submitted typed actions—including committed actions, preflight rejections and runtime rollbacks—and compares rewards, observations, termination flags, transaction metadata, affected-ledger declarations, world events, state-delta summaries and state-integrity checks with zero numerical tolerance. Case qualification separately reconciles the corresponding resource ledger and rollback receipts. This version-bound guarantee makes the full environment transition, rather than only the endpoint or action list, the reproducible unit. Thus, new worlds retain common module, interface, transaction, resource, observation and replay semantics after compilation.

5. Process-complete evidence and controlled world intervention

5.1 Complete lifecycles across diverse workflows

Eight protocol-frozen use cases test whether the same lifecycle semantics remain intact across distinct chemical workflows. They span reaction-to-crystallization, resource-limited equilibrium characterization, planned failure and recovery, continuous flow, electrochemistry, distillation, partition and a second crystallization world. The cases include single-stage and multistage processing, constrained measurement and multiple separation modalities. Each case is treated as an independent experimental unit, and every submitted action is audited within its complete lifecycle.

Across the eight cases, all 89 submitted actions have complete schema, transaction, state-integrity, event, resource and public-observation receipts. Eighty-eight actions committed and one protocol-frozen action rolled back. Every case committed one final assay, closed its lifecycle, reconciled resources and replayed exactly with zero numerical error. These cases establish workflow-spanning execution

Table 2. Reader-visible branch census for the 192 negative probes. Counts are inherited from the frozen qualification report; no post hoc probe reclassification was used.

Branch	n	Registered class and outcome
$P = 0$	64	schema / unknown operation; validation rejection before runtime execution
$P = 0$	64	campaign-resource exhaustion; rejection before candidate installation
$P = 1, C = 0$	64	runtime precondition failure; rollback preserves committed physical and observation-RNG state

under one lifecycle contract rather than introducing separate semantics for each chemical process.

5.2 Planned failure, rollback and recovery

The failure-recovery case embeds one deliberate invalid operation inside an otherwise complete experiment. Its first action passed schema, compatibility and campaign-resource admission. Runtime precondition validation then found that a separable phase had not been established, so the transaction entered the recorded $P = 1, C = 0$ non-commit branch before candidate physical state was installed. It preserved committed physical state and observation-RNG state, produced no ghost state, and reconciled the declared attempt consequences. The following 18 actions continued from the last committed state and completed the recovery path, final assay, resource reconciliation and exact replay of all 19 submitted actions.

Failure is therefore part of the experimental record rather than an episode-level exception: its attempt consequences remain auditable, while rejected physical state is excluded from all subsequent execution. The workflow can continue without erasing its committed history or restarting the complete experimental unit.

5.3 Single-private-law counterfactual interventions

Complete execution and controlled attribution require different experimental designs. The lifecycle cases test whether diverse workflows preserve common semantics; controlled forks instead ask whether one hidden law can be changed while every public experimental condition remains fixed. A controlled fork holds the public task contract and action sequence fixed while changing one protocol-frozen private component.

$$\begin{aligned} \mathcal{W}_p &= (W_{\text{pub}}, \theta_p), & \mathcal{W}_c &= (W_{\text{pub}}, \theta_c), \\ \theta_p &\neq \theta_c, & T_p &= T_c = T. \end{aligned}$$

The fork qualification contains six parent-child pairs: two intervention classes across three seeds. Each pair preserved nine versioned public-contract components: task, actions, instruments, observations, resources, failures, scoring, material catalogue and contracted invariant/safety surface. Parent and child therefore have distinct complete-world identities without changing the public task tuple. They executed the same fixed typed sequence with bound randomness. Repeating both variants produced 24 deterministic fork traces. All pairs passed lineage, single-target, public-invariance, same-sequence executability, expected state and observation divergence, and exact replay gates. The measured divergence is therefore a trace-level effect of one private-law intervention under fixed actions and noise identity (Fig. 3C); direction is checked separately by the frozen divergence oracle, and the magnitude oracle also requires the registered absolute and relative thresholds.

In the electrochemical fork, the permutation reassigns hidden electrolyte-response profiles to fixed public material labels. It therefore represents a matched change in private material properties rather than an identifier remapping or a change in the public catalogue.

Table 3. Reader-visible specification of the two controlled-fork classes. Public task, actions, instruments, observations, resources, failures, scoring, material catalogue and the contracted invariant/safety surface remain unchanged in every row. Thresholds were frozen before execution and require both the listed absolute and relative magnitudes plus the stated direction.

Fork class	Private target	Parent $\rightarrow$ child law	Registered state channel	Registered public channel
Partition consti-tutive law	phase-partition re-sponse	partition-base response $K^{1.00} \rightarrow K^{1.75}$	terminal organic-product amount P_{org} increases; $\Delta \geq 10^{-4}$ mol and relative difference ≥ 0.05	final-assay product_in_organic increases; $\Delta \geq 0.02$ and relative difference ≥ 0.02
Electrochemical material law	hidden electrolyte-profile effects	public profile labels stay fixed; hidden effect-row mapping (0, 1, 2, 3) $\rightarrow$ (2, 1, 0, 3)	terminal selective-product amount Red decreases; $\Delta \geq 10^{-6}$ mol and relative difference ≥ 0.01	final-assay ohmic_efficiency decreases; $\Delta \geq 0.05$ and relative difference ≥ 0.05

Figure 3. Execution, intervention and agent access

How ChemWorld turns validated worlds into process-complete experiments.

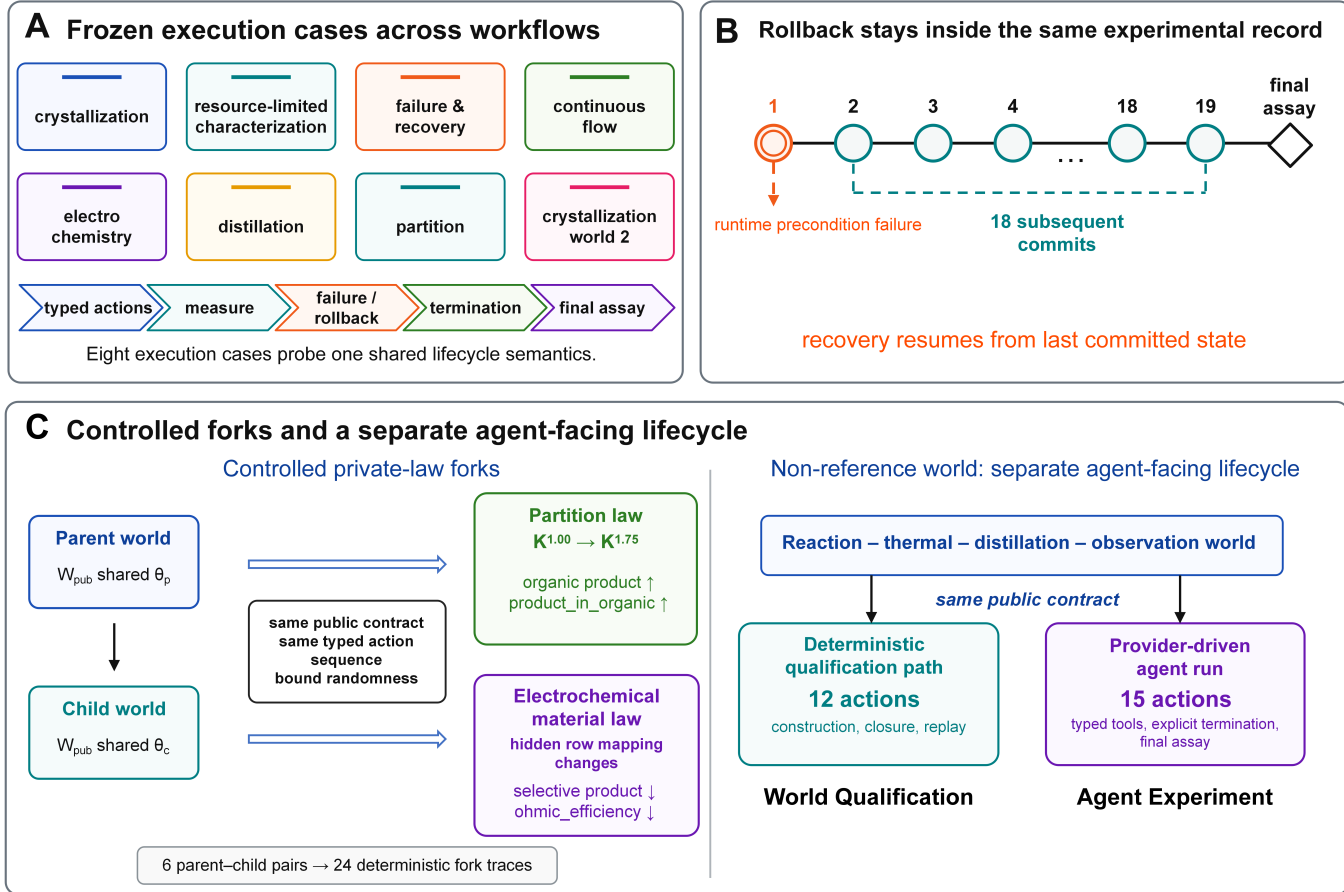


Figure 3. Execution, intervention and agent access. **A**, Eight frozen execution cases span crystallization, resource-limited characterization, planned failure and recovery, continuous flow, electrochemistry, distillation and partition workflows under one shared lifecycle semantics. **B**, A runtime-precondition failure at step 1 remains inside the same experimental record; recovery continues from committed state through 18 subsequent commits and final assay. **C**, Controlled private-law forks hold the public contract, typed action sequence and bound randomness fixed while changing one private law, and a separate non-reference world supports deterministic qualification and a provider-driven agent lifecycle through the same public contract.

6. Agent access through a common experimental contract

6.1 Evaluator-complete process readouts

Once complete trajectories are available, agent evaluation need not collapse an experiment into a single endpoint. ChemWorld retains terminal commitment, evidence acquisition, evidence-conditioned action, resource deploy-

ment and outcome trajectory as separate evaluator-visible groups. Nineteen registered process dimensions preserve this structure without a composite score. The evaluator can inspect complete simulator state, failure and resource consequences while the agent remains restricted to the public task contract. This is an agent-evaluation surface enabled by the qualified record, not a comparative agent benchmark.

6.2 Agent-relevant interaction patterns

Two qualified interaction patterns illustrate what this evaluation surface makes possible. In a resource-limited phase-observation world, an agent must decide whether additional pH or UV-visible evidence justifies scarce sample and instrument expenditure, then terminate explicitly when the evidence is sufficient. In the recovery world, a structured rollback permits a revised typed action without erasing committed experimental history or restarting the experiment. The deterministic cases in Section 5 qualify these interaction primitives; comparative policy behavior is reserved for subsequent studies.

6.3 Complete-agent integration on a non-reference world

The separation between deterministic world qualification and provider-driven agent access is summarized in Fig. 3C. The selected protocol-frozen non-reference reaction-distillation world was evaluated through two independent execution units. A 12-action deterministic path qualified construction, lifecycle closure and replay; a separate provider-driven language-model agent then completed a 15-action lifecycle through the same public instrument contract. This separation prevents agent behavior from serving as evidence for world qualification.

The fixed scaffold supplied the public task card, typed tool schemas, resource contract and explicit termination/final-assay requirement. The agent received only this public surface and issued every operation, including termination and final assay. One uninterrupted session submitted 15 actions under one fixed model/provider configuration. All 15 committed and closed the lifecycle, with zero rollback, right-censoring or undeclared private-field exposure.

The environment used 8,158.454 of 10,440 simulated process seconds, four of four instrument uses and 0.00085 of 0.001 L sample. The complete record links each decision to its public observation, hidden simulator consequence, transaction result and resource debit. The recorded 15-step submitted-action trace—all 15 actions committed—replayed with zero numerical mismatch, showing that a provider-driven experiment can enter the same auditable record as deterministic use cases. This is an interface-integration result rather than an agent-capability claim.

7. Discussion

7.1 World construction as an experimental variable

ChemWorld’s principal methodological contribution is a new locus of experimental control. Composition specifies what may vary in the world; the public contract specifies what must remain comparable; and the transaction and record layers preserve the consequences of each interaction. Researchers can therefore vary component topology, continuous conditions and private laws, then reset and repeat matched worlds while inspecting simulator-side process consequences under explicit compute and storage budgets. The result is not simply a larger catalogue of environments

but a qualified surface on which world construction itself can be planned as an experimental variable.

The evidence supporting this claim remains deliberately layered. Full-census, module, interface and negative-path qualification establish that declared worlds preserve a common executable contract after composition. Process-complete cases and controlled forks then show that the qualified substrate supports multistage workflows, failure recovery and attributable private-law intervention. Finally, the same public instrument contract exposes these worlds to an agent while the evaluator retains a complete process record. Separating world correctness, experimental capability and agent access prevents any one layer from serving as evidence for the others.

7.2 A substrate for controlled studies of experimental agency

Once the world can be varied independently of the public task contract, the research question can move beyond whether an agent reaches an endpoint. A process-complete record reveals how evidence, resources, failures and terminal commitment produced that endpoint. The 19 process dimensions preserve these factors as separate evaluator-visible coordinates, supporting future studies of measurement strategy, recovery after invalid actions, resource deployment and decision timing that disappear when an experiment is reduced to one score. The complete-agent unit shows that a provider-driven trajectory can enter this record without being used to qualify the underlying world.

Controlled private-law forks add the matched counterfactual needed to study response to a changed world. Parent and child expose the same actions, instruments and resources while one hidden law changes under the same typed sequence and bound randomness. Outcome and observation differences in the reported traces can therefore be assigned to that simulator intervention. This paper establishes the substrate and attribution logic; it does not yet claim comparative evidence about agent adaptation, law learning or scientific reliability. Those questions require separately frozen policy protocols layered on the qualified worlds.

7.3 A modular bridge to physical experimentation

The released qualification establishes compositional expansion within the declared component vocabulary and authored model domains. Those boundaries expose extension points rather than fixed task walls. The interfaces are designed to support additional constitutive laws, calibrated unit operations, empirical instrument models and new agents through the same task contract, although the present study does not measure third-party implementation effort or demonstrate that an independently authored module inherits every guarantee without integration work.

ChemWorld and physical SDLs therefore provide complementary experimental regimes. Software worlds supply controlled repetition, counterfactuals, evaluator-complete observability and rapid hypothesis narrowing without direct wet-laboratory consumable use; physical systems pro-

vide real-material execution and calibration. A shared experimental logic can use software-scale evidence to focus subsequent laboratory work on the conditions and mechanisms that require physical validation.

7.4 Qualification scope

The reported qualification establishes executable semantics and authored-model coherence for this software-scale experimental regime within the declared component vocabulary and compatibility domain, not universal chemical or physical fidelity. The synthetic instruments are controlled software observation models, not calibrated replicas of particular devices. Coverage samples frozen authored axes and is not an exhaustive enumeration of chemical space. The fork experiments establish the registered single-private-law interventions, not every possible intervention type. The module fixtures and directionality oracles primarily test internal consistency with the authored models; they are not substitutes for an independent reference implementation, fault-mutation study or empirical validation. The complete-agent run demonstrates interface integration rather than agent capability or model superiority. Exact replay is limited to the bound environment/action trace and does not imply policy re-execution, cross-platform numerical identity or cross-version archival replay.

8. Methods

8.1 Construction and compatibility

A composition declaration specifies component roles and parameters plus the public task surface. Normalization is deterministic. Compatibility checks cover dependencies, state ownership, unit agreement, parameter domains, resource feasibility, operation exposure, instrument availability and the existence of a closed lifecycle. A rejected declaration returns structured diagnostics and does not construct an environment.

The task contract is the authoritative public boundary. Runtime validation is restricted to the declared operations and instruments. Private constitutive laws, material identities and hidden simulator state remain evaluator-owned in θ ; the public contract contains W_{pub} and $S_{0,\text{pub}}$, not the complete private world identity. The 15 registered tasks are mapped into the same component and contract representation used by generated compositions.

8.2 Coverage design

The authoritative qualification protocol was frozen before execution. The frozen object includes eight component patterns, their discrete axes and compatible pairs, continuous bounds, seeds, ordered workflows, pass/failure rules and the first reaction–distillation row selected for complete-agent use. Discrete axes use pairwise covering rows. Continuous axes use seeded Latin hypercube samples inside the authored bounds. Each pattern contains one or two ordered workflows. The denominator is 52 generated cases, including 18 cases across three topologies absent from the reference registry and eight registered-topology

reaction–distillation cases with zero exact task–world identity overlap.

The coverage selection and pass rules are fixed before the reported qualification run and remain invariant across all outcomes. The reader-facing result is the complete frozen census defined by that design.

8.3 Qualification measurements

For each case, the report records normalized construction input, compile diagnostics, public contract, action sequence, schema and transaction status, state-integrity checks, events, resource preflight and outcome, public observation, termination, trajectory size and exact replay. Missing receipts, non-finite quantities, unexpected commits or rollbacks, undeclared private-field exposure, denominator drift and replay mismatch fail the case.

Reference qualification covers 64 task–world units and 1,786 complete recipes. Generated qualification covers 52 compositions. Negative qualification covers 192 invalid probes. Module and interface qualification use 32 and seven units, respectively. Compile mutation uses seven invalid declarations. Counts are exact qualification denominators.

The 32 process-module probes form an 8×4 design: each of reaction, thermal, phase, separation, crystallization, distillation, continuous flow and electrochemistry contributes one zero-input bounded-runtime probe, one valid low/high probe, one directionality probe and one runtime-invariant probe. Valid low/high checks use numerical reference fixtures for seven modules and a declared conceptual/synthetic fixture for crystallization; directionality checks are declared conceptual/synthetic oracles. Every numerical fixture records its own tolerance. Observation is qualified separately through instrument, sample-accounting, bounded-signal and public/private-boundary checks. The seven compile mutants comprise two missing-dependency cases and one case each for conflicting state ownership, unit mismatch, invalid parameter domain, lifecycle hole and resource impossibility.

8.4 Process-time envelopes

Environment process time is derived by pattern rather than assigned as an arbitrary common cap. For each pattern,

$$t_{\text{max}} = t_{\text{required stages}} + t_{\text{implicit reserve}} + t_{\text{allowed repeats}}$$

The required term sums the upper bounds of necessary timed stages. The implicit reserve covers authored quench and transfer operations. Repeat allowance is tied to explicit per-operation repeat limits. The resulting limits are 0 s for phase observation; 3,600 s for reaction–thermal observation; 1,860 s for phase separation; 11,100 s for reaction crystallization; 10,440 s for reaction distillation; 7,200 s for continuous flow; 5,400 s for electrochemistry; and 7,500 s for reaction–phase separation. A proposed action is rejected before runtime if either cumulative process time or a repeat limit would be exceeded.

8.5 Deterministic use cases

The eight cases, seeds and action lists were protocol-frozen before execution. Their total expected census was 89 submitted actions, 88 commits, one rollback and eight final assays. The failure-recovery case specified the failing action and rollback class in advance. All submitted actions were inspected as one deterministic census, isolating instrument qualification from provider variance.

8.6 Controlled forks

Each fork declares a parent, a child, one protocol-frozen private intervention target, an invariant public contract and expected divergence channels. Parent and child execute the same typed action sequence. Gates require lineage validity, exactly one changed private target, invariant public contract, executable sequence on both variants, expected physical and observation divergence and exact replay under deterministic execution.

For an aligned checkpoint value p in the parent and c in the child, the oracle records the signed change $\delta = c - p$, its magnitude $\Delta = |\delta|$, and the relative difference $\Delta/\max(|p|, |c|, s_0)$, where s_0 is the declared positive scale floor. A magnitude passes only when both the absolute and relative thresholds for that expectation are met; the direction oracle is checked separately from the magnitude.

8.7 Process readouts

The process profile retains 19 dimensions in five groups: terminal commitment, evidence acquisition, evidence-conditioned action, resource deployment and outcome trajectory. Undefined conditional quantities remain null rather than being set to zero. The resulting coordinate vector preserves process structure for subsequent agent studies and supports dimension-level comparison without a composite score. The released process-coordinate contract supplies each dimension’s numerator, denominator, value range, null condition and boundary-case rule together with the computation binding used by the reports.

8.8 Complete-agent non-reference-world protocol

The formal unit is one complete lifecycle on the first protocol-frozen non-reference reaction-distillation composition. The protocol binds one uninterrupted agent session, one model/provider/scaffold configuration and at most 16 submitted actions through the public instrument interface. Termination and final assay must be agent-issued. The action count, tool calls and trajectory records must agree exactly; every action must commit; the lifecycle must contain one termination and exactly one final assay; resources, public boundary and exact replay must pass.

The reported unit ran on 5 August 2026 with OpenAI GPT-5.6-sol at medium reasoning effort through the Codex subscription provider. This model, provider and scaffold binding applies only to the interface-integration demonstration.

Provider accounting distinguishes one provider session, one logical agent turn, 15 action calls and two read-only calls. The model, provider, reasoning effort, scaffold con-

straints, public prompt template and execution date are bound before the run. Cumulative input is separated into cached and uncached input; cached context is reused input, not repeated output. The formal limits are 640,000 cumulative input tokens, 192,000 uncached input tokens and 64,000 output tokens. Per-action wait is capped at 600 s, finalization at 300 s and runner reserve at 600 s, giving a conservative method wall limit of 10,500 s. These method resources are separate from the simulated process-time ledger.

8.9 Public boundary and exact replay

The evaluator owns hidden simulator identity and private state. Agent-facing task cards, observations and histories are checked for hidden fields and absolute private paths. Replay reconstructs the bound world from the same normalized contract, runtime, mechanism, observation and scoring identities plus the recorded seeds and interventions. It then resubmits every submitted typed action in recorded order, including committed actions, validation/preflight rejections and runtime rollbacks, and compares rewards, every public observation, termination and truncation flags, operation types, transaction status, rollback reason, affected-ledger declarations, world events, state-delta summaries and state-integrity checks. Case qualification joins this replay result to the separately reconciled resource ledger and rollback receipts. The reported qualification uses numerical tolerance zero and observed a maximum absolute error of zero. In this paper, leakage means undeclared direct exposure of evaluator-owned fields, private identifiers or absolute private paths. It does not mean inferential information about hidden state conveyed through task-declared measurements. We use exact replay narrowly for environment/action-trace reconstruction under the bound software identities. Policy re-execution, cross-platform numerical reproduction and cross-version archival replay are separate reproducibility questions and are not inferred from a zero-error environment replay. The public release contains the environment evidence needed for this reconstruction while keeping authentication data, private reasoning and unrestricted provider payloads outside the research artifact.

9. Data and code availability

Code, configuration, processed reports, figure source data and release tooling are available in the MIT-licensed ChemWorld repository at github.com/sunyrain/ChemWorld. The tracked materials regenerate the tables and figures and replay released simulator transitions and resource changes. The current arXiv bundle contains the manuscript source, dependency lock, processed evidence, figure data, coverage records and build manifest used for this submission. At immutable public deposition, release metadata will bind this package to the final full Git commit identifier and archive identifier; no archive DOI is claimed before that deposition. Provider authentication, unrestricted response bodies, private reasoning and hidden evaluator identities are excluded.

The release supports three complementary reproducibility layers. Processed evidence regenerates the reported counts and figures. Released trajectories reconstruct environment transitions, public observations and ledgers. Provider provenance binds the model, configuration and call accounting for the complete-agent unit. Exact replay refers to the executable world and its complete experimental record. In this paper, environment/action-trace replay is distinct from policy re-execution, cross-platform numerical reproduction and cross-version archival replay. Provider provenance supports audit of the complete-agent unit but does not imply that a later model call will regenerate the same actions.

10. Conclusion

ChemWorld establishes a software-scale experimental regime in which world construction itself can be controlled. Reusable components make topology, operating conditions, instrument configuration and private mechanisms programmable; one public contract preserves agent-facing operations, observations, resources, failures, termination and evaluation; and every submitted action enters a version-bound replayable transaction record. The world is therefore no longer only the fixed background of a task, but an explicit part of experimental design.

The evidence establishes the conditions required for that shift. Full-census, module, interface and negative-path qualification show that composed worlds preserve a common executable contract. Process-complete use cases and controlled forks place failure, recovery and single-private-law intervention inside attributable replayable experiments. A separate complete-agent unit shows that the same public instrument contract can support provider-driven action selection without using agent behavior to qualify the world itself.

Within the declared component vocabulary and authored model domains, ChemWorld thus provides a programmable medium for controlled counterfactual studies of experimental agency, resource-aware experimentation and systematic process analysis. It does not establish universal chemical fidelity or agent superiority. Rather, it complements physical laboratories: software worlds supply exact reset, matched intervention and complete simulator-side records, while physical systems supply real-material evidence and calibration.

Appendix A. Reader-facing capability and use-case map

A reference task-world unit pairs a registered task identity with a scenario identity as defined in Section 3.1. The 15 task identities below expand to 64 such units across their declared scenario seeds. A generated row overlaps the reference set only when both its task identity and scenario identity match a registered unit; the eight protocol-frozen non-reference rows have zero such overlap.

A.1 Representative instrument-use cases

The following cases isolate complementary process and record semantics; they do not define a cross-task performance ranking.

- **Reaction to crystallization.** *Components:* reaction, thermal, crystallization and observation. *Record:* propagation through seeding, cooling, filtration and final assay.
- **Resource-limited characterization.** *Components:* phase and observation. *Record:* measurement choice, sample consumption and explicit stopping under a small budget.
- **Failure and recovery.** *Components:* reaction, thermal, phase, separation and observation. *Record:* atomic rollback, attempt consequences and continuation from committed state.
- **Controlled private-law fork.** *Components:* one registered component changed privately. *Record:* an invariant public contract with protocol-specified state/observation divergence.
- **Generated reaction to distillation.** *Components:* reaction, thermal, distillation and observation. *Record:* construction and replay outside the reference task identities; one complete-agent lifecycle closed under the same public contract.
- **Reference library.** *Components:* flow, electrochemistry, distillation, partition and crystallization. *Record:* breadth of reusable task recipes without a cross-task score.

A.2 Registered tasks and component patterns

Table 4. Complete reference-task registry. Seed counts define the scenario identities exercised for each task.

Reference task identity	Component topology	World seeds	Public operation / instrument summary
electrochemical-conversion	reaction + electrochemistry + observation	5	6 operations; pH, UV-visible, final assay
equilibrium-characterization	reaction + thermal + observation	5	9 operations; pH, UV-visible, final assay
flow-reaction-optimization	reaction + continuous flow + observation	5	7 operations; HPLC, GC, UV-visible, final assay
low-budget-characterization	reaction + thermal + observation	3	9 operations; HPLC, GC, UV-visible, final assay
partition-discovery	reaction + phase + separation + observation	5	9 operations; HPLC, GC, UV-visible, final assay
public-private-generalization	reaction + thermal + observation	5	9 operations; HPLC, GC, UV-visible, final assay
purity-yield-tradeoff	reaction + thermal + phase + separation + observation	5	18 operations; HPLC, GC, UV-visible, final assay
reaction-mechanism-explanation	reaction + thermal + observation	3	9 operations; HPLC, GC, UV-visible, final assay
reaction-optimization-standard	reaction + thermal + observation	5	9 operations; HPLC, GC, UV-visible, final assay
reaction-safety-constrained	reaction + thermal + observation	5	9 operations; HPLC, GC, UV-visible, final assay
reaction-to-assay	reaction + thermal + observation	1	9 operations; HPLC, GC, UV-visible, final assay
reaction-to-crystallization	reaction + thermal + crystallization + observation	5	12 operations; HPLC, final assay
reaction-to-distillation	reaction + thermal + distillation + observation	5	12 operations; HPLC, GC, UV-visible, final assay
reaction-to-purification	reaction + thermal + phase + separation + observation	5	18 operations; HPLC, GC, UV-visible, final assay
tool-agent-planning	reaction + thermal + phase + separation + observation	2	18 operations; HPLC, GC, UV-visible, final assay

Table 5. Representative component-pattern library. Reusable component combinations expose a common operation and instrument surface across single-process and multistage worlds.

Component pattern	Principal state or process	Representative public operations	Representative instruments
Phase + observation	bounded phase/equilibrium state	add solvent, add reagent, measure, terminate	pH, UV-visible, final assay
Reaction + thermal + observation	batch reaction and temperature history	add, heat, quench, sample	HPLC, GC, final assay
Phase + separation + observation	phase formation and transfer	mix, settle, separate, wash, transfer	HPLC, final assay
Reaction + thermal + crystallization + observation	reaction followed by solid formation	heat, seed, cool, filter	HPLC, particle sizing, final assay
Reaction + thermal + distillation + observation	reaction, evaporation and fractionation	heat, quench, evaporate, distil, collect	HPLC, GC, final assay
Reaction + thermal + continuous flow + observation	flow, residence time and conversion	set flow, set temperature, run, sample	HPLC, GC, final assay
Reaction + electrochemistry + observation	potential/current-driven conversion	set potential/current, electrolyse, sample	voltammetry, HPLC, final assay
Reaction + thermal + phase + separation + observation	multistage reaction and purification	react, quench, separate, wash, concentrate, transfer	HPLC, GC, final assay

Appendix B. Coverage reconstruction and qualification census

The coverage design below fixes the pattern, seed, continuous domain, workflow count and generated denominator. Discrete factors include component-specific family or profile choices and instrument profiles; the released machine-readable coverage records map every discrete level, compatible pair, continuous stratum and ordered interaction to the rows that cover it. Covered and required counts are identical for all four target classes: 60/60 levels, 180/180 compatible pairs, 212/212 continuous strata and 84/84

ordered interactions.

Table 6. Topology and identity decomposition of the generated block. Topology novelty compares exact component sets with the 15-task reference registry; task-world novelty uses exact registered identities.

Generated group	Cases	Topology relation	Exact task-world relation
phase-observation	6	absent from reference registry	zero overlap implied by component-set difference
phase-separation-observation	6	absent from reference registry	zero overlap implied by component-set difference
reaction-thermal-continuous-flow-observation	6	absent from reference registry	zero overlap implied by component-set difference
reaction-thermal-distillation-observation	8	registered topology	zero exact overlap in the protocol-frozen non-reference block
four remaining generated patterns	26	registered topologies	used for reference-topology coverage; no separate non-reference identity claim

Table 7. Protocol-frozen coverage design. Bounds are inclusive authored domains; “none” denotes a purely discrete design.

Pattern	Seed	Continuous axes and bounds	Workflows	Cases
phase-observation	101	none	1	6
reaction-thermal-observation	102	heat 350–390 K; duration 600–1,800 s	2	6
phase-separation-observation	103	phase 0.010–0.020 L; extractant 0.010–0.025 L; mix 60–300 s; settle 120–600 s	2	6
reaction-thermal-crystallization-observation	104	reaction 350–390 K, 600–1,800 s; seed 0.002–0.010 g; cooling 275–305 K, 900–3,600 s	2	6
reaction-thermal-distillation-observation	105	reaction 350–390 K, 600–1,800 s; evaporation 325–345 K, 300–900 s; distillation 350–390 K, 900–2,400 s; reflux 1.0–3.0; transfer 0.65–0.95	2	8
reaction-thermal-continuous-flow-observation	106	flow 0.5–5.0 mL min ^{−1} ; residence 60–600 s; temperature 330–390 K	2	6
reaction-electrochemistry-observation	107	potential 0.5–1.8 V; current 25–150 mA; electrolysis 300–1,800 s	2	7
reaction-thermal-phase-separation-observation	108	reaction 350–390 K, 600–1,800 s; phase/extractant 0.010–0.020/0.010–0.025 L; mix 60–300 s; settle 120–600 s; wash 0.003–0.010 L; concentrate 300–900 s; transfer 0.65–0.95	2	7

Table 8. Qualification census. Every registered execution, probe, deterministic-use and controlled-fork denominator completed without missing receipts or unexpected outcomes.

Qualification unit	Passed	Denominator	Failure classes
Reference task-world units	64	64	0
Complete reference recipes	1,786	1,786	0
Coverage-generated compositions	52	52	0
Protocol-frozen non-reference reaction-distillation compositions	8	8	0
Invalid action probes	192	192	0 unexpected outcomes
Module probes	32	32	0
Cross-module interface paths	7	7	0
Invalid compile mutants	7	7	0 unexpected constructions
Deterministic use cases	8	8	0
Deterministic submitted actions	89	89	0 missing receipts
Controlled fork pairs	6	6	0
Controlled fork traces	24	24	0

Appendix C. Process-coordinate dictionary

The 19 coordinates are campaign-level descriptions, not a composite score. N_p , N_c , N_a , N_d and N_m denote planned, closed, assayed, discarded and measured lifecycles, with $N_c = N_a + N_d$ because the frozen lifecycle contract closes only by assay or discard. Undefined conditional quantities remain null; they are never replaced by zero.

Table 9. The 19 process coordinates. Numerators, denominators, null rules and interpretation are fixed by the process-profile contract. None is interpreted as a globally better direction unless explicitly stated.

Coordinate	Definition	Null or boundary rule	Interpretation
<i>Terminal commitment</i>			
Closed lifecycle fraction	N_c/N_p	defined as 0 when $N_p > 0$ and none closes	completion gate; no preferred assay/discard mix
Assay commitment fraction	N_a/N_c	null when $N_c = 0$	fraction of closed lifecycles committed to final assay
Discard fraction	N_d/N_c	null when $N_c = 0$	fraction of closed lifecycles deliberately discarded
<i>Evidence acquisition</i>			
Measured lifecycle fraction	N_m/N_c	null when $N_c = 0$	prevalence of at least one committed non-final measurement
Instrument uses per closed lifecycle	committed non-final measurements $/N_c$	null when $N_c = 0$	measurement intensity
First-measurement timing	mean of preceding attempts / attempts through termination	null when $N_m = 0$	lower values mean earlier evidence acquisition, not higher quality
<i>Evidence-conditioned action</i>			
Post-measure continuation prevalence	lifecycles with a later committed physical operation $/N_c$	null when $N_c = 0$	prevalence of evidence followed by further investment among closed lifecycles
Post-measure operations per closed lifecycle	later committed physical operations $/N_c$	null when $N_c = 0$	deployment intensity after first evidence
Threshold-eligible fraction	lifecycles with the frozen diagnostic and finite signal $/N_c$	null when $N_c = 0$	denominator gate for the diagnostic decision rule
Evidence-to-terminal concordance	terminal choices matching the frozen signal rule / eligible lifecycles	null when no lifecycle is eligible	agreement between declared evidence rule and assay/discard decision
<i>Resource deployment</i>			
Attempted operations per closed lifecycle	charged operation attempts $/N_c$	null when $N_c = 0$	includes validation failures and transactional rollbacks
Committed operations per closed lifecycle	committed typed operations $/N_c$	null when $N_c = 0$	installed operation intensity
Cost per closed lifecycle	campaign cost-ledger debit $/N_c$	null when $N_c = 0$	includes declared failed-attempt charges
Risk debit per closed lifecycle	campaign risk-ledger debit $/N_c$	null when $N_c = 0$	resource-card-specific risk deployment
<i>Outcome trajectory</i>			
Global-best discovery fraction	$(j^* - 1)/(N_a - 1)$, $j^* \in \{1, \dots, N_a\}$	null for no assay; defined as 0 for one assay	lower values mean earlier discovery of the observed best
Online incumbent retention	later assays retaining at least 90% of the prior incumbent $/(N_a - 1)$	null when $N_a < 2$	stability after the first assay
Maximum incumbent drawdown	$\max(\text{prior incumbent} - \text{next assay}, 0)$	null when $N_a < 2$	largest observed loss from the running best
Loss-episode recovery rate	recovered loss episodes / observed loss episodes	null when no loss episode occurs; terminal unresolved losses count unrecovered	recovery after an observed loss
Terminal-to-best retention	terminal assayed score / observed best assayed score	null when no positive assay exists	closeness of the terminal assay to the observed best

Outcome-trajectory coordinates are computed only after applying each task’s frozen score orientation and scale binding. Raw values are not interpreted across incompatible task metrics.

Table 10. Appendix D. Component model cards and extension points. Each module declares its runtime formulation, authored model domain, qualification oracle and extension interface for future alternative or empirically calibrated implementations.

Component	Runtime formulation	Principal authored domain	Qualification oracle	Intended use and extension path
Reaction	stoichiometric mass-action network with Arrhenius temperature dependence	authored reaction families and bounded batch temperature/time	exact amount fixtures, monotonic response, material closure and runtime invariants	reaction-law extension point for future named-reaction calibration
Thermal	dynamic batch heat-release and jacket-energy balance	bounded temperature, duration, vessel pressure and volume	temperature/energy finiteness, bounds, event propagation and ledger reconciliation	thermal-contract extension point for future equipment-specific coefficients
Phase	stability-gated, activity-corrected liquid-liquid equilibrium with TPD-style diagnostics	declared phase identities, volumes and composition ranges	phase/material balance, directional partition response and state identity	activity-model extension point for future compound-specific thermodynamics
Separation	settling, entrainment, wash and transfer coupled to the phase model	bounded mix/settle time, extractant/wash volume and transfer fraction	amount/unit conservation, transfer identity and expected directional response	separation-interface extension point for future hardware-scale transport
Crystallization	van’t Hoff solubility with seed, nucleation/growth cohorts, impurity occlusion and CSD summaries	bounded seed mass, cooling temperature and cooling time	material closure, solubility-direction checks, CSD and runtime-invariant receipts	law extension point for future calibrated nucleation and growth models
Distillation	bubble-gated, duty-limited VLE/Fenske fractionation with material and energy ledgers	bounded temperature/time, reflux ratio, fraction count and collected fraction	mass/energy closure, fraction identity, recovery/purity directions and equipment limits	operation-contract extension point for future compound and column models
Continuous flow	geometry-resolved plug-flow reactor with residence time, distributed thermal boundary and pressure drop	bounded flow, residence time and temperature	conversion direction, mass closure, pressure/geometry and solver diagnostics	runtime extension point for future reactor-specific transport or control models
Electrochemistry	Nernst potential, Butler-Volmer kinetics, limiting current, Randles transient and Faraday accounting	bounded potential, current and electrolysis time	charge/material closure, signed work, selectivity and limiting-current checks	electrochemical-law extension point for future material- and cell-specific parameters
Observation	state-coupled synthetic pH, UV-visible, HPLC, GC and final-assay contracts	task-declared instruments, sample and use budgets	instrument availability, sample consumption, finite/bounded signal and non-omniscience checks	instrument-schema extension point for future empirical response models

References

- [1] Daniil A. Boiko, Robert MacKnight, Ben Kline, and Gabe Gomes. Autonomous chemical research with large language models. *Nature*, 624:570–578, 2023. doi: 10.1038/s41586-023-06792-0.
- [2] Andres M. Bran, Sam Cox, Oliver Schilter, Carlo Baldassari, Andrew D. White, and Philippe Schwaller. Augmenting large language models with chemistry tools. *Nature Machine Intelligence*, 6:525–535, 2024. doi: 10.1038/s42256-024-00832-8.
- [3] Nathan J. Szymanski et al. An autonomous laboratory for the accelerated synthesis of inorganic materials. *Nature*, 624:86–91, 2023. doi: 10.1038/s41586-023-06734-w.
- [4] Tianyi Dai, Sriram Vijayakrishnan, Filip T. Szczypiński, et al. Autonomous mobile robots for exploratory synthetic chemistry. *Nature*, 635:890–897, 2024. doi: 10.1038/s41586-024-08173-7.
- [5] Kourosh Darvish, Marta Skreta, Yuchi Zhao, et al. OR-GANA: A robotic assistant for automated chemistry experimentation and characterization. *Matter*, 8(2), 2025. doi: 10.1016/j.matt.2024.10.015.
- [6] Tao Song, Man Luo, Xiaolong Zhang, et al. A multiagent-driven robotic AI chemist enabling autonomous chemical research on demand. *Journal of the American Chemical Society*, 147(15):12534–12545, 2025. doi: 10.1021/jacs.4c17738.
- [7] Gihan Panapitiya, Emily Saldanha, Heather Job, et al. AutoLabs: cognitive multi-agent systems with self-correction for autonomous chemical experimentation. *Scientific Reports*, 16:19554, 2026. doi: 10.1038/s41598-026-45593-z.
- [8] Simone Pilon, Elia Savino, Oliver M. Bayley, et al. A flexible and affordable self-driving laboratory for automated reaction optimization. *Nature Synthesis*, 2026. doi: 10.1038/s44160-026-01053-0.
- [9] Aikaterini Vriza, Michael H. Prince, Tao Zhou, Henry Chan, and Mathew J. Cherukara. Operating advanced scientific instruments with AI agents that learn on the job. *npj Computational Materials*, 12:160, 2026. doi: 10.1038/s41524-026-02005-0.
- [10] Kobi C. Felton, Jan G. Rittig, and Alexei A. Lapkin. Summit: Benchmarking machine learning methods for reaction optimisation. *Chemistry-Methods*, 1:116–122, 2021. doi: 10.1002/cmtd.202000051.
- [11] Florian Häse, Matteo Aldeghi, Riley J. Hickman, Loïc M. Roch, Melodie Christensen, Elena Liles, Jason E. Hein, and Alán Aspuru-Guzik. Olympus: a benchmarking framework

- for noisy optimization and experiment planning. *Machine Learning: Science and Technology*, 2:035021, 2021. doi: 10.1088/2632-2153/abedc8.
- [12] Maximilian Bloor, José Torracca, Ilya Orson Sandoval, et al. PC-Gym: Benchmark environments for process control problems, 2024. Preprint, arXiv:2410.22093.
- [13] Chris Beeler, Sriram Ganapathi Subramanian, Kyle Sprague, et al. ChemGymRL: A customizable interactive framework for reinforcement learning for digital chemistry. *Digital Discovery*, 3:742–758, 2024. doi: 10.1039/D3DD00183K.
- [14] Shreshth A. Malik, Tiarnan Doherty, Panagiotis Tigas, Muhammed Razzak, Stephen J. Roberts, Aron Walsh, and Yarin Gal. MADE: Benchmark environments for closed-loop materials discovery. In *International Conference on Machine Learning*, 2026.
- [15] Nikhil Abhyankar, Sanchit Kabra, Saaketh Desai, and Chandan K. Reddy. LLEMA: Evolutionary search with LLMs for multi-objective materials discovery. In *International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=TIqzhBvCNB>.
- [16] Peter Jansen, Marc-Alexandre Côté, Tushar Khot, Erin Bransom, Bhavana Dalvi Mishra, Bodhisattwa Prasad Majumder, Oyvind Tafjord, and Peter Clark. DiscoveryWorld: A virtual environment for developing and evaluating automated scientific discovery agents. In *Advances in Neural Information Processing Systems*, volume 37, 2024. doi: 10.52202/079017-0324.
- [17] Kanishk Gandhi, Michael Y. Li, Lyle Goodyear, Agam Bhatia, Louise Li, Aditi Bhaskar, Mohammed Zaman, and Noah D. Goodman. BoxingGym: Benchmarking progress in automated experimental design and model discovery, 2025. Preprint, arXiv:2501.01540.
- [18] Haonan Duan, Stephen Zhewen Lu, Caitlin Fiona Harri-gan, Nishkrit Desai, Jiarui Lu, Michał Koziarski, Leonardo Cotta, and Chris J. Maddison. Measuring scientific capabilities of language models with a systems biology dry lab, 2025. Preprint, arXiv:2507.02083.
- [19] Maximilian Nägele and Florian Marquardt. Agentic exploration of physics models. *Physical Review X*, 16:031002, 2026. doi: 10.1103/xnqc-q6nt.
- [20] Tianshi Zheng, Kelvin Kiu-Wai Tam, Newt Hue-Nam K. Nguyen, et al. NewtonBench: Benchmarking generalizable scientific law discovery in llm agents. In *International Conference on Learning Representations*, 2026.
- [21] Rui Li, Zixuan Hu, Wenxi Qu, et al. LabUtopia: High-fidelity simulation and hierarchical benchmark for scientific embodied agents. In *Advances in Neural Information Processing Systems, Datasets and Benchmarks Track*, 2025.
- [22] Yuhuan Wu, Zhao Jin, Tao Li, et al. Labimus: A simulation and benchmark for humanoid dexterous manipulation in chemical laboratory, 2026. Preprint.
- [23] David M. Cohen, Siddhartha R. Dalal, Michael L. Fredman, and Gardner C. Patton. The AETG system: An approach to testing based on combinatorial design. *IEEE Transactions on Software Engineering*, 23(7):437–444, 1997. doi: 10.1109/32.605761.
- [24] Luc Moreau and Paolo Missier. PROV-DM: The PROV data model. W3C Recommendation, April 2013. URL <https://www.w3.org/TR/prov-dm/>.