

When Does Experimental Knowledge Improve Scientific Decisions?

Jiangjie Qiu^{1,†}, Yijun Li^{1,†}, Yaotian Yang^{1,†}, Honghao Chen¹, Wentao Li¹, Xiaonan Wang^{1,*}

¹Beijing Key Laboratory of Artificial Intelligence for Advanced Chemical Engineering Materials, State Key Laboratory of Chemical Engineering and Low-Carbon Technology, Department of Chemical Engineering, Tsinghua University, Beijing 100084, China

Jiangjie Qiu, Yijun Li and Yaotian Yang contributed equally.

*Correspondence: wangxiaonan@tsinghua.edu.cn

Abstract

Scientific agents can improve experimental outcomes without converting experience into accurate, executable and useful knowledge. We measure four observable conversion questions in ChemWorld: search to selective correction, numerical prediction to structure, predictions to executable laws, and laws to unseen decisions. Two model systems each entered 135 campaigns across 45 matched task-world clusters. Prediction errors fell, selective-correction criteria remained unmet, and executable summaries lost predictive information. A subsequent 120-session disclosure intervention in ten shared worlds retained 112 valid completions and eight failures or interruptions. Completing the public observation mapping raised joint family/exponent recovery from 6/20 to 20/20 for GPT and 3/20 to 17/20 for DeepSeek: a pooled gain of 70 percentage points (approximate 95% interval [52.5, 85]). Optimal action choices increased from 5/20 to 12/20 for GPT but changed from 6/20 to 4/20 for DeepSeek. Structure recovery therefore did not ensure consistent action gains. Separately, a ten-world factorial intervention found no supported material fitted-law benefit and complete fitted-law agent/maximizer agreement. Delivering model laws alone to fresh recipients on new same-world candidates reduced regret by 0.13723 relative to task information alone, while nearest-evidence retrieval attained zero regret. These results identify conditional information benefits and distinguish artifact fidelity from decision utility, without establishing four internal causal failures, universal agent deficits or transfer to changed physical conditions.

1. Introduction

Autonomous scientific agents choose experiments, interpret observations and recommend what to do next. The value of experimental knowledge therefore depends on the decisions it supports. A useful outcome, an accurate prediction and an executable scientific summary answer different questions: an agent may find a productive recipe, predict a local response, or express a relation without being able to select a good plan under new conditions.

This problem matters as language-model agents operate chemistry tools and self-driving laboratories [4, 5, 8, 21–23]. Interactive discovery environments make repeated experimentation accessible [1, 9, 12, 14, 28, 29]. Predict-then-optimize and decision-focused learning already establish that predictive error and downstream decision loss can differ [10, 26]. The additional question for a scientific agent is how autonomously acquired evidence, a supplied prior and a submitted knowledge artifact relate to the actual decision reached by the complete system.

We use ChemWorld to make these objects separately observable. Within a matched cluster, the external world, public operations and resources remain fixed while the supplied initial description is opaque, aligned or misspecified at a declared entity, parametric or structural locus [19]. A persistent session performs experiments and submits predictions and typed laws. Independent evaluators score those artifacts and execute complete action plans. The assignment changes participant-facing information; it does not directly manipulate an unobservable internal belief.

The foundation paper establishes the bounded environment and replay semantics, while this study evaluates complete agent-tool configurations.

We organize the study around four observable conversion questions: **F1**, experimental search to selective correction; **F2**, numerical prediction to structural identification; **F3**, conditional predictions to executable laws; and **F4**, submitted laws to unseen-plan decisions. Each question uses its own protocol, denominator and failure accounting. The four questions do not form an identified internal causal chain, and success at one readout does not substitute for measuring the next.

The primary study used a fixed DeepSeek-v4-flash experimental-agent configuration, with 135 scheduled cells nested within 45 task-world clusters; a GPT-5.6-sol successor used the same scientific surface. A matched-packet diagnostic reduces submission demands; a subsequent disclosure intervention tests whether completing the observation mapping improves structure and action. We also cross law source with decision rule under fixed evidence, then deliver laws independently of raw evidence to fresh recipients. These interventions exhibit settings with agreement and useful knowledge, bounding a general law-use failure account without identifying the causes of historical cross-protocol differences.

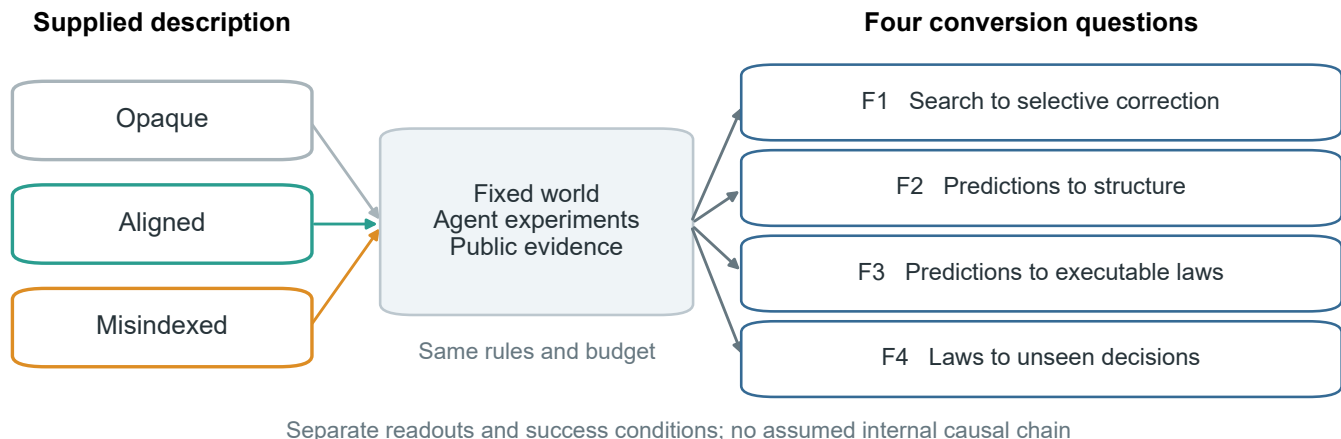


Figure 1. Endpoint success does not reveal what the agent learned. ChemWorld varies the supplied initial description while fixing the executable world, public rules, and budget. Four conversion questions separately assess correction, structure, law fidelity and unseen decisions. The diagram describes the design; its arrows do not identify internal belief or causal mediation through submitted knowledge.

2. Related work

2.1 Autonomous experimentation and laboratory agents

Autonomous chemistry systems combine planning, analysis and physical execution. Coscientist, ChemCrow, A-Lab and instrument-facing agents demonstrate tool use, synthesis planning, materials search and closed-loop experimentation on real equipment [4, 5, 7, 8, 21, 22]. These systems establish that AI agents can participate in consequential experimental workflows. Their main evidential strength is physical validity; their practical constraint for the present question is the cost of repeatedly constructing matched alternative worlds in which only the correctness of a prior changes.

2.2 Virtual chemistry and process environments

Summit and Olympus support repeatable reaction optimization and experimental-design benchmarks, while PC-Gym exposes nonlinear process-control problems [3, 11, 13]. ChemGymRL provides modular interactive benches for reaction, extraction, distillation and characterization, enabling reinforcement-learning agents to act within a virtual chemistry laboratory [2]. MADE extends closed-loop discovery benchmarks to budget-constrained materials settings [16]. These systems make experimentation cheaper, safer and more repeatable than physical execution, but they are generally used to compare policies or optimize endpoints under one task definition. The present study instead uses world programmability to hold the executable task fixed while intervening on the agent’s initial scientific model.

2.3 Interactive scientific-discovery benchmarks

DiscoveryWorld, BoxingGym, SciGym and SciExplorer organize scientific problems around repeated cycles of hypothesis formation, intervention and inference [9, 12, 14, 18]. PhysGym is the closest controlled-prior neighbor: it varies

the level of prior knowledge available to agents exploring interactive physics systems [6]. NewtonBench and DiscoverPhysics instead construct counterfactual or non-canonical physical worlds and ask agents to recover their hidden laws through experimentation [25, 29]. CausaLab separates task success from recovery of the underlying structural causal mechanism, while ReplaySCM evaluates executable mechanisms by held-out interventional replay [1, 28]. SciDisco turns process-verifiable discovery environments into intermediate training signals [27].

Another line develops discovery algorithms rather than diagnostic interventions. A probabilistic formulation treats language-model proposals and revisions as inference over mechanistic simulator models [24]. LLM-AutoSciLab couples hypothesis proposal, informative experiment selection and iterative mechanism refinement, whereas the Model Discovery Agent combines language-model structure proposals with sequential Monte Carlo, simulation-based inference and value-of-information design [15, 17]. These methods ask how to make mechanistic discovery more accurate or data efficient. The present study asks a complementary causal question about a fixed persistent agent: when the executable world, action space and resources are held constant, how does changing the correctness of its supplied initial description alter search, prediction, correction, executable-law recovery and unseen-action selection?

Decision-focused learning distinguishes prediction error from downstream decision loss [10, 26]. Our additional setting is an agent that acquires evidence under operational constraints and submits a reusable knowledge artifact. This study measures artifact and action outcomes; it does not introduce a decision-focused training algorithm.

2.4 The unresolved identification problem

Large-scale behavioral evidence already suggests that successful scientific workflows need not be accompanied by evidence-sensitive, self-correcting reasoning [20]. However, an observational comparison across systems cannot by

itself identify which capability transition produced the divergence. Three ambiguities remain when endpoint score, belief statement and scientific understanding are not separated. First, a correct prior can make an agent look like a rapid discoverer even if it merely confirms supplied information. Second, a wrong prior can improve an endpoint by encouraging useful exploration without ever being rejected. Third, a verbal law summary can be correct while the agent’s subsequent predictions or actions remain inconsistent with it. A matched correctness intervention on the initial model, typed checkpoints and evaluator-owned tests are needed to distinguish these cases. Unlike counterfactual-world benchmarks, the hidden law does not change within a matched comparison here; unlike prior-availability studies, aligned and misspecified arms receive equally explicit models and differ at the targeted scientific locus.

3. Conceptual framework

3.1 Fixed world, programmable initial world model

Each matched comparison begins with one executable world containing a fixed evaluator-owned law. Write the world as $W = (\mathcal{E}, G, \Theta, O, C)$: entities, causal/mechanistic structure, parameters and dynamics, observation mapping and the authoritative public contract. The participant-facing initial description is encoded as $M_0 = (\hat{\mathcal{E}}, \hat{G}, \hat{\Theta}, \hat{O}, \hat{S})$, where $\hat{S}$ represents assumptions about scope, modularity and compositional applicability. The public task, action space, actual observation channels, resource card, safety rules and bound stochastic identity are held constant. We intervene only on one declared component of M_0 before the first experiment. Changing W or the public contract would create a different task; changing one component of M_0 changes supplied information within the same task. Here M_0 denotes the external description, not a measured internal belief state.

The design space contains five scientific layers and one fixed contract boundary; only the entity, parametric and bounded structural layers have current participant outcomes.

Within any selected layer, intervention quality follows the same logic:

- **Opaque:** no additional task-specific claim is supplied for the manipulated layer.
- **Aligned:** incomplete information is directionally consistent with the fixed world.
- **Misspecified:** an equally detailed and equally confident model is wrong at the manipulated layer.

The current entity/ontology implementation realizes the misspecified condition through a misindexed dossier: the same property bundles, fields, values, wording and confidence language are retained, but the bundles are permuted across material identifiers. Structural, parametric and observation-model interventions require their own matched encodings and identifiability validation; they cannot be

declared equivalent to material misindexing after observing the result. Scope/compositionality is tested only when a learned artifact enters a fresh target context. Experimental evidence remains explicitly authoritative in all conditions. A wrong initial model is therefore not a trick question about obedience; it tests whether the agent seeks and uses evidence that can override a plausible scientific representation.

3.2 Operation, experiment and campaign

An operation is one submitted physical or measurement action. A complete experiment begins with a new batch and ends with a committed final assay or an allowed discard. A discovery campaign comprises multiple complete experiments under one fixed world, one persistent agent session and one shared resource ledger. Physical batch state resets between experiments, but the public history, agent context, hidden law and remaining resources persist.

This distinction matters because repeated operations and experiments inside one campaign are nested observations, not independent scientific samples. The independent analysis unit is the matched task-by-world cluster.

3.3 Observable outcomes and unresolved dependencies

We distinguish five outcomes that are often collapsed into a single score, while recording the intermediate transitions that connect them.

1. **Endpoint optimization:** whether the campaign identifies a high-quality experimental outcome.
2. **Predictive recovery:** whether held-out counterfactual prediction error decreases.
3. **Prior correction:** whether evidence selectively improves the wrong-prior condition without degrading the correct-prior condition.
4. **Executable-law consistency:** whether the final typed summary executes on prespecified held-out coordinates and preserves the quality of the agent’s conditional predictions.
5. **Unseen-plan selection:** whether the terminal agent state supports ranking and selecting previously unseen, fully specified executable plans rather than merely retrieving an observed incumbent.

A conceptual workflow connects these quantities; the arrows below are not estimated causal links:

initial world model → experiment selection → evidence
acquisition
→ prediction / belief update → executable law → unseen
action selection → artifact portability

The paper measures prediction error, prediction-to-law compression loss and law/action inconsistency. These read-outs locate observable gaps; they do not identify internal causal failure locations. The explicit-artifact interventions separately test fixed-evidence replacement and same-world information deployment; neither identifies transfer across new mechanisms.

Table 1. Programmable layers of the agent’s initial world model. The external executable world and public contract remain fixed within every matched comparison.

Initial-model layer	What may be aligned or wrong	Role in this paper
Entity / ontology Structural / mechanistic	identity–property mappings, entity classes and property bundles causal topology, active process modules and dominant-pathway assumptions	exploratory and prospective tests separately prespecified test
Parametric Observation model	coefficient signs, thresholds, orderings and plausible ranges instrument mapping, reliability, bias and noise assumptions	separately prespecified test qualification screen; no participant outcome
Scope / compositionality Contract / resource boundary	applicability domains, invariant modules and transfer boundaries budget, safety, action permissions and actual observation interface	new-mechanism transfer; unexecuted authoritative and fixed; never treated as a manipulable prior

An agent can succeed on any subset. In particular, endpoint success without predictive and transfer validity is classified as local optimization rather than law discovery.

4. Study design

4.1 Chemical-world cohort and intervention studies

The study is layer-stratified. Its entity/ontology backbone spans electrochemical conversion, reaction followed by crystallization, reaction followed by distillation, phase-partition discovery and safety-constrained reaction. Five independently selected public worlds per task yield 25 task-by-world clusters and 75 participant cells across opaque, aligned and misspecified arms. Parametric/dynamical and structural/mechanistic blocks each contain two independently validated task families and five worlds per task, adding 30 participant cells per locus. Exploratory, validation and prospective world instances remain disjoint. A sealed private cohort is an optional stronger study and was not executed in the current paper.

This design uses ChemWorld’s programmability to manipulate different components of M_0 , but does not turn the paper into a full factorial benchmark. Every block changes one locus, has its own identifiability criterion and retains its own denominator:

- 1. Initial-model-conditioned free discovery.** Entity interventions span five task families; parametric and structural interventions each span two validated task families. A cross-locus claim requires evidence from all three prespecified blocks; an entity-only result remains entity-specific.
- 2. Matched-evidence response.** A cloned-world secondary probe presents the same contradictory evidence to each arm and measures conditional response to a bundled packet plus extra turn. The analysis includes the unaffected parametric block and a corrected B2 phase-process block. B2 later failed participant-visible structural identifiability and is retained as a numerical–exact-law-expression diagnostic, not a mechanistic-identification test. An earlier structural run was excluded because its evaluator truth source omitted the prespecified world intervention. All matched-evidence sessions are independent and excluded from the free-discovery denominator.
- 3. Executable law and action.** Typed law summaries and held-out predictions test the transition from con-

ditional belief to executable relation. Blind incumbent replay tests whether a committed recommendation can reproduce observed value, while a separate longitudinal open-action assay tests whether the agent can rank previously unseen, fully specified ActionPlans; no verbal statement alone counts as discovery.

- 4. Explicit-artifact interventions.** A ten-world factorial assay replaces the quadratic representation and decision rule with public evidence held fixed. Information separation then compares task-only, raw-evidence, model-law-only and fitted-law-only inputs in fresh recipients on new plans in the same worlds. These interventions retain their own nested denominators; within-world deployment, new-parameter replication and compositional transfer are distinct.

Participant provenance is block-specific. The prospective three-locus cohort and the original 45-cell open-action matrix use the fixed DeepSeek-v4-flash configuration. A-P and A-S B2 have complete, separately reported DeepSeek-v4-flash and GPT-5.6-sol formal denominators; the three-locus C2 surface, the identifiable-law B3 surface and the four-condition action surface also have complete scheduled denominators for both model configurations. GPT-5.6-sol is the model; Codex denotes the common session harness. Oracle qualification, truth execution, exact replay, law-capacity fitting and gate-alignment diagnostics are provider-free. Historical contrasts remain separated by configuration. The artifact interventions prespecify equal-weight model/repeat means within world; this estimates the studied mixture of configurations, not provider effects or a leaderboard.

Observation/measurement interventions are reserved as a separate boundary probe. They require two-task identifiability and an exploratory three-arm study and are not included in the present denominator. Transfer across changed physical mechanisms remains untested. This preserves a complete conceptual intervention space without claiming that every programmable coordinate has already been executed.

Environment validation and participant outcomes form separate evidence layers. Environment tests check execution and controlled differences in observations. Structural identifiability additionally requires a participant-visible observation model; privileged reference fits do not establish it.

Locus	Task coverage	Clusters	Budget
Entity	Electrochemistry · crystallization Distillation · partition · safety	25	8
Parameters	Electrochemistry · reaction safety	10	10
Structure	Partition · crystallization	10	12

45 task-world clusters x 3 arms = 135 sessions

Budget = complete experiments per session; 1,260 planned in total.

Figure 2. Layer-stratified study architecture. The three loci contribute 25, 10, and 10 independent task-world clusters. Each cluster receives three supplied-description arms, giving 135 sessions and 1,260 planned complete experiments. Budgets are per session. Matched-packet, law-evaluation, and action studies retain separate denominators; later artifact interventions have separate inference units.

4.2 Persistent experimental agent

Each cell is controlled by one persistent agent process across one campaign. After every public outcome, the participant chooses the next operation through the host-owned laboratory tool. The host validates schemas, executes transactions, updates resources and protects private state, but does not select or repair scientific actions.

Campaign length is intervention-specific: entity studies use eight complete experiments with checkpoints after 0, 2, 4, 6 and 8 experiments; parametric studies use ten with checkpoints after 0, 2, 4, 7 and 10; structural studies use twelve with checkpoints after 0, 3, 6, 9 and 12. These pattern-owned counts and their finite resource cards were fixed before participant execution. A checkpoint records the agent’s assessment of initial-model reliability at the manipulated layer, predictions, uncertainty, evidence references, executable law summary and next experimental intent. Checkpoints do not create additional independent sessions.

4.3 Evaluator-owned evidence

The participant predicts four prespecified counterfactual queries per entity checkpoint and 16 per parametric or structural checkpoint. The evaluator executes each unique task-world query set independently; truth is shared across prior arms and checkpoints and is never returned to the participant. The primary prediction error is the mean normalized absolute error across prespecified query-metric pairs. The held-out evaluation is complete: 420/420 truth executions produced 1,620 query-metric truth values, and all 675 checkpoints were scored without additional model calls.

The evaluator also executes each final typed law sum-

mary on the same prespecified query coordinates. This produces a separate cell-level record of schema validity, complete query-metric executability, truth-normalized error, error change relative to the pre-evidence and effective-final checkpoints, and consistency with the participant’s final explicit predictions. These public measures are descriptive and are reported as executable-law consistency/compression; they do not establish reusable-law status. A reusable or transferable law would require independent coordinates or a context-reset transfer test.

After the campaign, the participant commits one completed experiment as its final recommendation. The evaluator then performs paired blind replay of the observed incumbent and the committed recommendation. These executions use separate resources and do not enter participant-operation or independent-sample denominators.

4.4 Longitudinal open-action assay

The longitudinal action assay addresses a different estimand from incumbent replay. One persistent agent first completes 12 autonomous experiments and mechanism checkpoints after 0, 3, 6, 9 and 12 experiments. Only after the final checkpoint is committed does the host reveal eight previously unseen ActionPlans. Each public plan includes its ordered operations, all submitted parameters, initial-state assumptions, measurement positions, terminal assay and omitted-operation declarations; candidate outcomes, evaluator ranks and other-arm evidence remain hidden. The evaluator executes exactly the public plan and verifies identity among the disclosed, truth-evaluated and executed plans.

The formal DeepSeek multi-task matrix contains three task families, five worlds per task and three initial-model

arms, giving 45 scheduled cells. Each cell contains 12 autonomous experiments and five checkpoints; 42 cells were eligible for action metrics and three crystallization failures remained in the scheduled denominator. The primary action endpoint is within-world regret of the selected plan; selected rank, Top-1, complete ranking and law adequacy are reported separately. This matrix is analyzed separately from the prospective locus tests, and no arm-level inference is made when a world lacks a complete triplet.

A separate causal follow-up prespecified five information conditions within each task–world–prior stratum: no evidence, stepwise evidence yoked from an autonomous donor, autonomous exploration, the donor’s learned law in a fresh context and a provider-free oracle law in a fresh context. Across three tasks, five formal worlds and three priors, the intended denominator was 225 sessions; only the 45 autonomous donors would have executed 12 experiments each. Before participant execution, every task–world required an outcome-disjoint oracle law to reproduce the eight-candidate ordering with Spearman rank correlation at least 0.80. Failure rejected the control design rather than authorizing world replacement or revealing an outcome table.

We subsequently evaluated the control rather than weakening this rule. A denser construction used 64 global queries and 256 candidate-neighborhood queries while keeping the fitted model family fixed. Exposed construction worlds and new prospective worlds remained separate. A final zero-execution diagnostic re-read all completed 96- and 320-query unit versions and compared the frozen Spearman gate with Top-1 selection, near-optimality and regret. It added no participant, provider or physical execution and did not alter any earlier stop decision.

4.5 Hypotheses and estimands

Let $E_{a,k}^{(\ell)}$ denote held-out prediction error for initial-model arm a , checkpoint k and intervention locus ℓ . Each block tests selective evidence-driven correction:

$$C_{\ell} = (E_{\text{misspecified,pre}}^{(\ell)} - E_{\text{misspecified,final}}^{(\ell)}) - (E_{\text{aligned,pre}}^{(\ell)} - E_{\text{aligned,final}}^{(\ell)}).$$

The contrast measures how the pre-to-final error gap changes and depends on initial error headroom. Initial predictions and the particular relation contradicted by evidence are needed for interpretation; a failed criterion does not establish an absence of correction ability.

For the entity locus, the misspecified arm is instantiated by a prespecified material permutation and $C_{\ell} = C_E$ is the confirmatory contrast. Success requires the lower confidence bound for the locus-specific contrast to exceed zero, the wrong-prior condition to improve, and the aligned condition not to deteriorate beyond a prespecified tolerance. Correct-prior utility, wrong-prior vulnerability and knowledge-to-action translation form a hierarchical secondary family. A cross-locus conclusion requires concordant, separately reported entity, parametric and structural results; standardized effects may be synthesized hierarchi-

cally, but raw contrasts are not pooled as if their intervention semantics were identical. Observation-model results remain a distinct boundary analysis unless evaluated in a separate prespecified study. Endpoint, calibration, behavior, law-summary, terminal-action, resource and safety outcomes are reported as separate channels rather than one leaderboard score.

Failed scientific cells remain in the denominator and are not replaced. Confirmatory correction assigns incomplete post-outcomes the adverse improvement range $[-1, +1]$; last-observation-carried-forward and zero improvement are observed-point sensitivities only. Only a pure infrastructure failure without a persisted trajectory may resume under the prespecified attempt cap.

5. Exploratory studies establish the identification problem

Development studies were used to discover the inferential traps that the prospective design had to remove. Across configuration-separated entity-level matrices, explicit initial information changed where the agent searched and sometimes improved the best observed endpoint, but the ordering was not aligned, opaque and then misspecified. In the retained five-task development cohort, all 75 trajectories replayed exactly and 69 met the prespecified eligibility criteria. Held-out predictions usually improved, yet the misspecified arm did not improve more than the aligned arm on average. Executable summaries frequently lost information present in checkpoint predictions, and blind recommendations almost always retrieved an observed incumbent. These results are protocol-development evidence, not part of the prospective denominator and not a cross-system comparison.

The same ambiguity appeared at the parameter level. In a one-world preliminary study, the misspecified agent tested inside its supplied potential window, obtained a zero score, sharply reduced its stated confidence in that model and moved the next experiment outside the window. This was behavioral rejection of a supplied model, but the agent still failed to recover the best finite-budget policy. Rejecting a wrong prior, improving prediction and recovering a useful law were therefore not interchangeable outcomes.

These exploratory observations motivated three safeguards in the main study: matched worlds with equally explicit aligned and misspecified models; evaluator-owned counterfactual predictions rather than endpoint score or verbal suspicion; and separate assays for executable-law fidelity and terminal selection among unseen plans. The prospective results below begin from this stricter identification problem. Exploratory configurations remain archived with their exact denominators and failures but do not compete with the main knowledge-and-decision results.

6. F1–F3: search, structure and executable knowledge

6.1 The prospective cohort closes the experimental and evaluator denominators

The prospective analysis combines 120 unaffected sessions with a complete 15-session replacement of the structural crystallization block after correction of its resource contract. All **135/135** scheduled sessions produced final records. The participant completed **1,243/1,260** planned experiments, and **121/135** sessions met the prespecified operational eligibility criteria. The denominator contains 1,269 closed batch lifecycles: 1,243 ended in a final assay and 26 were discarded. No dynamic physical failure occurred. Thirteen operations were rejected by the finite laboratory resource ledger, and 84 attempted operations were not committed. Failures and right-censoring remain in their assigned denominators.

Every session submitted all five checkpoints, giving **675/675** typed belief snapshots, 6,300 prespecified counterfactual predictions and 24,300 query–metric values. The evaluator independently completed **420/420** truth queries and scored every checkpoint without additional participant calls. The cohort therefore permits a continuous analysis from the starting model through search, prediction and executable summary rather than a comparison of endpoint scores alone.

6.2 Priors scaffold search without imposing one performance ordering

A retrospective manipulation analysis shows that the initial-model intervention reached both the reported belief state and the first experimental trajectory. Pre-evidence prediction errors differed across arms, although the aligned arm was not uniformly best. More directly, the first complete recipe differed between aligned and misspecified cells in **45/45** matched task–world clusters, between opaque and aligned cells in **45/45**, and between opaque and misspecified cells in **44/45**. Because the design did not include repeated same-arm sessions, exact-recipe divergence is a trajectory-sensitivity check rather than a new confirmatory estimand; provider stochasticity cannot be separated from intervention sensitivity at this resolution.

The ensuing campaigns were not simple copies of the first proposal. Across cells, **91.2%** of completed experiments used a unique recipe, **84.4%** of session optima occurred after the midpoint and **32.6%** occurred in the final completed experiment. Intermediate measurement was task appropriate rather than globally absent: 666/1,269 closed lifecycles included a non-final measurement, comprising 872 instrument uses. These records establish sustained search and observation. Improvement over the first experiment alone does not isolate feedback learning: non-adaptive search can improve with additional attempts; budget-matched controls are needed.

Those trajectory changes produced three recurring endpoint patterns. In entity-level partition, aligned information produced a durable advantage over the misspecified

arm: +0.106 on the first experiment and +0.200 at the best endpoint, both concordant in 5/5 worlds. In structural crystallization, the aligned model gave a +0.141 first-experiment head start in 5/5 worlds, but the best-endpoint gap narrowed to +0.055 as the initially disadvantaged arm explored. In structural partition, both aligned and misspecified descriptions outperformed opaque identifiers while differing little from one another, consistent with shared search scaffolding rather than correct-model utility. The remaining task–locus groups were heterogeneous. A correct initial model was therefore neither a universal advantage nor a stable endpoint ordering.

6.3 F1: Predictive learning does not establish selective repair

All three intervention loci showed mean pre-to-final prediction-error reductions in every arm. For the entity locus, reductions were 0.111, 0.097 and 0.097 for opaque, aligned and misspecified cells; for the parametric locus they were 0.090, 0.033 and 0.065; and for the structural locus they were 0.219, 0.228 and 0.221. The agent acquired predictive information during free discovery.

The prespecified improvement contrast was stricter. Evidence should improve the misspecified arm more than the aligned arm while preserving aligned performance. This selective-correction criterion failed at all three loci. Failure-aware point contrasts were **-0.214** for entity, **+0.033** for parametric and **-0.224** for structural. Confirmatory inference assigned incomplete arm improvements their adverse interval $[-1, +1]$, so the corresponding contrast could span $[-2, +2]$; last-observation-carried-forward and zero-improvement summaries were observed-point sensitivities rather than sources of confirmatory p values. The resulting one-sided locus values were $p = 0.990$, $p = 0.079$ and $p = 1.000$. The positive parametric direction is a replication hypothesis, not a passed locus. Structural crystallization and partition also pointed in opposite directions, defeating the required cross-task structural decision. General predictive learning and selective correction of a wrong starting model are thus empirically different readouts. The improvement contrast depends on initial error headroom, so the unmet criterion does not establish an absence of correction ability.

6.4 F2: Numerical prediction and structural identification

Free discovery cannot by itself distinguish failure to seek diagnostic evidence from failure to use evidence once obtained. The matched-evidence assay gives every arm the same packet after a pre-response, but the packet and added response turn are bundled without a turn-matched no-packet control. It therefore measures conditional post-packet response rather than a pure evidence-packet effect. In the parametric block, all five misspecified summaries rejected the supplied high-potential direction and expressed the peak-and-collapse response after the bundle. The pattern shows that the earlier absence of explicit repair is not

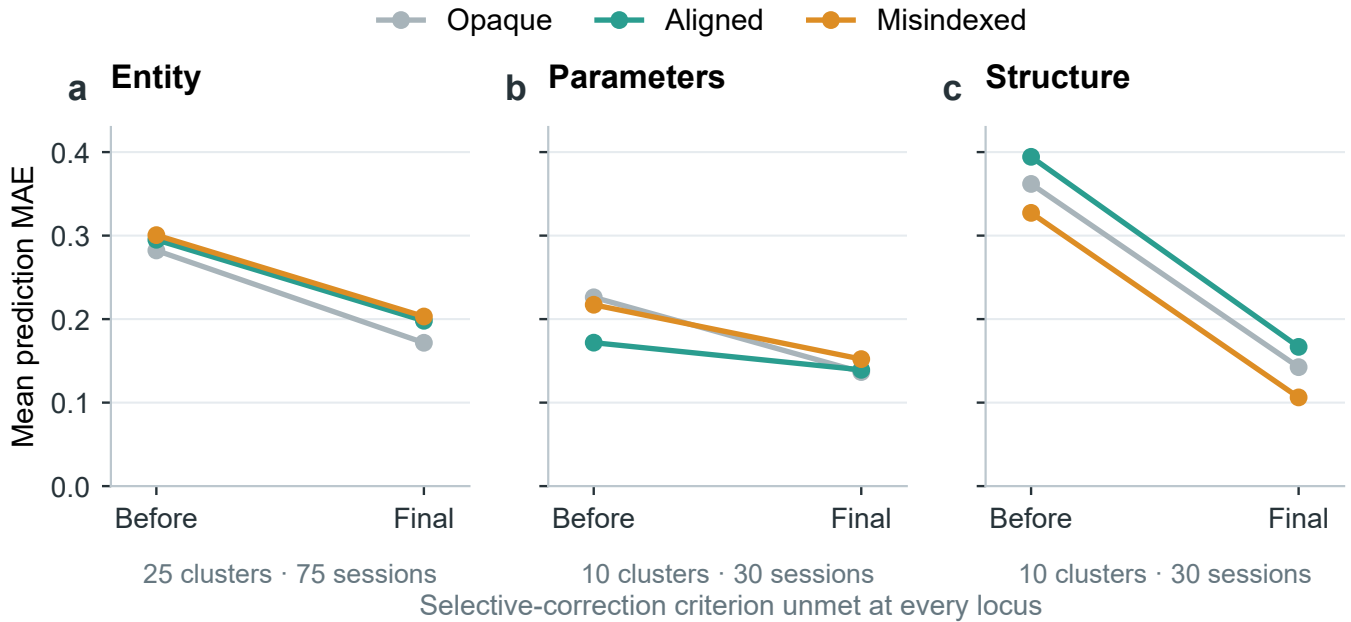


Figure 3. Prediction improves, but the evidence does not establish selective repair of the wrong model. a–c, Mean pre-evidence and final errors by arm in entity, parametric, and structural blocks; lines connect aggregate means, not individual trajectories or confidence bounds. The failure-aware selective-correction gates are unmet (one-sided $p = 0.990, 0.079, 1.000$), and initial error limits improvement headroom. First recipes differ in 45/45 aligned–misindexed, 45/45 opaque–aligned, and 44/45 opaque–misindexed clusters; this retrospective check has no repeated same-arm baseline.

immutable, but it does not isolate the packet from the additional response opportunity.

The corrected B2 DeepSeek assay produced a sharper numerical–expression dissociation. After all three arms received the same direct phase-process evidence, mean normalized errors fell from 0.2255, 0.2736 and 0.3392 to **0.0074, 0.0060 and 0.0071** for opaque, aligned and misspecified cells. The misspecified-minus-aligned update-gain contrast was +0.0645, but only 3/5 worlds were positive (exact one-sided sign-flip $p = 0.125$; descriptive 95% interval $[-0.0557, 0.1848]$). This is conditional post-packet numerical convergence, not a confirmatory arm effect. Retrospective keyword coding of public summaries found that **0/5** misspecified cells expressed the prespecified 1.75 power law, **1/5** explicitly rejected the supplied linear form, and **5/5** shifted to a saturation or endpoint model.

A participant-visible identifiability audit changes the interpretation of those expression counts. Every B2 evidence and scoring query fixed one nominal solvent/extractant pair, the base partition coefficient was not supplied, and no typed family or exponent field was required. A free-coefficient linear law is therefore exactly observationally equivalent to the registered 1.75-power law on this surface, while a constant endpoint baseline already reaches mean MAE 0.00649. The aligned DeepSeek-high exact-law positive control was only **1/5** and failed its readout criterion. B2 thus establishes low post-packet error without stable exact-law expression on an underidentifying free-text surface; it does not localize failure to the agent’s internal structural identification.

The matched replication preserved the numerical–

expression pattern in GPT-5.6-sol medium. In A-P, the registered misspecified-minus-aligned update-gain contrast was +0.0309 for DeepSeek (3/5 worlds) and +0.0602 for GPT (5/5; exact one-sided $p = 0.03125$). In A-S B2 it was +0.0645 for DeepSeek (3/5) and +0.0915 for GPT (4/5; $p = 0.0625$), while misspecified exact 1.75-law expression remained **0/5 in each model**. Aligned exact expression was only 1/5 for DeepSeek high and 0/5 for GPT. We report the two configurations separately and do not convert this retrospective free-text coding into a structural recovery or model-superiority test.

A same-harness DeepSeek low-reasoning ablation strengthened the numerical boundary. Its B2 canary passed 3/3 and formal execution completed **15/15** with no failed sessions. Mean post errors were 0.0067, 0.0069 and 0.0069 for opaque, aligned and misspecified cells; all 15 were below 0.02. The registered update contrast reversed to **-0.0405** (2/5 positive worlds; exact one-sided $p = 0.8125$; descriptive interval $[-0.1559, 0.0749]$), but misspecified exact-law expression remained **0/5**. Provider-reported reasoning output fell from 506,637 to 400,639 tokens (20.9%) relative to DeepSeek high on the same block. Thus low reasoning preserved the low-error/exact-expression dissociation while showing that selective numerical updating is configuration-sensitive. This is a robustness ablation, not a reasoning-superiority test or a thinking-off experiment.

An independent frozen control then disclosed reference coefficients across four nominal pairs and scored a disjoint eight-query roster. Its registered fitter recovered the exponent using privileged simulator access, which does not establish same-information identifiability. After a 3/3 ca-

nary, all **30/30** GPT-5.6-sol medium sessions completed (five worlds, three arms, two fresh sessions per arm and world). Mean post-evidence errors were 0.0367, 0.0215 and 0.0378 for opaque, aligned and misspecified cells. Joint family-exponent recovery was **0/10**, **5/10** and **0/10**; the aligned arm had lower world-mean exponent error than each comparator in **5/5** worlds. The misspecified arm selected the power family in 8/10 sessions but recovered the 1.75 exponent in 0/10, showing that a family label alone is not joint structural recovery. The supplied evidence partly preserved a correct prior but did not produce registered recovery in the misspecified stratum.

The same control also tested the evidence-to-action bridge without participant experiments. Only **2/30** choices were Top-1, both in the same world where no candidate could improve on the visible evidence incumbent by the registered 0.02 margin. Across the **18** cells in the three worlds where such an improvement was available, **0/18** selected an action reaching that margin; this included 0/2 eligible cells with joint structural recovery. Structural retention and useful novel action did not become a monotonic pair.

An independent DeepSeek-high successor then used the same five worlds, three prior arms, two-session replication, evidence/scoring rosters and action thresholds from its first cell. All 30 scheduled slots reached terminal records: **17 completed** and **13 participant-schema failures**. Under the failure-aware denominator, joint family-exponent recovery was **0/30**, Top-1 was **0/30**, mean regret was 0.958 and mean post-evidence MAE among completed cells was 0.0928. The corresponding GPT-5.6-sol values were 5/30, 2/30, 0.759 and 0.0320. Useful gain was 0/13 versus 0/18 among completed evaluable opportunities and 0/18 for both under the fixed scheduled-opportunity rule, which counts failures or unavailable rows as zero. These matched-surface differences are descriptive: the differential schema failure is part of the evaluated agent-provider system and precludes a model-superiority interpretation.

A final independent diagnostic reused all five B3 worlds, three priors, two model configurations and two repeats, now crossing optional numerics with a minimal submission. All 120 sessions were attempted; 117 completed and three failed. Mean prediction error fell on the 29/30/29/29 available pairs for GPT off/on and DeepSeek off/on, respectively. Yet joint family/exponent recovery was 0/80 across opaque and misspecified priors (78 valid completions). All 17 successes were aligned-prior retention: GPT off/on 6/10 and 7/10, DeepSeek 2/10 and 2/10. The prespecified tool-on minus tool-off contrast was +1.67 percentage points, with a five-world 95% bootstrap interval [-8.33, 10.00]. This supports neither a clear improvement nor equivalence. Tool uptake differed: GPT used numerics in 0/30 enabled sessions, DeepSeek in 20/30. The result therefore estimates availability in these systems, not a forced-computation effect. The historical reference fitter used a privileged simulator; public-only identifiability remains unproven. A post-hoc inspection of all 40 public calibration pairs found identical aqueous-product and phase-ratio observations in 40/40 pairs each. Mean abso-

lute target-reference differences were 0.005873 for organic product and 0.004992 for score. The packets disclose coefficient formulas but no complete observation equations or noise model. These are descriptive paired differences, not signal-to-noise estimates or held-out prediction baselines; no private simulator was used. This block reduces the observed submission-failure burden without randomly isolating a schema effect, and does not replace free-form law compression or the longitudinal action assay.

6.4.1 Completing the observation mapping

A separate disclosure intervention tests an actionable information condition. Ten new worlds span power exponents 1.35–2.25. Within each configuration, paired sessions receive the same observations, priors, minimal submission and optional calculator; only the post-evidence disclosure adds the complete observation mapping. GPT/medium and DeepSeek Flash/low each have 60 scheduled sessions. All 120 reached terminal states: 112 valid completions and eight DeepSeek failures or interruptions, retained in the denominator.

Among unknown or wrong priors, joint recovery rises from 6/20 to 20/20 for GPT and from 3/20 to 17/20 for DeepSeek (Fig.~6). Both gains are 70 percentage points; the pooled approximate world-bootstrap 95% interval is [52.5, 85]. Models and priors are averaged within each of ten shared worlds before resampling. Correct-prior retention is separate: 8/10 to 10/10 and 6/10 to 10/10, respectively.

Prediction error also decreases among available submissions, but action gains differ. GPT Top-1 rises from 5/20 to 12/20 and normalized regret falls from 0.07097 to 0.00748; DeepSeek Top-1 changes from 6/20 to 4/20 and regret from 0.15090 to 0.24263. The latter direction is descriptive, not a significant-worsening claim. Completing the mapping thus improves structural outputs in both tested configurations without guaranteeing action improvement. Disclosure length and paired observation noise are part of this setting; the new runtime and bounded power-family coverage do not retrospectively establish identifiability of historical packets. A selected one-retry sensitivity retains both directions: DeepSeek recovery 5/20 to 20/20 and Top-1 7/20 to 5/20; it does not replace the original primary.

6.5 F3: Executable laws often lose information present in conditional predictions

All **135/135** final typed laws executed on their prespecified continuous coordinates, but executability did not preserve the information in the agent's conditional predictions. Mean law MAE was 0.237. Relative to the effective final predictions, executable laws were better in 50 cells, equal in one and worse in 84; mean law-minus-final error was +0.069. Even in the structural locus, where pre-to-law improvement was largest, law error remained higher than final explicit-prediction error on average. The typed interface solved syntax and coverage, not faithful model compression.

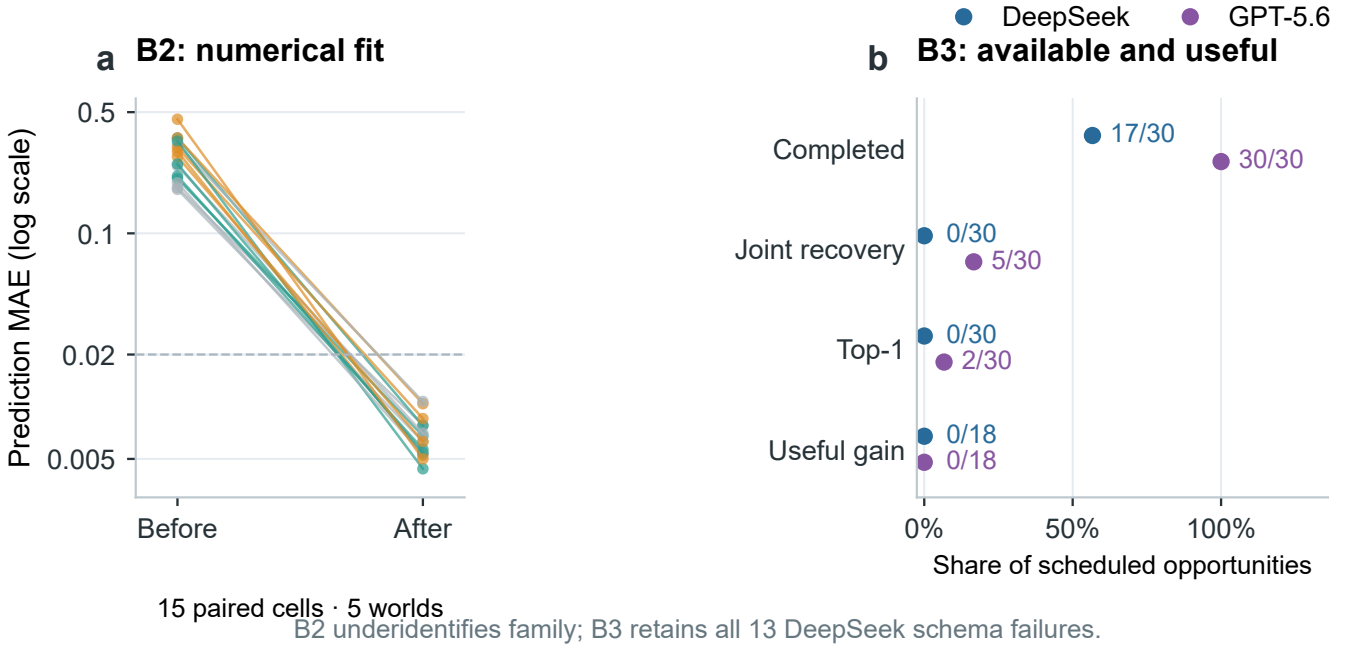


Figure 4. Numerical fit and structural recovery require different tests. **a**, All 15 DeepSeek-high B2 cells before and after the same packet, shown on a log scale; gray/teal/orange denote opaque/aligned/misindexed arms. All post-packet errors are below 0.02, but the one-pair surface underidentifies family; low error is not structural recovery. **b**, B3 completion, joint family–exponent recovery, Top-1, and useful gain retain all scheduled opportunities. Counts distinguish 30 sessions from 18 gain opportunities per model, including 13 DeepSeek schema failures. Configuration contrasts are descriptive.

A same-domain schema-capacity control assessed whether these prediction vectors were expressible. For every cell, we fitted the best legal identity-link typed law directly to the agent’s complete final prediction vector and executed it through the production parser. The full registered basis reproduced the prediction state in **135/135** cells (mean MAE 4.25×10^{-13}), whereas the participant’s submitted law differed from the same prediction state by 0.1539 MAE. Holding the participant’s term set fixed reduced that gap to 0.0114 MAE (58/135 near-exact cells), and leave-one-query-out fitting yielded 0.0788 MAE. Thus the schema can carry these observed prediction vectors, while the submitted laws preserve them imperfectly. The fit uses the same evaluation domain; it establishes representation capacity, without identifying an internal cause of the discrepancy or demonstrating global mechanistic recovery.

Paired blind replay tested a still narrower claim: whether the final commitment reproduced the value of an observed incumbent. It completed **726/726** executions for 121 evaluable cells; the 14 failed or right-censored cells remained as unstarted. Recommendations were better, equivalent and worse than the incumbent in **1/119/1** cells. This demonstrates reliable incumbent retrieval, not selection beyond the observed campaign. A separate assay is required for unseen plans.

The matched GPT-5.6-sol successor supplied a second complete 135-cell scheduled surface. It reached **126 completed, 3 failed and 6 right-censored** cells, with 1,253/1,260 participant experiments, 420/420 evaluator

truth executions, 669/675 scored checkpoints, 129/135 executable-law evaluations and 756/810 scheduled blind executions. Its entity, parametric and structural selective-correction gates all failed, as in DeepSeek. Mean prediction improvement was 0.1329 versus 0.1198 for DeepSeek, while final prediction error was 0.1614 versus 0.1685. GPT-5.6-sol exhibited lower law MAE, 0.1753 versus 0.2371, and compression loss from 0.0686 to 0.0142, but blind gain remained approximately zero (−0.0001 versus −0.0010); its blind better/equivalent/worse counts were 0/125/1. Thus a materially lower observed executable-law error coexisted with near-zero blind gain. This is a matched cross-configuration description, not a causal law-quality intervention or provider effect.

The checkpoint interface is part of this evaluated system. Although all checkpoints were eventually recovered, 888 typed-checkpoint submissions were rejected before acceptance. This burden did not remove prediction payloads, but it increased context and recovery work. Results therefore apply to the complete agent–tool configuration rather than the base language model alone.

7. F4: submitted laws, unseen actions and success conditions

7.1 Complete plan semantics remove a hidden-workflow explanation

Blind incumbent replay asks whether a recommendation can reproduce an observed batch; it does not test decisions outside the campaign history. We therefore used a

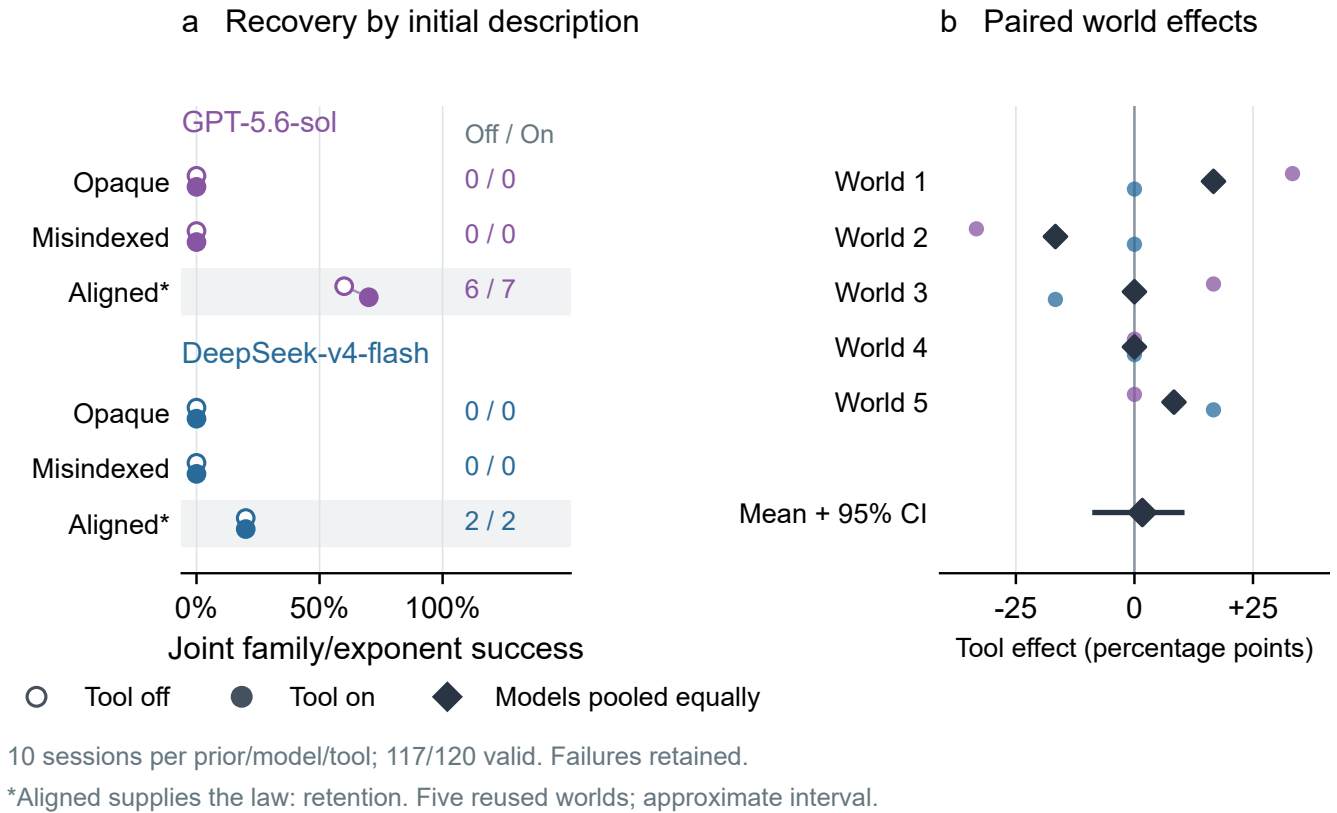


Figure 5. Valid submissions and optional numerics do not ensure structural recovery. **a**, Joint family/exponent success by prior, model and tool availability; each point retains ten scheduled sessions. All successes are in the aligned-prior stratum, where the correct law was supplied. **b**, Paired effects in five reused worlds and the equally weighted mean with its prespecified approximate 95% interval. Tool availability is the intervention: GPT used it in 0/30 sessions and DeepSeek in 20/30. Three failures remain in the denominator.

second assay in which the agent first explores freely for 12 experiments and only then ranks eight unseen plans. Every candidate is a complete ActionPlan, including ordered operations, submitted parameters, measurement positions and terminal assay. Public, evaluator-truth and executed plans were verified as identical, and no evaluator-owned default could silently alter a workflow. Candidate outcomes and ranks remained hidden. An incorrect ranking therefore cannot be attributed to undisclosed execution semantics.

7.2 Executable-law error is not a sufficient proxy for unseen action selection

The formal matrix produced final records for 45/45 scheduled cells across three tasks, five worlds and three initial-model arms. Independent evaluation completed 240/240 truth executions and 240/240 exact replays. 42/45 cells were uncontaminated and eligible for action metrics. The three excluded cells were all crystallization cells: two exhausted agent-selected resources or process options and one was right-censored by interruption. All three remain in the scheduled denominator.


Across eligible cells, 11/42 terminal readouts selected the true Top-1 plan; after the three missing rankings were retained as failures, the scheduled result was 11/45. Mean selected rank among eligible cells was 3.31/8 and mean

normalized regret was 0.297. The uniform-random rank of 4.5 is a geometric reference, not a causal baseline: the design contains neither a no-evidence action arm nor a pre-exploration ranking from the same agent. The study therefore describes post-campaign selection competence but does not estimate how much exploration or a recovered law caused it.

The joint mechanism-action result exposes the boundary more sharply. 30/42 cells had an inadequate law and wrong action, 11/42 had an inadequate law but correct action, 1/42 had an adequate law but wrong action, and 0/42 combined an adequate law with a correct action. The single law-adequate/wrong-action cell is a counterexample to logical guarantee, not a population estimate of law sufficiency; correct action also occurred without thresholded law adequacy.

The conclusion did not depend on the 0.10 adequacy cut-off. Across all 42 eligible cells, law MAE had weak pooled associations with selected rank (Spearman $\rho = -0.073$, task-world cluster-bootstrap 95% interval $[-0.380, 0.256]$) and normalized regret ($\rho = -0.133$, $[-0.452, 0.217]$). Task-stratified rank associations reversed direction: +0.524 for electrochemical conversion, -0.592 for reaction safety and -0.007 for crystallization. Sweeping the law-MAE threshold from 0.05 to 0.30 increased the adequate-law subset

Information helps structure; action gains differ

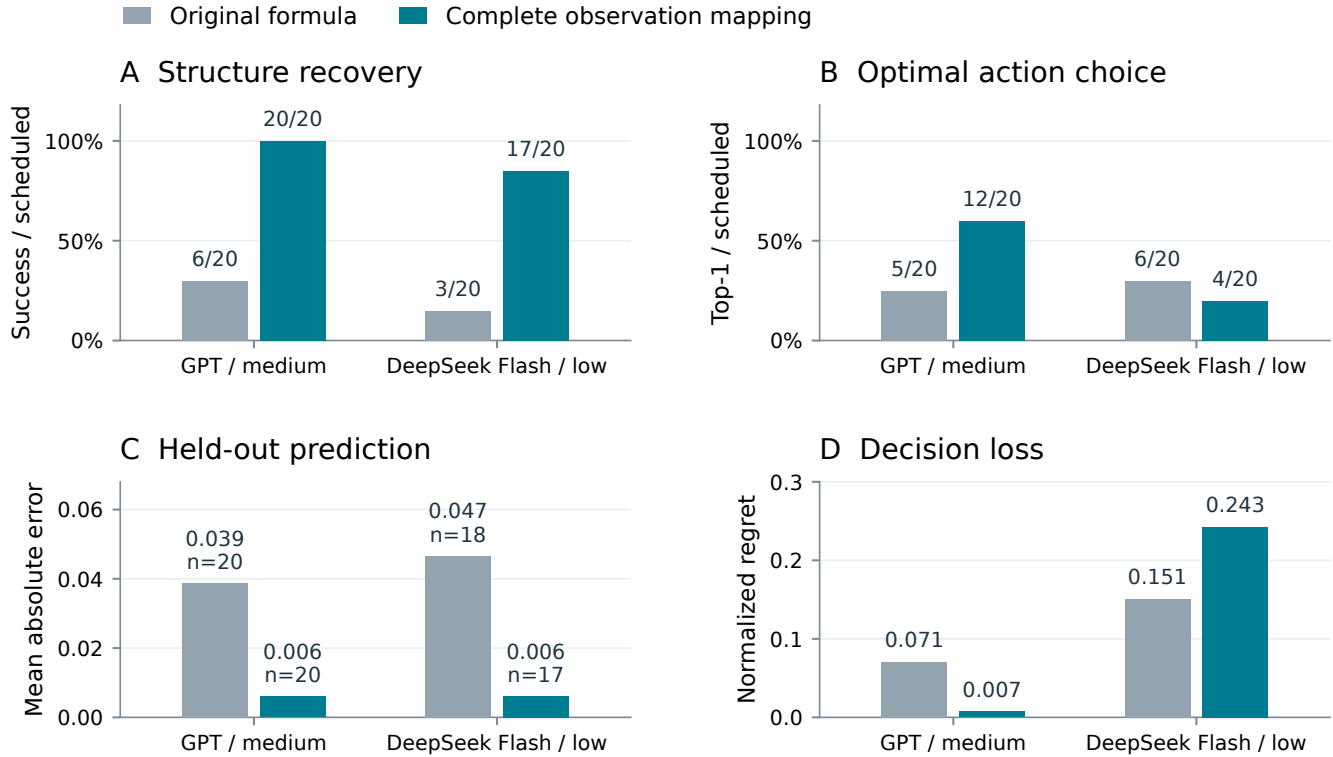

Unknown / wrong priors; 10 shared worlds. All original failures retained.

Recovery gain: +70 pp in each configuration; pooled approximate 95% CI [+52.5, +85].

Figure 6. Completing the observation mapping improves structure recovery; action gains differ. a–b, Joint family/exponent recovery and optimal action choice retain 20 scheduled unknown/wrong-prior sessions per configuration and disclosure condition. c, Prediction error uses the available submissions shown by n . d, Failed sessions receive worst normalized regret. All panels show the original attempts, with ten shared worlds; selected failure retries do not replace these outcomes. The two configurations are compared within system, not at equal compute.

Table 2. Formal multi-task unseen-plan matrix. Rank and regret summaries use the 42 eligible cells; all 45 scheduled cells remain in the denominator and the three crystallization failures are retained. Lower rank and regret are better.

Arm	Scheduled	Eligible	Mean rank	Top-1	Mean normalized regret
Opaque	15	14	3.14	5	0.2742
Aligned	15	14	3.36	3	0.2958
Misspecified	15	14	3.43	3	0.3222

from 1 to 34 cells, yet its correct-action count rose only from 0 to 9; at no threshold did adequacy become sufficient for a correct action. The binary four-way table is therefore one readable slice of a continuous, task-dependent descriptive association rather than an artifact of a single cutoff. It does not identify a causal law-quality effect.

A decision-aligned reanalysis of the DeepSeek-v4-flash cohort then executed the last-available executable law from every frozen cell on the same eight candidate plans. Three cells retained an earlier executable law but had no terminal action ranking. All 45/45 laws were evaluable, but their implied choices reached the true Top-1 in 0/45 cells, versus 11/45 for failure-aware participant action. Among the 42 cells with a valid participant ranking, the participant followed the law-implied Top-1 in only 12/42. Mean law-implied and participant failure-aware regret were

0.438 and 0.344; the direction reversed in crystallization. These quantities separate truth-law error from action-module utilization descriptively. Neither law quality nor law following was randomized, so they do not estimate a causal law-to-action effect.

Performance varied substantially by task. Electrochemical conversion reached Top-1 in 4/15 cells with mean rank 3.60, reaction safety in 4/15 with mean rank 2.00, and crystallization in 3/12 with mean rank 4.58. Every pairwise arm-rank contrast changed sign under some leave-one-cluster-out omission. Arm means are therefore descriptive, not causal. The bounded result is that complete public action semantics and autonomous exploration did not yield uniformly reliable ranking of unseen plans.

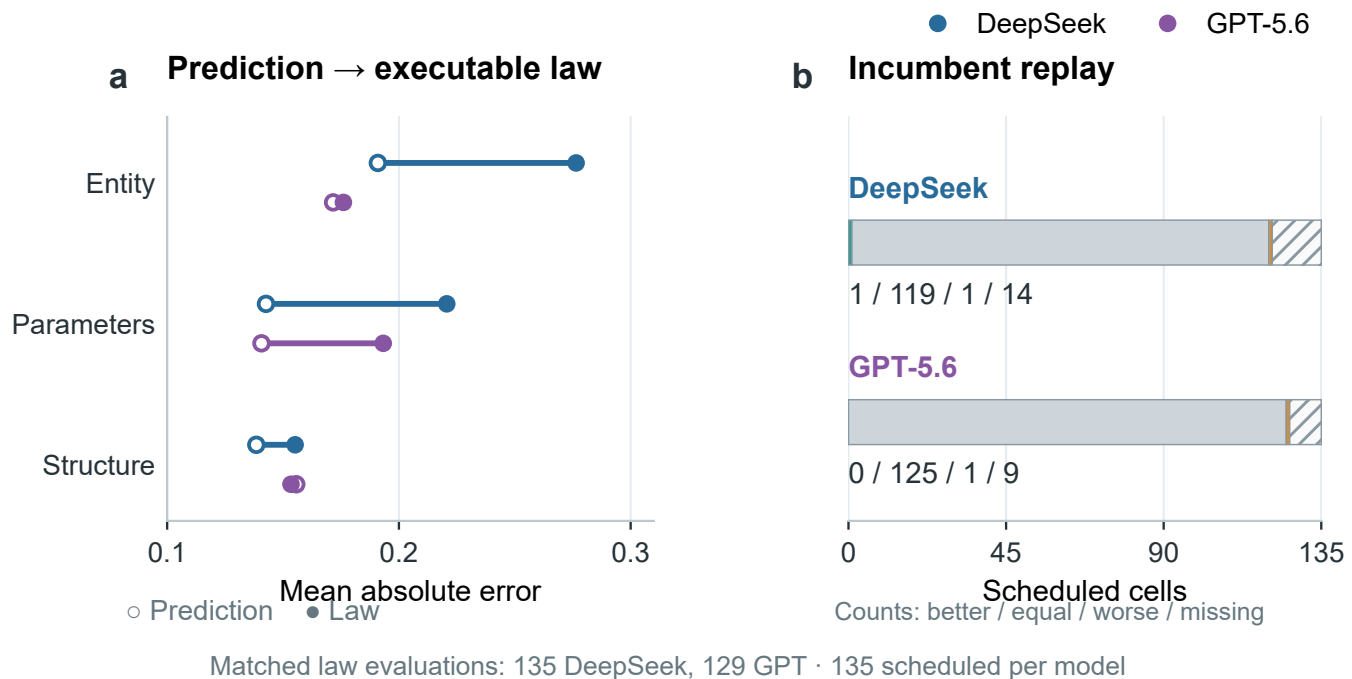


Figure 7. Lower executable-law error coexists with near-zero incumbent gain. **a**, Hollow and filled points show final-prediction and executable-law MAE on the same law-evaluable cells, grouped by locus and model; connecting lines show compression differences, not uncertainty. The matched denominators are 135 DeepSeek and 129 GPT laws. **b**, Better/equivalent/worse/unavailable incumbent-replay counts retain all 135 scheduled cells per model; hatching marks unavailable readouts. These are descriptive configuration contrasts and incumbent replays, not causal artifact effects or unseen-action benefits.

7.3 The repair is sensitivity evidence, not a replacement cell

An independent aligned-arm crystallization repair completed all 12 experiments and produced a terminal readout, but the agent first proposed an infeasible seeding operation and incurred one resource rejection before adapting. Its final choice ranked 8/8 with normalized regret 1.0 and remained in the inadequate-law/wrong-action category. The repair shows that a fresh session can cross the original interruption while revealing a genuine resource-planning risk. It has a different trajectory and is not merged into the original 45-cell denominator.

7.4 Four-condition strategies expose autonomy and learned-law-only limits

We therefore ran an independent development successor that removed the oracle condition while preserving the frozen open-action worlds, complete ActionPlans, initial-model arms and action metrics. For each model, all 45 task-world-prior strata scheduled no evidence, yoked evidence, learned-law-only and autonomous-exploration conditions, yielding **180 slots per model and 360 total**. DeepSeek reused its 45 immutable open-action donors, of which 42 were eligible; GPT-5.6-sol created a separate 45-donor cohort, of which 26 were eligible. Donor-dependent slots remain blocked when the corresponding donor failed, and all recipient failures remain in the scheduled denominator. The models share 26 donor-eligible strata across 13 task-world clusters.

The primary strategy estimand retains all 45 scheduled strata per model, assigning failure-aware regret one to donor failure, blocked descendants, recipient failure or a missing ranking. Autonomous-minus- no-evidence regret was **-0.0913** for DeepSeek-v4-flash (task-world cluster-bootstrap 95% interval $[-0.2124, 0.0388]$) and **+0.1102** for GPT-5.6-sol ($[-0.0533, 0.2794]$); directions differed and both intervals crossed zero. GPT-5.6-sol's all-scheduled yoked-minus-no-evidence and learned-law-minus-no-evidence estimates were **+0.2165** ($[0.0561, 0.3878]$) and **+0.2459** ($[0.0953, 0.3883]$). They are end-to-end strategy outcomes that include missing donors and system failures, not pure evidence or artifact effects.

Autonomous-minus-no-evidence also changed sign by task. For electrochemistry, safety and crystallization, the estimates were **-0.2398/-0.4060/+0.3720** for DeepSeek and **+0.0891/-0.2191/+0.4605** for GPT-5.6-sol. The pooled direction therefore masks strong heterogeneity; all four registered contrasts and their cluster-bootstrap intervals are descriptive and were not multiplicity-adjusted.

Donor-eligible estimates are availability-conditioned sensitivities because donor eligibility is a post-treatment variable. On those 42 DeepSeek and 26 GPT-5.6-sol strata, autonomy-minus-no-evidence was **-0.1214** and **-0.1379**, respectively; equal-task sensitivities were **-0.0879** and **-0.0259**. Yoked completion was **10/42** and **24/26** admitted recipients. The successor therefore did not establish a consistent autonomy or learned-law-only benefit and exposed model-specific failure pathways. It remains a prospective develop-

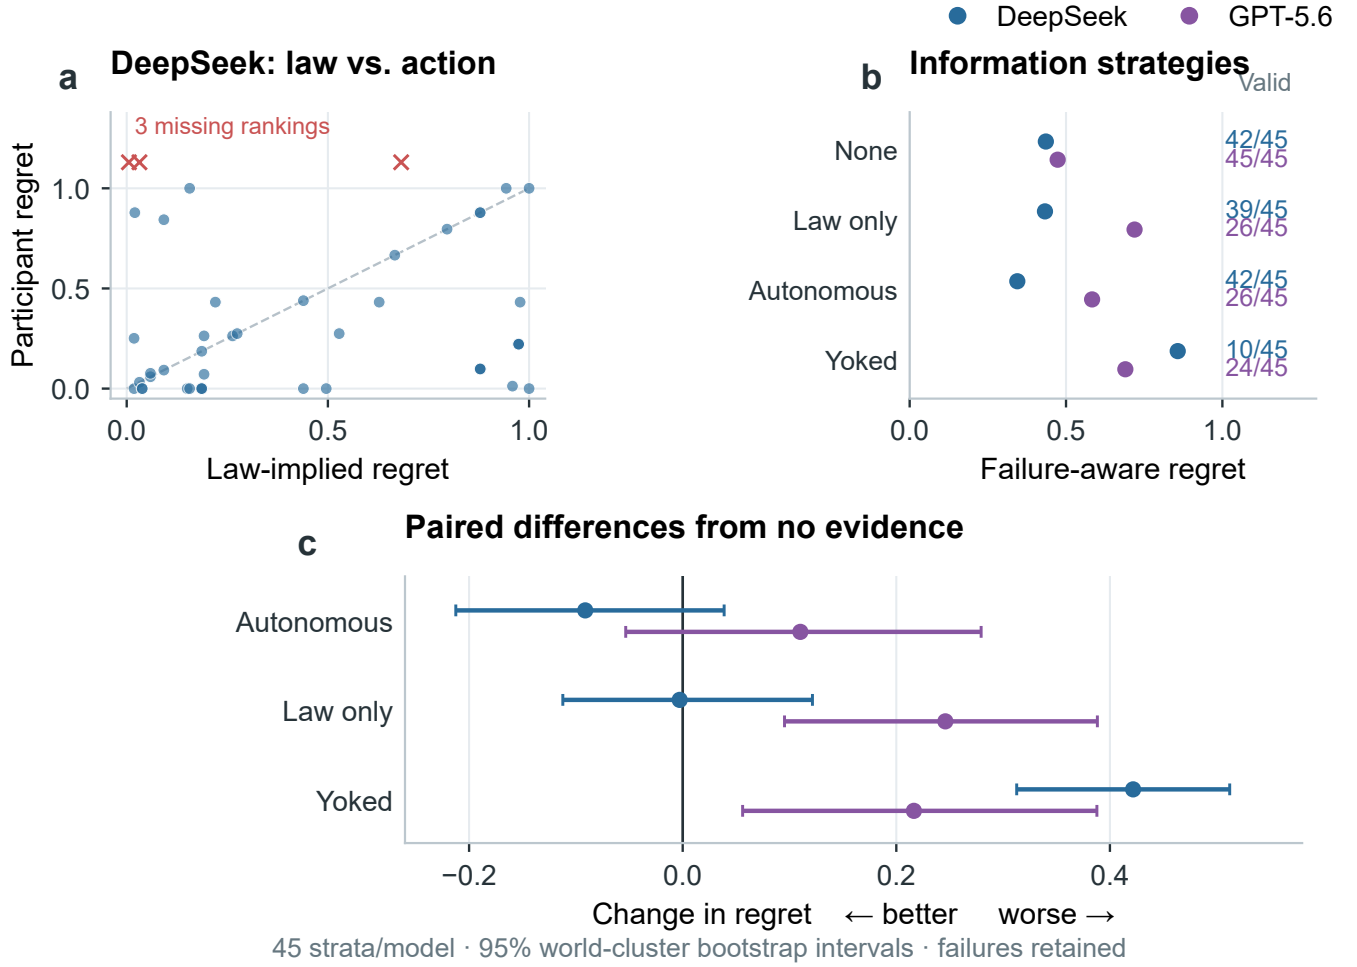


Figure 8. Law quality and information strategies have distinct decision readouts. **a**, Law-implied versus participant regret in the 45-cell DeepSeek matrix; 42 observed choices are dots and three missing rankings are crosses above the plotting range. The diagonal marks equal regret. **b**, Failure-aware strategy means with valid/scheduled counts. **c**, Paired strategy-minus-no-evidence differences with task-stratified world-cluster bootstrap 95% intervals, retaining all 45 strata per model. Both autonomous contrasts cross zero. The strategy block is development evidence; yoked failures prevent a pure acquisition-effect interpretation. Complete-ranking diagnostics remain in the appendix.

ment experiment rather than confirmatory evidence, not a continuation or relabelling of the stopped five-condition protocol below.

Conditions followed fixed manifest and dependency order rather than randomization or counterbalancing, and DeepSeek autonomous donors predated their recipient conditions. Provider/time drift and order effects are therefore not separable from strategy differences.

7.5 The original five-condition oracle gate failed before participant execution

The terminal matrix cannot identify whether acquired evidence caused better selection, so we prepared the separate five-condition follow-up described above. Its provider-free formal stage fixed 15 task-world clusters and 1,680 candidate, checkpoint and oracle-grid truth executions with exact replay. The first eight clusters completed **896/896** truth executions and exact replays without a provider call. All eight candidate-opportunity gates passed, and seven

oracle laws passed the frozen rank criterion.

The eighth cluster was a fresh crystallization world. Its outcome-disjoint oracle law achieved Spearman rank correlation **0.738095** across the eight candidates, below the prespecified **0.80** threshold; its predicted Top-1 also disagreed with truth, while fit/candidate overlap remained zero. The formal preparation therefore stopped by design. The remaining seven clusters, operational canary, all 225 participant sessions and all 540 planned participant experiments were not started, and no world or unfavorable result was replaced. This result does not estimate a poor participant effect. It establishes that the current oracle-law control was not robust enough in fresh formal worlds to support the intended causal decomposition.

7.6 A denser oracle grid repairs exposed failures but not prospective ranking

We next tested whether the failure arose from sparse coverage rather than typed-law representation. The oracle grid

was expanded from 96 queries to **320**: 64 global queries plus 256 queries around the candidate neighborhood. The fitted ExtraTrees family and the frozen Spearman threshold were unchanged, so the intervention isolated coverage. After a platform-defective partial run was retained and the evidence-reference limit repaired, the complete construction screen passed **7/7** exposed units with **2,352/2,352** truth executions and exact replays. All four historical failures were repaired and the minimum construction Spearman correlation was 0.857143.

Construction success did not transfer to the prospective block. Its first new electrochemical world completed **336/336** truth executions and exact replays but obtained Spearman correlation **0.714286**, below the frozen 0.80 gate. The oracle nevertheless selected the true Top-1 action with zero regret; fit/candidate overlap remained zero and candidate outcomes were not used for fitting. The stop rule therefore left the remaining 14 prospective clusters unstarted. Increasing coverage repaired known worlds but did not establish fresh-world complete-ranking validity.

7.7 Evaluator-level ranking and decision quality are different estimands

A frozen retrospective diagnostic compared the original ranking decision with action endpoints for all **16/16** completed oracle unit versions from the 96- and 320-query studies. Original Spearman and Top-1 values were reproduced exactly without new truth execution. Among the eight fresh 96-query formal preparation units, **7/8** passed the rank gate but only **1/8** selected the true Top-1 action and **3/8** selected within 0.01 of the optimum; six units were rank-pass/action-wrong. Conversely, the first fresh 320-query unit was rank-fail/action-correct with normalized regret zero.

The disagreement is bidirectional. Complete-ranking correlation measures global ordering, whereas the causal study needs a positive control for the selected action and its decision loss. The original gate and stop decisions remain valid for their frozen protocol, but the diagnostic shows that future control qualification must prospectively prioritize regret, near-optimal selection and near-tie-aware ordering, with full-ranking correlation retained as a secondary diagnostic.

7.8 Fixed-evidence representation and decision interventions

The factorial intervention holds twelve public experiments per world fixed and crosses two quadratic representations—a source model’s law (L) and a public ridge fit (F)—with two decision rules: a fresh same-model agent (A) and a shared deterministic maximizer (X). Five new worlds per task, two model configurations and two source repeats yield 40 source states nested within ten worlds. Sources never see the eight terminal candidates; fresh recipients receive the evidence, candidates and designated law. All 120 provider sessions, 160 condition slots and 200 physical executions with exact replay completed without failure or replacement.

The prespecified primary contrast, F-X minus L-X, was -0.00538 (95% world-bootstrap interval $[-0.01630, 0.00061]$). Its upper endpoint did not fall below -0.01 , so the block does not support the proposed material benefit (Fig.~9). The task means were -0.01087 in electrochemistry and $+0.00010$ in crystallization; the negative effect was concentrated in one electrochemistry world. Regret uses a fixed utility scale of one, with models and repeats averaged within world. Five worlds per task limit the bootstrap approximation.

Fresh-agent and maximizer choices agreed in 39/40 model-law pairs and all 40/40 fitted-law pairs. F-X minus F-A was consequently zero in every observed pair; its degenerate bootstrap interval is not a population-equivalence guarantee. Fitted-law selection had mean regret 0.00425, compared with 0.00354 for nearest public evidence and 0.11109 for exact expected uniform-random selection. The fitted method therefore shows no observed advantage over the simple retrieval baseline. These are local response-surface decisions with fixed acquisition. They supply a boundary to general law-use failure. Because raw evidence accompanies the artifacts here, independent artifact utility requires the information-separated test below; historical protocol differences remain unresolved.

7.9 Information separation reveals independent artifact value

We reused all ten factorial worlds and forty sealed sources, fixed eight new candidates per world, and assigned fresh recipients task information alone, raw evidence, model law alone (L) or fitted law alone (F). Only the raw condition received observations; law conditions received six original coefficients without source dialogue or provenance labels. All 160 sessions and 80 hidden evaluations with exact replay completed, with no new recipient measurements.

The primary L-minus-none regret contrast was -0.13723 (95% interval $[-0.15584, -0.12257]$), meeting the prespecified material-benefit criterion (Fig.~10). Nine world means improved and one was zero; task means were -0.25937 for electrochemistry and -0.01509 for crystallization. These remain ten reused worlds, not ten additional independent replications. Mean regrets for none/raw/L/F were $0.14727/0.01124/0.01004/0.01459$. Raw and F also improved on none under adjusted intervals. L minus raw was -0.00120 (99% interval $[-0.02353, 0.00951]$); this establishes neither superiority nor equivalence. Nearest public evidence selected the measured optimum in all ten worlds, so these data do not establish an advantage over retrieval.

Law-only deployment used 392,101 input tokens versus 541,225 for raw evidence, a descriptive 27.6% reduction; source acquisition and generation costs had already been incurred. Model-law recipients followed the deterministic maximizer in 40/40 states and fitted-law recipients in 39/40. The result supports same-world context portability of the delivered artifact, without identifying internal law use, transfer across changed mechanisms or experimental savings.

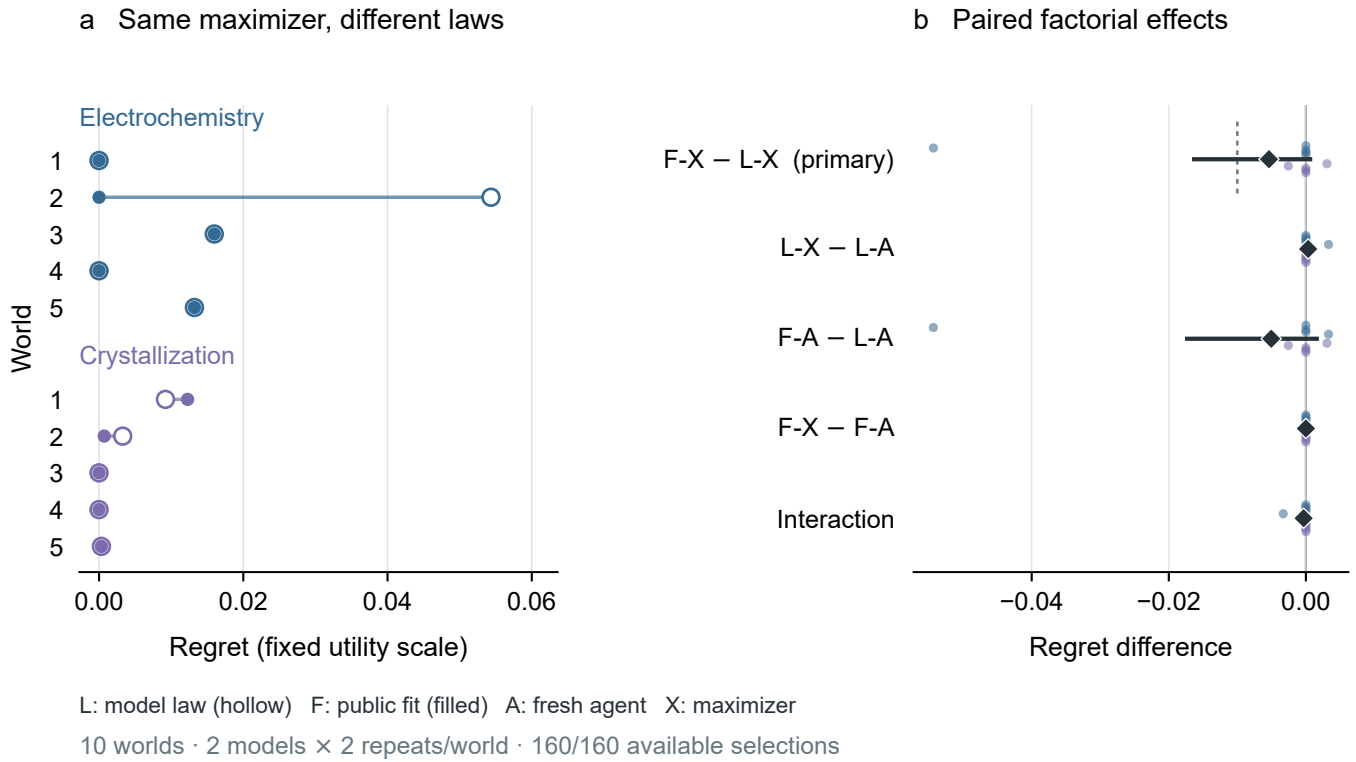


Figure 9. Fixed-evidence intervention did not establish a material repair benefit. **a**, Every world has its own row. Hollow and filled points show model-law and fitted-law regret under the same maximizer, averaged over two models and two repeats; concentric points denote equality. Blue denotes electrochemistry and purple crystallization. **b**, Colored points are individual world effects; black diamonds and lines show means and prespecified intervals (95% primary; 98.75% secondary). The dotted primary reference is -0.01. Interaction is $(R_{F-X} - R_{L-X}) - (R_{F-A} - R_{L-A})$ in regret. Zero-width intervals describe observed equality, not population equivalence. All 160 selections were available; repeats do not increase the ten-world denominator.

Table 3. Prespecified factorial contrasts. Differences use the fixed regret scale. The primary material threshold is -0.01. Secondary intervals adjust for four comparisons.

Contrast	Mean difference	Interval
F-X minus L-X (primary)	-0.005384	95% [-0.016303, 0.000614]
L-X minus L-A	+0.000331	98.75% [0.000000, 0.001323]
F-A minus L-A	-0.005053	98.75% [-0.017329, 0.001582]
F-X minus F-A	0.000000	98.75% [0.000000, 0.000000]
Interaction	-0.000331	98.75% [-0.001323, 0.000000]

8. Experimental knowledge and decision quality

The four conversion questions retain distinct denominators: F1 tests selective correction, F2 joint structure recovery, F3 executable fidelity, and F4 previously unseen choices. The final F2 diagnostic separates 17 aligned-prior retentions from zero opaque/misspecified recoveries; improved paired numerical predictions do not establish structural recovery on this surface. Prediction quality, artifact fidelity and final decision quality are distinct observable quantities. Two configurations show different compression losses while both largely retain the incumbent. The independent unseen-plan assay makes the gap concrete: participants can select plans their submitted laws would not recommend. These associations do not identify the causal role of an internal world model.

Operational outcomes are a separate axis. The four-condition development study includes delivery and donor failures, so its all-scheduled estimates describe implemented information strategies. They cannot isolate knowledge content or experiment choice from availability. Identifiable-law controls and ranking diagnostics delimit what the measurements establish.

The fixed-evidence factorial block implements that representation/decision-rule intervention. It finds no supported material fitted-law benefit and 40/40 fitted-law agent/maximizer agreement. This limits a general law-use failure account, without isolating which difference from the historical protocols matters. The information-separated follow-up establishes independent same-world artifact value relative to task-only input, while raw evidence also helps and nearest retrieval reaches the measured optimum in

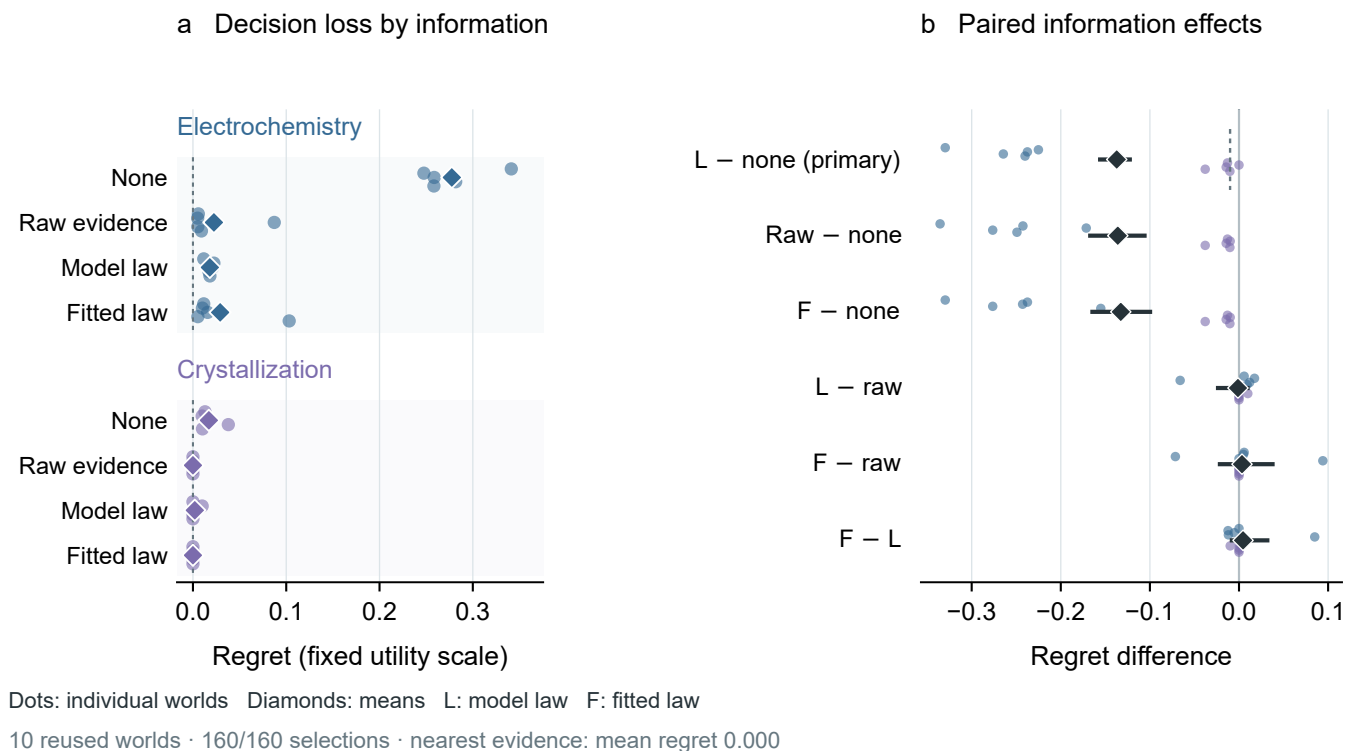


Figure 10. Artifacts support fresh decisions, while retrieval remains a strong baseline. **a**, Dots show world means over two models and two repeats per information condition; diamonds show task means. All 160 selections are available. Nearest evidence has zero regret in all ten worlds. **b**, Colored points show paired world effects; black diamonds and lines show means and prespecified intervals (95% primary; 99% for five secondary comparisons). The dotted primary reference is -0.01. L/F denote model-generated/fitted laws supplied without raw observations. These are new candidate plans in the ten reused worlds, not new physical mechanisms or additional independent replication worlds.

every world. Within each task, all five worlds share one candidate grid and have the same measured optimum coordinates. Transfer to changed mechanisms remains open.

9. Discussion

9.1 The decision value of experimental knowledge

Completing the public mapping improves structural recovery by 70 percentage points in each of two tested configurations, while their action changes differ. This intervention identifies a conditional information benefit, not an internal mechanism or a general action repair.

Prediction error and decision loss need not agree, as established in predict-then-optimize and decision-focused learning [10, 26]. Our setting adds autonomous evidence collection, supplied descriptions of hidden chemical relations, executable knowledge summaries and complete operational plans. We measure the fidelity of submitted laws to the agent’s own predictions and their agreement with actual choices, then deliver the laws separately from source observations to test recipient decision utility. The direct factorial intervention adds a boundary: fitted-law replacement did not meet its material-benefit criterion, and fresh agents agreed with its maximizer in every fitted-law pair. The information-separated follow-up establishes independent artifact utility for new same-world plans, with a larger benefit in electrochemistry. Raw evidence also

helps, and nearest retrieval solves all ten candidate sets; a generally useful repair method remains unresolved.

Last-available laws reach Top-1 in 0/45 scheduled cases, participants in 11/45, and agreement is 12/42 evaluable rankings. A submitted artifact is an incomplete proxy for the participant’s decision. The original longitudinal cohort lacks a no-evidence action control; its 11/42 scored Top-1 choices alone do not estimate the benefit of experimentation or establish performance relative to chance. The independent four-condition successor addresses information strategies, with its own population and substantial operational limitations.

9.2 Measurement and interface limits

Matched parametric packets support conditional response after counterevidence and an added response turn. They do not isolate a pure packet effect. The one-pair structural packet admits an exact linear/power alias, so low prediction error and absent exact expression cannot establish failure to identify an identifiable law. The historical multi-pair control used a privileged reference fitter, with sparse recovery and 13 DeepSeek schema failures. The final minimal-interface block retained 117/120 valid sessions but zero joint recoveries in 80 opaque or misspecified cases. Its tool-effect interval crosses zero, and GPT never used the offered tool. Neither public-only identifiability nor recovery of arbitrary causal graphs follows from these

results.

The same-domain capacity control distinguishes a legal representation’s capacity from the fidelity of the submitted artifact. It does not test generalization outside the fitted coordinates. Global rank correlation and decision utility address different losses. Historical oracle results are evaluator diagnostics, not an additional internal Agent failure mode or a missing condition that can be filled retrospectively.

The interface affects the trajectory being measured. DeepSeek’s checkpoints were eventually accepted after 888 rejected typed submissions. The final diagnostic measures optional numerics under a minimal submission, but its historical comparison does not randomly isolate reduced schema burden. The participant is the complete agent–tool configuration, including prompts, context, recovery and resource rules.

9.3 Scope and unresolved questions

The disclosure intervention spans ten shared worlds in one power family. Additional prompt length and paired noise are part of the treatment; it is not changed-mechanism transfer. DeepSeek/low and GPT/medium differ in reasoning and observed compute. Calendar and concurrency amendments are reported, and selected failure retries remain supplementary sensitivity evidence.

The study covers bounded simulated chemistry and two model families under study-specific tool/reasoning configurations, with world counts defined separately for each protocol. C2 retains different completion patterns, and model contrasts are descriptive rather than provider effects. A-P/B2 have only five worlds; B2 uses retrospective expression coding on an underidentifying surface. DeepSeek low is not a thinking-off experiment or a reasoning-superiority test; its parametric block has no qualified formal denominator.

The four-condition study retains donor and recipient failures in its primary population. Completed-donor analyses are post-treatment availability sensitivities. Fixed execution order and earlier DeepSeek donors confound configuration with time and order. Ten prospective cells retain discard-affected checkpoint timing that cannot be repaired retrospectively. Exact replay preserves recorded execution; it does not erase these design limits.

Transfer to changed physical conditions, private confirmation and independent-backend replication remain untested. The completed representation/decision-rule block uses quadratic representations on two-dimensional control domains; the simulator utility need not be quadratic. Numerical fitting is contrasted against tool-free model fitting. Arithmetic and representation construction are bundled. Only five worlds per task support its approximate intervals, and differences from historical protocols do not isolate a single cause. Nearest-evidence retrieval is already competitive; no general repair algorithm is established.

9.4 Conclusion

Experimental knowledge must be evaluated through the decisions it actually supports. In these systems, predictive improvement does not establish selective repair, executable summaries lose different amounts of information, and submitted laws do not reproduce many participant choices. Completing observation mapping improves structure recovery in both tested configurations, while action gains differ. Information-strategy estimates further depend on delivery reliability. The direct factorial test supplies an additional boundary: no supported material fitted-law advantage and complete fitted-law agent/maximizer agreement. Information separation then shows that compact laws can independently support new decisions in the same worlds, with task-dependent benefit and no demonstrated superiority to raw evidence or retrieval. Decision utility, operational availability, deployment cost and transfer to changed mechanisms remain separate questions.

10. Methods

10.1 World and initial-model construction

Each task instantiates an executable $W = (\mathcal{E}, G, \Theta, O, C)$ and a participant-facing $M_0 = (\hat{\mathcal{E}}, \hat{G}, \hat{\Theta}, \hat{O}, \hat{S})$. Prospective worlds are selected deterministically from a set disjoint from exploratory worlds. Within each world cluster, all arms share W , the resource card and stochastic identity; exactly one declared component of M_0 changes. In the entity locus, aligned and misindexed dossiers contain identical fields, values, wording and confidence language, while the latter applies a prespecified permutation to material identifiers. Structural, parametric and observation-model extensions alter only their declared agent-facing representation while retaining the external world and contract. Confirmatory structural claims require a separate participant-visible identifiability analysis. The B2 post-packet block failed that requirement and is retained only as an underidentification/expression diagnostic; B3 supplies a typed structural readout whose public-only information sufficiency remains unproven.

10.2 Transactional execution and resources

Every operation enters schema validation and resource preflight before candidate execution. Committed operations update physical state and the campaign ledger; invalid or resource-rejected attempts retain their declared reporting debit without entering committed physical state. Task-specific resource cards bound vessel starts, assays, measurements, stocks, process time, repeated operations, quench and transfer time, and final-assay reserve across all experiments in a campaign.

10.3 Persistent agent and tool execution

Each participant cell launches one persistent agent process and retains one session across the complete pattern-owned campaign. The participant instructions prohibit shell use, file changes and repository inspection and require physical decisions to pass through the host-owned laboratory inter-

face. The bounded domain tools expose material information, belief checkpoints, operation submission, public state and history, artifact inspection and final recommendation commitment. The host validates and executes submitted actions but never chooses a fallback scientific action.

Every operation submission contains a brief structured rationale stating its expected effect, diagnostic target and evidence dependence. Tool records retain call order, status, timestamps and error classes without retaining raw interaction payloads or private chain-of-thought. An infrastructure retry or resume is an operational attempt within the same cell, not a new experiment or independent sample. Belief checkpoints are tool calls inside the existing session rather than separate conversations.

10.4 Belief and law-summary checkpoints

Checkpoint records contain prior assessment, predictions, uncertainty, evidence references, an executable law summary, next-experiment intent and overall confidence. The schema permits bounded rationales but not an unconstrained persistent notebook. After the campaign, explicit predictions and the final law summary are evaluated against sealed truth packs. The summary must execute for the exact prespecified query-metric set; the analysis records its normalized error, pre-to-summary improvement, error relative to the effective final checkpoint and prediction-consistency error. These quantities are reported continuously. They are not converted post hoc into a public binary law-discovery label, and a reusable or transferable-law claim additionally requires independent transfer evidence.

The schema-capacity control refits every complete final prediction vector with legal identity-link laws over the registered feature coordinates and allowed bases. The full fit permits up to 64 terms per metric; the term-matched fit uses the participant’s submitted per-metric term budget; and the leave-one-query-out fit withholds each registered query in turn. Every fitted payload must pass the production parser and executor, and executor predictions must agree with the independently computed design-matrix predictions within 10^{-10} . These are same-domain representation and distillation controls, not tests of global mechanism recovery or transfer.

10.5 Statistical analysis

The prospective cohort contains 45 independent matched task-world clusters: 25 entity-level, ten parametric and ten structural. Every cluster contains three participant arms, which are paired interventions rather than independent samples. Prediction-to-law inference is performed separately by locus. The entity locus uses a three-component failure-aware intersection-union criterion; the parametric and structural loci use task-fixed-effect contrasts, require both task means to be positive and retain adverse bounds for failed or unscorable arms. A global cross-locus decision requires all three locus criteria to pass, and naive pooling across the nine task-locus combinations is forbidden. Endpoint contrasts in Section 6 are descriptive trajectory

outcomes, not substitutes for that prespecified prediction-error analysis. Prespecified sensitivity analyses include observed-point, complete-case, heteroscedasticity-robust and task-stratified cluster-bootstrap summaries.

Matched-evidence analyses use the world as the inference unit and retain the prespecified contrast $(E_{mis,pre} - E_{mis,post}) - (E_{aligned,pre} - E_{aligned,post})$. The B2 phase-process study uses five worlds, so all 2^5 sign flips are enumerated for the exact one-sided directional check and a Student- t interval is reported descriptively. Protocol-validation sessions are excluded. Exact-law-expression counts are retrospective keyword coding of the submitted public model summary and evidence assessment, never private reasoning text. They were not preregistered structural-recovery endpoints. A participant-visible audit additionally checks the number of nominal pairs, availability of the base partition coefficient, presence of typed family/exponent fields, observational aliases, a constant endpoint baseline and an aligned positive control. Because that audit rejects structural-family identifiability, B2 expression counts remain diagnostics; the separate typed B3 assay supplies a structural readout, with a privileged reference qualification and an unresolved public-information gap.

The DeepSeek-high and GPT-medium matched-evidence blocks use identical world, arm, query and packet coordinates. The DeepSeek-low B2 ablation changes only the reasoning-effort setting within the Codex harness; its public coordinates and evaluator are identical to DeepSeek high. Each configuration is analysed separately with the same world-level estimand and exact sign-flip procedure. Cross-configuration differences are descriptive; no model- or reasoning-superiority test, pooled provider effect or extrapolation to the prospective cohort and open-action blocks is performed. The low parametric block has no qualified denominator and is excluded.

The independent typed-law control fixes five public structural worlds, the same three prior arms and two independent fresh sessions per arm and world. Its eight evidence rows and disjoint eight-query scoring roster are selected provider-free on development worlds. All five public worlds enter family, exponent, prediction, Top-1, rank and regret denominators; action gain enters only for the three worlds whose best candidate exceeds the evidence incumbent by at least 0.02. Replicates are nested within worlds. Joint structural recovery requires the registered power family and exponent error at most 0.10; canary sessions remain outside the 30-cell scientific denominator.

10.6 Open-action plan construction and analysis

For the formal multi-task action assay, an outcome-blind generator constructed eight candidate ActionPlans per world across three task families and five worlds per task before participant execution. Candidate selection used only the declared plan coverage criteria and could not read evaluator scores, participant trajectories, checkpoint outcomes or later model responses. Every plan began from the same fresh-batch contract and disclosed its full

operation sequence and parameters. Independent validation executed all candidate and checkpoint truth queries without additional model calls, verified exact replay and confirmed that the disclosed plan was the plan evaluated.

After 12 participant experiments and the final checkpoint, the participant returned a complete ranking and selected one candidate. Evaluator-owned outcomes were then used to calculate selected rank, Top-1, raw regret, normalized regret, complete-ranking agreement and the joint mechanism–action category. A law was classified as adequate when its normalized held-out mechanism MAE was at most 0.05 under the frozen evaluator threshold; otherwise it was classified as inadequate. This binary label was fixed before action outcomes were interpreted. A cell was eligible only when all 12 experiments, five checkpoints, final ranking, resource reconciliation and execution-integrity checks completed without contamination. All 45 scheduled cells remained in the denominator. Arm summaries are descriptive because three crystallization cells were ineligible and only 12 task–world clusters retain all three arms. The three additional interface validations used one world seed per task and were evaluated only as interface checks, not as multi-world scientific evidence.

The continuous law–action control retained the same 42 eligible cells and never imputed the three historical failures. Pearson and Spearman associations were calculated pooled and task-stratified. Intervals resampled the 15 frozen task–world clusters, retaining every eligible arm in a sampled cluster, for 10,000 bootstrap replicates with seed 20260827. Threshold sensitivity used the seven fixed law-MAE cutoffs 0.05, 0.075, 0.10, 0.15, 0.20, 0.25 and 0.30; action outcomes did not select cells, tasks, bases or cutoffs.

The five-condition causal follow-up paired each autonomous donor with no-evidence, yoked-evidence, learned-law-only and oracle-law recipients within task–world–prior strata. Donor failure would have retained the donor and marked its yoked and learned-law descendants as not started; donor replacement was forbidden. The oracle law used the same typed schema and scientific scope as the learned law, but was fitted provider-free on 96 registered queries disjoint from the eight candidates. Formal expansion required every task–world oracle to reach candidate-order Spearman correlation at least 0.80. The formal stage completed 896 truth executions and exact replays across eight clusters before a crystallization oracle obtained 0.738095 and rejected the block. Because no participant session was started, none of the prespecified autonomous-minus-no-evidence, yoked-minus-no-evidence, autonomous-minus-yoked, learned-law-minus-no-evidence or oracle-minus-learned-law contrasts was estimated.

The independent large-grid study increased oracle coverage to 64 global and 256 candidate-neighborhood queries while holding the fitted ExtraTrees family fixed. Construction used seven exposed unit versions; prospective qualification used new worlds and the same frozen Spearman threshold. The first new world failed at 0.714286 after 336 truth executions and exact replays, despite Top-1 agreement and zero regret, so 14 planned worlds remained

unstarted. A separate retrospective alignment analysis re-read the 16 completed 96- and 320-query unit versions, reproduced their original Spearman and Top-1 outcomes, and added no execution. Top-1, regret, selection within 0.01 of the optimum and near-tie-aware pair ordering were treated as action endpoints; no result was used to revise an earlier gate or stop rule.

10.7 Optional private confirmation boundary

No private participant cohort was executed for the present study. If private confirmation is pursued, it will use newly sealed world instances disjoint from exploratory and public worlds, retain the same three-arm participant and evaluator contracts, and preserve every completed, failed and unstarted cell in a one-shot denominator. Such a cohort would test within-family replication. The information separation assay assesses new decisions in the same physical worlds. Compositional transfer would require a prespecified change in mechanism topology, not only a new conversation or parameter set.

10.8 Reproducibility and failure accounting

Participant trajectories, evaluator truth sets and blind-replay sets are stored separately and joined through stable record identifiers. Every completed participant trajectory must pass physical replay, campaign-resource replay and hidden-boundary verification. Process attempts, sessions, tool calls, operation attempts, committed operations, complete experiments, cells and evaluator executions are reported with distinct denominators.

Historical stopped-block records remain immutable and are not spliced into later denominators. The GPT-5.6-sol C2 successor starts from its first scheduled cell and preserves all 135 outcomes; the DeepSeek B3 successor likewise starts from its first scheduled cell and preserves all 30 outcomes. The four-condition study constructs separate model-specific tables over all 45 scheduled strata, marks donor-dependent conditions not started when the donor is ineligible and uses only jointly donor-eligible coordinates for common-stratum descriptions. Participant, schema, provider, resource and process failures are never replaced. Cross-model estimates are matched descriptive, clustered by task–world, and are not treated as provider effects.

10.9 Independent-world representation-by-decision protocol

The factorial block fixes public evidence while replacing either its explicit representation or the decision rule. Each of two task families has five new public-test worlds. Two fixed model configurations each produce two independently sampled source artifacts per world, giving 40 source states nested within ten task–world clusters. Every source state has four conditions: model law with fresh agent selection (L-A), the same law with a deterministic maximizer (L-X), public-data fit with fresh agent selection (F-A), and the same fit with the maximizer (F-X). The scheduled design comprises 40 source and 80 recipient sessions, 160 condition slots, 120 public evidence experiments and 80 hidden

candidate evaluations, with exact replay of each physical execution. This block uses fixed experiment acquisition.

Each world shares twelve evidence points and eight outcome-hidden candidate plans across models and repeats. Independently seeded Latin hypercubes fix the two-dimensional coordinates before outcomes are observed. Electrochemistry varies controlled potential over 0.65–1.65 V and current over 20–120 mA. Its fixed probe uses 1.18 V, 70 mA and 630 s; controlled duration is 3540 s, reagent amount 0.004 mol, electrolyte profile 2 and solvent 1. The complete LHS is rejected before execution if any point violates minimum probe changes of 0.02 V or 1 mA. Crystallization varies reaction temperature over 350–405 K and crystallization temperature over 275–295 K. Catalyst 0 at 0.000315 mol, solvent 1, reagent 0.015 mol, stirring 675 rpm, reaction duration 3600 s, seed mass 0.008 g and crystallization duration 7200 s remain fixed. Both tasks share the same normalized design and disclose the complete executable plans.

L and F use the same unclipped quadratic basis $(1, x, y, x^2, xy, y^2)$ in linearly normalized coordinates. F is ridge regression on the twelve public utilities, with penalty 10^{-6} and an unpenalized intercept. Source models see evidence before candidates are revealed and return six finite coefficients. Fresh recipients receive evidence, candidates and one artifact, and return only a candidate identifier. Calls are tool-free, capped at 600 s each, with no repair turn or replacement. The request for 2,048 output tokens does not cap hidden reasoning; actual usage is recorded. Source states have a fixed outcome-blind permutation, and each world/model uses one L-first and one F-first decision repeat. The maximizer breaks exact ties by candidate order. All choices are sealed before candidate utilities are loaded for analysis.

Candidate utility is a single keyed-noise measured score in $[0, 1]$. M1 regret uses the fixed utility scale one; earlier action assays retain their registered range normalization. Missing or invalid choices receive regret one in the scheduled primary analysis; completed-only values retain separate denominators. Near-optimality means regret at most 0.01. The primary contrast is F-X minus L-X. Differences are first averaged over the four model/repeat states within world, then equally across worlds within task and across tasks. A task-stratified world bootstrap uses 20,000 percentile replicates. Its two-sided 95% upper endpoint must be below -0.01 to support the prespecified material benefit. The four secondary contrasts (L-X minus L-A, F-A minus L-A, F-X minus F-A, and their factorial interaction) use 98.75% marginal intervals, a Bonferroni adjustment for four comparisons. Five worlds per task give approximate small-sample intervals; model repeats do not add independent worlds.

The nearest-public-observation baseline uses normalized Euclidean distance and row-order ties; the random baseline is its exact uniform-candidate expected regret. Both reuse the same data and count once per world. Missing source artifacts block the dependent L conditions while F continues. Physical, semantic or replay failure stops

dependent provider work; forbidden tools and missing or reused session identity invalidate the remaining block. Interrupted started slots are retained without retries. Physical CPU/wall includes replay; recipe-resource totals count primary execution once. The protocol replaces explicit artifacts and decision computation, and does not identify internal belief mediation or artifact-only transfer: recipients still receive the original evidence.

10.9.1 Factorial outcomes and resources

All 40 source states, 120 sessions and 160 conditions completed; there were no failed, blocked, replaced or unstarted slots. Scheduled and completed-only losses coincide. Mean regrets in L-A/L-X/F-A/F-X order were 0.01436/0.01502/0.00425/0.00425 for DeepSeek and 0.00425/0.00425/0.00425/0.00425 for GPT. These configuration-specific summaries are descriptive. F-X selected the exact best measured candidate in 20/40 states and a candidate within 0.01 in 28/40; the replicated fit copies still represent only ten worlds. Candidate MAE was 0.05028 for DeepSeek laws, 0.04832 for GPT laws and 0.04459 for the public fit, all finite. Better average prediction error thus did not establish a material decision improvement.

The ten-world average nearest-evidence regret was 0.00354, versus 0.00425 for F-X and 0.11109 for exact expected uniform-random choice. These prespecified baselines reuse the same evidence and candidate evaluations; the comparison supplies no novel-algorithm advantage. The F-A/F-X bootstrap interval collapses to zero because all observed paired choices agree. It does not establish exact equivalence for unobserved worlds or model samples.

Physical execution and replay consumed 1,780.8 s wall time and 1,768.3 s CPU. The 120 public evidence executions account for 1,068.6 s wall time; 80 hidden evaluations account for 712.3 s. Recipe resources count primary executions once: 2,300 operations, 54.8 measurement units, 1,497,000 simulated recipe seconds and 1.9 mol reagent. Provider calls used 8,859.5 s wall time, 1,623,791 input tokens (450,816 cached) and 942,258 output tokens (939,441 reasoning). All 120 calls report input/output usage; reasoning is included in output and cache in input. Source generation used 7,404.1 s versus 1,455.4 s for decisions. These costs describe this block, without extrapolating provider billing or virtual resource use to laboratory expenditure.

10.10 Information separation and same-world context portability

The context-portability assay reuses all ten factorial worlds, their twelve public observations per world and forty sealed source states. Private mechanisms, initial-state construction, objective, control ranges and fixed controls remain unchanged. A separately fixed eight-point Latin-hypercube design provides new candidate plans, disjoint from both the source observations and the earlier candidates. This requires 80 hidden physical evaluations and 80 exact replays,

but no additional source measurements and no measurements by recipients. The independent-world denominator remains ten; the forty sources and 160 recipient sessions are nested within them. This is a new-decision assay in the same worlds, not transfer across changed private parameters or mechanism topology.

Four information conditions receive identical task descriptions, coordinate/basis semantics, utility direction and range, complete candidate controls and ActionPlans, and the same minimal candidate-ID output schema. None receives no experiment-derived information. Raw receives the twelve public observations, including their plans, without a law. L and F receive only the six coefficients of the sealed model-generated or fitted quadratic, respectively, without raw observations, source dialogue or provenance labels. Coefficients are reused exactly, without refitting to the new candidates. No condition receives prior candidate outcomes or world identity. Information quantity and context length are part of these deployment strategies; prompts are not padded to equal length. Prompt bytes and actual provider tokens are recorded separately.

The same two model configurations and two repeats per world are used, with fresh tool-free recipients. The forty source states are permuted before execution, and cyclic rotations of the four conditions across the nested states place each condition in each serial position once per world. Sessions have a 600-second timeout and no repair turns or retries. Missing artifacts block only their dependent information condition. Participant schema failures remain in the scheduled denominator; interrupted started calls are retained without replacement. Physical, replay, information-isolation or session-identity defects stop dependent work and invalidate formal inference. All recipient and deterministic choices are sealed before analysis loads new scores.

The primary contrast is L minus none in failure-aware regret. The utility scale is fixed at one; missing or invalid choices receive regret one. Within-world differences average the four nested model/repeat states, then weight worlds equally within task and tasks equally overall. A 20,000-replicate task-stratified world bootstrap supplies a two-sided 95% interval; its upper endpoint must be below -0.01 to support a material benefit. Five secondary contrasts—raw minus none, F minus none, L minus raw, F minus raw and F minus L—use 99% marginal intervals, adjusting for five comparisons. Completed-only losses retain eligible denominators. Top-1, regret at most 0.01, individual-world effects and exact-maximizer agreement accompany the primary estimate. Small-sample and previously exposed-world limits remain; nonsignificance is not equivalence.

Deterministic L/F maximizers, nearest public evidence and uniform-random expected regret are prespecified descriptive controls on the same new candidates. They add no provider or physical executions. New recipient and hidden-evaluation costs are separate from historical acquisition and source-generation costs. None uses no acquired evidence; raw and F inherit the shared public acquisition, while L also inherits its model’s original source-generation

cost. Source tool permissions remain those of the factorial experiment: matching recipient permissions does not remove the original model-versus-numerical-solver arithmetic difference. Zero recipient queries do not estimate experimental savings, and no internal mediation or new repair algorithm is identified by this information comparison.

10.10.1 Information-separation outcomes and resources

All 160 recipients completed with no failures, retries or replacements; scheduled and completed-only losses coincide. The primary effect was negative in nine worlds and zero in one. Benefits were substantially larger in electrochemistry than crystallization.

Model-law recipients matched the exact maximizer in 40/40 states and fitted-law recipients in 39/40. Deterministic model-law and fitted-law regret was 0.01004 and 0.00609. The single fitted-law recipient disagreement increases its group mean to 0.01459; it is retained as a valid choice. Nearest public evidence selected the measured optimum in all ten worlds; uniform-random expected regret was 0.12022. These comparisons do not establish a novel-algorithm advantage.

New physical execution/replay used 724.6 s wall time and 718.3 s CPU, with 920 operations, 21.92 measurement units, 598,800 simulated recipe seconds and 0.76 mol reagent counted once for primary executions. Provider time was 2,722.6 s, with usage reported for 160/160 calls: 1,716,721 input tokens (648,704 cached) and 255,544 output tokens (253,304 reasoning). Raw versus model-law deployment used 541,225/392,101 input tokens and 102,235/47,745 output tokens. Prompt bytes were 838,900/351,996 (58.0% fewer), whereas provider input fell by 27.6%; these measures include different overheads and must not be interchanged. Raw/model-law provider time was 929.1/529.3 s. Costs describe this deployment block, not monetary expenditure or experimental savings. Historical M1 public acquisition and original source generation are reported separately and were not incurred again. No equivalence or new-mechanism transfer claim follows from these data.

10.11 Minimal-interface and optional-numeric diagnostic

The final diagnostic reuses five scored partition worlds and their sealed public packets, three initial descriptions, two model configurations and two fresh-session repeats. Within each combination, post-evidence numerics is either unavailable or optional, giving 120 sessions and 240 pre/post turns. The pre stage has no tools; post resumes the same thread. Family, exponent and eight query predictions are declared once; post also selects a query. The public mapping to a typed law does not fit parameters or inspect hidden truth. No new independent worlds, participant physics, truth execution or replay were produced.

The numerical interface accepts only literal array arithmetic and a fixed whitelist including logarithms and least

Table 4. Information-separated decision quality. Every model/condition has 20 scheduled and completed recipients, nested within ten reused worlds.

Model	Information	Mean regret	Near-optimal	Top-1
deepseek	none	0.15270	3/20	3/20
deepseek	raw	0.01643	17/20	15/20
deepseek	L	0.01157	11/20	9/20
deepseek	F	0.02309	12/20	10/20
gpt	none	0.14184	10/20	10/20
gpt	raw	0.00605	13/20	11/20
gpt	L	0.00850	12/20	11/20
gpt	F	0.00609	12/20	10/20

Table 5. Prespecified information contrasts. Negative regret differences favor the first condition. The primary material threshold is -0.01.

Contrast	Mean difference	Interval
L minus none	-0.137231	95% [-0.155845, -0.122566]
raw minus none	-0.136032	99% [-0.166955, -0.106025]
F minus none	-0.132680	99% [-0.164488, -0.099817]
L minus raw	-0.001199	99% [-0.023529, 0.009508]
F minus raw	+0.003352	99% [-0.021421, 0.037629]
F minus L	+0.004551	99% [-0.008013, 0.031772]

squares. It cannot read files, use the network or invoke the simulator. At most eight attempted calls are permitted per session; rejected expressions also consume that allowance. Budgets were fixed after a separate twelve-session development block: 600 seconds per turn, 1,200 per session and 18 hours overall, with request and stream retries disabled. GPT used medium reasoning and DeepSeek high; these are not equal-compute settings.

Joint success requires the power family and an exponent within 0.10 of 1.75. A failed session scores zero joint success and normalized regret one; predictive errors use explicit available-pair denominators. The sole primary contrast is tool-on minus tool-off joint success, averaging priors and repeats within model and the two models equally within world. The five world means are resampled 20,000 times with seed 90770 for a percentile 95% interval. The interval is a small-sample approximation, not evidence that 120 sessions are independent worlds. Aligned priors already supply the correct family and exponent: their success measures retention.

The terminal block contains 117 valid sessions and three retained failures: one DeepSeek tool-enabled post-submission validation failure, one GPT transport interruption and one DeepSeek provider output-limit failure. All 240 turns were attempted, without replacement. The separate development block had ten valid sessions and two provider failures; it is excluded from formal denominators. The five paired world effects were +0.16667, -0.16667, 0, 0 and +0.08333. Opaque and misspecified strata contain zero joint recoveries in 80 scheduled sessions; the 17 aligned successes measure retention. Top-1 choices were 0/30, 1/30, 0/30 and 0/30 in table order. These action readouts are restricted query choices, not a replication of the longitudinal assay.

Total recorded wall time was 33,619 seconds (9.34 hours). Reported usage was 8,251,168 input and 5,152,198 output tokens; two failed turns lack usage, so these are known lower bounds. GPT made no numerical calls in its 30 enabled sessions. DeepSeek attempted 63 calls in 20/30 enabled sessions, including nine rejected expressions; tool computation totaled 0.027 seconds. Availability includes voluntary uptake and its message/computation costs. It does not isolate internal arithmetic, and the high versus medium settings do not imply equal reasoning budgets. The old B3 qualification fitter accessed a privileged simulator, so its success does not establish public-only identifiability. Historical schema differences were not randomized.

10.12 Observation-mapping disclosure intervention

This block uses ten new partition worlds with independently fixed seeds and target exponents spanning 1.35–2.25 within the same power-law family. Three prior conditions cross original formula disclosure with the complete observation mapping in each world and configuration. Each model has 60 scheduled fresh sessions, with a pre-response and a post-evidence continuation in the same thread. All 119 delivered DeepSeek prompts match their GPT counterparts byte for byte. Both conditions expose identical candidate parameter domains, observations, queries, prior descriptions, schema and calculator access. The post-response in the complete condition additionally receives the observation equations, process factors and noise specification. Disclosure length is consequently bundled with information completeness. Observation noise is paired across conditions; no unseen-family or changed-mechanism generalization is tested.

Before provider execution, a public-only numerical reference was qualified on the current observation contract and

Table 6. Final diagnostic outcomes retain every scheduled session. Each model/tool group has 30 sessions and 18 prespecified useful-gain opportunities. Prediction MAE uses the complete paired denominator in column two.

Model / numerics	Valid	Pre / post MAE	Joint	Useful gain
GPT / off	29/30	0.2963 / 0.0367	6/30	0/18
GPT / on	30/30	0.2891 / 0.0435	7/30	2/18
DeepSeek / off	29/30	0.2946 / 0.0695	2/30	0/18
DeepSeek / on	29/30	0.2899 / 0.0718	2/30	0/18

all ten stimulus worlds. The first 24-execution endpoint block exposed an inactive runtime setting and failed qualification; its executions and replays remain recorded. After correcting the new block’s setting, all 24 requalification and 240 ten-world stimulus executions and their exact replays passed. This correction was made before the agent blocks; it does not change the historical B3 or optional-numerics data. Six development sessions per configuration passed separately before the 60-session blocks.

GPT uses medium reasoning and DeepSeek Flash uses low reasoning in the same native agent harness. Each turn is limited to 600 seconds and each session to 1,200 seconds, with at most eight post-response calculator attempts and zero provider retries. The initial GPT block limit was four hours. DeepSeek’s original calendar limit was later removed by user instruction; after 21 terminal sessions, the remaining 39 were dispatched by one coordinator to at most three independent workers, finishing in 99.44 minutes without a rate-limit downgrade. These are disclosed scheduling changes. Scientific inputs, per-session budgets and failure scoring remained fixed; the systems are not equal-compute competitors. A thinking-disabled development configuration failed qualification and did not enter either formal result.

Family must be correct and exponent absolute error at most 0.10 for joint recovery. The primary population contains the two unknown/wrong-prior strata; correct-prior retention is reported separately. Failures receive zero joint recovery and Top-1, and worst normalized regret of one. Prediction error is reported only for available valid submissions with exact sample counts. The complete-minus-original recovery contrast averages priors and configurations within world, then weights the ten worlds equally. Approximate 95% intervals resample these ten clusters 20,000 times with a fixed analysis seed; model/query counts do not increase independent worlds.

GPT completes 60/60 sessions; DeepSeek completes 52/60, with two tool-budget failures, three post-response schema failures, one provider output-limit failure, one turn timeout and one retained user interruption. Together they account for 239/240 scheduled turns. In the complete DeepSeek recovery group, all 17 valid submissions recover structure, but the primary remains 17/20. Correct-prior retention changes from 8/10 to 10/10 for GPT and 6/10 to 10/10 for DeepSeek. Recovery improves in eight GPT worlds (two ties) and all ten DeepSeek worlds. Both effects are +70 percentage points; configuration-specific approximate intervals are [45, 95] and [55, 85]. The pooled recovery rate changes from 9/40 to 37/40, with interval [52.5, 85]

for the gain. The opposite action directions are descriptive and do not establish significant worsening or an internal structure-to-action mechanism.

Resources are cumulative within a conversation, so the last available usage per thread is counted once. GPT reports 1,552,862 input tokens (332,544 cached), 327,180 output tokens (278,923 reasoning), and 8,355.718 session-wall seconds. DeepSeek reports 15,067,287 input tokens (13,120,384 cached), 3,470,258 output tokens (3,356,264 reasoning), 296 calculator attempts and 88 rejections. DeepSeek session-wall time totals 26,198.564 seconds, with the interrupted session incomplete; it is not parallel elapsed time. Usage is available for 114/119 attempted turns, so DeepSeek resource totals are lower bounds. No cost is erased by concurrency, interruption or failure.

10.12.1 One additional attempt for each failed session

After inspecting the original terminal results, the user authorized one additional attempt for every failed or interrupted DeepSeek session. This selected-failure sensitivity block fixed all eight eligible cases before execution, retained the original scientific inputs and frozen executor, and used a fresh complete pre/post session for each. Reasoning, turn/session limits, calculator limits and zero provider retries were unchanged. Three independent workers were allowed, without a block calendar deadline. Further failures or unfavorable answers would not trigger another attempt. The original 120-session primary and its eight failures remain intact.

All eight additional sessions completed validly (16/16 turns), without execution failures. Five unknown/wrong-prior cases recovered structure; two of three correct-prior cases retained it, while the remaining valid answer was incorrect. In the descriptive virtual result allowing one retry per original failure, DeepSeek recovery changes from 5/20 to 20/20, compared with 3/20 to 17/20 in the original primary. Top-1 is 7/20 versus 5/20 and normalized regret is 0.05551 versus 0.09597. Thus the structure benefit and the descriptive adverse action direction persist after this reliability sensitivity. Correct-prior retention is 8/10 versus 10/10. These are post-hoc selected attempts, not an independent replication, a new primary or evidence of statistically significant action worsening. No confidence interval is claimed for this selected retry comparison.

Additional elapsed time was 20.10 minutes; session-wall time summed to 3,404.030 seconds. All 16 usage receipts are available: 2,255,824 input tokens (1,979,776 cached), 450,242 output tokens (433,005 reasoning), 35 calculator

Table 7. Original disclosure results. Unknown/wrong-prior groups each contain 20 scheduled sessions. Parentheses in the prediction column give available sample counts. Correct-prior retention is separate.

Configuration	Disclosure	Recovery	Top-1	MAE (n)	Regret
GPT / medium	Original	6/20	5/20	0.03871 (20)	0.07097
	Complete	20/20	12/20	0.00606 (20)	0.00748
DeepSeek / low	Original	3/20	6/20	0.04654 (18)	0.15090
	Complete	17/20	4/20	0.00608 (17)	0.24263

Table 8. Descriptive one-retry sensitivity for DeepSeek. Original successful attempts are retained; each original failure contributes its single additional attempt. The original primary is unchanged.

Population	Disclosure	Recovery/retention	Top-1	Regret
Unknown/wrong	Original	5/20	7/20	0.05551
	Complete	20/20	5/20	0.09597
Correct prior	Original	8/10	5/10	0.06583
	Complete	10/10	3/10	0.08297

attempts and 11 rejections. These costs are additional to the original formal block. The complete programme therefore retains 128 attempted sessions, including the original eight failures, rather than erasing them after successful retries.

11. Data and code availability

The current source release contains the executable environment, prespecified protocols, analysis code, source data and reproducible figure scripts used for this manuscript. The fixed agent-system configuration, prompt contract, reasoning setting and sampling parameters are bound in the release metadata. Raw interaction payloads and credentials are excluded, and no private cohort data are included because that optional study was not executed.

12. Competing interests

The authors declare no competing interests.

References

- [1] Serafim Batzoglou. ReplaySCM: A benchmark for executable causal mechanism induction from interventions, 2026. Preprint.
- [2] Chris Beeler, Sriram Ganapathi Subramanian, Kyle Sprague, et al. ChemGymRL: A customizable interactive framework for reinforcement learning for digital chemistry. *Digital Discovery*, 3:742–758, 2024. doi: 10.1039/D3DD00183K.
- [3] Maximilian Bloor, José Torracca, Ilya Orson Sandoval, et al. PC-Gym: Benchmark environments for process control problems, 2024. Preprint, arXiv:2410.22093.
- [4] Daniil A. Boiko, Robert MacKnight, Ben Kline, and Gabe Gomes. Autonomous chemical research with large language models. *Nature*, 624:570–578, 2023. doi: 10.1038/s41586-023-06792-0.
- [5] Andres M. Bran, Sam Cox, Oliver Schilter, Carlo Baldassari, Andrew D. White, and Philippe Schwaller. Augmenting large language models with chemistry tools. *Nature Machine Intelligence*, 6:525–535, 2024. doi: 10.1038/s42256-024-00832-8.
- [6] Yimeng Chen, Piotr Piękos, Mateusz Ostaszewski, Firas Laakom, and Jürgen Schmidhuber. PhysGym: Benchmarking llms in interactive physics discovery with controlled priors. In *Advances in Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=w8uII2qAmd>.
- [7] Tianyi Dai, Sriram Vijayakrishnan, Filip T. Szczyp-
iński, et al. Autonomous mobile robots for exploratory synthetic chemistry. *Nature*, 635:890–897, 2024. doi: 10.1038/s41586-024-08173-7.
- [8] Kourosh Darvish, Marta Skreta, Yuchi Zhao, et al. OR-GANA: A robotic assistant for automated chemistry experimentation and characterization. *Matter*, 8(2), 2025. doi: 10.1016/j.matt.2024.10.015.
- [9] Haonan Duan, Stephen Zhewen Lu, Caitlin Fiona Harri-
gan, Nishkrit Desai, Jiarui Lu, Michał Koziarski, Leonardo Cotta, and Chris J. Maddison. Measuring scientific capabilities of language models with a systems biology dry lab, 2025. Preprint, arXiv:2507.02083.
- [10] Adam N. Elmachtoub and Paul Grigas. Smart Predict, then Optimize. *Management Science*, 68(1):9–26, 2022. doi: 10.1287/mnsc.2020.3922.
- [11] Kobi C. Felton, Jan G. Rittig, and Alexei A. Lapkin. Sum-
mit: Benchmarking machine learning methods for reaction optimisation. *Chemistry-Methods*, 1:116–122, 2021. doi: 10.1002/cmtd.202000051.
- [12] Kanishk Gandhi, Michael Y. Li, Lyle Goodyear, Agam Bhatia, Louise Li, Aditi Bhaskar, Mohammed Zaman, and Noah D. Goodman. BoxingGym: Benchmarking progress in automated experimental design and model discovery, 2025. Preprint, arXiv:2501.01540.
- [13] Florian Häse, Matteo Aldeghi, Riley J. Hickman, Loïc M. Roch, Melodie Christensen, Elena Liles, Jason E. Hein, and Alán Aspuru-Guzik. Olympus: a benchmarking framework for noisy optimization and experiment planning. *Machine Learning: Science and Technology*, 2:035021, 2021. doi: 10.1088/2632-2153/abedc8.
- [14] Peter Jansen, Marc-Alexandre Côté, Tushar Khot, Erin Bransom, Bhavana Dalvi Mishra, Bodhisattwa Prasad Ma-
jumper, Oyvind Tafjord, and Peter Clark. DiscoveryWorld:

- A virtual environment for developing and evaluating automated scientific discovery agents. In *Advances in Neural Information Processing Systems*, volume 37, 2024. doi: 10.52202/079017-0324.
- [15] Sanchit Kabra, Nikhil Abhyankar, Saaketh Desai, Prasad Iyer, and Chandan K. Reddy. LLM-AutoSciLab: Closed-loop scientific discovery via active experimentation with llms, 2026. Preprint, arXiv:2605.24043.
 - [16] Shreshth A. Malik, Tiarnan Doherty, Panagiotis Tigas, Muhammed Razzak, Stephen J. Roberts, Aron Walsh, and Yarin Gal. MADE: Benchmark environments for closed-loop materials discovery. In *International Conference on Machine Learning*, 2026.
 - [17] Kevin Murphy. Model discovery agent: Llm-assisted bayesian experiment design for data-efficient discovery of mechanistic world models, 2026. Preprint, arXiv:2608.09696.
 - [18] Maximilian Nägele and Florian Marquardt. Agentic exploration of physics models. *Physical Review X*, 16:031002, 2026. doi: 10.1103/xnqc-q6nt.
 - [19] Jiangjie Qiu, Yijun Li, and Xiaonan Wang. Chem-World: Programmable chemical worlds for controlled and replayable agent experimentation, 2026. Preprint, arXiv:2608.10792.
 - [20] Martiño Ríos-García, Nawaf Alampara, Chandan Gupta, Indrajeet Mandal, Sajid Mannan, Ali Asghar Aghajani, N. M. Anoop Krishnan, and Kevin Maik Jablonka. Ai scientists produce results without reasoning scientifically, 2026. Preprint, arXiv:2604.18805.
 - [21] Tao Song, Man Luo, Xiaolong Zhang, et al. A multiagent-driven robotic AI chemist enabling autonomous chemical research on demand. *Journal of the American Chemical Society*, 147(15):12534–12545, 2025. doi: 10.1021/jacs.4c17738.
 - [22] Nathan J. Szymanski et al. An autonomous laboratory for the accelerated synthesis of inorganic materials. *Nature*, 624:86–91, 2023. doi: 10.1038/s41586-023-06734-w.
 - [23] Aikaterini Vriza, Michael H. Prince, Tao Zhou, Henry Chan, and Mathew J. Cherukara. Operating advanced scientific instruments with AI agents that learn on the job. *npj Computational Materials*, 12:160, 2026. doi: 10.1038/s41524-026-02005-0.
 - [24] Stefan Wahl, Raphaela Schenk, Ali Farnoud, Jakob H. Macke, and Daniel Gedon. A probabilistic framework for llm-based model discovery, 2026. Preprint, arXiv:2602.18266.
 - [25] Matt L. Wiemann, Lindsay M. Smith, Peter Melchior, Siddharth Mishra-Sharma, Andrew Gordon Wilson, Pavel Izmailov, and Carolina Cuesta-Lázaro. DiscoverPhysics: Benchmarking llms for out-of-the-box scientific thinking, 2026. Preprint, arXiv:2605.26087.
 - [26] Bryan Wilder, Bistra Dilkina, and Milind Tambe. Melding the data-decisions pipeline: Decision-focused learning for combinatorial optimization. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 1658–1665, 2019. doi: 10.1609/aaai.v33i01.33011658.
 - [27] Yucheng Xu, Keyi Zhang, Yuyang Yu, Min Zhang, Shiyuan Meng, Pei Chu, and Zhongying Tu. Scaling scientific discovery environments for turn-level agentic RL, 2026. Preprint, arXiv:2607.28990.
 - [28] Junlin Yang, Dylan Zhang, Xiangchen Song, et al. CausaLab: A scalable environment for interactive causal discovery toward ai scientists, 2026. Preprint.
 - [29] Tianshi Zheng, Kelvin Kiu-Wai Tam, Newt Hue-Nam K. Nguyen, et al. NewtonBench: Benchmarking generalizable scientific law discovery in llm agents. In *International Conference on Learning Representations*, 2026.