

ChemWorld: A Composable Executable Chemical-World Substrate and Programmable Virtual Instrument

Jiangjie Qiu¹, Yijun Li¹

¹Beijing Key Laboratory of Artificial Intelligence for Advanced Chemical Engineering Materials, State Key Laboratory of Chemical Engineering and Low-Carbon Technology, Department of Chemical Engineering, Tsinghua University, Beijing 100084, China

Abstract

Physical self-driving laboratories establish execution on real matter, but access, replication, safety and intervention are constrained by apparatus, materials and time; many digital benchmarks instead reduce an experiment to an objective-function query. We present ChemWorld as a complementary, composable executable chemical-world substrate and programmable virtual instrument. Reusable physical and transactional components compile into a world, and a public task contract attaches initial state, operations, instruments, observations, resources, failure rules, termination and evaluation. This software operating regime permits exact reset, repeatable matched worlds, complete simulator-side observation and private-law interventions without consuming physical reagents or creating laboratory hazards, while making no claim of virtual-to-real accuracy. The 15 registered tasks are reference examples rather than a bound on the construction space. Qualification covered 64/64 reference world units, 1,786/1,786 complete reference recipes and 52/52 coverage-generated compositions, including eight frozen non-reference reaction-distillation compositions. All 192 invalid-action probes, 32 module probes, seven interface paths and seven invalid declarations produced their registered outcomes, with zero missing receipts or public/private leakage. Across eight deterministic instrument-use cases, 89/89 submitted actions were audited: 88 committed, one planned failure rolled back without ghost state, all eight lifecycles closed, every resource ledger reconciled and every trajectory replayed with zero numerical mismatch. Six controlled single-private-component fork pairs preserved the public contract across 24 provider-free traces. Finally, one complete agent closed the first frozen non-reference world in one uninterrupted session with 15/15 committed actions, explicit termination, a final assay and exact environment replay. The evidence qualifies a finite v1 virtual instrument; it does not establish arbitrary physics, laboratory prediction or agent superiority.

1. Introduction

Self-driving laboratories (SDLs) and chemistry agents have demonstrated that algorithms can plan, execute and revise workflows on real materials. That physical validity is essential, but it also makes matched replication expensive, slow and safety constrained: instruments must be available, reagents and consumables are spent, failures can damage material or equipment, and a laboratory state cannot usually be reset bit-for-bit. At the other extreme, many digital optimization environments are inexpensive and repeatable but expose an experiment mainly as a query that returns a value. A complementary virtual instrument is needed for experiments that require controllable worlds, state-changing operations, resource and failure semantics, complete process observation and exact environment replay.

ChemWorld treats a chemical world as an explicit executable object rather than an opaque task label. Its v1 vocabulary contains reaction, thermal, phase, separation, crystallization, distillation, continuous-flow, electrochemical and observation components. A world is a compatible selection of these components, their parameters and private laws. A task contract is $T = (W, S_0, A, I, O, R, \tau, E)$: the world, initial state, operations, instruments, observations, resources, termination rule and evaluation surface. A scenario instantiates the contract; a trajectory records the

resulting operation-observation sequence; and a controlled fork changes one private component while preserving the public contract.

This architecture creates a different operating regime from a physical SDL. ChemWorld can be run wherever the software and compute environment are available; a simulated experiment does not consume physical reagents, create wet-laboratory waste or expose people and equipment to chemical hazards; world state can be reset and replayed; every simulator-held state transition and resource event can be audited; and private laws can be authored or forked within the declared component interfaces. These are qualitative affordances, not a measured cost or throughput comparison, and they do not confer laboratory validity. The purpose is to make controlled, high-observability experimentation possible before or beside physical execution (Fig. 1).

The central qualification question is therefore not whether an agent succeeds on a fixed list. It is whether reusable components and their declared interfaces remain coherent when assembled into coverage-guided combinations, including combinations absent from the reference task identities. This paper contributes:

1. a public component vocabulary and task-contract model for constructing executable chemical worlds;
2. a compatibility checker that rejects missing dependen-

- cies, conflicting state owners, unit mismatches, invalid parameter domains, impossible resources and lifecycle holes before runtime;
- 3. a coverage-guided generator combining pairwise discrete coverage, seeded space-filling continuous samples and ordered workflow interactions;
- 4. full-census qualification of reference worlds, generated compositions, module limits, cross-module interfaces, transactional semantics, observation boundaries and exact replay;
- 5. deterministic instrument-use cases and controlled world forks that show what the apparatus records, without converting those records into a scalar intelligence score or a model ranking; and
- 6. a single complete-agent lifecycle on the first frozen non-reference composition, used only to demonstrate access through the same public instrument contract.

The scope is deliberately finite. We validate the declared v1 vocabulary and compatibility domain, not arbitrary worlds or physical laws. The modules are synthetic or conceptual models within stated domains, not digital twins. A complete agent is one possible user of the instrument, but explaining its behaviour, isolating a model or scaffold effect and measuring adaptation under changed laws require separate studies.

2. Relation to existing systems

2.1 Physical autonomous laboratories and chemistry agents

Physical autonomous laboratories establish what a purely virtual system cannot: execution on real materials with real sensors, actuators, safety systems and hardware failure modes. Coscientist and ChemCrow connect language-model planning to chemistry tools and robotic or cloud-laboratory execution [1, 2]. A-Lab and mobile robot systems demonstrate closed-loop synthesis and characterization [3, 4], while ORGANA, ChemAgents and newer instrument-facing systems extend this line toward visual feedback, long workflows, modular automation and teachable operation [5–9].

ChemWorld does not replace this physical evidence. It addresses the complementary regime in which exact matched replication, counterfactual laws, complete state access and repeated failure injection are desirable. The marginal requirements are compute and software rather than reagent, instrument and human-safety capacity. Consequently, ChemWorld can support large controlled studies before physical validation, but any claim about real chemistry must still be established in a laboratory.

2.2 Optimization suites, virtual laboratories and discovery worlds

Reaction-optimization and experiment-planning suites such as Summit and Olympus provide scalable, repeatable comparisons over objective functions, while PC-Gym provides nonlinear process-control environments with constraints and disturbances [10–12]. ChemGymRL already

establishes a customizable, fine-grained virtual chemistry laboratory for reinforcement learning [13]. Closed-loop materials environments further couple candidate generation, budgeted oracle feedback and multi-objective search [14, 15]. ChemWorld therefore does not claim novelty for simulation, interactivity, resource budgets or closed loops individually.

Interactive scientific worlds broaden evaluation toward hypothesis formation, experiment selection and law recovery. DiscoveryWorld, BoxingGym, SciGym, SciExplorer and NewtonBench represent complementary approaches to long-horizon discovery and initially unknown systems [16–20]. Laboratory simulators such as LabUtopia and Labimus emphasize embodied procedure and manipulation [21, 22]. ChemWorld is narrower in embodiment and law diversity. Its distinctive unit is an executable chemistry lifecycle in which typed operations change sample state, instruments consume resources, invalid actions have transactional consequences, termination is explicit, and the complete record is replayable.

2.3 Position and qualitative operating advantages

The adjacent systems should be compared by purpose rather than collapsed into one ranking. Physical SDLs maximize empirical validity; optimization suites maximize controlled algorithmic comparison; virtual laboratories and discovery worlds expose interactive task structure. ChemWorld concentrates on composable world construction and process-level observability. Within its declared model domain, researchers can instantiate new component combinations, change private laws, repeat the same world many times, inspect hidden simulator consequences and recover the complete resource and failure history. Table 1 summarizes these operating regimes; it is a capability comparison, not a performance or cost benchmark.

3. A public construction surface for executable worlds

3.1 Components, worlds and task contracts

Each component declares the state it owns, the interfaces it consumes or produces, its parameter domains and its contribution to the public operating surface. Reaction and electrochemical components transform material state; thermal, phase, separation, crystallization, distillation and continuous-flow components supply process-specific state transitions; the observation component attaches synthetic instruments. Public operations are typed actions rather than free-form simulator mutations.

The compiler first normalizes the declaration and then checks compatibility. It fails closed on missing dependencies, multiple owners of the same state surface, unit incompatibility, unsupported parameters, impossible resource declarations and workflows that cannot reach termination. A successful compile returns both an executable task and a reader-auditable public surface: allowed operations, instruments, observations, resources, termination and evaluation. Private laws and hidden state remain outside that surface.

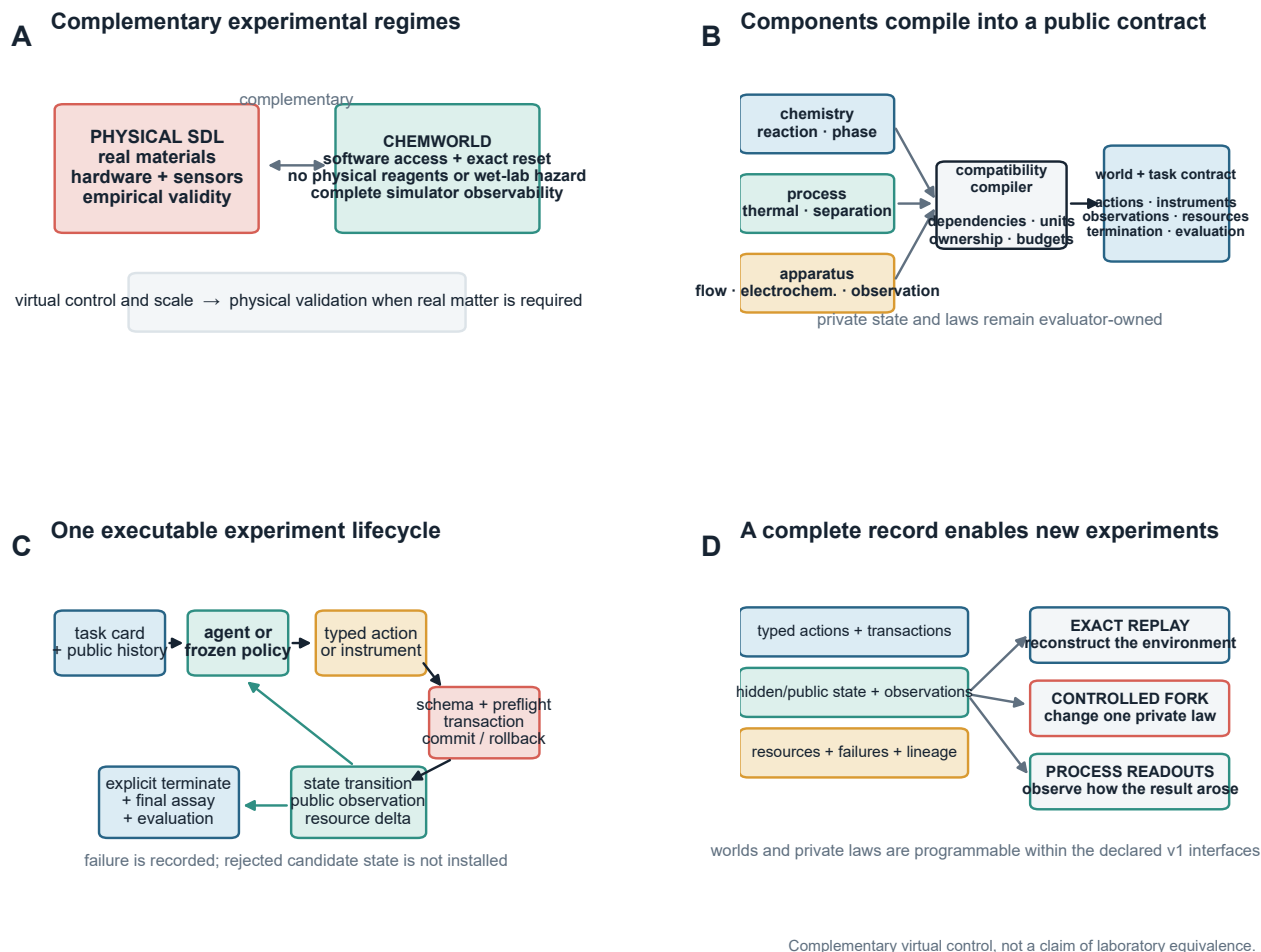


Figure 1. ChemWorld as a programmable virtual instrument from world construction to auditable experiment.

A, Physical SDLs provide real-material validity, whereas the virtual substrate provides software access, exact reset, non-hazardous repetition and full simulator observability; the two regimes are complementary. **B**, Reusable components and private laws compile through compatibility checks into a world and public task contract. **C**, An agent or deterministic policy acts only through typed operations and instruments until explicit termination and final assay. **D**, The immutable record joins state transitions, observations, resources, failures and lineage, enabling exact environment replay and controlled private-law forks.

The public capability map contains 15 registered reference tasks, 28 typed operation kinds, five synthetic instrument contracts and 62 ordered task-by-metric bindings. These counts describe different objects. An operation kind is not a task; a task-metric binding is not a unique endpoint; and an executed qualification recipe is not an independent agent trial. The reference tasks span the declared surface but do not define its cardinality.

3.2 Coverage-guided generation

Composition generation is driven by coverage targets rather than by a desired number of examples. Discrete component and instrument choices are arranged with pairwise covering rows. Continuous temperature, time, flow, volume, potential, current, reflux and transfer axes are sampled with seeded Latin hypercube designs. Ordered workflows separately require critical interactions such as reaction before separation, quench before downstream transfer and

fraction collection before final measurement.

The frozen design contains eight component patterns, from phase-observation through reaction-phase-separation-observation. It generated 52 compositions. Eight use a reaction-thermal-distillation-observation topology that has zero identity overlap with the 15 reference tasks. We call these *frozen non-reference compositions*: their components belong to the declared v1 vocabulary, but their task and world identities do not belong to the frozen reference registry. This is more precise than calling them arbitrary or wholly unseen worlds. The first generated row of this batch is the fixed target for the complete-agent instrument demonstration and cannot be replaced after its result is known.

Table 1. Qualitative operating regimes of adjacent experimental systems. Entries describe typical capabilities rather than universal properties or measured superiority.

System class	Primary evidence	Access and repetition	World or law control	Process observability and replay
Physical SDL / chemistry robot	real-material execution and hardware integration	constrained by apparatus, consumables, time and safety	protocol and hardware changes; physical state cannot be reset exactly	sensor and automation logs; physical matter is not exactly replayable
Optimization or control suite	algorithmic comparison over objectives or dynamics	software-scalable and repeatable	usually fixed functions, datasets or process models	query or controller traces; lifecycle detail depends on the suite
Interactive virtual lab / discovery world	sequential manipulation, discovery or embodied procedure	software-scalable with controlled reset	environment-specific tasks and latent rules	action histories and observations; replay guarantees vary
ChemWorld	composable executable-world and instrument qualification	software access; no physical reagent use, wet-lab waste or chemical hazard	declared components and private-law forks within a bounded API	typed actions, hidden and public state, failures, resources, termination, lineage and exact environment replay

4. Qualification of components, interfaces and runtime semantics

4.1 Reference and generated full censuses

The reference qualification treats a world unit as a task-world pairing rather than a single task label. All 64/64 reference units passed. Boundary and categorical recipes produced 1,786/1,786 complete executions. The generated block passed for all 52/52 compositions, including all eight non-reference reaction-distillation rows. There were no failure classes, missing receipts or public/private leakage findings.

Compilation success alone was not a pass condition. Each generated composition had to execute its complete workflow, close exactly once, reconcile declared and observed resources and replay exactly. Seven deliberately broken declarations tested missing dependencies, conflicting state ownership, unit mismatches, invalid domains, resource impossibility and lifecycle gaps; all seven were rejected before environment construction.

4.2 Physical and cross-module checks

Thirty-two module probes exercise zero input, declared boundaries, monotonic directions, conservation and model-specific invariants. The seven cross-module paths then check that material amount, unit, identity and state meaning survive transfer between modules. When applicable, the checks also include charge, energy, phase balance and event propagation. All 32 module probes and seven interface paths passed.

These results establish internal qualification within each model card. They do not show that the synthetic kinetics, spectra, phase equilibria or equipment responses predict

a particular physical laboratory. The validity claim is therefore interface and virtual-instrument validity, not empirical chemical accuracy.

4.3 Transactions, resources, observations and replay

Every submitted action first passes schema, compatibility and resource preflight. A valid action commits atomically. A rejected action records its attempt and declared penalty but does not install candidate physical state. The 192 negative probes cover invalid schema, preconditions, resource exhaustion, terminal closure and other fail-closed paths; all 192 produced the registered rejection and preserved state as required.

Resource accounting separates material, sample, instrument use, process time, operation count and terminal assay. Observation checks ensure that public packets contain only task-declared fields. Exact replay reconstructs the same compiled world from its bound contract and seeds, resubmits the committed typed actions, and compares rewards, observations, termination flags, transaction metadata, state-delta summaries, resource events and constitution checks with zero numerical tolerance. It is an environment-level claim under the bound software and model definitions, not reproduction of a physical batch or a provider’s token sequence.

5. Deterministic instrument-use cases

Eight frozen use cases test the recording surface without a provider. They cover a reaction-to-crystallization workflow, resource-limited equilibrium characterization, an intentional failure followed by recovery, continuous flow, electrochemistry, distillation, partition and a second crys-



Figure 2. Coverage-guided construction and full-census qualification. **A**, Eight frozen component patterns define the construction block; the highlighted reaction–distillation topology has zero identity overlap with the reference registry. **B**, Pairwise discrete coverage, seeded continuous samples and ordered workflows determine 52 frozen rows rather than an arbitrary example count. **C**, All reference units, reference recipes, generated compositions and non-reference compositions completed and replayed. **D**, Module, interface, invalid-declaration and invalid-action probes all produced their registered outcomes, with zero missing receipts or public/private leakage. Counts are qualification denominators, not statistical samples.

tallization world. The cases are independent qualification units; their actions are not treated as statistical replicates.

Across the eight cases, all 89 submitted actions have complete schema, transaction, constitution, event, resource and public-observation receipts. Eighty-eight actions committed. The first action of the failure–recovery case deliberately attempted phase separation before its preconditions were satisfied. It rolled back, preserving physical state and observation random-number state while reconciling the declared attempt consequences. The following 18 actions completed the recovery path. Every case committed one final assay, closed its lifecycle, reconciled resources and replayed exactly with zero numerical error.

The generated reaction–distillation world also has a 12-action deterministic reference path. It establishes construction, workflow execution and replay for the fixed non-reference world, but it is not a substitute for the separate complete-agent unit reported below. That unit originated

every submitted action from one uninterrupted session and was judged against its own lifecycle, provider-resource and replay gates.

6. Controlled single-component forks

General composition and controlled attribution are different operations. Composition assembles multiple declared components subject to compatibility rules. A world fork holds the public task contract and action sequence fixed while changing one preregistered private component.

The fork qualification contains six parent–child pairs: two intervention classes across three seeds. Each pair preserved all nine public-contract components and executed the same fixed sequence on parent and child. Repeating both variants produced 24 provider-free traces. All pairs passed lineage, single-target, public-invariance, same-sequence executability, expected state and observation divergence, exact replay and zero-provider gates. The mea-

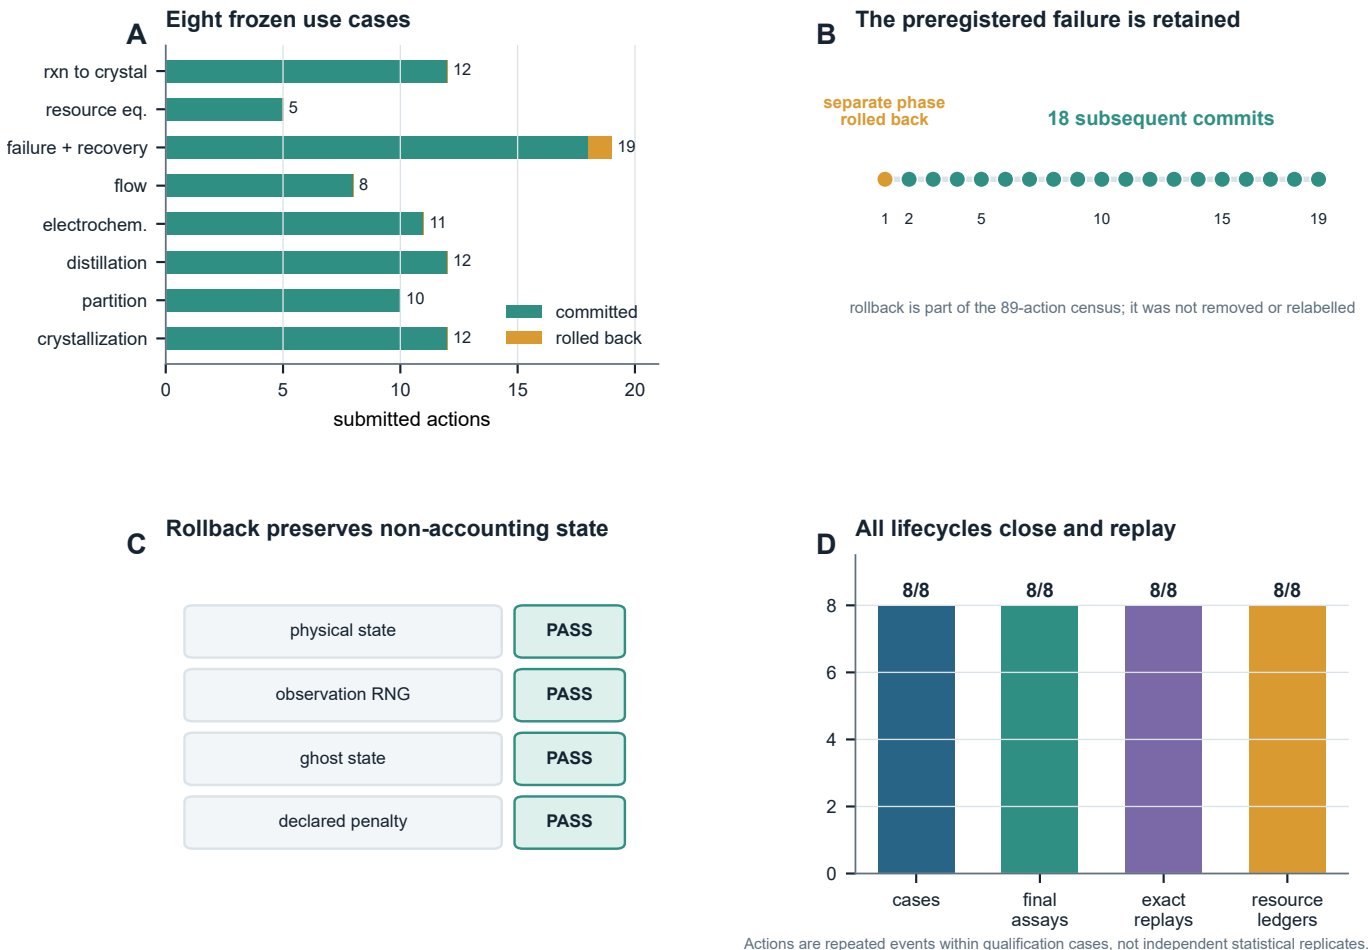


Figure 3. Deterministic cases exercise lifecycle and failure semantics. **A**, Eight frozen cases span single-process, multistage and reference-library workflows. **B**, Eighty-eight of 89 submitted actions committed; one preregistered precondition failure rolled back. **C**, The rollback preserved physical state and allowed the remaining 18-step recovery path to close. **D**, All eight final assays, resource ledgers and exact replays passed.

sured divergences demonstrate that a named private law can be manipulated while the public instrument remains invariant. They do not establish arbitrary multi-component authoring or agent adaptation.

7. Complete-agent use and process observability

An endpoint cannot reconstruct how it was reached. ChemWorld therefore keeps terminal commitment, evidence acquisition, continued process investment, resource deployment, failure and outcome trajectory as separate coordinates. Nineteen registered process dimensions remain separate; no scalar intelligence score is formed. The important advantage is observability: the evaluator can inspect complete simulator state and resource consequences while the agent remains restricted to its public task contract.

The complete-agent demonstration used the first frozen non-reference reaction–distillation world. It ran on 5 August 2026 with OpenAI GPT-5.6-sol at medium reasoning

effort through the Codex subscription provider. The fixed one-turn scaffold supplied the public task card, typed tool schemas, resource contract and explicit termination/final-assay requirement; it did not expose hidden state, repair actions or auto-close the experiment. One uninterrupted session submitted 15 actions without restart or model switch. All 15 committed; one explicit termination and one final assay closed the lifecycle, with no rollback, right-censoring or public/private leakage.

The environment used 8,158.454 of 10,440 simulated process seconds, four of four instrument uses and 0.00085 of 0.001 L sample. The 17 interface calls consist of the 15 state-changing step calls plus one initial material-information read and one status read; they are not 17 submitted actions. Cumulative provider input was 493,092 tokens: 440,832 tokens were reused cached context and 52,260 were uncached input. Cache hits therefore indicate context reuse across the persistent tool-using turn, not repeated model output; output was 2,973 tokens. These values are a resource ledger for one usability demonstra-

tion, not an efficiency comparison. The complete 15-step environment trajectory replayed with zero numerical mismatch.

8. Discussion

8.1 What is established

The evidence establishes that ChemWorld has a real construction surface rather than only a task catalogue. Declared components compile through explicit compatibility rules; coverage-guided rows extend beyond the reference identities; and reference, generated and non-reference compositions preserve the tested physical, transactional, resource, observation and replay semantics. Controlled forks separately show that one named private component can change under an invariant public contract.

The strongest evidence is deterministic and full-census. Every registered unit is shown with its exact denominator, and every failure would remain visible. The qualification does not rely on a favourable sample or on significance testing applied to repeated actions. This is appropriate for a software-defined instrument whose first requirement is coherent semantics.

The resulting practical advantage is experimental freedom rather than empirical fidelity. Within the declared interfaces, a researcher can construct new topologies, vary continuous conditions, substitute private constitutive or material laws, rerun matched identities and observe the complete simulator-side process. Such experiments are available without booking physical hardware, consuming reagents or introducing chemical risk, and can be repeated until the intended study denominator is reached. These affordances can make large-scale agent diagnosis and counterfactual design economically accessible, but they remain simulations whose external validity must be established separately.

8.2 What is not established

The tested component vocabulary is finite, and compatibility is only claimed inside its declared domains. Passing 52 generated compositions does not prove an infinite or arbitrary world language. The physical models are synthetic or conceptual abstractions and have not been calibrated as predictive replicas of laboratory equipment or materials. Exact replay reproduces simulator state and public records, not physical matter or stochastic provider decisions.

The current evidence also does not establish general agent competence. The deterministic cases qualify the apparatus. The complete-agent non-reference-world unit shows that one system could use the same public contract and close one frozen lifecycle; it is not a benchmark, reliability estimate or comparison group. Model ranking, behavioural mechanisms, rule learning, cross-model attribution and broad agent statistics are explicitly outside this paper.

8.3 Why composition and process records matter

A fixed benchmark can reveal whether an algorithm performs well on its entries, but it cannot by itself show that the environment is reusable. Composition qualification shifts the unit of validation toward components and interfaces. Process records add a second shift: they preserve evidence acquisition, resource use, failure and terminal commitment instead of collapsing the interaction into one score. Together these properties make the environment useful as a programmable virtual instrument, even when no claim is made about the intelligence or rationality of its user.

The intended workflow is therefore staged: use ChemWorld to generate controlled worlds, stress policies, observe failure and resource behaviour, and narrow hypotheses at software scale; use physical SDLs or conventional experiments when the question requires real materials, hardware interaction or empirical calibration. Treating the two systems as complements avoids both overclaiming simulation and underusing its control and visibility.

9. Methods

9.1 Construction and compatibility


A composition declaration specifies component roles and parameters plus the public task surface. Normalization is deterministic. Compatibility checks cover dependencies, state ownership, unit agreement, parameter domains, resource feasibility, operation exposure, instrument availability and the existence of a closed lifecycle. A rejected declaration returns structured diagnostics and does not construct an environment.

The task contract is the authoritative public boundary. Runtime validation is restricted to the declared operations and instruments. Private constitutive laws, material identities and hidden simulator state remain evaluator-owned. The 15 registered tasks are mapped into the same component and contract representation used by generated compositions.

9.2 Coverage design

The qualification design was frozen before data generation. Eight patterns were assigned fixed seeds. Discrete axes use pairwise covering rows. Continuous axes use seeded Latin hypercube samples inside the authored bounds. Each pattern contains one or two ordered workflows chosen before execution. The frozen denominator is 52 generated cases, including eight reaction-distillation cases absent from the registered task identities.

The coverage selection and pass rules are fixed before the reported qualification run and cannot be changed in response to its outcomes. The reader-facing result is the complete current frozen census; development diagnostics and superseded engineering runs are not part of the scientific denominator.

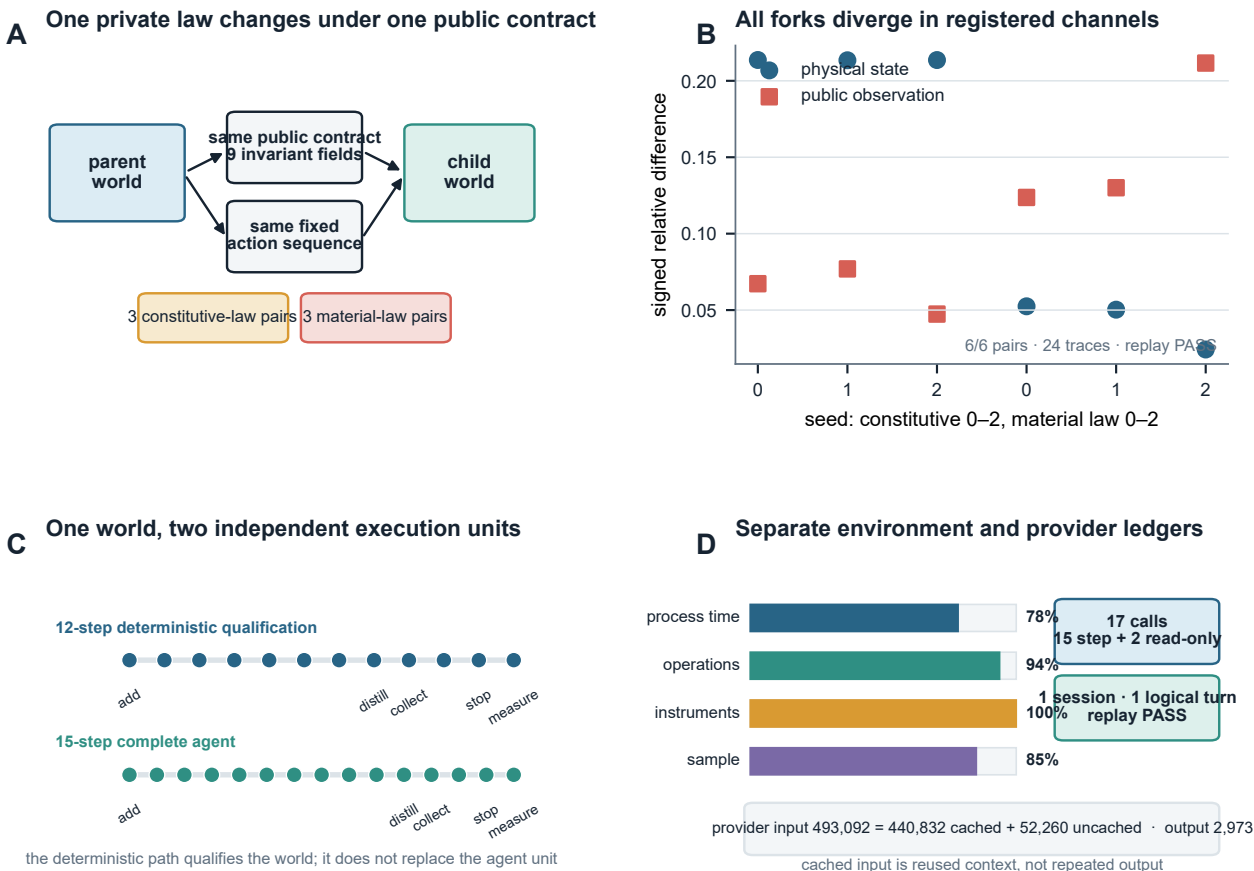

Forks establish controlled intervention; the agent unit establishes instrument usability, not model ranking.

Figure 4. Controlled private-law interventions and complete-agent use of the same instrument surface. **A**, Parent and child worlds share the public contract and action sequence while one private constitutive or material law changes. **B**, Six pairs and 24 provider-free traces pass lineage, public-invariance, divergence and exact-replay gates. **C**, The fixed non-reference reaction–distillation world has an independent 12-step deterministic qualification path and a separate 15-step complete-agent lifecycle. **D**, The agent closes the lifecycle within environment resources; 17 interface calls equal 15 step calls plus two read-only calls, and cached input denotes reused context rather than repeated output.

9.3 Qualification measurements

For each case, the report records normalized construction input, compile diagnostics, public contract, action sequence, schema and transaction status, constitution checks, events, resource preflight and outcome, public observation, termination, trajectory size and exact replay. Missing receipts, non-finite quantities, unexpected commits or roll-backs, leakage, denominator drift and replay mismatch fail the case.

Reference qualification covers 64 task–world units and 1,786 complete recipes. Generated qualification covers 52 compositions. Negative qualification covers 192 invalid probes. Module and interface qualification use 32 and seven units, respectively. Compile mutation uses seven invalid declarations. Counts are exact qualification denominators.

9.4 Process-time envelopes

Environment process time is derived by pattern rather than assigned as an arbitrary common cap. For each pattern,

$$t_{\max} = t_{\text{required stages}} + t_{\text{implicit reserve}} + t_{\text{allowed repeats}}$$

The required term sums the upper bounds of necessary timed stages. The implicit reserve covers authored quench and transfer operations. Repeat allowance is tied to explicit per-operation repeat limits. The resulting limits are 0 s for phase observation; 3,600 s for reaction–thermal observation; 1,860 s for phase separation; 11,100 s for reaction crystallization; 10,440 s for reaction distillation; 7,200 s for continuous flow; 5,400 s for electrochemistry; and 7,500 s for reaction–phase separation. A proposed action is rejected before runtime if either cumulative process time or a repeat limit would be exceeded.

9.5 Deterministic use cases

The eight cases, seeds and action lists were frozen before execution. Their total expected census was 89 submitted actions, 88 commits, one rollback and eight final assays. The failure-recovery case specified the failing action and rollback class in advance. All submitted actions were inspected; no sampling was used. The provider-call denominator was zero.

9.6 Controlled forks

Each fork declares a parent, a child, one private intervention target, an invariant public contract and expected divergence channels. Parent and child execute the same typed action sequence. Gates require lineage validity, exactly one changed private target, invariant public contract, executable sequence on both variants, expected physical and observation divergence, exact replay and zero provider calls.

9.7 Complete-agent non-reference-world protocol

The formal unit is one complete lifecycle on the first frozen non-reference reaction-distillation composition. One uninterrupted agent session may submit at most 16 actions through the public instrument interface. There is no run-level restart, model switch, host fallback, automatic repair, automatic termination or automatic final assay. The action count, tool calls and trajectory records must agree exactly; every action must commit; the lifecycle must contain a termination and exactly one final assay; resources, public boundary and exact replay must pass.

Provider accounting distinguishes one provider session, one logical agent turn, 15 action calls and two read-only calls. The model, provider, reasoning effort, scaffold constraints, public prompt template and execution date are bound before the run. Cumulative input is separated into cached and uncached input; cached context is reused input, not repeated output. The formal limits are 640,000 cumulative input tokens, 192,000 uncached input tokens and 64,000 output tokens. Per-action wait is capped at 600 s, finalization at 300 s and runner reserve at 600 s, giving a conservative method wall limit of 10,500 s. These method resources are separate from the simulated process-time ledger.

9.8 Process readouts

The process profile retains 19 dimensions in five groups: terminal commitment, evidence acquisition, evidence-conditioned action, resource deployment and outcome trajectory. Undefined conditional quantities remain null rather than being set to zero. These coordinates are available for later agent studies but are not pooled into the current substrate qualification or a composite intelligence score.

9.9 Public boundary and exact replay

The evaluator owns hidden simulator identity and private state. Agent-facing task cards, observations and histories are checked for hidden fields and absolute private paths.

Replay reconstructs the bound world from the same normalized contract, runtime, mechanism, observation and scoring identities plus the recorded seeds and interventions. It then resubmits every committed typed action and compares rewards, every public observation, termination and truncation flags, operation types, transaction status, rollback reason, events, state-delta summaries, constitution checks and resource consequences. The reported qualification uses numerical tolerance zero and observed a maximum absolute error of zero. This guarantee is bound to the released software and model definitions; cross-version or cross-platform replay must first reproduce those bindings and is not asserted merely from the action list. Provider response bodies, private reasoning, authentication data and raw local payloads are excluded from the release.

10. Data and code availability

Code, configuration, processed reports, figure source data and release tooling are available in the MIT-licensed ChemWorld repository at github.com/sunyrain/ChemWorld. The tracked materials regenerate the tables and figures and replay released simulator transitions and resource changes. Provider authentication, unrestricted response bodies, private reasoning and hidden evaluator identities are excluded.

Three reproducibility levels should be distinguished. First, the reported counts and figures can be regenerated from processed evidence. Second, released trajectories reproduce environment transitions, public observations and ledgers. Third, stochastic provider decisions are not exactly reproducible. Exact replay in this paper always refers to the executable world and its records.

11. Conclusion

ChemWorld is a composable executable chemical-world substrate and programmable virtual instrument. Its public construction surface assembles reusable components into legal worlds; its qualification programme checks reference and generated compositions at the component, interface, transaction, resource, observation and replay levels. The 15 tasks are reference examples rather than the boundary of the platform. Deterministic use cases and controlled forks show that the instrument records complete lifecycles, preserves failed-action semantics and supports single-private-component interventions under an invariant public contract.

The claim remains intentionally bounded. The results establish internal virtual-instrument qualification within the declared v1 domain, not arbitrary task generation, laboratory prediction or agent superiority. The single complete-agent non-reference-world lifecycle shows instrument usability under its frozen contract but does not support a general competence or comparative claim. What is established is the substrate on which such studies can be conducted: an endpoint is a result, while the experimental process is a replayable record.

Appendix A. Reader-facing capability map

A reference identity is a registered task identity paired with one of its declared public world seeds. The 15 task identities below expand to 64 task-world units. A generated row is counted as overlapping the reference set only when both its task identity and compiled world identity match a registered unit; the eight frozen non-reference rows have zero such overlap.

Appendix B. Coverage reconstruction and qualification census

The coverage design below fixes the pattern, seed, continuous domain, workflow count and generated denominator. Discrete factors include component-specific family or profile choices and instrument profiles; the released machine-readable coverage records map every discrete level, compatible pair, continuous stratum and ordered interaction to the rows that cover it.

Appendix C. Instrument-use case library

Appendix D. Process-coordinate dictionary

The 19 process dimensions remain separate and are grouped as follows.

Terminal commitment: closed-lifecycle fraction, assay fraction and discard fraction.

Evidence acquisition: measured-lifecycle fraction, non-final instrument uses per closed lifecycle and normalized first-measurement position.

Evidence-conditioned action: continued-after-measurement fraction, post-measure process operations per closed lifecycle, threshold-eligible fraction and threshold-decision concordance.

Resource deployment: attempted operations per closed lifecycle, committed operations per closed lifecycle, cost per closed lifecycle and risk per closed lifecycle.

Outcome trajectory: normalized best-discovery position, online incumbent-retention rate, maximum absolute incumbent drawdown, loss-episode recovery rate and terminal-to-best ratio. Mean and best endpoint scores are reported beside this profile and never enter a composite score.

Appendix E. Component model-card summary

Each module is qualified only inside its stated virtual-instrument domain. The table gives the controlling formulation, principal authored domain, validation oracle and the boundary that prevents the result from being read as laboratory calibration.

Table 2. Complete reference-task registry. Seed counts define the public world identities exercised for each task.

Reference task identity	Component topology	World seeds	Public operation / instrument summary
electrochemical-conversion	reaction + electrochemistry + observation	5	6 operations; pH, UV-visible, final assay
equilibrium-characterization	reaction + thermal + observation	5	9 operations; pH, UV-visible, final assay
flow-reaction-optimization	reaction + continuous flow + observation	5	7 operations; HPLC, GC, UV-visible, final assay
low-budget-characterization	reaction + thermal + observation	3	9 operations; HPLC, GC, UV-visible, final assay
partition-discovery	reaction + phase + separation + observation	5	9 operations; HPLC, GC, UV-visible, final assay
public-private-generalization	reaction + thermal + observation	5	9 operations; HPLC, GC, UV-visible, final assay
purity-yield-tradeoff	reaction + thermal + phase + separation + observation	5	18 operations; HPLC, GC, UV-visible, final assay
reaction-mechanism-explanation	reaction + thermal + observation	3	9 operations; HPLC, GC, UV-visible, final assay
reaction-optimization-standard	reaction + thermal + observation	5	9 operations; HPLC, GC, UV-visible, final assay
reaction-safety-constrained	reaction + thermal + observation	5	9 operations; HPLC, GC, UV-visible, final assay
reaction-to-assay	reaction + thermal + observation	1	9 operations; HPLC, GC, UV-visible, final assay
reaction-to-crystallization	reaction + thermal + crystallization + observation	5	12 operations; HPLC, final assay
reaction-to-distillation	reaction + thermal + distillation + observation	5	12 operations; HPLC, GC, UV-visible, final assay
reaction-to-purification	reaction + thermal + phase + separation + observation	5	18 operations; HPLC, GC, UV-visible, final assay
tool-agent-planning	reaction + thermal + phase + separation + observation	2	18 operations; HPLC, GC, UV-visible, final assay

Component pattern	Principal state or process	Representative public operations	Representative instruments
Phase + observation	bounded phase/equilibrium state	add solvent, add reagent, measure, terminate	pH, UV-visible, final assay
Reaction + thermal	batch reaction and temperature history	add, heat, quench, sample	HPLC, GC, final assay
Phase + separation	phase formation and transfer	mix, settle, separate, wash, transfer	HPLC, final assay
Reaction + crystallization	reaction followed by solid formation	heat, seed, cool, filter	HPLC, particle sizing, final assay
Reaction + distillation	reaction, evaporation and fractionation	heat, quench, evaporate, distil, collect	HPLC, GC, final assay
Reaction + continuous flow	flow, residence time and conversion	set flow, set temperature, run, sample	HPLC, GC, final assay
Reaction + electrochemistry	potential/current-driven conversion	set potential/current, electrolyse, sample	voltammetry, HPLC, final assay
Reaction + phase + separation	multistage reaction and purification	react, quench, separate, wash, concentrate, transfer	HPLC, GC, final assay

Table 3. Frozen coverage design. Bounds are inclusive authored domains; “none” denotes a purely discrete design.

Pattern	Seed	Continuous axes and bounds	Workflows	Cases
phase-observation	101	none	1	6
reaction-thermal-observation	102	heat 350–390 K; duration 600–1,800 s	2	6
phase-separation-observation	103	phase 0.010–0.020 L; extractant 0.010–0.025 L; mix 60–300 s; settle 120–600 s	2	6
reaction-crystallization-observation	104	reaction 350–390 K, 600–1,800 s; seed 0.002–0.010 g; cooling 275–305 K, 900–3,600 s	2	6
reaction-distillation-observation	105	reaction 350–390 K, 600–1,800 s; evaporation 325–345 K, 300–900 s; distillation 350–390 K, 900–2,400 s; reflux 1.0–3.0; transfer 0.65–0.95	2	8
reaction-continuous-flow-observation	106	flow 0.5–5.0 mL min ⁻¹ ; residence 60–600 s; temperature 330–390 K	2	6
reaction-electrochemistry-observation	107	potential 0.5–1.8 V; current 25–150 mA; electrolysis 300–1,800 s	2	7
reaction-phase-separation-observation	108	reaction 350–390 K, 600–1,800 s; phase/extractant 0.010–0.020/0.010–0.025 L; mix 60–300 s; settle 120–600 s; wash 0.003–0.010 L; concentrate 300–900 s; transfer 0.65–0.95	2	7

Qualification unit	Passed	Denominator	Failure classes
Reference task-world units	64	64	0
Complete reference recipes	1,786	1,786	0
Coverage-generated compositions	52	52	0
Frozen non-reference reaction-distillation compositions	8	8	0
Invalid action probes	192	192	0 unexpected outcomes
Module probes	32	32	0
Cross-module interface paths	7	7	0
Invalid compile mutants	7	7	0 unexpected constructions
Deterministic use cases	8	8	0
Deterministic submitted actions	89	89	0 missing receipts
Controlled fork pairs	6	6	0
Controlled fork traces	24	24	0

Scientific use	Components	What the record demonstrates
Reaction to crystallization	reaction, thermal, crystallization, observation	propagation from reaction through seeding, cooling, filtration and final assay
Resource-limited characterization	phase, observation	measurement choice, sample consumption and explicit stopping under a small budget
Failure and recovery	reaction, thermal, phase, separation, observation	atomic rollback, attempt consequences and continuation from committed state
Controlled private-law fork	one registered component changed privately	invariant public contract with preregistered state/observation divergence
Generated reaction to distillation	reaction, thermal, distillation, observation	construction and replay outside the reference task identities; one complete-agent lifecycle closed under the same public contract
Reference library	flow, electrochemistry, distillation, partition, crystallization	breadth of reusable task recipes without a cross-task performance score

Component	Runtime formulation	Principal v1 domain	Qualification oracle	Known boundary
Reaction	stoichiometric mass-action network with Arrhenius temperature dependence	authored reaction families and bounded batch temperature/time	exact amount fixtures, monotonic response, material closure and runtime constitution	synthetic/reference slice; no claim of kinetic fit to a named wet-lab reaction
Thermal	dynamic batch heat-release and jacket-energy balance	bounded temperature, duration, vessel pressure and volume	temperature/energy finiteness, bounds, event propagation and ledger reconciliation	simplified vessel and heat-transfer representation
Phase	stability-gated, activity-corrected liquid-liquid equilibrium with TPD-style diagnostics	declared phase identities, volumes and composition ranges	phase/material balance, directional partition response and state identity	intrinsic distribution behaviour is benchmark-calibrated rather than compound-specific
Separation	settling, entrainment, wash and transfer coupled to the phase model	bounded mix/settle time, extractant/wash volume and transfer fraction	amount/unit conservation, transfer identity and expected directional response	no hydrodynamic or hardware-scale separation calibration
Crystallization	van't Hoff solubility with seed, nucleation/growth cohorts, impurity occlusion and CSD summaries	bounded seed mass, cooling temperature and cooling time	material closure, solubility-direction checks, CSD and runtime-constitution receipts	conceptual population-balance instrument, not a calibrated crystallizer
Distillation	bubble-gated, duty-limited VLE/Fenske fractionation with material and energy ledgers	bounded temperature/time, reflux ratio, fraction count and collected fraction	mass/energy closure, fraction identity, recovery/purity directions and equipment limits	simplified pseudo-component and stage representation
Continuous flow	geometry-resolved plug-flow reactor with residence time, distributed thermal boundary and pressure drop	bounded flow, residence time and temperature	conversion direction, mass closure, pressure/geometry and solver diagnostics	not a controller or digital twin of a particular flow platform
Electrochemistry	Nernst potential, Butler-Volmer kinetics, limiting current, Randles transient and Faraday accounting	bounded potential, current and electrolysis time	charge/material closure, signed work, selectivity and limiting-current checks	synthetic materials and electrodes; no cell-specific calibration
Observation	state-coupled synthetic pH, UV-visible, HPLC, GC and final-assay contracts	task-declared instruments, sample and use budgets	instrument availability, sample consumption, finite/bounded signal and non-omniscience checks	synthetic response definitions are not empirical spectra or chromatograms

References

- [1] Daniil A. Boiko, Robert MacKnight, Ben Kline, and Gabe Gomes. Autonomous chemical research with large language models. *Nature*, 624:570–578, 2023. doi: 10.1038/s41586-023-06792-0.
- [2] Andres M. Bran, Sam Cox, Oliver Schilter, Carlo Baldassari, Andrew D. White, and Philippe Schwaller. Augmenting large language models with chemistry tools. *Nature Machine Intelligence*, 6:525–535, 2024. doi: 10.1038/s42256-024-00832-8.
- [3] Nathan J. Szymanski et al. An autonomous laboratory for the accelerated synthesis of inorganic materials. *Nature*, 624:86–91, 2023. doi: 10.1038/s41586-023-06734-w.
- [4] Tianyi Dai, Sriram Vijayakrishnan, Filip T. Szczypiński, et al. Autonomous mobile robots for exploratory synthetic chemistry. *Nature*, 635:890–897, 2024. doi: 10.1038/s41586-024-08173-7.
- [5] Kouros Darvish, Marta Skreta, Yuchi Zhao, et al. OR-GANA: A robotic assistant for automated chemistry experimentation and characterization. *Matter*, 8(2), 2025. doi: 10.1016/j.matt.2024.10.015.
- [6] Tao Song, Man Luo, Xiaolong Zhang, et al. A multiagent-driven robotic AI chemist enabling autonomous chemical research on demand. *Journal of the American Chemical Society*, 147(15):12534–12545, 2025. doi: 10.1021/jacs.4c17738.
- [7] Gihan Panapitiya, Emily Saldanha, Heather Job, et al. AutoLabs: cognitive multi-agent systems with self-correction for autonomous chemical experimentation. *Scientific Reports*, 16:19554, 2026. doi: 10.1038/s41598-026-45593-z.
- [8] Simone Pilon, Elia Savino, Oliver M. Bayley, et al. A flexible and affordable self-driving laboratory for automated reaction optimization. *Nature Synthesis*, 2026. doi: 10.1038/s44160-026-01053-0.
- [9] Aikaterini Vriza, Michael H. Prince, Tao Zhou, Henry Chan, and Mathew J. Cherukara. Operating advanced scientific instruments with AI agents that learn on the job. *npj Computational Materials*, 12:160, 2026. doi: 10.1038/s41524-026-02005-0.
- [10] Kobi C. Felton, Jan G. Rittig, and Alexei A. Lapkin. Summit: Benchmarking machine learning methods for reaction optimisation. *Chemistry–Methods*, 1:116–122, 2021. doi: 10.1002/cmdt.202000051.
- [11] Florian Häse, Matteo Aldeghi, Riley J. Hickman, Loïc M. Roch, Melodie Christensen, Elena Liles, Jason E. Hein, and Alán Aspuru-Guzik. Olympus: a benchmarking framework for noisy optimization and experiment planning. *Machine Learning: Science and Technology*, 2:035021, 2021. doi: 10.1088/2632-2153/abedc8.
- [12] Maximilian Bloor, José Torracca, Ilya Orson Sandoval, et al. PC-Gym: Benchmark environments for process control problems, 2024. Preprint, arXiv:2410.22093.
- [13] Chris Beeler, Sriram Ganapathi Subramanian, Kyle Sprague, et al. ChemGymRL: A customizable interactive framework for reinforcement learning for digital chemistry. *Digital Discovery*, 3:742–758, 2024. doi: 10.1039/D3DD00183K.
- [14] Shreshth A. Malik, Tiarnan Doherty, Panagiotis Tigas, Muhammed Razzak, Stephen J. Roberts, Aron Walsh, and Yarin Gal. MADE: Benchmark environments for closed-loop materials discovery. In *International Conference on Machine Learning*, 2026.
- [15] Nikhil Abhyankar, Sanchit Kabra, Saaketh Desai, and Chandan K. Reddy. LLEMA: Evolutionary search with LLMs for multi-objective materials discovery. In *International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=TIqzhBvCNB>.
- [16] Peter Jansen, Marc-Alexandre Côté, Tushar Khot, Erin Bransom, Bhavana Dalvi Mishra, Bodhisattwa Prasad Majumder, Oyvind Tafjord, and Peter Clark. DiscoveryWorld: A virtual environment for developing and evaluating automated scientific discovery agents. In *Advances in Neural Information Processing Systems*, volume 37, 2024. doi: 10.52202/079017-0324.
- [17] Kanishk Gandhi, Michael Y. Li, Lyle Goodyear, Agam Bhatia, Louise Li, Aditi Bhaskar, Mohammed Zaman, and Noah D. Goodman. BoxingGym: Benchmarking progress in automated experimental design and model discovery, 2025. Preprint, arXiv:2501.01540.
- [18] Haonan Duan, Stephen Zhewen Lu, Caitlin Fiona Harri-gan, Nishkrit Desai, Jiarui Lu, Michał Koziarski, Leonardo Cotta, and Chris J. Maddison. Measuring scientific capabilities of language models with a systems biology dry lab, 2025. Preprint, arXiv:2507.02083.
- [19] Maximilian Nägele and Florian Marquardt. Agentic exploration of physics models. *Physical Review X*, 16:031002, 2026. doi: 10.1103/xnqc-q6nt.
- [20] Tianshi Zheng, Kelvin Kiu-Wai Tam, Newt Hue-Nam K. Nguyen, et al. NewtonBench: Benchmarking generalizable scientific law discovery in llm agents. In *International Conference on Learning Representations*, 2026.
- [21] Rui Li, Zixuan Hu, Wenxi Qu, et al. LabUtopia: High-fidelity simulation and hierarchical benchmark for scientific embodied agents. In *Advances in Neural Information Processing Systems, Datasets and Benchmarks Track*, 2025.
- [22] Yuhan Wu, Zhao Jin, Tao Li, et al. Labimus: A simulation and benchmark for humanoid dexterous manipulation in chemical laboratory, 2026. Preprint.