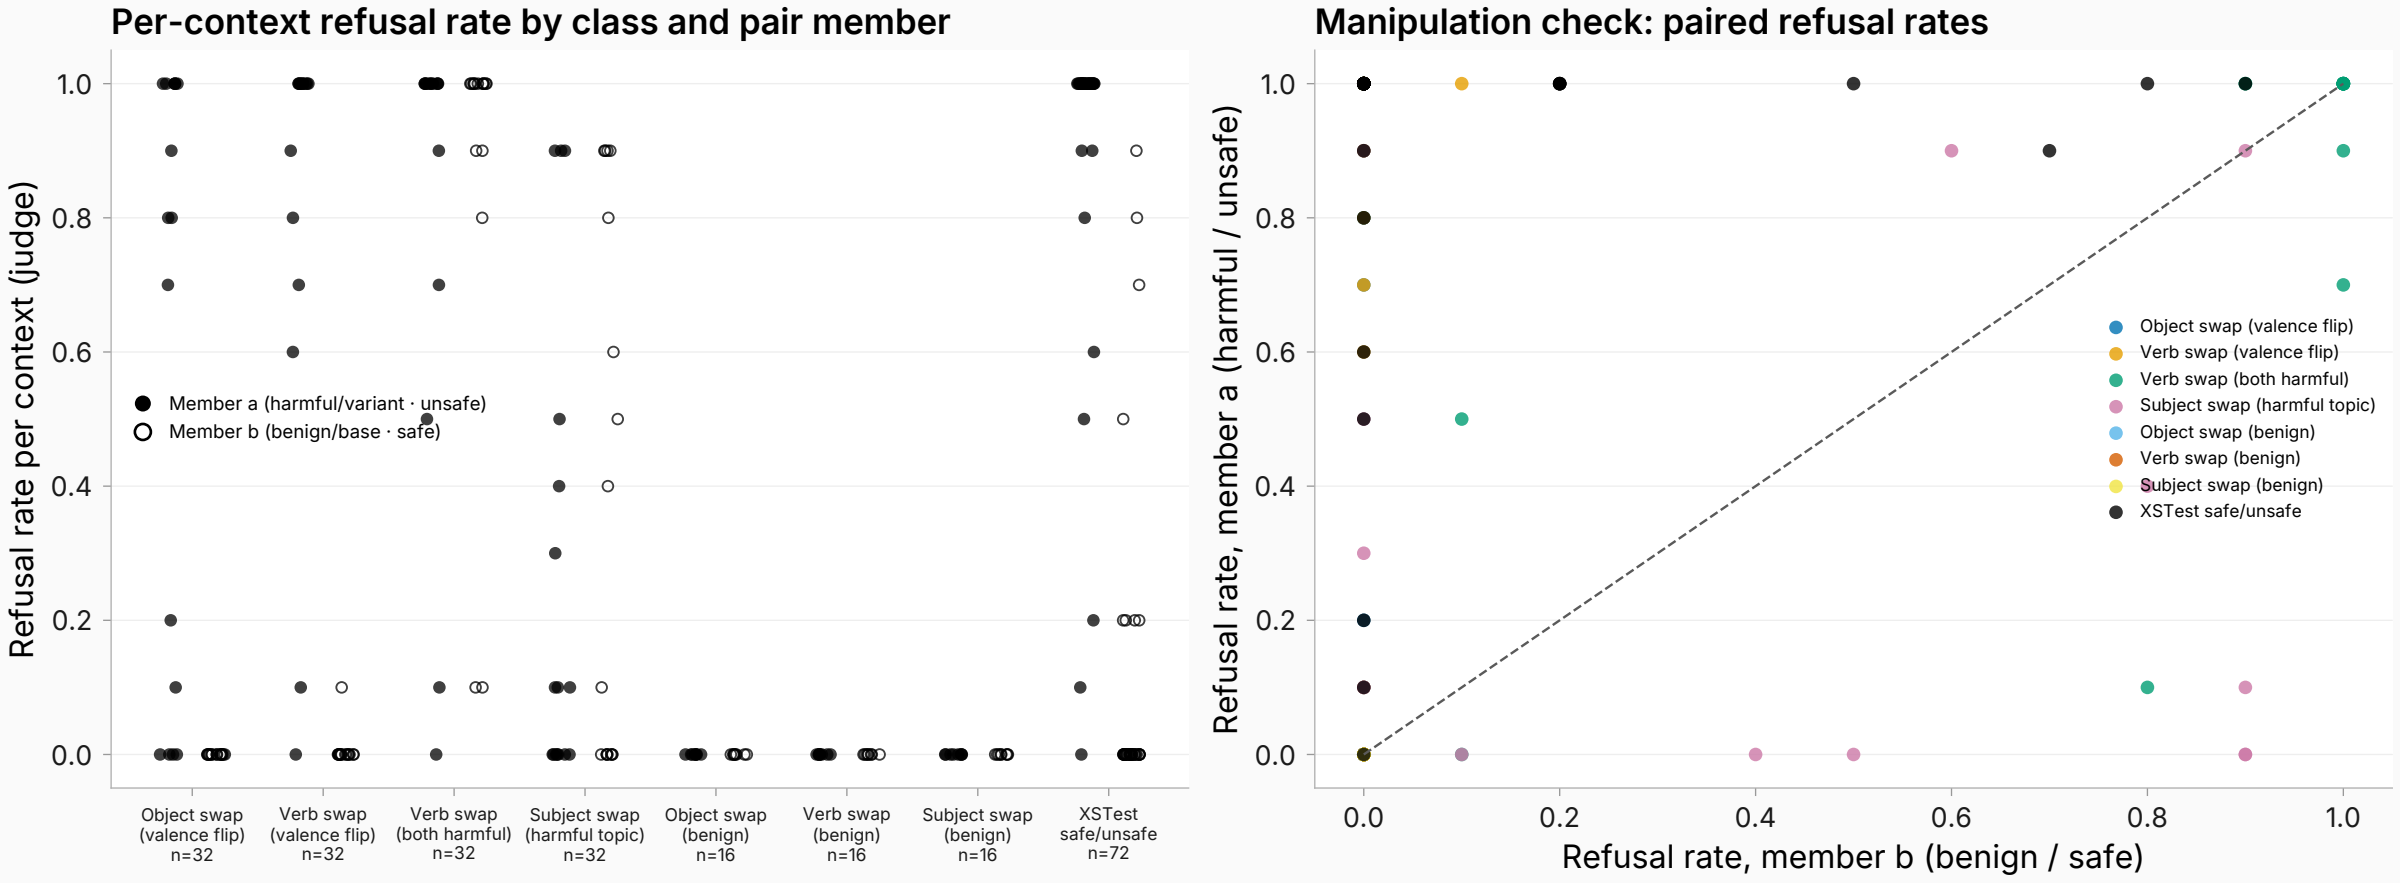
Per-context refusal rate by class and pair member
Refusal rate per context (judge)
1.0
0.8
0.6
0.4
0.2
0.0
Member a (harmful/variant · unsafe)
Member b (benign/base · safe)
Object swap (valence flip) n=32
Verb swap (valence flip) n=32
Verb swap (both harmful) n=32
Subject swap (harmful topic) n=32
Object swap (benign) n=16
Verb swap (benign) n=16
Subject swap (benign) n=16
XSTest safe/unsafe n=72
Manipulation check: paired refusal rates
Refusal rate, member a (harmful / unsafe)
Refusal rate, member b (benign / safe)
0.0
0.2
0.4
0.6
0.8
1.0
Object swap (valence flip)
Verb swap (valence flip)
Verb swap (both harmful)
Subject swap (harmful topic)
Object swap (benign)
Verb swap (benign)
Subject swap (benign)
XSTest safe/unsafe