


Which predictors work at matched firing rate?
AUROC within per-token firing-rate bins — 0.5 = no discrimination; sorted by mean |AUROC - 0.5|

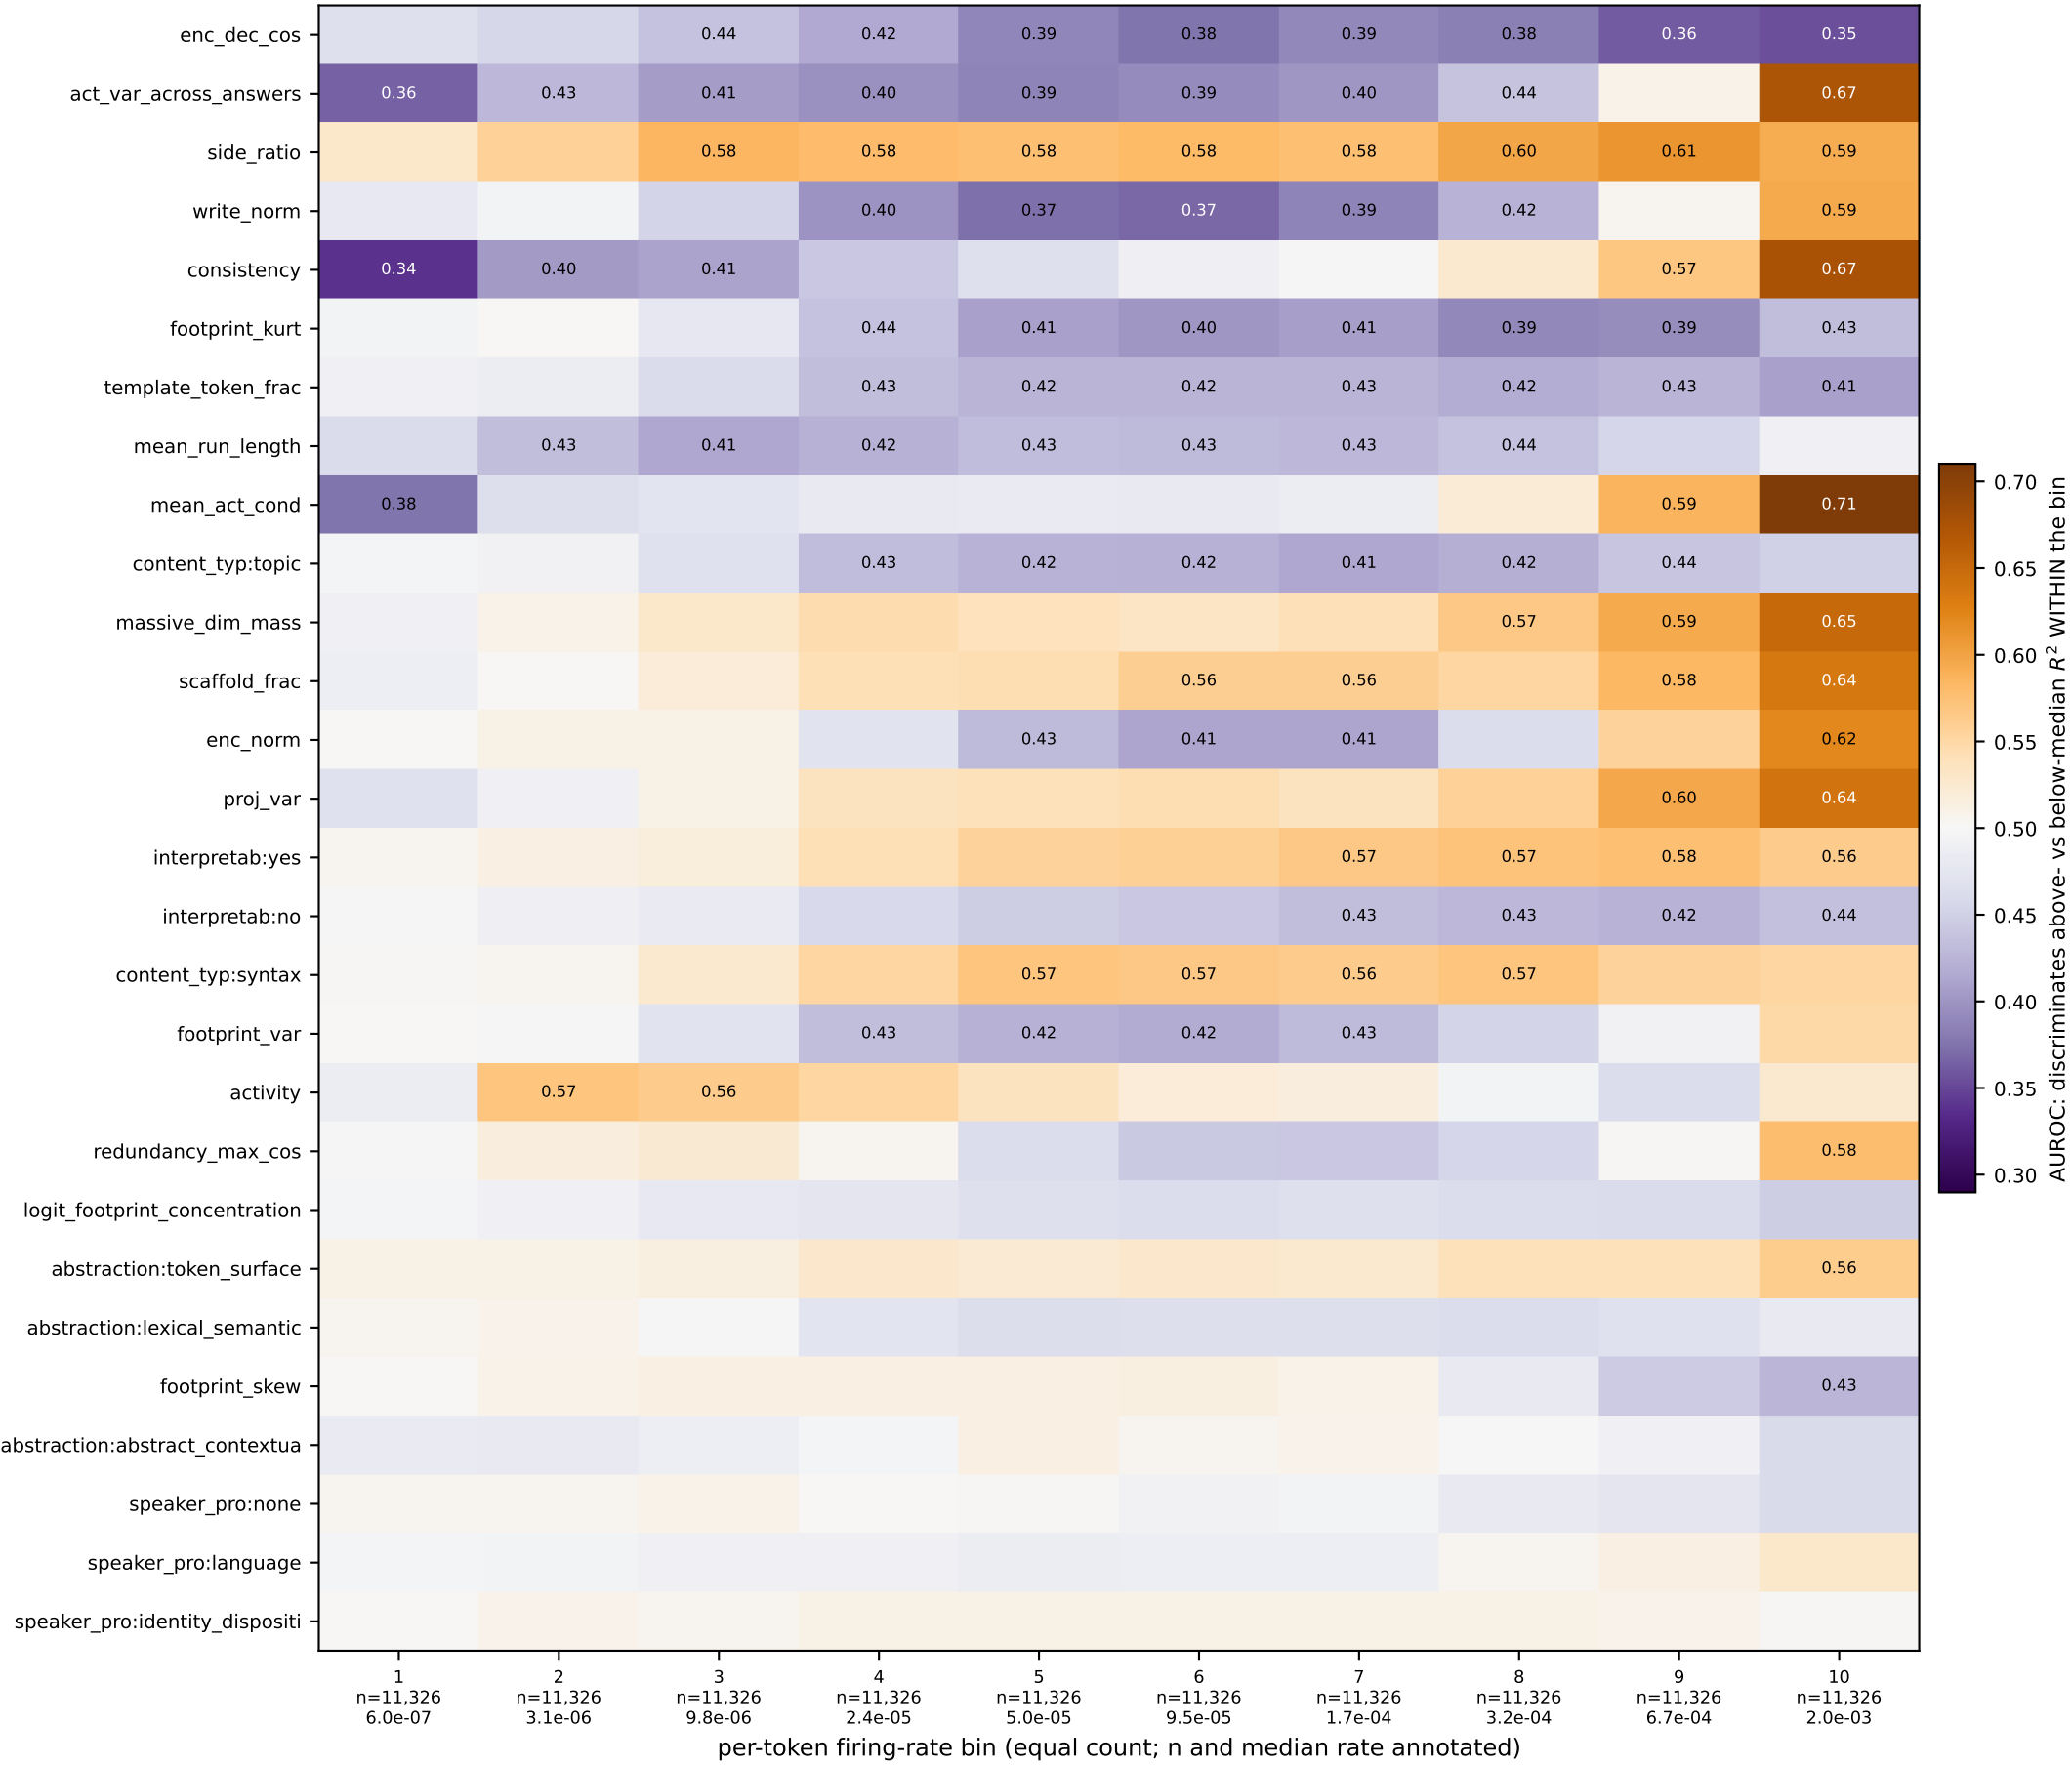

AUROC: discriminates above- vs below-median R^2 WITHIN the bin

Binning on firing rate is NONPARAMETRIC matching (assumes no functional form), unlike partialling. R^2 is binarised at the WITHIN-BIN median, so continuous and binary predictors share one scale. Each cell is a MARGINAL association: other predictors are NOT controlled, so collinear predictors can show each other through.