


Before the implant installs, the role header already carries more wrong-persona marker mass

Descriptive per-seed paired d at the wrong-persona teacher-forced probe, computed from the per-cell JSONs WITHOUT the implant-active gate. Points = the 5 raw per-seed values (no bootstrap CI on purpose: floor-regime exploratory read). Dashed lines = per-contrast means. Own argmax-emit is 0.000 everywhere at 5–18 steps; the 30-step column matches the gated primary read.

Ungated paired d = log P (system – role) (nats)

Trained on pirate

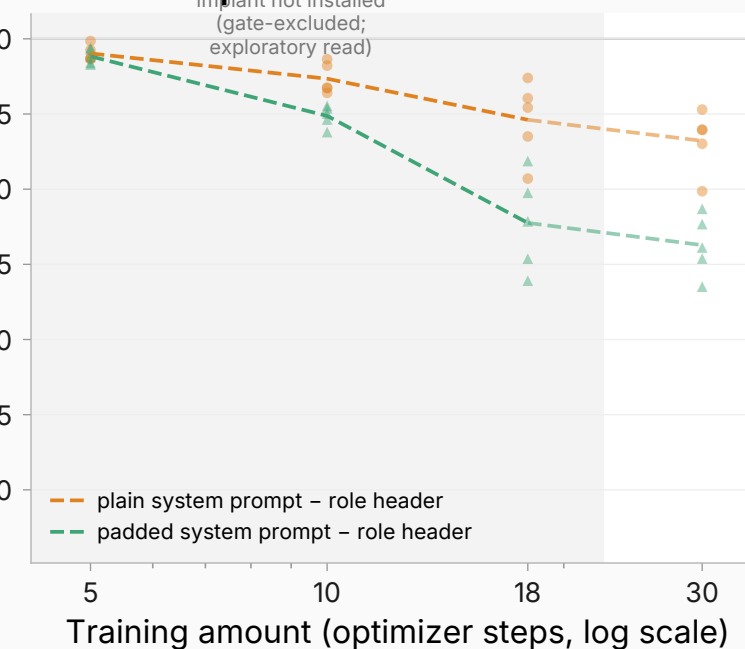

Trained on villain

