


Banked-map R^2 at the context-end v_C : real vs spectrum-matched random map, unpatched vs patched

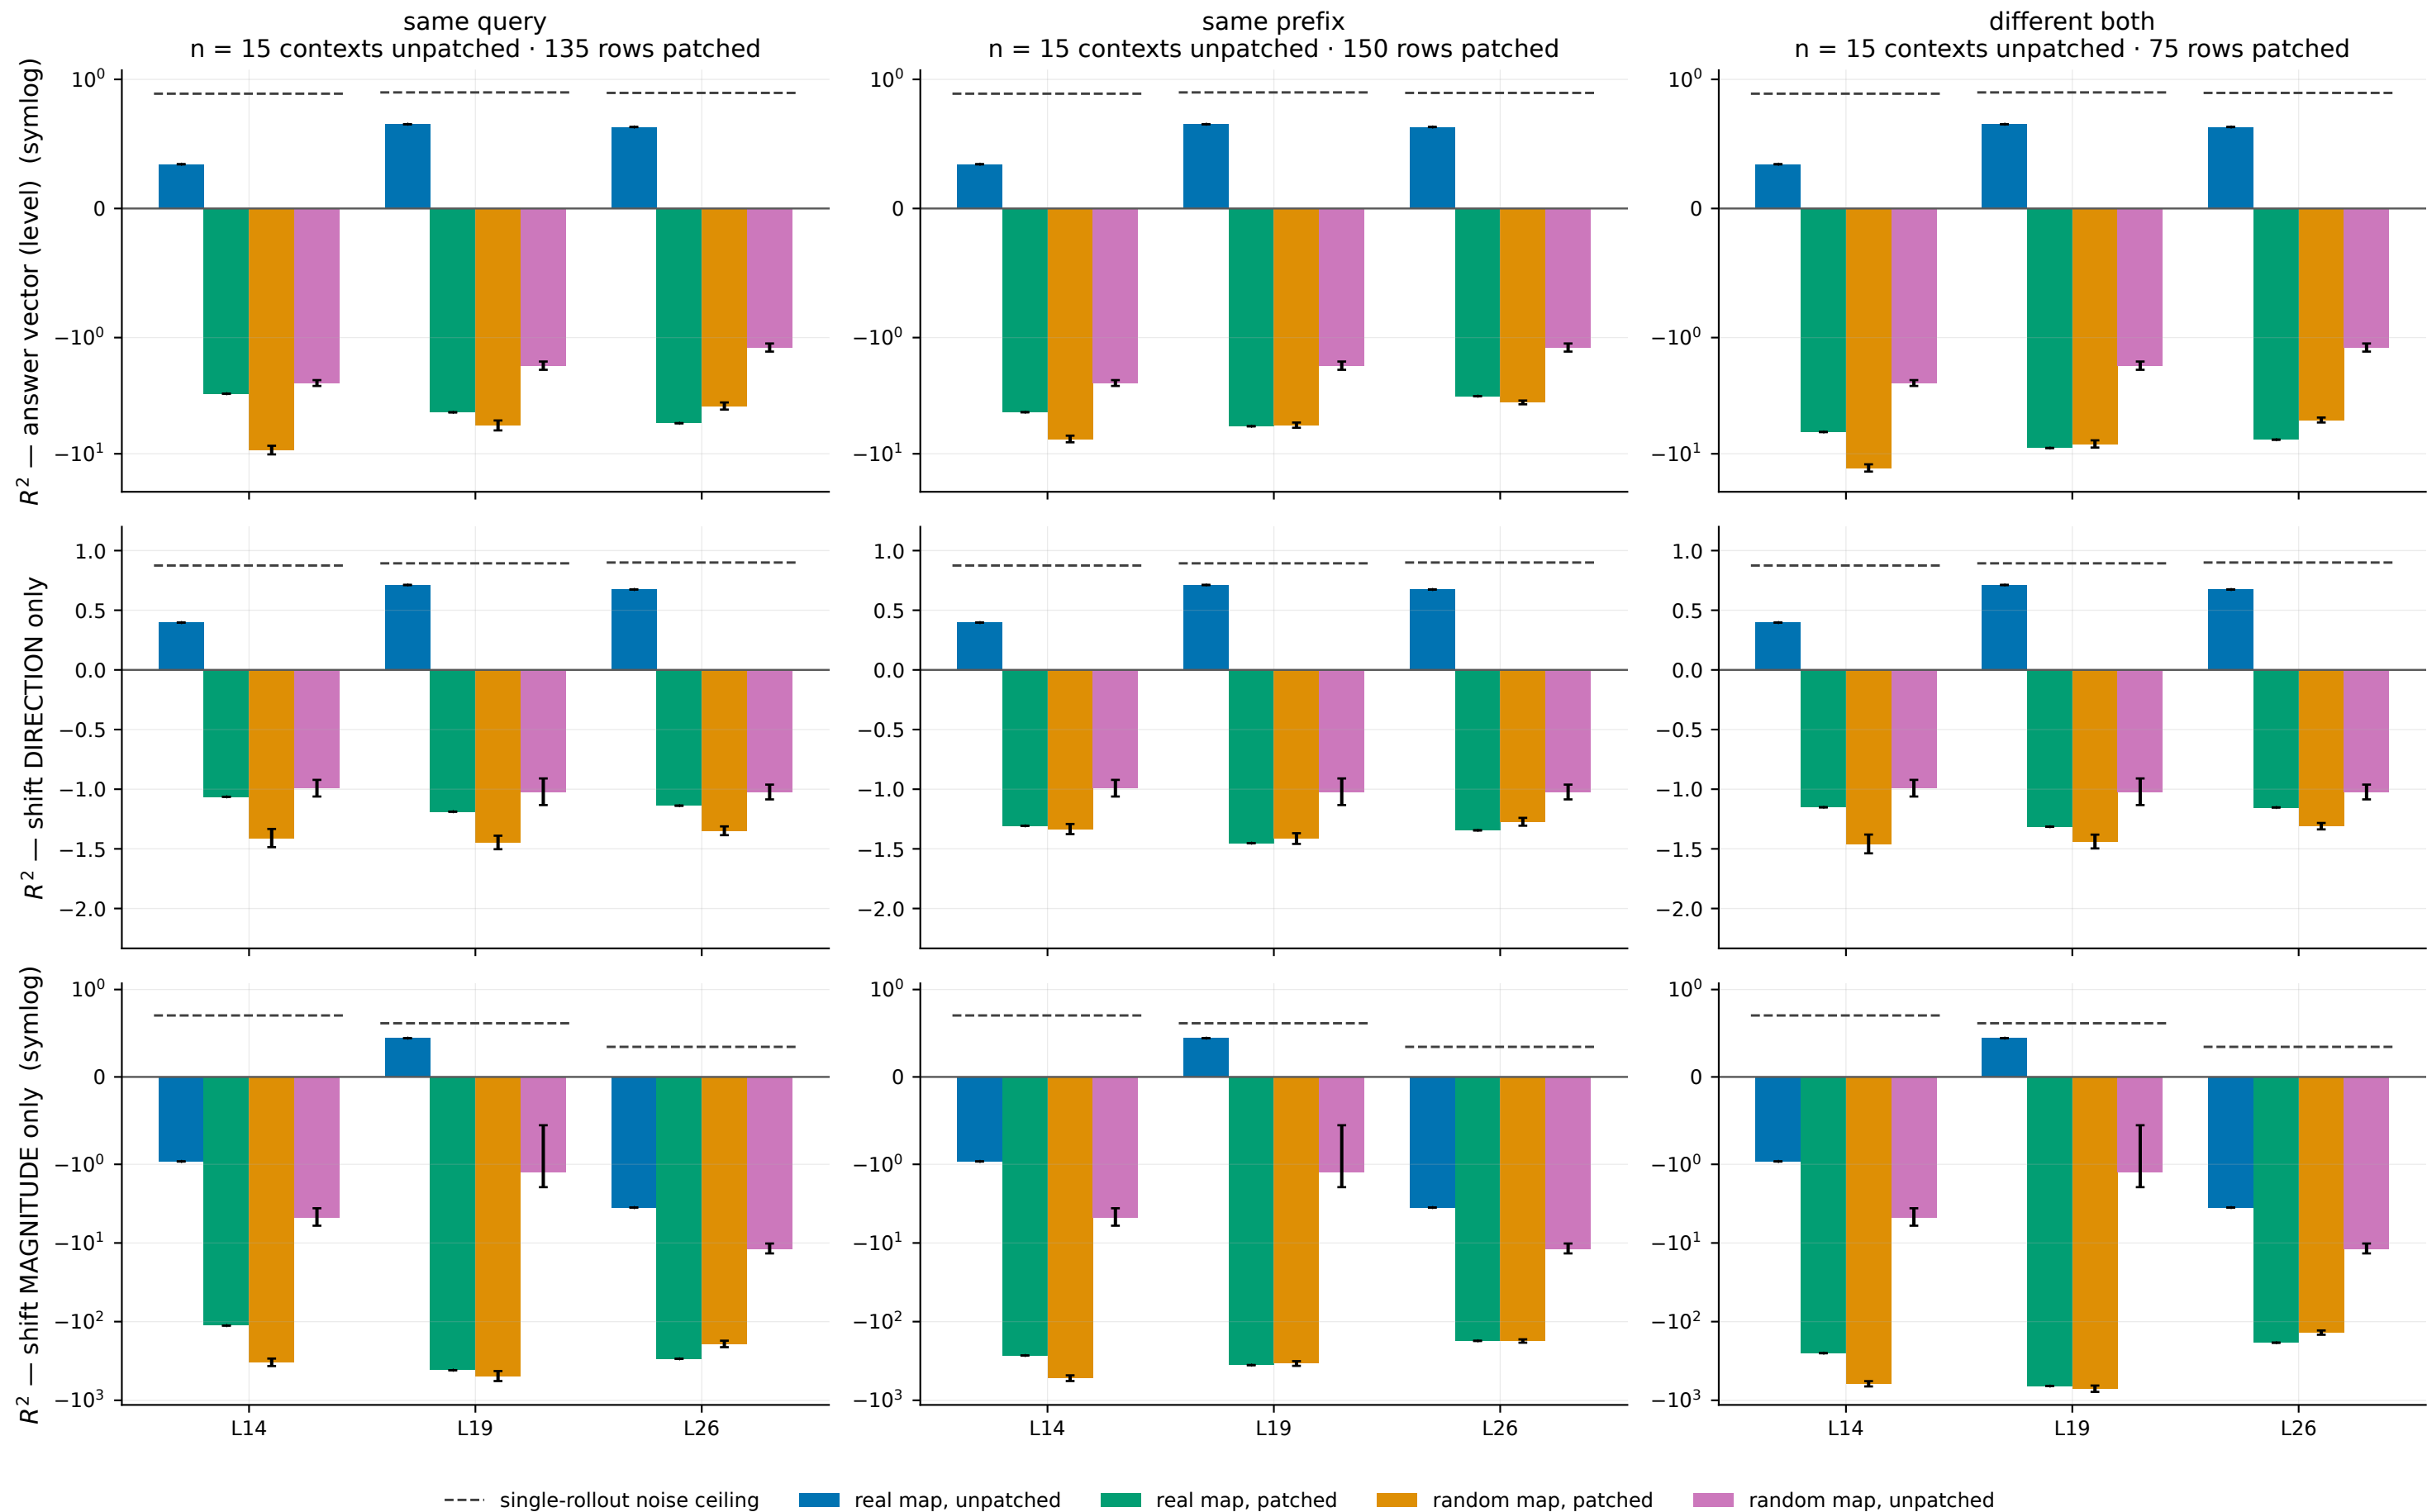

Random-map bars = mean of 20 spectrum-matched rotation draws ($W_{\text{rand}} = R \cdot W$, identical singular values; error bar = draw sd). Patched arms: steered rows only, doses pooled, degenerate self-transfer excluded.

The unpatched arms are setting-INVARIANT by construction — all 15 anchored contexts appear in every setting's pairs — so they repeat across columns. Ceiling (dashed) = leave-one-out over the 10 anchor draws: the most any context-level predictor can score against a SINGLE rollout, which is what the patched arms are scored against.