Where the log-p peak sits across the greedy answer
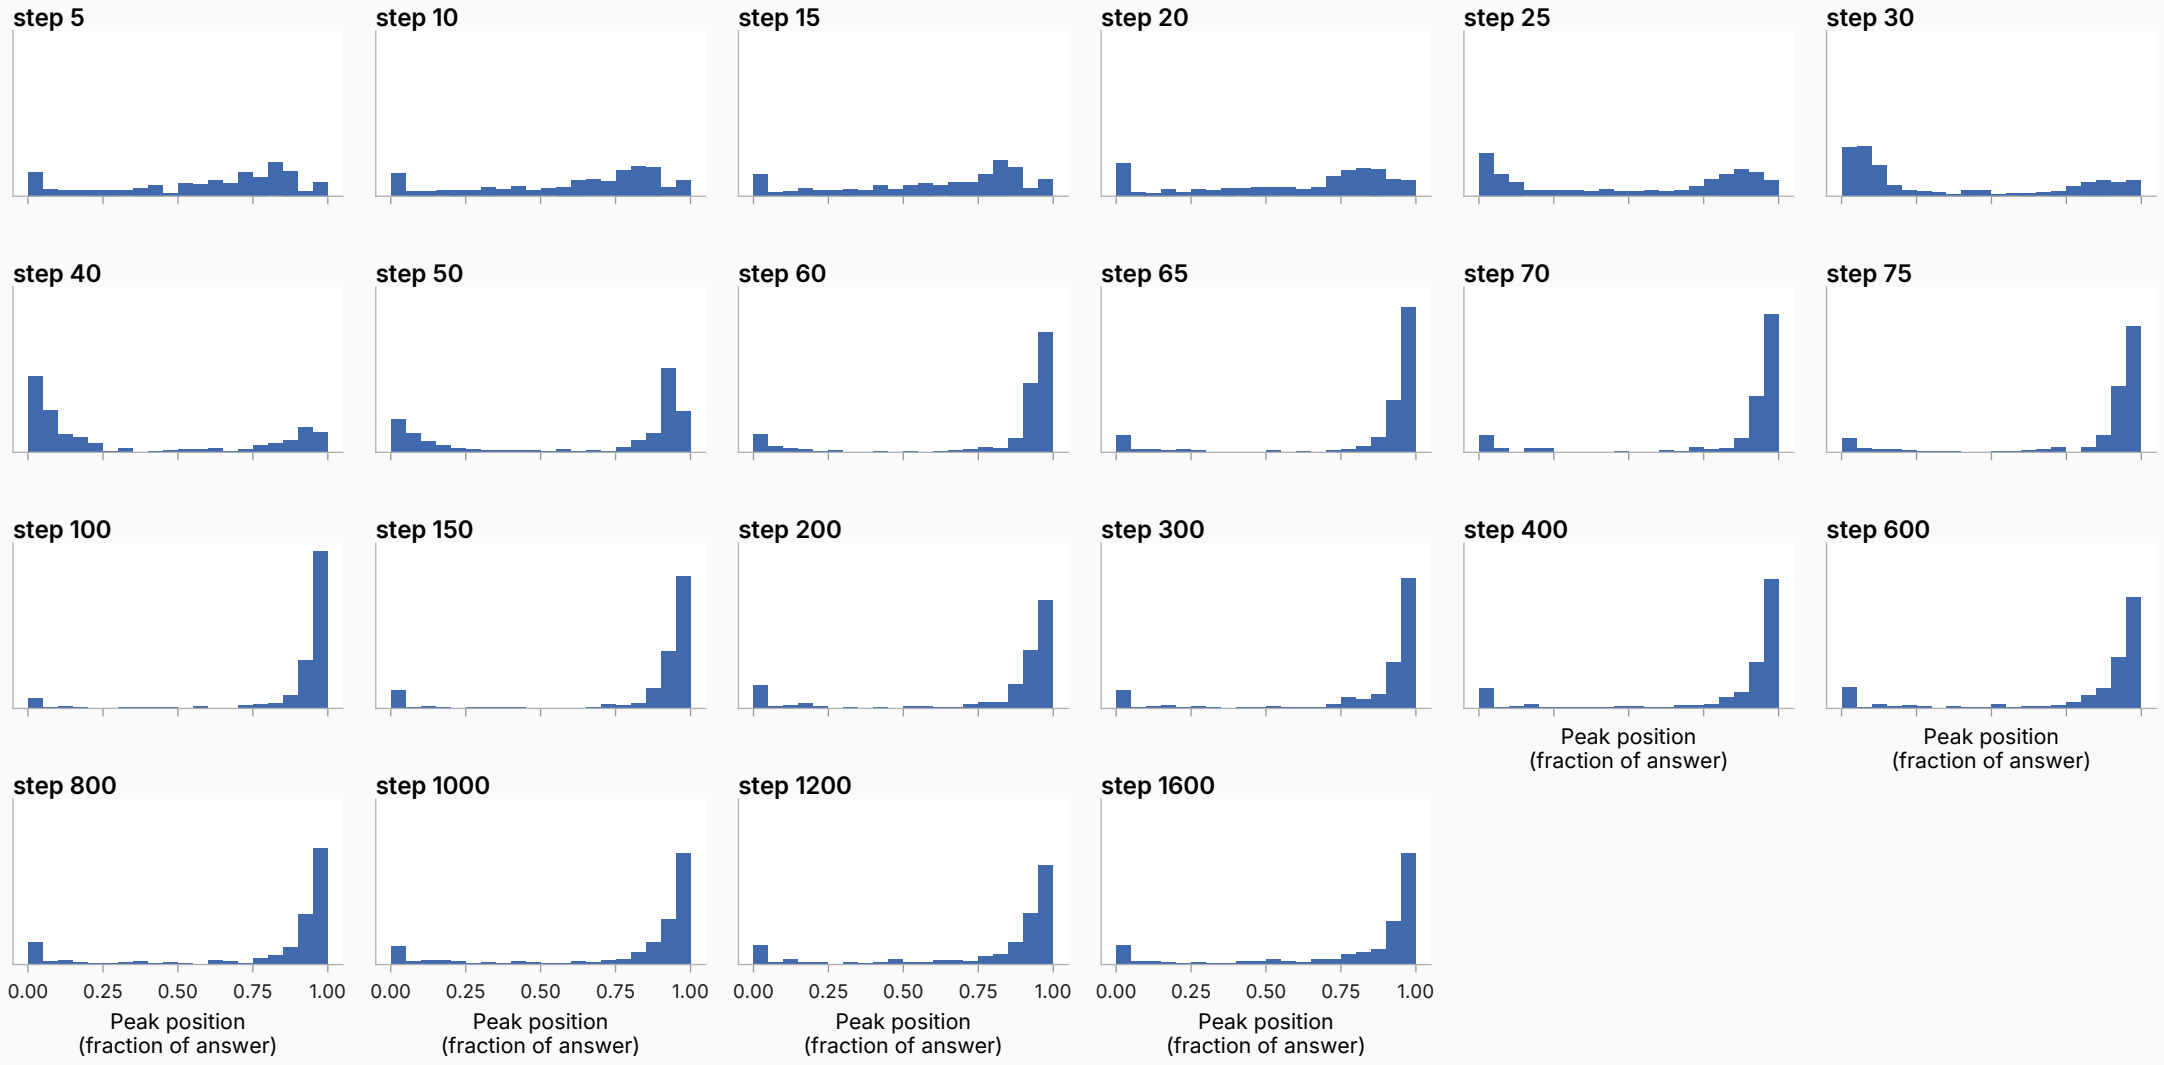
One histogram per training step. x = position of argmax(log p) divided by answer length. 1.0 = model puts max marker mass at the final generated token.