
OPENPGP CARD APPLICATION USER GUIDE

LEDGER SAS



https://github.com/LedgerHQ/app-openpgp

Contents

1	License	1
2	Introduction	2
3	How to install GPG Application 3.1 System Configuration 3.1.1 Linux 3.1.2 MAC 3.1.3 Windows 3.1.3 Windows 3.1.4 Manual update of CCID 3.1.4 Ma	2 2 2 2 2 2
4	OpenPGP Card application explained 4.1 Menu Overview 4.2 Device Info 4.3 Select Slot 4.4 Settings 4.4.1 Key Template 4.4.2 Seed mode 4.4.3 PIN mode 4.4.4 UIF mode 4.4.5 Reset 4.4.5 Reset	3 3 4 4 4 4 6 6 7 8
5	5.1.5 Decrypting and Signing 5.2 SSH 5.2.1 Overview 5.2.2 Generate new key on device 5.2.3 Add sub-key 5.2.4 Configure SSH and GPG 5.3 Backup and Restore 5.3.1 Introduction 5.3.2 Restore without backup	8 8 8 9 12 14 14 14 14 17 18 18 18
6 7	6.1 Test command line tool	23 23 26 26 26
	, ,	28

1 License

Ledger App OpenPGP. (c) 2024 Ledger SAS.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

2 Introduction

GnuPG application for Ledger devices.

This application implements "The OpenPGP card" specification revision 3.3. This specification is available in doc directory at [G10CODE].

The application supports:

- RSA with key up to 3072 bits
- ECDSA with secp256R1 and secp256K1
- EDDSA with Ed25519 curve
- ECDH with secp256R1, secp256K1 and curve25519 curves

This release has known missing parts (see also [GPGADD]):

• Seed mode ON/OFF via apdu

3 How to install GPG Application

3.1 System Configuration

You need to install CCID. For Linux and MAC, the Ledger CCID interface is not supported by default by pcscd and must be manually added.

3.1.1 Linux

You have to add your devices to /etc/libccid_Info.plist

3.1.2 MAC

- 1. First it is necessary to disable SIP, that forbid editing files in /usr/.
- 2. You have to add your devices to /usr/libexec/SmartCardServices/drivers/ifd-ccid.bundle/Contents/Info.p
- 3. Enable SIP

 $Note: See \ https://developer.apple.com/library/content/documentation/Security/Conceptual/System_Integrity_Protection_Guide/ConfiguringSystemIntegrityProtection/ConfiguringSystemIntegrityProtection.html$

3.1.3 Windows

TODO...

3.1.4 Manual update of CCID

In case the devices ids are not set or not correct, please update the Info.plist file manually. Remember there are 3 important nodes in this xml file, and the lines must be coherent between those nodes:

- <key>ifdVendorID</key>
- <key>ifdProductID</key>
- \bullet <key>ifdFriendlyName</key>

Thus, you must ensure (or add):

- For Nanos:
 - ifdVendorID: 0x2C97

```
- ifdProductID: 0x1009
    - ifdFriendlyName: Ledger Nano S
• For Nanox:
    - ifdVendorID: 0x2C97
    - ifdProductID: 0x4009
    - ifdFriendlyName: Ledger Nano X
• For Nanos+:
    - ifdVendorID: 0x2C97
    - ifdProductID: 0x5009
    - ifdFriendlyName: Ledger Nano S Plus
• for Stax:
    - ifdVendorID: 0x2C97
    - ifdProductID: 0x6009
    - ifdFriendlyName: Ledger Stax
• for Flex:
    - ifdVendorID: 0x2C97
    - ifdProductID: 0x7009
```

- ifdFriendlyName: Ledger Flex

Notes:

- The 3 entry nodes must be added for each device. It can be easier to add new ones at the end of each list.
- A file 0001-plist.patch is provided in this directory.

4 OpenPGP Card application explained

4.1 Menu Overview

The full menu layout is:

```
Select Slot
  Choose:
  Slot 1 #+
  Slot 2
  Slot 3
  Set Default slot
Settings
  Key Template
     Choose Key...
        Signature
        Decryption
        Authentication
     Choose Type...
        RSA 2048
        RSA 3072
        SECP 256R1
        ED25519
     Set Template
  Seed mode ON/OFF
  PIN mode
     Choose:
     On Screen
     Confirm only #+
     Trust
     Set as Default
  UIF mode
    UIF for Signature ON/OFF
    UIF for Decryption ON/OFF
```

```
UIF for Authentication ON/OFF
Reset
About
OpenPGP\ Card
(c)\ Ledger\ SAS
Spec\ 3.3.1
App\ 1.5.4
```

Emphasis entries are not selectable and just provide information.

A "#" after the entry label means default value on reset.

A "+" after the entry label means current value.

4.2 Device Info

The Device Info provides current user and slot information. The format is:

```
<User: **name** / Serial: **s** / Slot: **n** >
```

with:

- name is the one provided to gpg --card-edit. See [GPGSC].
- s is the 32 bits card serial number. Note that the last three bits always encode the current slot value.
- **n** is the current slot, see below.

4.3 Select Slot

This menu is not available on Nanos, limited to a single slot. It is available on all other devices.

A Slot is a set of 3 key pairs Signature, Decryption, Authentication as defined by gnupg specification.

Usually a GPG card application only manages a single set. Ledger version enhances this and allows you to manage 3 key sets.

The Select Slot menu allows you to select the slot you want to play with, and to set the default slot when the application start.

To change the current slot, display the slot you want and select it

To change the default slot, first select it, and then select the Set Default entry.

4.4 Settings

4.4.1 Key Template

A key template is defined by the OpenGPG card application specification. It describes the key to be generated with the generate command in gpg --card-edit

To set up a new ECC template you have three choices:

- The gpg --edit-card interactive setup (recommended)
- \bullet The gpg-connect-agent tool
- The device menu.

gpg --card-edit

This method suppose you have a recent GnuPG tool and that you correctly configured it. See the dedicated section for that.

In a terminal launch:

```
$ gpg --card-edit gpg/card> admin $$ admin commands are allowed gpg/card> key-attr
```

```
Changing card key attribute for: Signature key
Please select what kind of key you want:
  (1) RSA
  (2) ECC
Your selection? 2
Please select which elliptic curve you want:
  (1) Curve 25519
  (4) NIST P-384
Your selection? 1
The card will now be re-configured to generate a key of type: ed25519
Note: There is no guarantee that the card supports the requested size.
    If the key generation does not succeed, please check the
   documentation of your card to see what sizes are allowed.
Changing card key attribute for: Encryption key
Please select what kind of key you want:
  (1) RSA
  (2) ECC
Your selection? 2
Please select which elliptic curve you want:
  (1) Curve 25519
  (4) NIST P-384
Your selection? 1
The card will now be re-configured to generate a key of type: cv25519
Changing card key attribute for: Authentication key
Please select what kind of key you want:
  (1) RSA
  (2) ECC
Your selection? 2
Please select which elliptic curve you want:
  (1) Curve 25519
  (4) NIST P-384
Your selection? 1
The card will now be re-configured to generate a key of type: ed25519
```

To show the current template use the gpg --card-status command.

gpg-connect-agent

This method suppose you have correctly configured your GnuPG tool. See the dedicated section for that. In a terminal launch:

```
gpg-connect-agent "SCD SETATTR KEY-ATTR --force 1 <a href="tags-curvename">tags-curvename</a> /bye gpg-connect-agent "SCD SETATTR KEY-ATTR --force 2 18 <a href="tags-curvename">curvename</a> /bye gpg-connect-agent "SCD SETATTR KEY-ATTR --force 3 <a href="tags-curvename">tags-curvename</a> /bye
```

This 3 commands fix, in that order, the template for Signature, Decryption, Authentication keys.

Supported curve name are:

- secp256k1 with tag 19
- secp256r1 with tag 19
- nistp256 with tag 19
- cv25519 (only for key 2)
- ed25519 with tag 22 (only for key 1 and 3)

To show the current template use the gpg --card-status command.

Device menu

First under *Choose Key* menu, select the one of 3 keys for which you want to modify the template. Then under "Choose Type", select the desired key template. Finally select "Set Template" entry to set it.

To show the current template use the gpg --card-status command.

4.4.2 Seed mode

When generating new keys on the device, those keys can be generated randomly or in a deterministic way. The deterministic way is specified in [GPGADD]. The current mode is displayed in the first sub menu. To activate the seed mode select ON, to deactivate the seed mode select OFF.

When the application starts, the seed mode is always set to ON

4.4.3 PIN mode

Some operations require the user to enter his PIN code. The default PIN values are:

user: 123456admin: 12345678

The PIN entry can be done using 3 methods, named On Screen, Confirm only, Trust.

After each mode a + or # symbol may appear to tell which mode is the current one and which one is the default when the application starts. The default mode can be changed by first selecting the desired mode and then selecting the $Set\ default$ menu.

Note: Trust can not be set as default mode.

Before you can change the PIN mode, you need to verify the PIN on the client. To do this, run gpg --card-edit, then admin and finally verify on you PC. You will then be asked to enter the current PIN. After doing so, you can change the PIN mode on your device.

On Screen

The PIN is entered on the device screen. For entering the PIN choose the next digit by using the left or right button. When the digit you expect is displayed select it by pressing both buttons at the same time.



Once all digits are selected, validate the PIN by selecting the 'V' (Validate) letter



If you want to change the previous digit select the 'C' (Cancel) letter.




Finally if you want to abort the PIN entry, select the 'A' (Abort) letter.



Confirm only

The user is requested, on the device screen, to confirm the PIN validation. The PIN value is not required, the user just has to push the REJECT or OK button on the device.

This is the default mode after application installation.

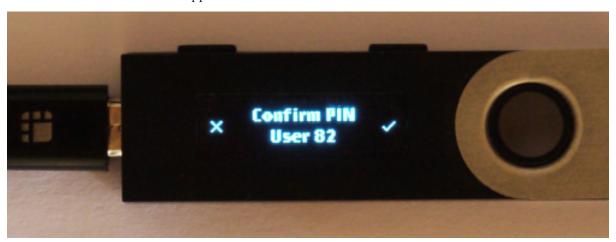

Trust

Act as if the PIN is always validated. This is a dangerous mode which should only be used in a highly secure environment.

4.4.4 UIF mode

By activating UIF mode for either signature, decryption or authentication, a user validation will be ask by the device each time the related operation is performed.

To activate or deactivate the UIF, select the operation to protect and press both button. When activated, a '+' symbol appears after the operation name.

4.4.5 Reset

Selecting the menu will erase all OpenPGP Card Application data and will reset the application in its 'just installed' state.

5 OpenPGP Card application usage

5.1 GPG

The OpenGPG Card application need at least version 2.1.19 for full support. A version prior to 2.1.19 will fail when using ECC.

You should test with a test key and make a backup of your keyring before starting, except if your are sure about what you do.

5.1.1 Configuration

In order to use a Ledger device with gpg it is needed to explicitly setup the reader and the delegated PIN support. Create or edit the file ~/.gnupg/scdaemon.conf and add the following lines:

```
reader-port "Ledger Token"
allow-admin
enable-pinpad-varlen
```

Note: enable-pinpad-varlen option is mandatory, else gpg could request the PIN on the *host*, which is not supported by Ledger App.

You can check the reader-port value by running the command line pcsc_scan:

```
$ pcsc_scan
Using reader plug'n play mechanism
Scanning present readers...
0: Ledger Nano S Plus [Nano S Plus] (0001) 00 00
1: Alcor Micro AU9540 01 00
Thu Jan 11 10:58:25 2024
Reader O: Ledger Nano S Plus [Nano S Plus] (0001) 00 00
 Event number: 0
 Card state: Card inserted, Exclusive Mode,
 ATR: 3B 00
ATR: 3B 00
+ TS = 3B --> Direct Convention
+ T0 = 00, Y(1): 0000, K: 0 (historical bytes)
Reader 1: Alcor Micro AU9540 01 00
 Event number: 0
 Card state: Card removed,
```

5.1.2 Get/Set basic information

The gpg --card-status command provides default card information. Just after installation it should look like this:

```
$ gpg --card-status
Reader .....: Ledger Nano S Plus [Nano S Plus] (0001) 01 00
Application ID ...: D2760001240103002C97AFB114290000
Version .....: 3.3
Manufacturer ....: unknown
Serial number ...: AFB11429
```

```
Name of cardholder: [not set]
    Language prefs ...: [not set]
    Salutation ....:
    URL of public key: [not set]
    Login data ....: [not set]
    Signature PIN ....: not forced
    Key attributes ...: rsa2048 rsa2048 rsa2048
    Max. PIN lengths .: 12 12 12
    PIN retry counter: 3 0 3
    Signature counter: 0
    Signature key ....: [none]
    Encryption key....: [none]
    Authentication key: [none]
    General key info..: [none]
You can set the user information with the gpg --card-edit subcommands. For examples:
     $ gpg --card-edit
     gpg/card> admin
    Admin commands are allowed
    gpg/card> name
    Cardholder's surname: Doe
    Cardholder's given name: John
    gpg/card> salutation
    salutation ((M)ale, (F)emale or space): M
    gpg/card> list
    Reader ..... Ledger Nano S Plus [Nano S Plus] (0001) 01 00
    Application ID ...: D2760001240103002C97AFB114290000
    Version ..... 3.3
    Manufacturer ....: unknown
    Serial number ....: AFB11429
    Name of cardholder: John Doe
    Language prefs ...: [not set]
    Salutation ....: Mr.
    URL of public key: [not set]
    Login data ....: [not set]
    Signature PIN ....: not forced
    Key attributes ...: rsa2048 rsa2048 rsa2048
    Max. PIN lengths .: 12 12 12
    PIN retry counter: 3 0 3
    Signature counter: 0
    Signature key ....: [none]
    Encryption key...: [none]
    Authentication key: [none]
    General key info..: [none]
```

Notes:

- Modifying the user information will prompt you to enter User PIN.
- Setting user information is not required for using gpg client.

5.1.3 Generate new key pair

For generating a new key pair follow those steps:

- Select the desired slot
- Setup the desired key template for this slot

• Generate the new key set

Step 1

Starting from main menu:

- Select Select slot menu
- Scroll to desired slot
- Select it
- Optionally set it as default by selecting Set Default menu
- Select Back to return to main menu.

Step 2

The default template for each three keys (signature, decryption, authentication) is RSA 2048. If you want another kind of key you have to set the template before generating keys.

WARNING: Changing the current template of a key automatically erases the associated one.

Starting from main menu:

- Select Settings
- Select Key template
- Select Choose Key... (a)
- Scroll and select which key you want to set the new template for
- Select Choose type...
- Scroll and select among the supported key types and sizes
- Select Set template
- Repeat this process from (a) if you want to modify another key template
- Select Back to return to main.

Step 3

Once the template has been set, it's possible to generate new key pairs with gpg.

WARNING: gpg will generate the 3 key pairs and will overwrite any key already present in the selected slot.

Here after is a detailed log of key generation of ECC keys, assuming the key templates are NIST P256.

Edit Card

```
$ gpg --edit-card
Reader .....: Ledger Nano S Plus [Nano S Plus] (0001) 01 00
Application ID ...: D2760001240103002C97AFB1142B0000
Version ..... 3.3
Manufacturer ....: unknown
Serial number ....: AFB1142B
Name of cardholder: John Doe
Language prefs ...: [not set]
Salutation .....: Mr.
URL of public key: [not set]
Login data ....: [not set]
Signature PIN ....: not forced
Key attributes ...: nistp256 nistp256 nistp256
Max. PIN lengths .: 12 12 12
PIN retry counter: 3 0 3
Signature counter: 0
Signature key ....: [none]
Encryption key...: [none]
Authentication key: [none]
General key info..: [none]
```

Switch to admin mode:

```
gpg/card> admin
    Admin commands are allowed
Request new key generation without backup
     gpg/card> generate
    Make off-card backup of encryption key? (Y/n) n
Unlock user level "81"
    Please unlock the card
    Number: 2C97 AFB1142B
    Holder: John Doe
    Use the reader's pinpad for input.
    Press any key to continue.
Set key validity
    Please specify how long the key should be valid.
          0 = key does not expire
        <n> = key expires in n days
       < n>w = key expires in n weeks
       n = key expires in n months
       < n>y = key expires in n years
    Key is valid for? (0) \theta
    Key does not expire at all
    Is this correct? (y/N) y
Set user ID
    GnuPG needs to construct a user ID to identify your key.
    Real name: John Doe
    Email address: john.doe@foo.com
    Comment:
    You selected this USER-ID:
       "John Doe <john.doe@foo.com>"
    Change (N)ame, (C)omment, (E)mail or (O)kay/(Q)uit? O
Unlock admin level "83"
    Please enter the Admin PIN
    Number: 2C97 AFB1142B
    Holder: John Doe
    Use the reader's pinpad for input.
    Press any key to continue.
Unlock user level "81"
    Please unlock the card
    Number: 2C97 AFB1142B
    Holder: John Doe
    Counter: 0
```

Use the reader's pinpad for input.

OK

Press any key to continue.

Final confirmation

```
Change (N)ame, (C)omment, (E)mail or (0)kay/(Q)uit? O gpg: key DF3FA4A33EF00E47 marked as ultimately trusted gpg: revocation certificate stored as 'xxxx/openpgp-revocs.d/89F772243C9A3E583CB59AB5DF3FA4A33E public and secret key created and signed.
```

Get information after key generation

```
gpg/card> list
Reader .....: Ledger Nano S Plus [Nano S Plus] (0001) 01 00
Application ID ...: D2760001240103002C97AFB1142B0000
Version ..... 3.3
Manufacturer ....: unknown
Serial number ....: AFB1142B
Name of cardholder: John Doe
Language prefs ...: [not set]
Salutation .....: Mr.
URL of public key: [not set]
Login data ....: [not set]
Signature PIN ....: not forced
Key attributes ...: nistp256 nistp256 nistp256
Max. PIN lengths .: 12 12 12
PIN retry counter: 3 0 3
Signature counter: 12
Signature key ....: F844 38BB CA87 F9A7 6830 F002 F8A4 A353 3CBF CAA5
   created ....: 2017-08-22 15:59:36
Encryption key....: B1D3 C9F2 C3C5 87CA 36A7 F02E E137 28E9 13B8 77E1
   created ....: 2017-08-22 15:59:36
Authentication key: F87D EF02 9C38 C43D 41F0 6872 2345 A677 CE9D 8223
   created ....: 2017-08-22 15:59:36
General key info..: pub nistp256/F8A4A3533CBFCAA5 2017-08-22 John Doe
<john.doe@foo.com>
sec> nistp256/F8A4A3533CBFCAA5 created: 2017-08-22 expires: never
                    card-no: 2C97 AFB1142B
ssb> nistp256/2345A677CE9D8223 created: 2017-08-22 expires: never
                    card-no: 2C97 AFB1142B
ssb> nistp256/E13728E913B877E1 created: 2017-08-22 expires: never
                    card-no: 2C97 AFB1142B
```

At this point it's possible to check that the key has been generated on card with the following command:

5.1.4 Moving an existing key pair

This section shows how to move an existing key onto the Ledger device.

```
The key to transfer here is a RSA 4096 bits key:
```

```
$ gpg --list-secret-keys "RSA 4096"
      rsa4096 2017-04-26 [SC]
   FB6C6C75FB016635872ED3E49B93CB47F954FB53
uid
              [ultimate] RSA 4096
      rsa4096 2017-04-26 [E]
ssb
```

In case of transfer it is not necessary to previously set the template. It will be automatically changed. When generating a new key, the 3 keys (signature, decryption, authentication) are automatically generated. When transferring existing ones, it is possible to choose which one will be moved.

Edit Key

```
$ gpg --edit-key "RSA 4096"
gpg (GnuPG) 2.2.27; Copyright (C) 2021 Free Software Foundation, Inc.
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.
Secret key is available.
sec rsa4096/9B93CB47F954FB53
   created: 2017-04-26 expires: never
                                             usage: SC
                        validity: ultimate
   trust: ultimate
ssb rsa4096/49EE12B0F5CBDF26
   created: 2017-04-26 expires: never
                                             usage: E
[ultimate] (1). RSA 4096
```

Select the key to move, here the encryption one.

```
gpg> key 1
sec rsa4096/9B93CB47F954FB53
  created: 2017-04-26 expires: never
                                            usage: SC
  trust: ultimate
                       validity: ultimate
ssb* rsa4096/49EE12B0F5CBDF26
   created: 2017-04-26 expires: never
                                             usage: E
[ultimate] (1). RSA 4096
```

Move

```
gpg> keytocard
Please select where to store the key:
  (2) Encryption key
Your selection? 2
```

Unlock admin level "83"

```
Number: 2C97 1D49B409
Holder:
Use the reader's pinpad for input.
Press any key to continue.
```

Unlock admin level "83" (maybe twice....)

```
Please enter the Admin PIN
Number: 2C97 1D49B409
```

Holder:

Please enter the Admin PIN

```
Use the reader's pinpad for input.
    Press any key to continue.
    sec rsa4096/9B93CB47F954FB53
       created: 2017-04-26 expires: never
                                                 usage: SC
       trust: ultimate
                            validity: ultimate
     ssb* rsa4096/49EE12B0F5CBDF26
        created: 2017-04-26 expires: never
                                                  usage: E
     [ultimate] (1). RSA 4096
    gpg> save
    gpg> quit
check
    $ gpg --edit-key "RSA 4096"
    gpg (GnuPG) 2.2.27; Copyright (C) 2021 Free Software Foundation, Inc.
    This is free software: you are free to change and redistribute it.
    There is NO WARRANTY, to the extent permitted by law.
    Secret key is available.
    sec rsa4096/9B93CB47F954FB53
       created: 2017-04-26 expires: never
                                                  usage: SC
       trust: ultimate
                             validity: ultimate
    ssb rsa4096/49EE12B0F5CBDF26
       created: 2017-04-26 expires: never
                                                  usage: E
       card-no: 2C97 7BB895B9
     [ultimate] (1). RSA 4096
```

The encryption key is now associated with a card.

5.1.5 Decrypting and Signing

Decrypting and Signing will act exactly the same way as if keys were not on the card. The only difference is gpg will request the PIN code instead of the passphrase.

5.2 SSH

5.2.1 Overview

In order to use gpg for SSH authentication, an "authentication" is needed. There are two solutions for that, either generate one on the device or add an authentication sub-key to your existing master gpg key.

Once done, it is necessary to configure ssh to point to the right key and delegate the authentication to gpg-ssh-agent instead of ssh-agent.

5.2.2 Generate new key on device

The important thing to keep in mind here is there is no way to tell gpg to only generate the authentication key. So generating this key will also generate the two other under a new identity and will erase existing keys on the current slot on the device.

Nevertheless, if you want to use a different identity for ssh login, you can use another slot on the device. See OpenPGP Card application explained and Generate new key pair.

5.2.3 Add sub-key

```
Edit pgp key set
```

```
$ gpg --expert --edit-key "john.doe@foo.com"
gpg (GnuPG) 2.2.27; Copyright (C) 2021 Free Software Foundation, Inc.
```

This is free software: you are free to change and redistribute it. There is NO WARRANTY, to the extent permitted by law.

Secret key is available.

sec rsa2048/831415DA94A9A15C

created: 2017-08-25 expires: never usage: SC

trust: ultimate validity: ultimate

ssb rsa2048/8E95F2999EEC38C4

created: 2017-08-25 expires: never usage: E

[ultimate] (1). John Doe <john.doe@foo.com>

Add sub key

gpg> addkey

Please select what kind of key you want:

- (3) DSA (sign only)
- (4) RSA (sign only)
- (5) Elgamal (encrypt only)
- (6) RSA (encrypt only)
- (7) DSA (set your own capabilities)
- (8) RSA (set your own capabilities)
- (10) ECC (sign only)
- (11) ECC (set your own capabilities)
- (12) ECC (encrypt only)
- (13) Existing key
- (14) Existing key from card

Your selection? 8

Toggle sign/encrypt OFF, Toggle authentication ON

Possible actions for a RSA key: Sign Encrypt Authenticate Current allowed actions: Sign Encrypt

- (S) Toggle the sign capability
- (E) Toggle the encrypt capability
- (A) Toggle the authenticate capability
- (Q) Finished

Your selection? S

Possible actions for a RSA key: Sign Encrypt Authenticate Current allowed actions: Encrypt

- (S) Toggle the sign capability
- (E) Toggle the encrypt capability
- (A) Toggle the authenticate capability
- (Q) Finished

Your selection? E

Possible actions for a RSA key: Sign Encrypt Authenticate Current allowed actions:

- (S) Toggle the sign capability
- (E) Toggle the encrypt capability
- (A) Toggle the authenticate capability
- (Q) Finished

Your selection? A

Possible actions for a RSA key: Sign Encrypt Authenticate Current allowed actions: Authenticate

- (S) Toggle the sign capability
- (E) Toggle the encrypt capability
- (A) Toggle the authenticate capability
- (Q) Finished

Your selection? Q

Set key options

RSA keys may be between 1024 and 4096 bits long. What keysize do you want? (2048) 2048 Requested keysize is 2048 bits

Please specify how long the key should be valid.

0 = key does not expire

< n> = key expires in n days

< n>w = key expires in n weeks

n>m = key expires in n months

<n>y = key expires in n years

Key is valid for? (0) θ

Key does not expire at all

Is this correct? (y/N) y

Really create? (y/N) y

We need to generate a lot of random bytes. It is a good idea to perform some other action (type on the keyboard, move the mouse, utilize the disks) during the prime generation; this gives the random number generator a better chance to gain enough entropy.

sec rsa2048/831415DA94A9A15C

created: 2017-08-25 expires: never usage: SC

trust: ultimate validity: ultimate

ssb rsa2048/8E95F2999EEC38C4

created: 2017-08-25 expires: never usage: E

ssb rsa2048/C20B90E12F68F035

created: 2017-08-28 expires: never usage: A

[ultimate] (1). John Doe <john.doe@foo.com>

Select the key and move it

gpg> key 2

sec rsa2048/831415DA94A9A15C

created: 2017-08-25 expires: never usage: SC

trust: ultimate validity: ultimate

ssb rsa2048/8E95F2999EEC38C4

created: 2017-08-25 expires: never usage: E

ssb* rsa2048/C20B90E12F68F035

created: 2017-08-28 expires: never usage: A

[ultimate] (1). John Doe <john.doe@foo.com>

gpg> keytocard

Please select where to store the key:

(3) Authentication key

Your selection? 3

sec rsa2048/831415DA94A9A15C

```
created: 2017-08-25 expires: never usage: SC
  trust: ultimate validity: ultimate
ssb rsa2048/8E95F2999EEC38C4
  created: 2017-08-25 expires: never usage: E
ssb* rsa2048/C20B90E12F68F035
  created: 2017-08-28 expires: never usage: A
[ultimate] (1). John Doe <john.doe@foo.com>
```

5.2.4 Configure SSH and GPG

First, tell gpg-agent to enable ssh-auth feature by adding the following line to your .gpg-agent.conf:

```
enable-ssh-support
```

Starting with gpg is necessary to add some configuration options to make the *pinentry* work properly. Add the following line to ~/.bashrc file:

```
export SSH_AUTH_SOCK=`gpgconf --list-dirs agent-ssh-socket'
export GPG_TTY=`tty'
gpgconf --launch gpg-agent
```

It may be also necessary to setup the loopback pinentry options.

Add the following line to your ~/.gnupg/gpg-agent.conf:

```
allow-loopback-pinentry
```

And add the following line to your ~/.gnupg/gpg.conf:

```
pinentry-mode loopback
```

Then export your authentication public key. First execute the command: gpg -k --with-subkey-fingerpr --with-keygrip john.doe@foo.com.

Add the keygrip of the authentication key, the one identified by [A], to .gnupg/sshcontrol file:

```
$ echo 6D60CB58D9D66EE09804E7FE460E865A91F5E41A > .gnupg/sshcontrol
```

Export your authentication key, identifier by its fingerprint, in a SSH compliant format.

```
$ gpg --export-ssh-key 2D0E4FFFAA448AA2770C7F02C20B90E12F68F035 ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAABAQDCIARKh0IZTH1d+I6oA8nwrgnCUQE8f 7X3pmI4ZwryT52fKhpcsQJsd3krodXrM//LiK8+m2ZRMneJ9iG1qqE7SCyZkNBj1GUm9s rK3Q5eoR6nU0s+sq17b/FAtQWHBJTqqa0tyA33hFj5twUtWZ6rokX9cNZrD1ne8kRVHDe 3uEBsaY5PR1Tuko/GwywLyZu0SwfEobl/RPjL7P8rUSc7DTHpQMw8fjJFb4BNvIHAlaVC5FwZwkuogygaJdN/44MayHFm0Zmzx9CAgYgLpTzen35+CcyhlqCqi+HjNlnHL2DDWd4iRd3Y6pY8LjS3xQkECc3Bhedptp17D+H9AVJt openpgp:0x2F68F035
```

Finally copy the above export (ssh-rsa AAAAB...Jt openpgp:0x2F68F035) into the ~/.ssh/authorized_keys file on your remote server.

Now, if everything is correctly setup and running, an ssh-add -1 should show your key:

```
$ ssh-add -1
2048 SHA256:sLCzsoi5GAG2kJkG6hSp8gTLPxSvo/zNtsks2kQ7vTU cardno:2C979421A9E1
(RSA)
2048 SHA256:sLCzsoi5GAG2kJkG6hSp8gTLPxSvo/zNtsks2kQ7vTU (none) (RSA)
```

And you should be able to ssh to your remote server with your gpg key!

5.3 Backup and Restore

5.3.1 Introduction

The OpenPGP card specification does not provide any mechanism for backuping you key. Thus if you generate your keys on device and loose it, you definitively loose you private key.

In order to avoid such extreme panic situation, a backup/restore mechanism is provided. At any time you can backup a snapshot of your device data, including your private keys. All public data are retrieve in clear form. The private key are stored encrypted with a key derived from your seed, i.e. from your 24 BIP words.

The backup/restore tool is located in pytools directory.

See Tools later in this document for the tools details and usage.

Note: The keys backup will work only if the SEED Mode is enabled!

5.3.2 Restore without backup

If you have seeded key but do not have done a backup and still have your keyring, there is a solution to restore at least the key and their related information: serial and fingerprints. All other information such as name, url, ... shall be set manually with gpg --card-edit.

Step 1: Retrieve information

Run the command gpg --edit-key john.doe@foo.com.

\$ gpg --edit-key john.doe@foo.com

```
gpg (GnuPG) 2.2.27; Copyright (C) 2021 Free Software Foundation, Inc.
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.
Secret key is available.
sec ed25519/8451AAF7D43D1095
   created: 2018-10-10 expires: never
                                             usage: SC
   card-no: 2C97 FD6C11BE
   trust: ultimate
                        validity: ultimate
ssb ed25519/C5A8FB078520ABBB
   created: 2018-10-10 expires: never
                                             usage: A
   card-no: 2C97 FD6C11BE
ssb cv25519/0953D871FC4B9EA4
   created: 2018-10-10 expires: never
                                             usage: E
   card-no: 2C97 FD6C11BE
[ultimate] (1). John Doe <john.doe@foo.com>
```

The *usage* field tells you each key purpose:

- S for signature,
- C for Certification (subkey signature),
- A for authentication,
- E for encryption.

The *card-no* field provides you with the serial number of the card on which the key are stored. You should have 3 or less keys with the same serial. These are the keys we want to restore.

For each key you also have the key template (rsa2048, rsa3072, ed2559, cv25519) followed by the short fingerprint, e.g. ed25519/8451AAF7D43D1095

Please note the serial and the 3 key template names: FD6C11BE , ed25519:cv25519:ed25519. Take care of the order: SC:E:A.

To get the full fingerprint of each key, run (yes twice --fingerprint):

Assemble the 3 full fingerprint, corresponding to the one identified previously, in the the following order SC:E:A:

2C688345BDDA0EDFB24DB4FB8451AAF7D43D1095:DF157BD4AC3BD1EE991099C80953D871FC4B9EA4:CCC59AE6A76614BC3C6D37D9C5A8FB078520ABBB.

Note: If you only have one single key to restore you can omit the others. For example, to only restore the authentication key: :: CEC59AE6A76614BC3C6D37D9C5A8FB078520ABBB

Step 2: Restore

Plug your device and run the OpenPGP application.

Finally run the following command:

```
python3 -m gpgcard.gpgcli --pinpad --set-template ed255519:cv25519:ed255519
--set-fingerprints
'2C688345BDDA0EDFB24DB4FB8451AAF7D43D1095:DF157BD4AC3BD1EE991099C80953D871FC4B9EA4:CEC59AE6A76
--serial 'FD6C11BE' --seed-key
```

5.3.3 Restore lost Keyring

In case the local keyring files are lost, follow the recovery process hereafter. Usually under ~/.gnupg/, the keyring files contain the Public keys and associated metadata.

Step 1: Retrieve key metadata

Check that your device is connected and recognised, and print out the *keygrips* and *creation timestamps* of your keys:

```
$ gpg --card-status --with-keygrip
Reader ..... Ledger Nano S Plus [Nano S Plus] (0001) 00 00
Application ID ...: D2760001240103032C97E1A67CBF0000
Application type .: OpenPGP
Version ....: 3.3
Manufacturer ....: unknown
Serial number ....: E1A67CBF
Name of cardholder: [not set]
Language prefs ...: [not set]
Salutation ....:
URL of public key : [not set]
Login data .....: [not set]
Signature PIN ....: not forced
Key attributes ...: rsa2048 rsa2048 rsa2048
Max. PIN lengths .: 12 12 12
PIN retry counter: 3 0 3
Signature counter: 4
```

```
Signature key ....: FE93 6FEC 13BE BDAA AOC6 3E72 05DC 472D A6F6 A13B created ....: 2024-01-18 10:08:41 keygrip ....: 348411953EBC6DE6416D40A7048F5C5795A956A2

Encryption key ....: CD29 B086 FE23 3DAD 3D51 B713 7E6F 425E 7A90 EE9E created ....: 2024-01-18 10:08:41 keygrip ....: 1066E2EC6FB7F21738C010D62676CA64FDD5001F

Authentication key: 218F 67FB 8577 1DF1 60C1 CFE0 4A6F EB8C 0F76 76FD created ....: 2024-01-18 10:08:41 keygrip ....: 73921B6FC73851E61AE9A0196003BE9516B916A0

General key info..:
```

Step 2: Import the Master key

Comment:

You selected this USER-ID:

First, import your master **Signature key** from the device.

Because GPG key IDs are based in part on their creation time, we need to set a fake system time to match the *created* time for the Signature key shown above.

Convert the creation date format like so by removing punctuation, adding a "T" between the date and time, and adding an exclamation mark to the end:

```
2024-01-18 10:08:41 becomes 20240118T100841!
```

Add that to your GPG arguments like so to start importing the key. When the menu pops up, pick the Existing key from card option. Then, pick the key which has the **cert,sign** right enabled (1), and follow through the prompts to create your user ID.

```
$ gpg --faked-system-time "20240118T100841!" --full-generate-key
gpg (GnuPG) 2.2.27; Copyright (C) 2021 Free Software Foundation, Inc.
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.
gpg: WARNING: running with faked system time: 2024-01-18 10:08:41
Please select what kind of key you want:
  (1) RSA and RSA (default)
  (2) DSA and Elgamal
  (3) DSA (sign only)
  (4) RSA (sign only)
 (14) Existing key from card
Your selection? 14
Serial number of the card: D2760001240103032C97E1A67CBF0000
Available keys:
  (1) 348411953EBC6DE6416D40A7048F5C5795A956A2 OPENPGP.1 rsa2048 (cert,sign)
  (2) 1066E2EC6FB7F21738C010D62676CA64FDD5001F OPENPGP.2 rsa2048 (encr)
  (3) 73921B6FC73851E61AE9A0196003BE9516B916A0 OPENPGP.3 rsa2048 (sign,auth)
Your selection? 1
Please specify how long the key should be valid.
       0 = key does not expire
    <n> = key expires in n days
    <n>w = key expires in n weeks
    n>m = key expires in n months
    <n>y = key expires in n years
Key is valid for? (0)
Key does not expire at all
Is this correct? (y/N) y
GnuPG needs to construct a user ID to identify your key.
Real name: testkey
Email address:
```

```
"testkey"
```

```
Change (N)ame, (C)omment, (E)mail or (0)kay/(Q)uit? O
gpg: xxxx/manual-tests/gnupg/trustdb.gpg: trustdb created
gpg: key 05DC472DA6F6A13B marked as ultimately trusted
gpg: directory 'xxxx/manual-tests/gnupg/openpgp-revocs.d' created
gpg: revocation certificate stored as 'xxxx/manual-tests/gnupg/openpgp-revocs.d/FE936FEC13BEBDA
public and secret key created and signed.

Note that this key cannot be used for encryption. You may want to use
the command "--edit-key" to generate a subkey for this purpose.
pub rsa2048 2024-01-18 [SC]
   FE936FEC13BEBDAAA0C63E7205DC472DA6F6A13B
uid testkey
```

Step 3: Import the Encryption subkey

Next, add the **encr** key as subkey of this master key.

Use the ID of the master key that was printed in that final **pub rsa2048** block to start editing it, along with the creation dates from card-status.

\$ gpg --faked-system-time "20240118T100841!" --edit-key FE936FEC13BEBDAAA0C63E7205DC472DA6F6A13

Note: Please ensure the creation date is the same, or update the command line accordingly!

```
gpg (GnuPG) 2.2.27; Copyright (C) 2021 Free Software Foundation, Inc.
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.
gpg: WARNING: running with faked system time: 2024-01-18 10:08:41
Secret key is available.
gpg: checking the trustdb
gpg: marginals needed: 3 completes needed: 1 trust model: pgp
gpg: depth: 0 valid: 1 signed: 0 trust: 0-, 0q, 0n, 0m, 0f, 1u
sec rsa2048/05DC472DA6F6A13B
   created: 2024-01-18 expires: never
                                             usage: SC
   card-no: 2C97 E1A67CBF
   trust: ultimate
                        validity: ultimate
[ultimate] (1). testkey
gpg> addkey
Secret parts of primary key are stored on-card.
Please select what kind of key you want:
  (3) DSA (sign only)
  (4) RSA (sign only)
  (5) Elgamal (encrypt only)
  (6) RSA (encrypt only)
 (14) Existing key from card
Your selection? 14
Serial number of the card: D2760001240103032C97E1A67CBF0000
Available keys:
  (1) 348411953EBC6DE6416D40A7048F5C5795A956A2 OPENPGP.1 rsa2048 (cert,sign)
  (2) 1066E2EC6FB7F21738C010D62676CA64FDD5001F OPENPGP.2 rsa2048 (encr)
  (3) 73921B6FC73851E61AE9A0196003BE9516B916A0 OPENPGP.3 rsa2048 (sign,auth)
Your selection? 2
Please specify how long the key should be valid.
       0 = key does not expire
    n> = key expires in n days
    <n>w = key expires in n weeks
    n>m = key expires in n months
```

```
<n>y = key expires in n years
Key is valid for? (0)
Key does not expire at all
Is this correct? (y/N) y
Really create? (y/N) y
sec rsa2048/05DC472DA6F6A13B
   created: 2024-01-18 expires: never
                                              usage: SC
   card-no: 2C97 E1A67CBF
   trust: ultimate
                        validity: ultimate
ssb rsa2048/7E6F425E7A90EE9E
   created: 2024-01-18 expires: never
                                              usage: E
   card-no: 2C97 E1A67CBF
[ultimate] (1). testkey
```

Step 4: Import the Authentication subkey

Finally, add the **sign**, **auth** key as subkey of this master key.

Use the ID of the master key that was printed in that final pub rsa2048 block to start editing it, along with the creation dates from card-status.

Note: Please ensure the creation date is the same, or update the command line accordingly!

```
gpg> addkey
Secret parts of primary key are stored on-card.
Please select what kind of key you want:
  (3) DSA (sign only)
  (4) RSA (sign only)
  (5) Elgamal (encrypt only)
  (6) RSA (encrypt only)
 (14) Existing key from card
Your selection? 14
Serial number of the card: D2760001240103032C97E1A67CBF0000
Available keys:
  (1) 348411953EBC6DE6416D40A7048F5C5795A956A2 OPENPGP.1 rsa2048 (cert,sign)
  (2) 1066E2EC6FB7F21738C010D62676CA64FDD5001F OPENPGP.2 rsa2048 (encr)
  (3) 73921B6FC73851E61AE9A0196003BE9516B916A0 OPENPGP.3 rsa2048 (sign,auth)
Your selection? 3
Please specify how long the key should be valid.
       0 = key does not expire
    <n> = key expires in n days
    n>w = key expires in n weeks
    n>m = key expires in n months
    <n>y = key expires in n years
Key is valid for? (0)
Key does not expire at all
Is this correct? (y/N) y
Really create? (y/N) y
sec rsa2048/05DC472DA6F6A13B
   created: 2024-01-18 expires: never
                                              usage: SC
   card-no: 2C97 E1A67CBF
   trust: ultimate
                         validity: ultimate
ssb rsa2048/7E6F425E7A90EE9E
   created: 2024-01-18 expires: never
                                              usage: E
   card-no: 2C97 E1A67CBF
ssb rsa2048/4A6FEB8C0F7676FD
   created: 2024-01-18 expires: never
                                              usage: SA
   card-no: 2C97 E1A67CBF
[ultimate] (1). testkey
```

```
gpg> save
gpg> quit
```

Now you should be able to see your imported key by running this command:

6 Tools

There are 2 tools provided:

- gpgcli.py: General test tool
- backup.py: Backup and Restore of the configuration

If you encounter an error when performing the backup/restore, reload your scdaemon with gpgconf --reload scdaemon

6.1 Test command line tool

A test tool is provided under the directory pytools. There may be some dependencies package to install. Thus, don't forget to use the command:

```
pip install -r requirements.txt
```

This tool allows to execute lots of test with the device, like key generation, metadata modification, or simply get the information on the configuration and keys.

Its usage is:

Manage OpenPGP App on Ledger device

```
options:
-h, --help
                       show this help message and exit
                       Get and display card information
--info
                      PCSC reader name (default is 'Ledger')
--reader READER
--apdu
                       Log APDU exchange
                       Select slot (1 to 3)
--slot \{1,2,3\}
--reset
                       Reset the application (all data will be erased)
                      PIN validation will be delegated to pinpad
--pinpad
--adm-pin PIN
                       Admin PIN (if pinpad not used)
```

```
--user-pin PIN
                         User PIN (if pinpad not used)
     --new-user-pin PIN
                         Change User PIN
     --new-adm-pin PIN
                         Change Admin PIN
     --reset-code RESET_CODE
                  Update 'PW1 Resetting Code'
     --reset-pw1 RESET_PW1
                  Reset the User PIN
     --serial SERIAL
                         Update the 'serial' data (4 bytes)
     --salutation {Male, Female}
                  Update 'salutation' data
     --name NAME
                         Update 'name' data
     --url URL
                         Update 'url' data
                         Update 'login' data
     --login LOGIN
     --lang LANG
                         Update 'lang' data
     --key-type {SIG,DEC,AUT}
                  Select key type SIG:DEC:AUT (default is all)
     --key-action {Export, Generate, Read}
                  Generate key pair or Read public key
     --set-fingerprints SIG:DEC:AUT
                  Set fingerprints for selected 'key-type'
                  If 'key-type' is not specified, set for all keys (SIG:DEC:AUT)
                  Each fingerprint is 20 hex bytes long
     --set-templates SIG:DEC:AUT
                  Set template identifier for selected 'key-type'
                  If 'key-type' is not specified, set for all keys (SIG:DEC:AUT)
                  Valid values are rsa2048, rsa3072, nistp256, ed25519, cv25519
     --seed-key
                          Regenerate all keys, based on seed mode
                          Public Key export file (default is 'pubkey')
     --file FILE
Sample output to get Card information:
    $ ./gpgcli.py --adm-pin 12345678 --user-pin 123456 --info
    Connect to card 'Ledger'...
    Verify PINs...
    Get card info...
    ======== Application Identifier =========
    # AID
                         : D2760001240103032C97E1A67CBF0000
     - RID
                        : D276000124
     - Application
                       : 01
     - Version
                        : 3.3
     - Manufacturer : 2C97
- Serial : E1A6
                        : E1A67CBF
    ======= Historical Bytes =========
     - historical bytes : 0031c573c00180000000000059000
    ======= Max Extended Length ========
     ____eпaed : 254
- Response
    - PW1
                         : UTF-8 (12 bytes), Error Counter=3, Validity=Several
    PSO:CDS
     - Reset Counter
                         : UTF-8 (12 bytes), Error Counter=0
                          : UTF-8 (12 bytes), Error Counter=3
    ======= Extended Capabilities =========
     - Secure Messaging : X
     - Get Challenge : ✓ (Max length: 254)
     - Key import
                        : ✓
    - Private DOs
     - PW status
                        : Changeable
                        : ✓
     - Algo attributes : Changeable
```

```
- PSO:DEC AES
- Key Derived Format : X
- Max Cert len : 2560
- Max Special DO : 512
- PIN 2 format : X
- MSE : ✓
======== Hardware Features =========
- Display
              : X
- Biometric sensor : X
- Button/Keypad : ✓
- LED
- Loudspeaker
                    : X
- Microphone
                    : X
- Touchscreen : X
                     : X
- Battery
========== User Info =========
- Name
- Login
- URL
- Salutation
========== Slots Info ==========
- Number of Slots : 3
- Default Slot
- Selection by APDU : \checkmark
- Selection by screen : \checkmark
- Current : 1
======== Keys Info =========
- CDS counter : 8
- RSA Pub Exponent : 0x010001
SIG:
 - UIF
                    : X
 - Fingerprint : fe936fec13bebdaaa0c63e7205dc472da6f6a13b
 - CA fingerprint : N/A
 - Creation date : 2024-01-18 10:08:41
- Attribute : RSA-2048, Format: standard with modulus (n), Exponent
size: 32
 - Certificate :
 - Kev:
  * OS Target ID : 0x33100004
* API Level : 12
  * Public exp size : 4
  * Public exp : 0x010001
  * Private key size: 1040
DEC:
 - UIF
                    : X
 - Fingerprint
                 : cd29b086fe233dad3d51b7137e6f425e7a90ee9e
 - CA fingerprint : N/A
 - Creation date : 2024-01-18 10:08:41

- Attribute : RSA-2048, Format: standard with modulus (n), Exponent
size: 32
 - Certificate :
 - Key:
  * OS Target ID : 0x33100004
* API Level : 12
  * Public exp size : 4
  * Public exp : 0x010001
  * Private key size: 1040
```

```
AUT:
```

- UIF : **X**

- Fingerprint : 218f67fb85771df160c1cfe04a6feb8c0f7676fd

- CA fingerprint : N/A

- Creation date : 2024-01-18 10:08:41

- Attribute : RSA-2048, Format: standard with modulus (n), Exponent

size: 32

- Certificate

- Key:

* OS Target ID : 0x33100004

* API Level : 12 * Public exp size : 4 * Public exp : 0x010001

* Private key size: 1040

6.2 Backup tool

The tool usage is the following:

```
$ ./backup.py --help
```

```
usage: backup.py [-h] [--reader READER] [--slot {1,2,3}] [--pinpad] --adm-pin PIN --user-pin PIN [--restore] [--file FILE]
```

Backup/Restore OpenPGP App configuration

options:

```
-h, --help show this help message and exit
```

--reader READER PCSC reader name (default is 'Ledger')

--slot {1,2,3} Select slot (1 to 3)

--pinpad PIN validation will be delegated to pinpad

--adm-pin PIN Admin PIN (if pinpad not used)
--user-pin PIN User PIN (if pinpad not used)
--restore Perform a Restore instead of Backup

--file FILE Backup/Restore file (default is 'gpg_backup')

--seed-key After Restore, regenerate all keys, based on seed mode

Keys restore is only possible with SEED mode...

To perform a backup, simply use the tool like this:

```
$ ./backup.py --adm-pin 12345678 --user-pin 123456
```

Connect to card 'Ledger'...

Configuration saved in file 'gpg_backup'.

To restore a backup, simply use the tool like this:

```
$ ./backup.py --restore --adm-pin 12345678 --user-pin 123456 --seed-key Connect to card 'Ledger'...
Configuration restored from file 'gpg_backup'.
```

7 Annexes

7.1 Trouble/FAQ

Q: It may happens the reader is no more visible with gpg tool, whereas it can be seen by pytools.

R: In such case (which seems to be linked to the PC configuration), one solution is to re-install the tool packages and libraries:

```
sudo apt remove --purge libpcsclite-dev scdaemon pcscd opensc pcsc-tool sudo apt autoremove sudo apt install libpcsclite-dev scdaemon pcscd opensc pcsc-tool
```

Q: gpg-connection agent failed

R: Check that you don't have multiple running agents. After setting-up all SSH stuff, try to fully logout/login

Q: It does not work at all, HELP ME!!!

R Please keep calm and do not cry. Add the following option to ~/.gnupg/gpg-agent.conf

```
debug-level guru
log-file /tmp/gpgagent.log
```

Add the following option to ~/.gnupg/scdaemon.conf

```
log-file /tmp/scd.log
debug-level guru
debug-all
```

Make a nice issue report under github providing log and and command line you run.

WARNING: This may reveal confidential information such as key values. Do your log with a test key.

Q: I'm having issue when using SSH, there is no pinpad prompt. (sign_and_send_pubkey: signing failed: agent refused operation)

R: You might need to add this command to your .bashrc or .zshrc:

```
gpg-connect-agent updatestartuptty /bye >/dev/null
```

Q: My mac is not able to see my Ledger Token

R: For some reason, SC communication on Mac takes some times or mess it up sometimes.

To troubleshot those issues, you can try to reload the scdaemon using this command:

```
gpgconf --reload scdaemon
gpgconf --reload gpg-agent
```

If not successful, you can try to trigger daemons to restart by sending a SIGTERM like so:

```
kill -TERM $(pgrep gpg-agent) $(pgrep scdaemon).
```

Changing USB port might also help sometimes. Do not hesitate.

Q: My mac is STILL not able to see my Ledger Token

R: This might be related to your CCID drivers. You can manually install a more recent version from this https://ccid.apdu.fr/files/ and install it this way:

```
CCID_VERSION=1.5.4
wget https://ccid.apdu.fr/files/ccid-${CCID_VERSION}.tar.bz2
tar xzvf ccid-${CCID_VERSION}.tar.bz2
cd ccid-${CCID_VERSION}
./MacOSX/configure
make
make install
```

Installing the driver depends on libusb which can be installed using the following brew install libusb. It also requires static linking against it, if you use dynamic linking you will have the following output when using the ./MacOSX/configure step:

```
************************
Rename it to force a static link
You can use the following:
   LIBUSB_VERSION=1.0.23

for f in /usr/local/Cellar/libusb/${LIBUSB_VERSION}/lib/*.dylib; do
   mv $f $f.fake
   done

./MacOSX/configure

for f in /usr/local/Cellar/libusb/${LIBUSB_VERSION}/lib/*.dylib.fake; do
   ORIG="$( echo $f | sed 's#.fake##g' )"
   mv $f ${ORIG}
```

7.2 References

done

G10CODE The OpenPGP card application, https://g10code.com/p-card.html

GPG The GNU Privacy Guard, https://gnupg.org/

 $\label{eq:gpgadd} \textbf{GPGADD} \ \ \textit{The OpenPGP card application add-on}, \ \text{https://github.com/LedgerHQ/app-openpgp/blob/master/doc/developer/gpgcard-addon.rst}$

 $\label{eq:GPGSC} \textbf{GPGSC} \ \textit{The GnuPG Smartcard HOWTO}, \ \text{https://gnupg.org/howtos/card-howto/en/smartcard-howto.html}$