



LAB10 WebClient Report

ผลลัพธ์ใน response มีชื่อและรหัสนักศึกษา (ใน Product name ที่ seed ไว้)

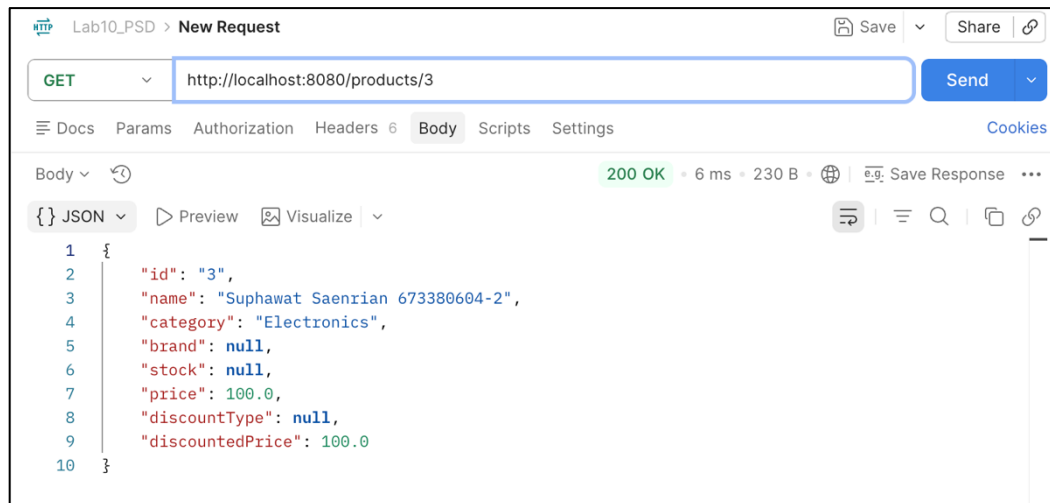


End point

1. GET /products/{id} → Mono<Product>

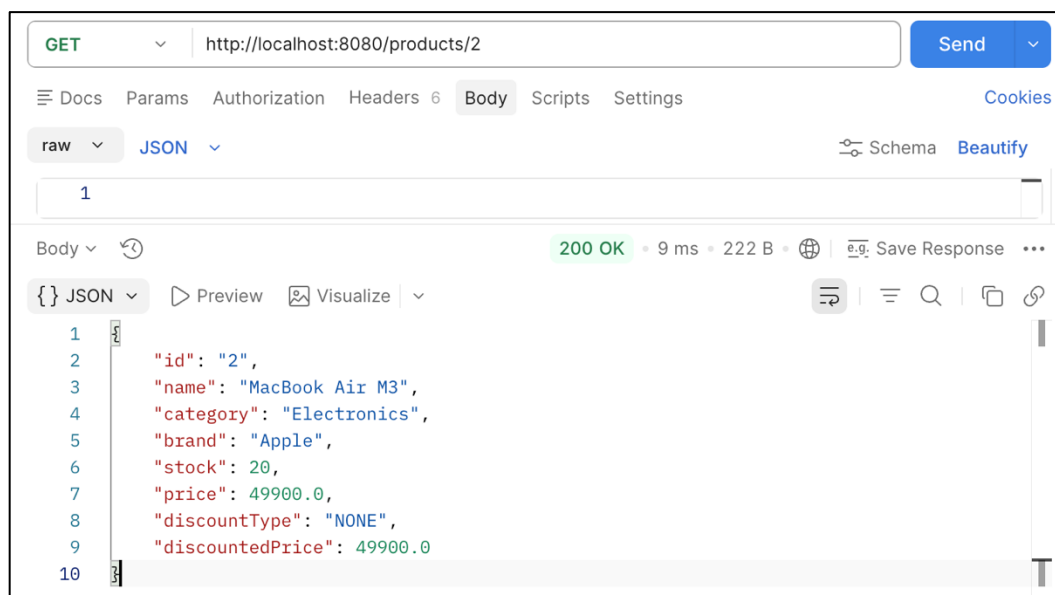

2. GET /products → Flux<Product>

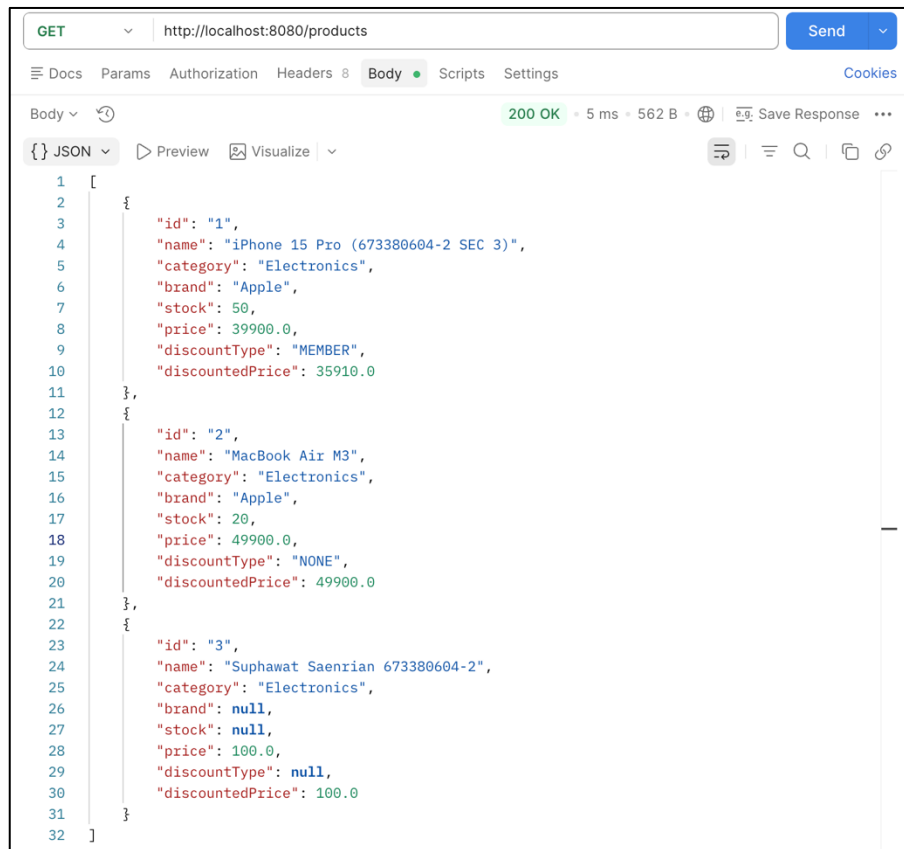


The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** http://localhost:8080/products
- Status:** 200 OK
- Time:** 5 ms
- Size:** 562 B
- Response Type:** JSON


The JSON response is a list of three products:

```
[
  {
    "id": "1",
    "name": "iPhone 15 Pro (673380604-2 SEC 3)",
    "category": "Electronics",
    "brand": "Apple",
    "stock": 50,
    "price": 39900.0,
    "discountType": "MEMBER",
    "discountedPrice": 35910.0
  },
  {
    "id": "2",
    "name": "MacBook Air M3",
    "category": "Electronics",
    "brand": "Apple",
    "stock": 20,
    "price": 49900.0,
    "discountType": "NONE",
    "discountedPrice": 49900.0
  },
  {
    "id": "3",
    "name": "Supawat Saenrian 673380604-2",
    "category": "Electronics",
    "brand": null,
    "stock": null,
    "price": 100.0,
    "discountType": null,
    "discountedPrice": 100.0
  }
]
```


3. POST /products → Mono<Product>

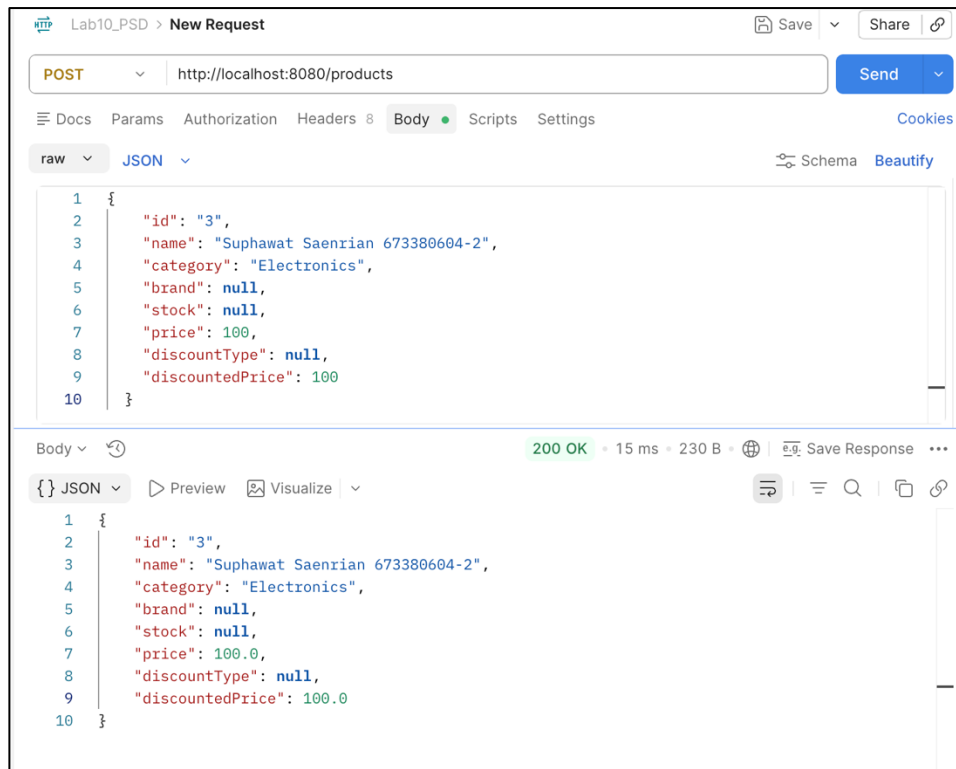

4. DELETE /products/{id} → Mono<Void>

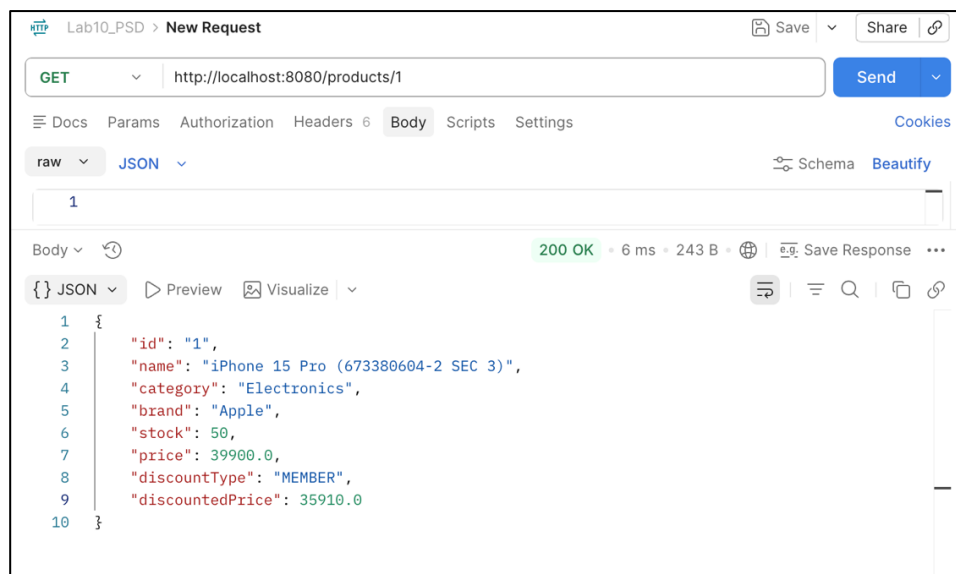

5. GET /products/category/{cat} → Flux<Product>

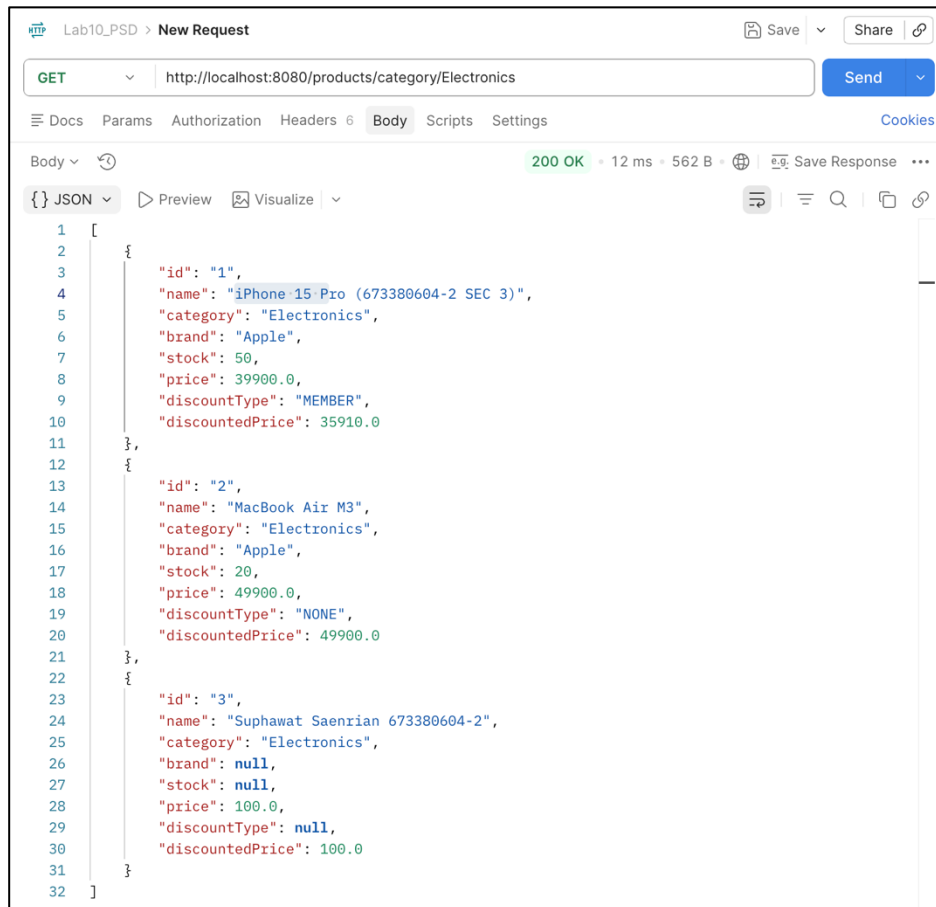

6. GET /products/{id}/price → Mono<Double>

