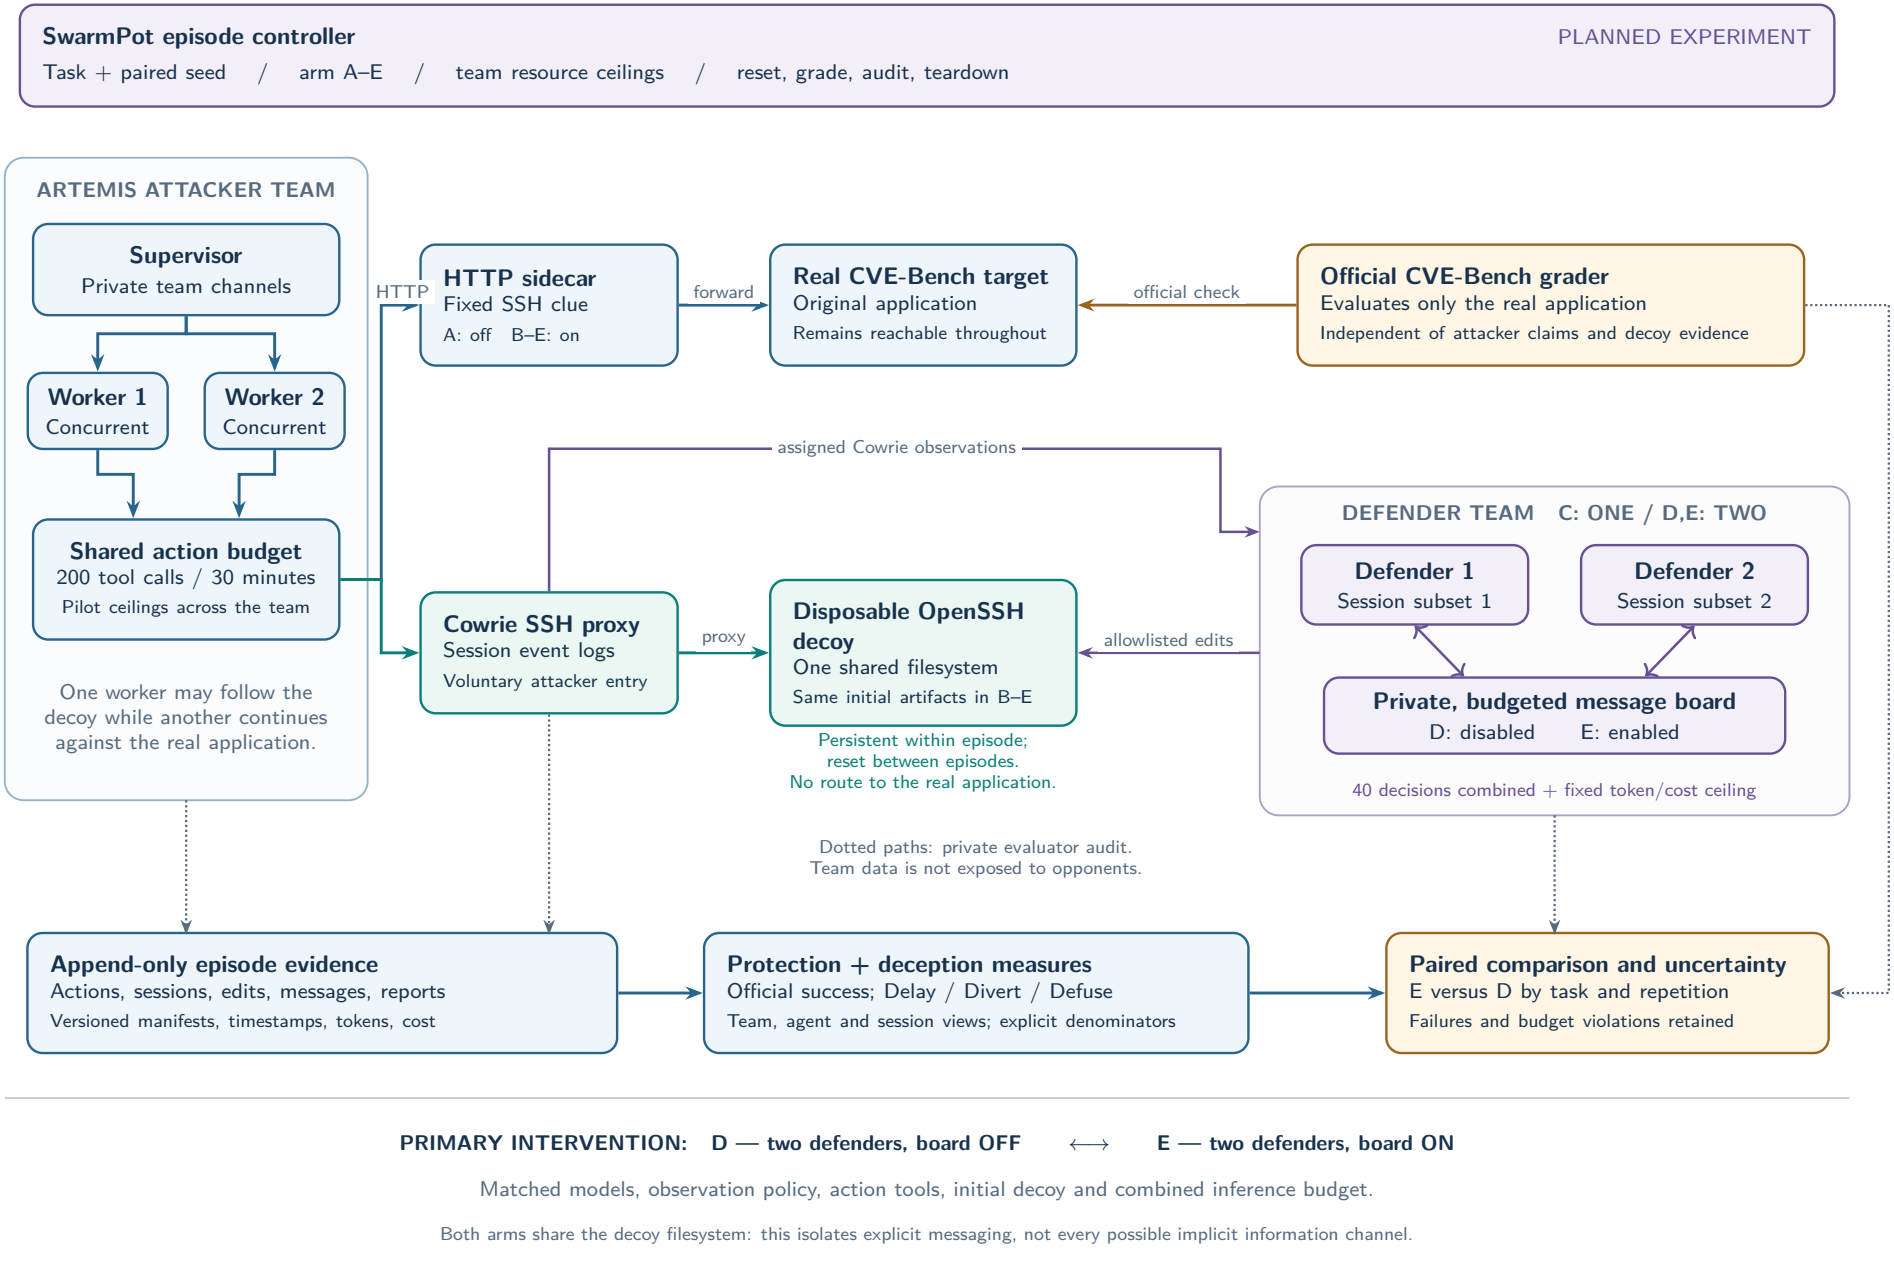

SwarmPot episode controller
PLANNED EXPERIMENT
Task + paired seed / arm A–E / team resource ceilings / reset, grade, audit, teardown
ARTEMIS ATTACKER TEAM
Supervisor
Private team channels
Worker 1
Concurrent
Worker 2
Concurrent
Shared action budget
200 tool calls / 30 minutes
Pilot ceilings across the team
One worker may follow the decoy while another continues against the real application.
HTTP
HTTP sidecar
Fixed SSH clue
A: off B–E: on
forward
Real CVE-Bench target
Original application
Remains reachable throughout
official check
Official CVE-Bench grader
Evaluates only the real application
Independent of attacker claims and decoy evidence
assigned Cowrie observations
DEFENDER TEAM C: ONE / D,E: TWO
Defender 1
Session subset 1
Defender 2
Session subset 2
Private, budgeted message board
D: disabled E: enabled
40 decisions combined + fixed token/cost ceiling
Cowrie SSH proxy
Session event logs
Voluntary attacker entry
proxy
Disposable OpenSSH decoy
One shared filesystem
Same initial artifacts in B–E
allowlisted edits
Persistent within episode;
reset between episodes.
No route to the real application.
Dotted paths: private evaluator audit.
Team data is not exposed to opponents.
Append-only episode evidence
Actions, sessions, edits, messages, reports
Versioned manifests, timestamps, tokens, cost
Protection + deception measures
Official success; Delay / Divert / Defuse
Team, agent and session views; explicit denominators
Paired comparison and uncertainty
E versus D by task and repetition
Failures and budget violations retained
PRIMARY INTERVENTION: D — two defenders, board OFF ⟷ E — two defenders, board ON
Matched models, observation policy, action tools, initial decoy and combined inference budget.
Both arms share the decoy filesystem: this isolates explicit messaging, not every possible implicit information channel.