

Don Bosco Institute of Technology, Kurla(W)
Department of Electronics and Tele-Communication Engineering
ECL304 - Skill Lab: C++ and Java Programming
Sem III
2021-22

Lab Number:	5
Student Name:	SURAJ KUMAR
Roll No :	42

Title:

To perform Operator Overloading using C++ for

- **Multiplying 2 complex numbers**
- **adding matrices**

Learning Objective:

- Students will be able to perform user-defined overloading of built-in operators.

Learning Outcome:

- Understanding the overloading concept on built-in operators.

Course Outcome:

ECL304.2	Comprehend building blocks of OOPs language, inheritance, package and interfaces
-----------------	--

Theory:

Explain about operator overloading with respect to:

- **Constructor**
Constructor overloading is a concept in which one class can have multiple constructors with different parameters. The main thing to note here is that the constructors will run according to the arguments for example if a program consists of 3 constructors with 0, 1, and 2 arguments, so if we pass 1 argument to the constructor the compiler will automatically run the constructor which is taking 1 argument.
- **Methods**
Method overloading is the process of overloading the method that has the same name but different parameters. C++ provides this method of overloading features. Method overloading allows users to use the same name to another method, but the parameters passed to the methods should be different. The return type of methods can be the same or different.
- **operators.**
- In C++, it can add special features to the functionality and behaviour of already existing operators like arithmetic and other operations. The mechanism of giving special meaning to an operator is known as operator overloading. For example, we can overload an operator '+' in a class like string to concatenate two strings by just using +

Faculty: Ms. Deepali Kayande

Don Bosco Institute of Technology, Kurla(W)
Department of Electronics and Tele-Communication Engineering
ECL304 - Skill Lab: C++ and Java Programming
Sem III
2021-22

Algorithm :	1-Start 2-Creating class of name complex 3-Declaring attributes- real , img 4-Declaring methods- 1)get_elements()-to take input from user 2)display()- to print the result 5-Operator overloading function to overload “*”“*”----for performing operation 6-Defining methods outside the class 7-Creating an objects of class in main function 8-Calling the methods using object of class 9-Displaying the result 10-End
Program:1	//Multiplication of two complex number : # include<iostream> using namespace std; class complex { float real; float img; public: void get_elements(); //take numbers from user complex operator *(complex c1); //operator overloading

Don Bosco Institute of Technology, Kurla(W)
Department of Electronics and Tele-Communication Engineering
ECL304 - Skill Lab: C++ and Java Programming
Sem III
2021-22

```
void display();    //print the result

};

void complex::get_elements()
{
    cout<<"Enter the real and img of complex no.\n";
    cout<<"Real :";
    cin>>real;
    cout<<"Img :";
    cin>>img;
}

void complex::display()
{
    cout<<"("<<real<<")"<<"+"<<"("<<img<<")"<<"i";
}

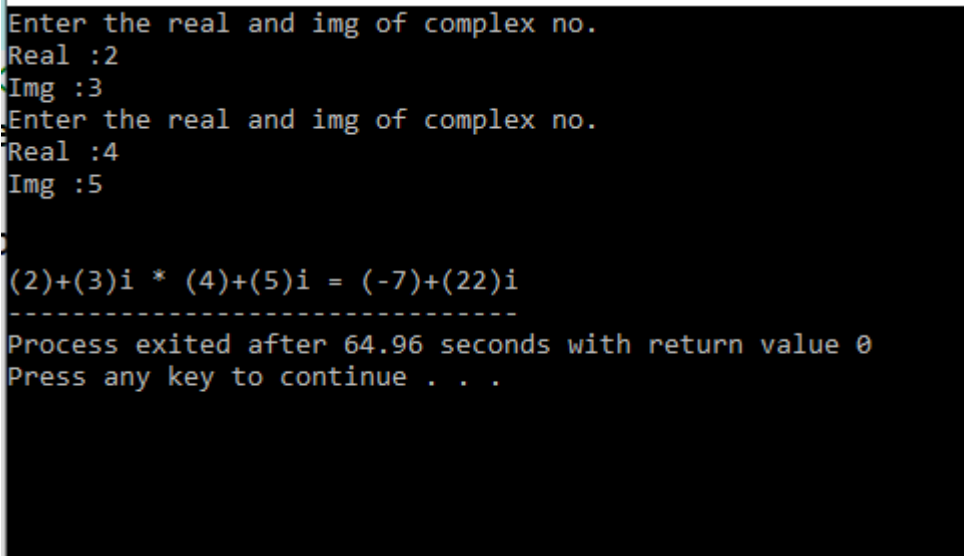
complex complex::operator*(complex c1)
{
    complex mul;
    mul.real = ((real*c1.real)-(img*c1.img));
    mul.img = ((real*c1.img)+(c1.real*img));
    return(mul);
}

int main()
```

Don Bosco Institute of Technology, Kurla(W)
Department of Electronics and Tele-Communication Engineering
ECL304 - Skill Lab: C++ and Java Programming
Sem III
2021-22

	<pre>{ complex obj1,obj2,obj3; obj1.get_elements(); obj2.get_elements(); obj3= obj1*obj2; cout<<"\n\n"; obj1.display(); cout<<" * "; obj2.display(); cout<<" = "; obj3.display(); }</pre>
Input given:	<p>1 number =2+3i</p> <p>2number =4+5i</p>

Don Bosco Institute of Technology, Kurla(W)
Department of Electronics and Tele-Communication Engineering
ECL304 - Skill Lab: C++ and Java Programming
Sem III
2021-22

Output Screenshot:	 <pre> Enter the real and img of complex no. Real :2 Img :3 Enter the real and img of complex no. Real :4 Img :5 (2)+(3)i * (4)+(5)i = (-7)+(22)i ----- Process exited after 64.96 seconds with return value 0 Press any key to continue . . . </pre>
---------------------------	--

Algorithm:2	<p>1-Start</p> <p>2-Creating class of name matrices</p> <p>3-Declaring a[2][2],b[2][2],c[2][2]</p> <p>4-Declaring methods- 1)get_elements()-to take input from user 2)display()- to print the result</p> <p>5-Operator overloading function to overload “+”----for performing operation</p> <p>7-Creating an objects of class in main function</p> <p>8-Calling the methods using object of clas</p>
Program:2	<pre> //Addition of two matrices: #include<iostream> using namespace std; class matrices { </pre>

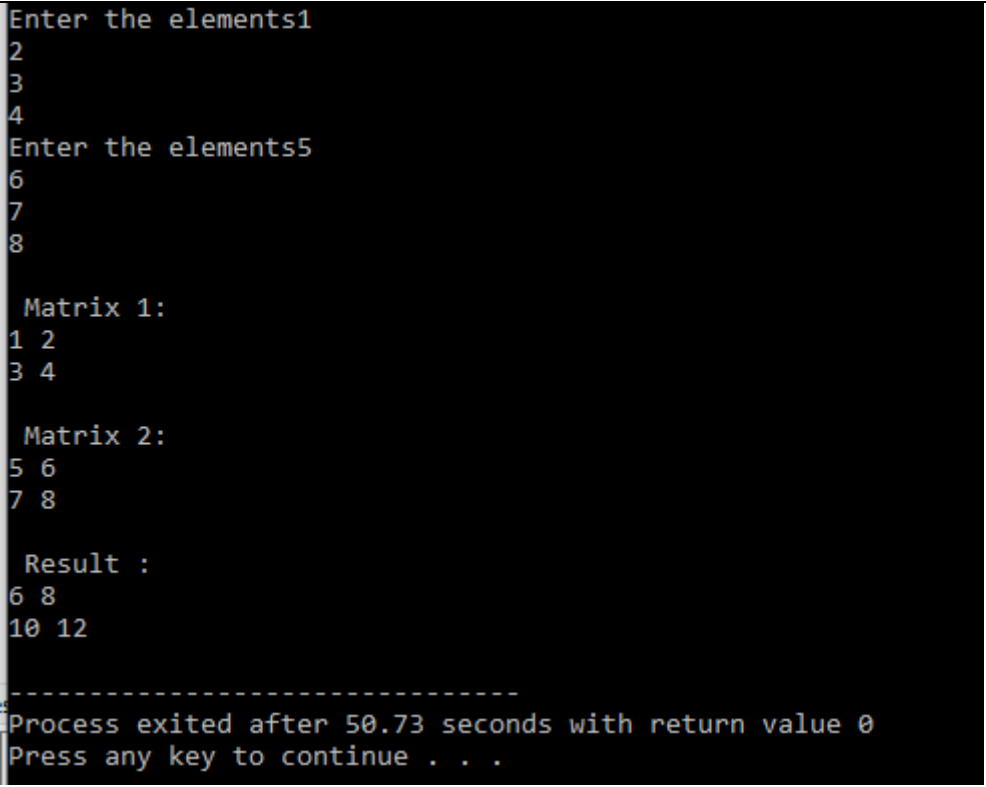
Don Bosco Institute of Technology, Kurla(W)
Department of Electronics and Tele-Communication Engineering
ECL304 - Skill Lab: C++ and Java Programming
Sem III
2021-22

	<pre>public: //Declaring Attributes int a[2][2]; int b[2][2]; int c[2][2]; void get_elements() //To take input from user { cout<<"Enter the elements"; for(int i=0;i<2;i++) { for(int j=0;j<2;j++) { cin>>a[i][j]; } } } matrices operator +(matrices m2) // To overload "+" { matrices m3; for(int i=0;i<2;i++) { for(int j=0;j<2;j++) m3.a[i][j]=a[i][j]+m2.a[i][j]; } return(m3); } void display() //To display result</pre>
--	---

Don Bosco Institute of Technology, Kurla(W)
Department of Electronics and Tele-Communication Engineering
ECL304 - Skill Lab: C++ and Java Programming
Sem III
2021-22

```
{  
    for(int i=0;i<2;i++)  
    {  
        for(int j=0;j<2;j++)  
        {  
            cout<<a[i][j]<<" ";  
        }  
        cout<<endl;  
    }  
}  
  
};  
  
int main()  
{  
    matrices ob1,ob2; //Creaing an object  
    ob1.get_elements();  
    ob2.get_elements();  
    cout<<"\n Matrix 1:\n";  
    ob1.display();  
    cout<<"\n Matrix 2:\n";  
    ob2.display();  
    ob1=ob1+ob2;  
    cout<<"\n Result : \n";  
    ob1.display();
```

Don Bosco Institute of Technology, Kurla(W)
Department of Electronics and Tele-Communication Engineering
ECL304 - Skill Lab: C++ and Java Programming
Sem III
2021-22

	}
Input given:	Matrix 1: 1 2 3 4 Matrix 2: 5 6 7 8
Output Screenshot:	 <pre> Enter the elements1 2 3 4 Enter the elements5 6 7 8 Matrix 1: 1 2 3 4 Matrix 2: 5 6 7 8 Result : 6 8 10 12 ----- Process exited after 50.73 seconds with return value 0 Press any key to continue . . . </pre>