

Binary Search

How Binary Search Works?


For a binary search to work, it is mandatory for the target array to be sorted. We shall learn the process of binary search with a pictorial example. The following is our sorted array and let us assume that we need to search the location of value 31 using binary search.



First, we shall determine half of the array by using this formula –

$$\text{Mid} = (\text{low} + \text{high}) / 2$$

Here it is, $0 + (9 - 0) / 2 = 4$ (integer value of 4.5). So, 4 is the mid of the array.

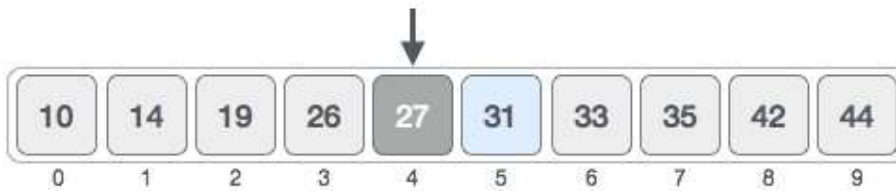

Now we compare the value stored at location 4, with the value being searched, i.e. 31. We find that the value at location 4 is 27, which is not a match. As the value is greater than 27 and we have a sorted array, so we also know that the target value must be in the upper portion of the array.



$$\text{Low} = \text{mid} + 1$$

$$\text{Mid} = \text{low} + (\text{high} - \text{low}) / 2$$


Our new mid is 7 now. We compare the value stored at location 7 with our target value 31.



The value stored at location 7 is not a match, rather it is more than what we are looking for. So, the value must be in the lower part from this location.



Hence, we calculate the mid again. This time it is 5.

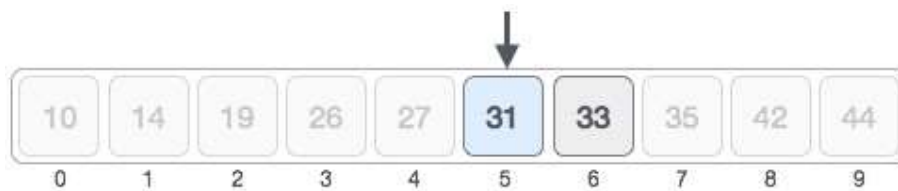

We compare the value stored at location 5 with our target value. We find that it is a match.



We conclude that the target value 31 is stored at location 5.

Binary search halves the searchable items and thus reduces the count of comparisons to be made to very less numbers.