




Signal	Wire ID	Wire Status	Pattern A	Edge A	Cursor A
- RS232 Example				•	
TX	D0	H	X	↓	1
RX	D1	H	X		1

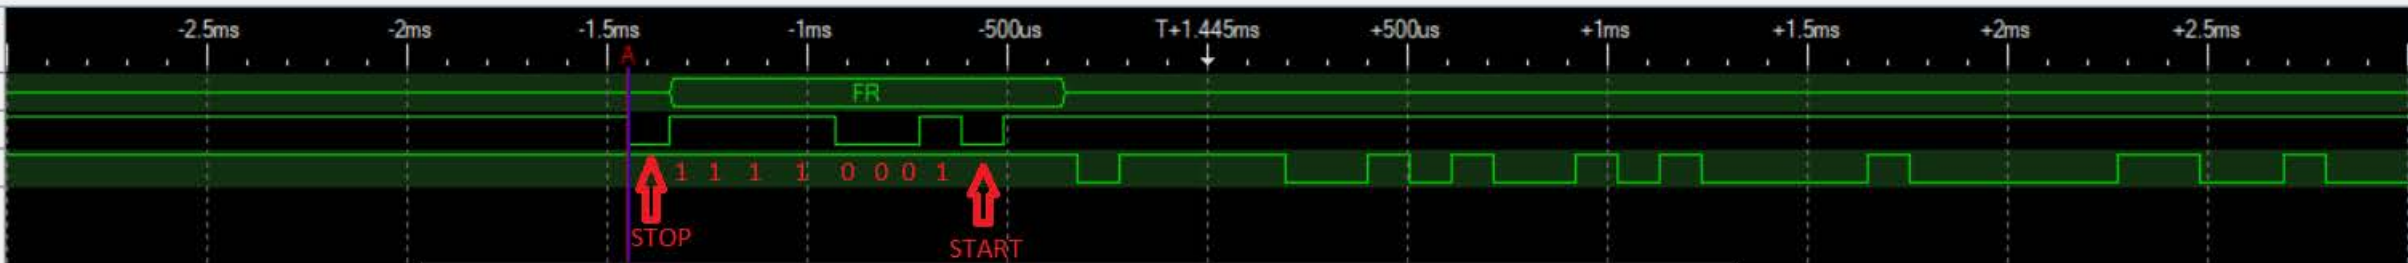

```
COM3 - PuTTY
Character to receive  Function:Recievewait
a
00:22:55:.4      Debug Mode: Wai
ting for Character to receive  Function:Recievewait
c
00:26:54:.4      Debug M
ode: Waiting for Character to receive  Function:Recievewait
b
00:27:03:.2
Debug Mode: Waiting for Character to receive  Function:Recievewait
U
00:28:58:
.7      Debug Mode: Waiting for Character to receive  Function:Recievewait
U
0
0:30:13:.5      Debug Mode: Waiting for Character to receive  Function:Recievewait
U
00:31:00:.5      Debug Mode: Waiting for Character to receive  Functio
n:Recievewait
O
00:34:31:.3      Debug Mode: Waiting for Character to receive
Function:Recievewait
```

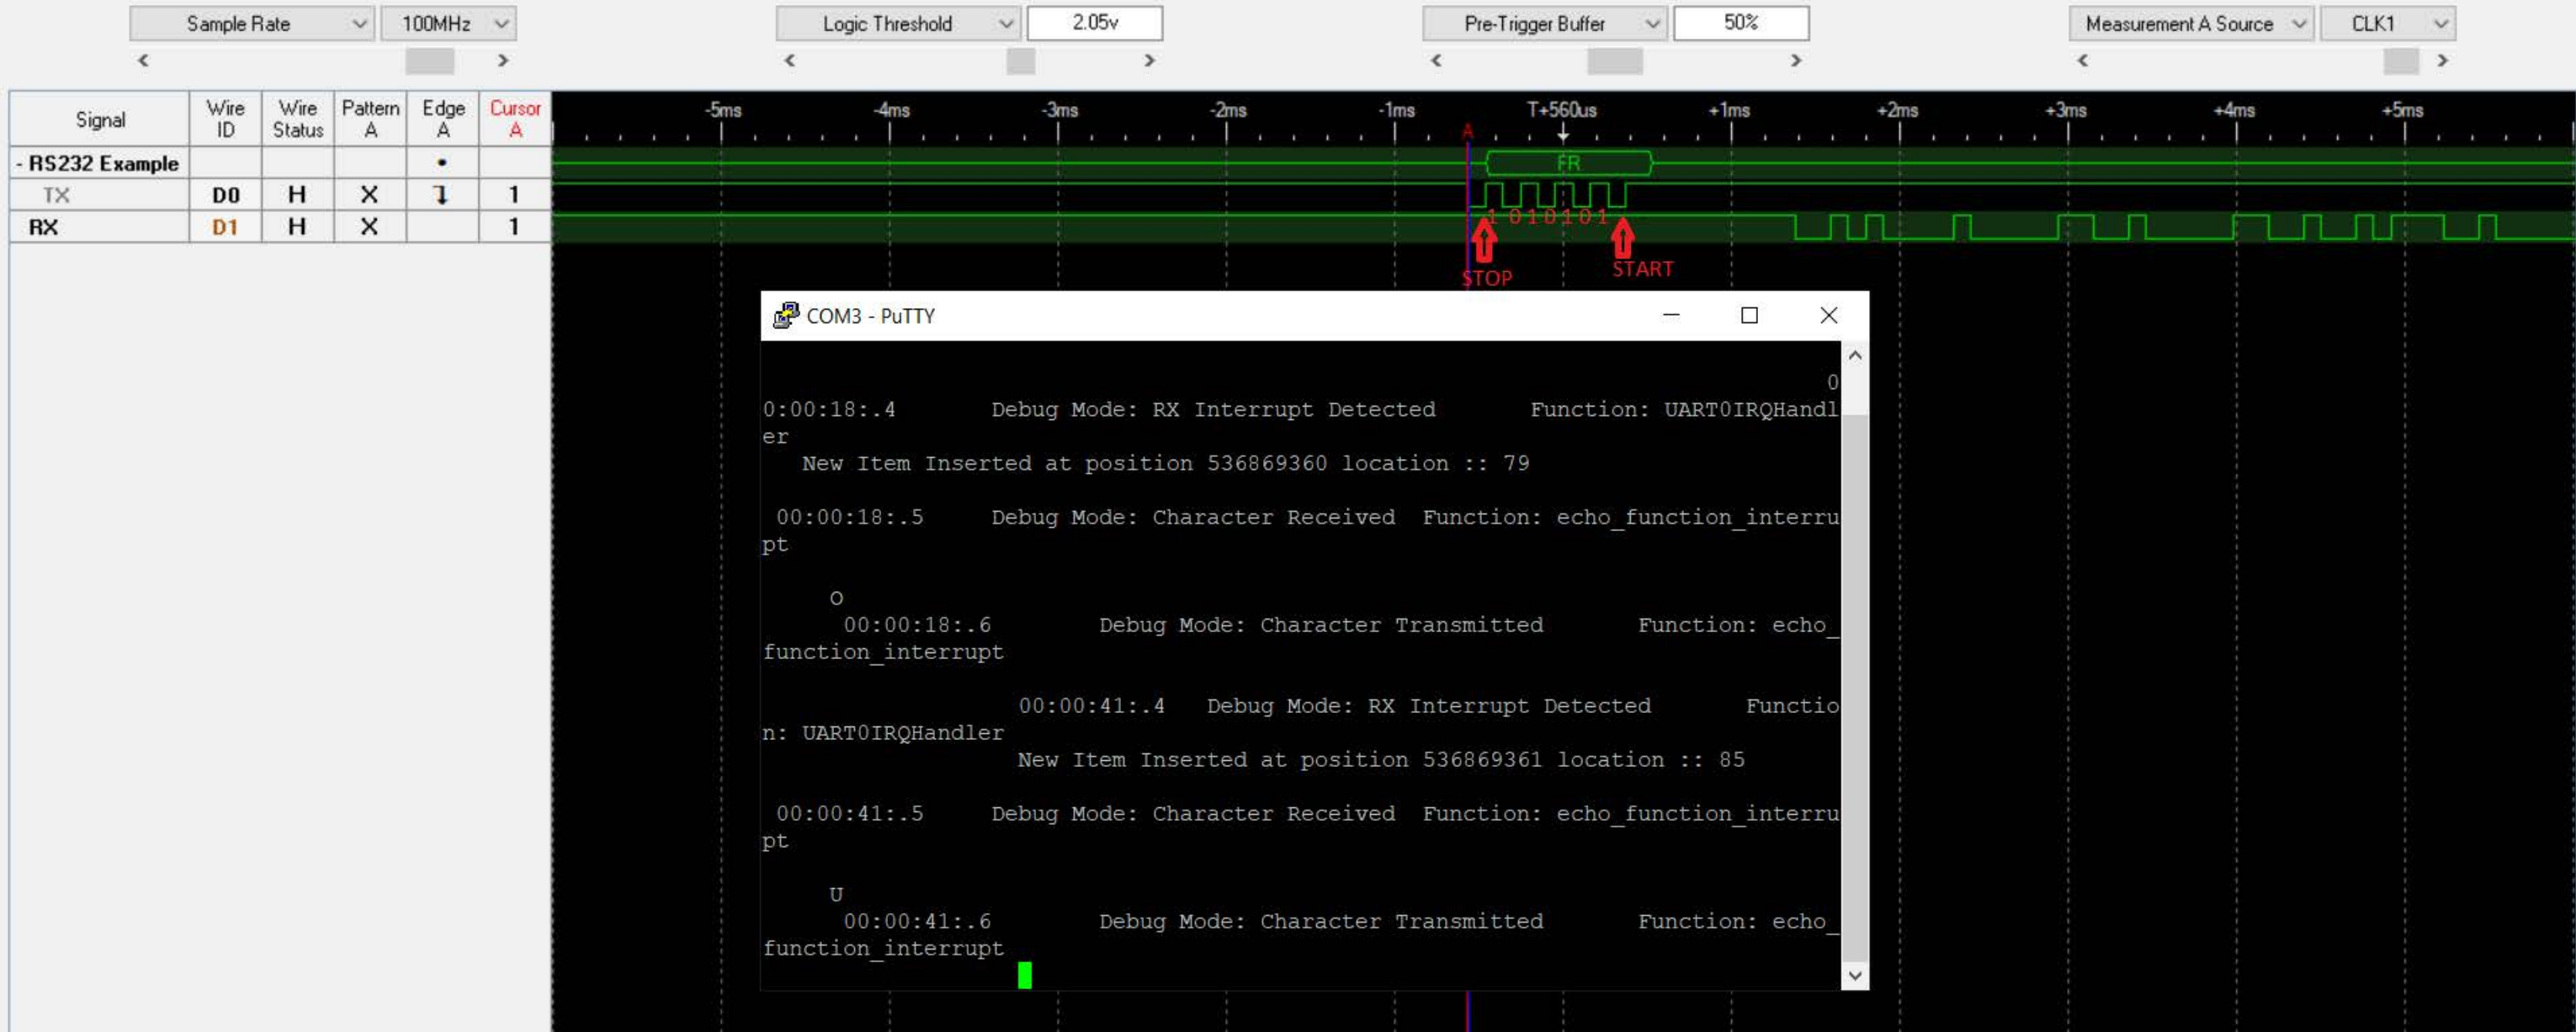

Signal	Wire ID	Wire Status	Pattern A	Edge A	Cursor A
- RS232 Example				•	
TX	D0	H	X	↓	1
RX	D1	H	X		1

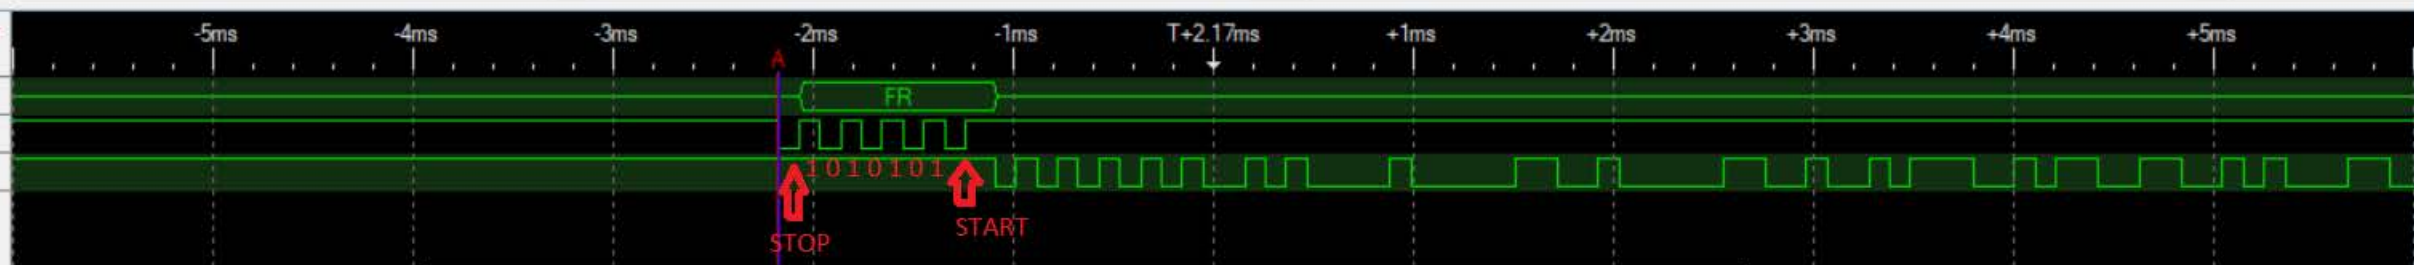

```

COM3 - PuTTY
er to receive    Function:Recievewait
a
00:22:50:.1      Debug Mode: Waiting for
Character to receive    Function:Recievewait
a
00:22:55:.4      Debug Mode: Wai
ting for Character to receive    Function:Recievewait
c
00:26:54:.4      Debug M
ode: Waiting for Character to receive    Function:Recievewait
b
00:27:03:.2
Debug Mode: Waiting for Character to receive    Function:Recievewait
U
00:28:58:
.7      Debug Mode: Waiting for Character to receive    Function:Recievewait
U
00:30:13:.5      Debug Mode: Waiting for Character to receive    Function:Recievewait
U
00:31:00:.5      Debug Mode: Waiting for Character to receive    Function:Recievewait

```