

Objects and Classes in Java

In this page, we will learn about Java objects and classes. In object-oriented programming technique, we design a program using objects and classes.


An object in Java is the physical as well as a logical entity, whereas, a class in Java is a logical entity only.

What is an object in Java

An entity that has state and behavior is known as an object e.g., chair, bike, marker, pen, table, car, etc. It can be physical or logical (tangible and intangible). The example of an intangible object is the banking system.

An object has three characteristics:


Objects: Real World Examples

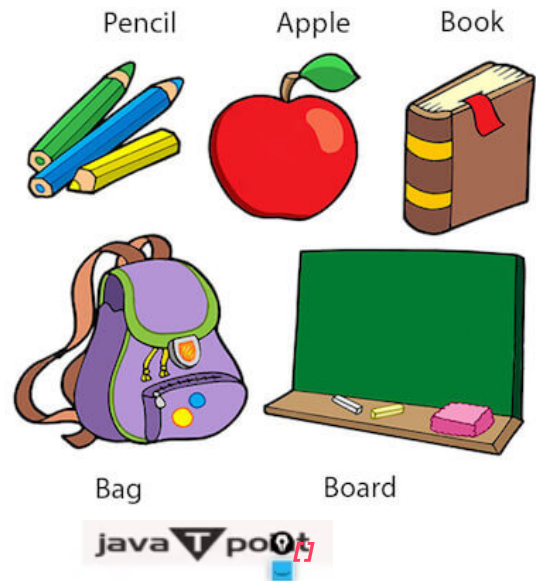

C Programming

Output based
questions on
Structures

- **State:** represents the data (value) of an object.
- **Behavior:** represents the behavior (functionality) of an object such as deposit, withdraw, etc.
- **Identity:** An object identity is typically implemented via a unique ID. The value of the ID is not visible to the external user. However, it is used internally by the JVM to identify each object uniquely.

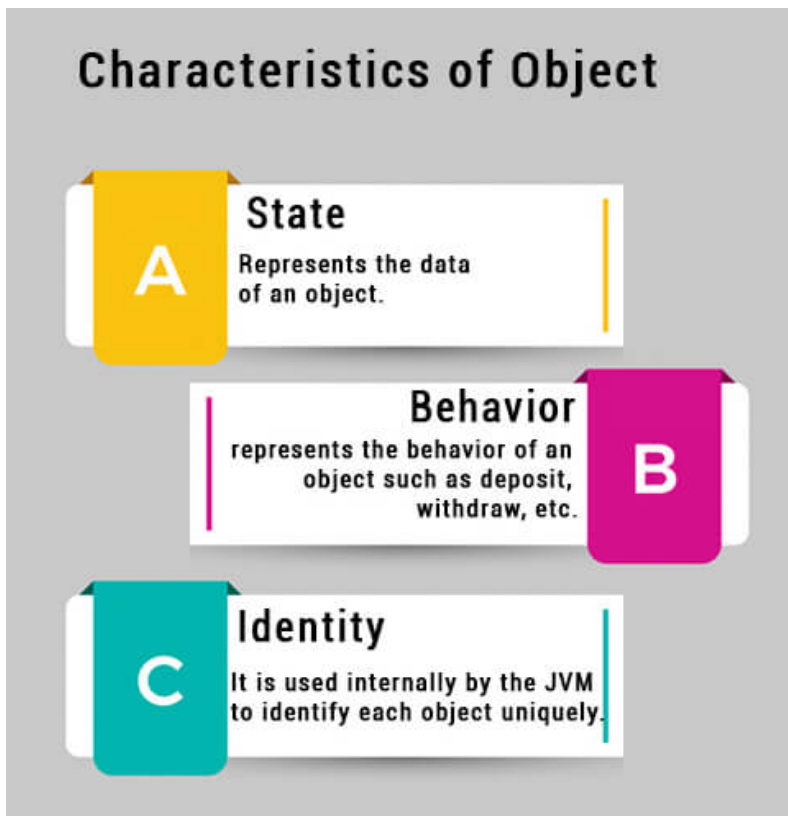


For Example, Pen is an object. Its name is Reynolds; color is white, known as its state. It is used to write, so writing is its behavior.

An object is an instance of a class. A class is a template or blueprint from which objects are created. So, an object is the instance(result) of a class.

Object Definitions:

- An object is *a real-world entity*.
- An object is *a runtime entity*.
- **The object is an entity which has state and behavior.**
- **The object is an instance of a class.**

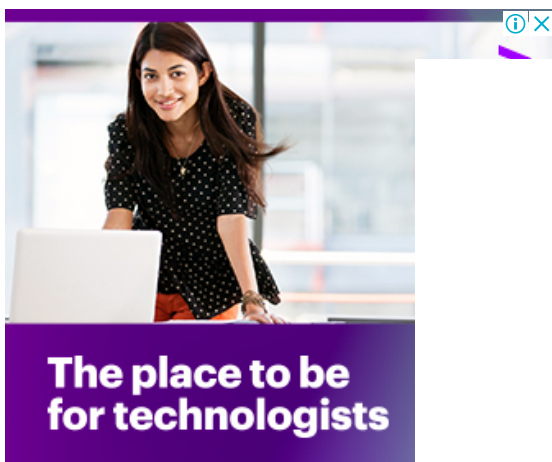


What is a class in Java

A class is a group of objects which have common properties. It is a template or blueprint from which objects are created. It is a logical entity. It can't be physical.

A class in Java can contain:

- **Fields**
- **Methods**
- **Constructors**
- **Blocks**
- **Nested class and interface**

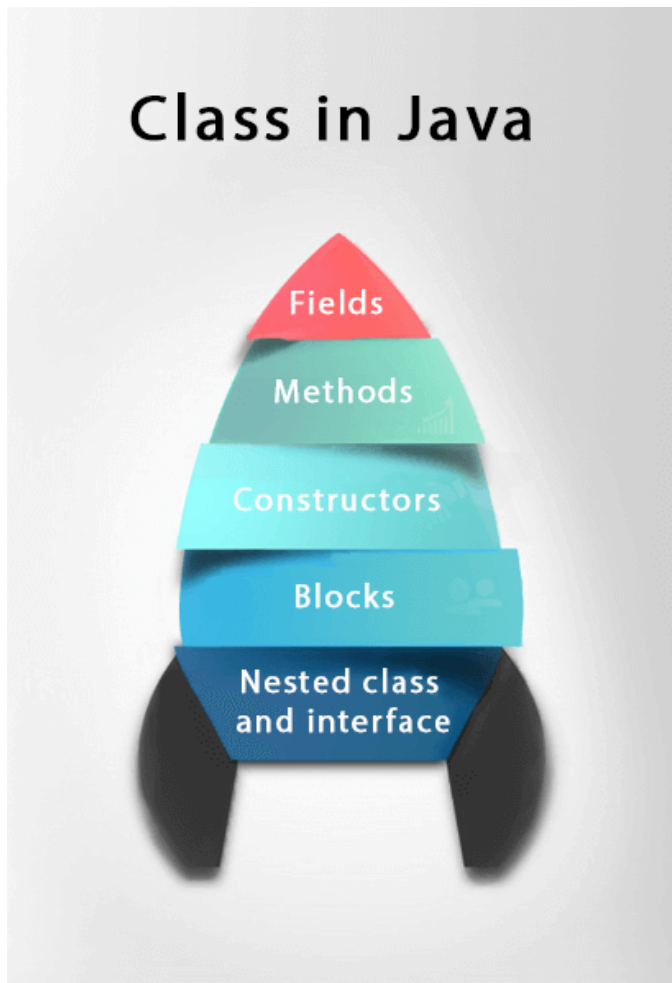

Syntax to declare a class:

```
class <class_name>{  
    field;  
    method;  
}
```

Instance variable in Java

A variable which is created inside the class but outside the method is known as an instance variable. Instance variable doesn't get memory at compile time. It gets memory at runtime when an object or instance is created. That is why it is known as an instance variable.

Method in Java

In Java, a method is like a function which is used to expose the behavior of an object.

Advantage of Method

- Code Reusability
- Code Optimization

new keyword in Java

The new keyword is used to allocate memory at runtime. All objects get memory in Heap memory area.

Object and Class Example: main within the class

In this example, we have created a Student class which has two data members **id and name**. We are creating the object of the Student class by new keyword and printing the object's value.

Here, we are creating a main() method inside the class.

File: Student.java

```
//Java Program to illustrate how to define a class and fields
//Defining a Student class.
class Student{
    //defining fields
    int id;//field or data member or instance variable
    String name;
    //creating main method inside the Student class
    public static void main(String args[]){
        //Creating an object or instance
        Student s1=new Student();//creating an object of Student
        //Printing values of the object
        System.out.println(s1.id);//accessing member through reference variable
        System.out.println(s1.name);
    }
}
```

```
}  
}
```

Test it Now

Output:

```
0  
null
```

Object and Class Example: main outside the class

In real time development, we create classes and use it from another class. It is a better approach than previous one. Let's see a simple example, where we are having main() method in another class.

We can have multiple classes in different Java files or single Java file. If you define multiple classes in a single Java source file, it is a good idea to save the file name with the class name which has main() method.

File: TestStudent1.java

```
//Java Program to demonstrate having the main method in  
//another class  
//Creating Student class.  
class Student{  
    int id;  
    String name;  
}  
//Creating another class TestStudent1 which contains the main method  
class TestStudent1{  
    public static void main(String args[]){  
        Student s1=new Student();  
        System.out.println(s1.id);  
        System.out.println(s1.name);  
    }  
}
```

Test it Now

Output:

```
0  
null
```

3 Ways to initialize object

There are 3 ways to initialize object in Java.

1. By reference variable
2. By method (invocation)
3. By constructor

1) Object and Class Example: Initialization through reference

Initializing an object means storing data into the object. Let's see a simple example where we are going to initialize the object through a reference variable.

File: TestStudent2.java

```
class Student{  
    int id;  
    String name;  
}  
class TestStudent2{  
    public static void main(String args[]){  
        Student s1=new Student();  
        s1.id=101;           >>>>>           object initialization  
        s1.name="Sonoo";     >>>String data should be within " ..."  
        System.out.println(s1.id+ " "+s1.name);//printing members with a white space  
    }  
}
```

Test it Now

Output:

```
101 Sonoo
```

We can also create multiple objects and store information in it through reference variable.

File: TestStudent3.java

```
class Student{
    int id;
    String name;
}
class TestStudent3{
    public static void main(String args[]){
        //Creating objects
        Student s1=new Student();
        Student s2=new Student();
        //Initializing objects
        s1.id=101;
        s1.name="Sonoo";
        s2.id=102;
        s2.name="Amit";
        //Printing data
        System.out.println(s1.id+ " "+s1.name);
        System.out.println(s2.id+ " "+s2.name);
    }
}
```

Test it Now

Output:

```
101 Sonoo
102 Amit
```

2) Object and Class Example: Initialization through method

In this example, we are creating the two objects of Student class and initializing the value to these objects by invoking the insertRecord method. Here, we are displaying the state (data) of the objects by invoking the displayInformation() method.

File: TestStudent4.java

```
class Student{
```




```
int rollno;
String name;
void insertRecord(int r, String n){
    rollno=r;
    name=n;
}
void displayInformation(){System.out.println(rollno+" "+name);}
}
class TestStudent4{
    public static void main(String args[]){
        Student s1=new Student();
        Student s2=new Student();
        s1.insertRecord(111,"Karan");
        s2.insertRecord(222,"Aryan");
        s1.displayInformation();
        s2.displayInformation();
    }
}
```

Test it Now

Output:

```
111 Karan
222 Aryan
```

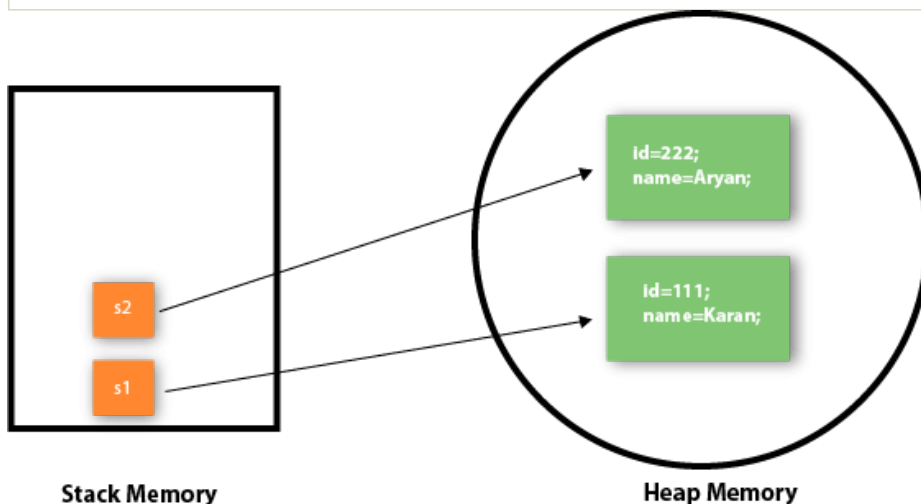

As you can see in the above figure, object gets the memory in heap memory area. The reference variable refers to the object allocated in the heap memory area. Here, s1 and s2 both are reference variables that refer to the objects allocated in memory.

3) Object and Class Example: Initialization through a constructor

We will learn about constructors in Java later.

Object and Class Example: Employee

Let's see an example where we are maintaining records of employees.

File: TestEmployee.java

```
class Employee{
    int id;
    String name;
    float salary;
    void insert(int i, String n, float s) {
        id=i;
        name=n;
        salary=s;
    }
    void display(){System.out.println(id+" "+name+" "+salary);}
}

public class TestEmployee {
    public static void main(String[] args) {
        Employee e1=new Employee();
        Employee e2=new Employee();
        Employee e3=new Employee();
        e1.insert(101,"ajeet",45000);
        e2.insert(102,"irfan",25000);
        e3.insert(103,"nakul",55000);
        e1.display();
        e2.display();
        e3.display();
    }
}
```

Test it Now

Output:

```
101 ajeet 45000.0
102 irfan 25000.0
103 nakul 55000.0
```

Object and Class Example: Rectangle

There is given another example that maintains the records of Rectangle class.

File: TestRectangle1.java

```
class Rectangle{
    int length;
```

```
int width;
void insert(int l, int w){
    length=l;
    width=w;
}
void calculateArea(){System.out.println(length*width);}
}
class TestRectangle1{
    public static void main(String args[]){
        Rectangle r1=new Rectangle();
        Rectangle r2=new Rectangle();
        r1.insert(11,5);
        r2.insert(3,15);
        r1.calculateArea();
        r2.calculateArea();
    }
}
```

Test it Now

Output:

```
55
45
```


What are the different ways to create an object in Java?

There are many ways to create an object in java. They are:

- By new keyword
- By newInstance() method
- By clone() method
- By deserialization
- By factory method etc.

We will learn these ways to create object later.

Different ways to create an object in Java

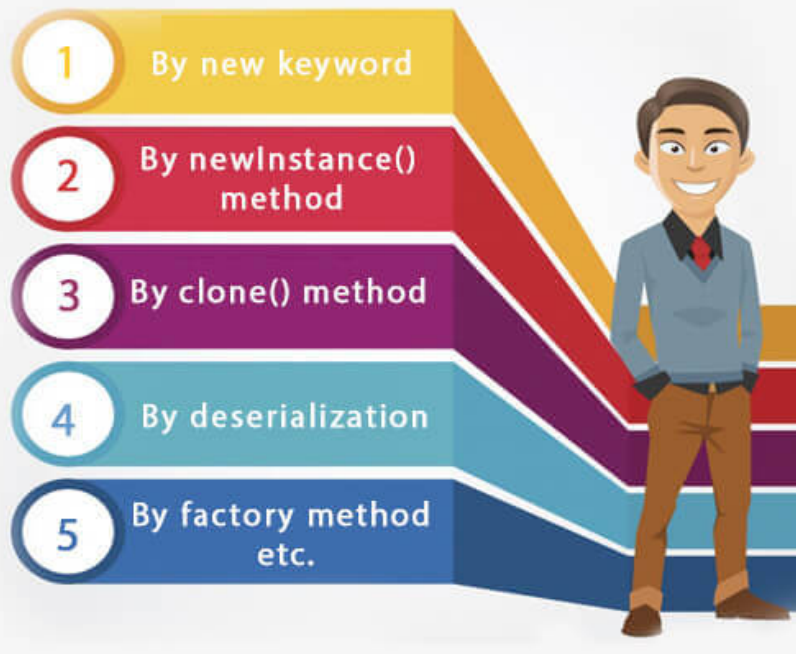

Anonymous object

Anonymous simply means nameless. An object which has no reference is known as an anonymous object. It can be used at the time of object creation only.

If you have to use an object only once, an anonymous object is a good approach. For example:

```
new Calculation();//anonymous object
```

Calling method through a reference:

```
Calculation c=new Calculation();  
c.fact(5);
```

Calling method through an anonymous object

```
new Calculation().fact(5);
```

Let's see the full example of an anonymous object in Java.

```
class Calculation{  
    void fact(int n){  
        int fact=1;  
        for(int i=1;i<=n;i++){  
            fact=fact*i;  
        }  
    }  
}
```

```
System.out.println("factorial is " + fact);
}
public static void main(String args[]){
    new Calculation().fact(5);//calling method with anonymous object
}
}
```

Output:

```
Factorial is 120
```

Creating multiple objects by one type only

We can create multiple objects by one type only as we do in case of primitives.

Initialization of primitive variables:

```
int a=10, b=20;
```

Initialization of reference variables:

```
Rectangle r1=new Rectangle(), r2=new Rectangle();//creating two objects
```

Let's see the example:

```
//Java Program to illustrate the use of Rectangle class which
//has length and width data members
class Rectangle{
    int length;
    int width;
    void insert(int l,int w){
        length=l;
        width=w;
    }
    void calculateArea(){System.out.println(length*width);}
}
class TestRectangle2{
    public static void main(String args[]){
        Rectangle r1=new Rectangle(),r2=new Rectangle();//creating two objects
        r1.insert(11,5);
        r2.insert(3,15);
        r1.calculateArea();
        r2.calculateArea();
    }
}
```

Test it Now

Output:

```
55
45
```

Real World Example: Account

File: TestAccount.java

```
//Java Program to demonstrate the working of a banking-system
//where we deposit and withdraw amount from our account.
//Creating an Account class which has deposit() and withdraw() methods
class Account{
    int acc_no;
    String name;
    float amount;
    //Method to initialize object
    void insert(int a,String n,float amt){
        acc_no=a;
        name=n;
        amount=amt;
    }
    //deposit method
    void deposit(float amt){
        amount=amount+amt;
        System.out.println(amt+" deposited");
    }
    //withdraw method
    void withdraw(float amt){
        if(amount<amt){
            System.out.println("Insufficient Balance");
        }else{
            amount=amount-amt;
            System.out.println(amt+" withdrawn");
        }
    }
    //method to check the balance of the account
    void checkBalance(){System.out.println("Balance is: "+amount);}
    //method to display the values of an object
    void display(){System.out.println(acc_no+" "+name+" "+amount);}
}
//Creating a test class to deposit and withdraw amount
```

```
class TestAccount{  
    public static void main(String[] args){  
        Account a1=new Account();  
        a1.insert(832345,"Ankit",1000);  
        a1.display();  
        a1.checkBalance();  
        a1.deposit(40000);  
        a1.checkBalance();  
        a1.withdraw(15000);  
        a1.checkBalance();  
    }  
}
```

Test it Now

Output:

```
832345 Ankit 1000.0  
Balance is: 1000.0  
40000.0 deposited  
Balance is: 41000.0  
15000.0 withdrawn  
Balance is: 26000.0
```

← Prev

Next →



For Videos Join Our Youtube Channel: [Join Now](#)

Feedback

- Send your Feedback to feedback@javatpoint.com

Help Others, Please Share



Your IT career in Germany

Op

Make it in Germany

Learn Latest Tutorials



Splunk



SPSS



Swagger



Transact-SQL



Tumblr



ReactJS



Regex



Reinforcement
Learning



R Programming



RxJS



React Native



Python Design
Patterns



Python Pillow



Python Turtle



Keras

Preparation



Aptitude



Reasoning



Verbal Ability



Interview Questions



Company Questions

Trending Technologies



Artificial
Intelligence



AWS



Selenium



Cloud Computing



Hadoop



ReactJS

ReactJS



Data Science

Data Science



Angular 7

Angular 7



Blockchain

Blockchain



GIT

Git



Machine Learning



DevOps

B.Tech / MCA

DBMS tutorial
DBMSData Structures tutorial
Data StructuresDAA tutorial
DAAOperating System tutorial
Operating SystemComputer Network tutorial
Computer NetworkCompiler Design tutorial
Compiler DesignComputer Organization and Architecture
Computer OrganizationDiscrete Mathematics Tutorial
Discrete MathematicsEthical Hacking Tutorial
Ethical HackingComputer Graphics Tutorial
Computer GraphicsSoftware Engineering Tutorial
Software Engineeringhtml tutorial
Web TechnologyCyber Security tutorial
Cyber SecurityAutomata Tutorial
AutomataC Language tutorial
C ProgrammingC++ tutorial
C++Java tutorial
Java.Net Framework tutorial
.NetPython tutorial
PythonList of Programs
ProgramsControl Systems tutorial
Control SystemData Mining Tutorial
Data MiningData Warehouse Tutorial
Data Warehouse

