
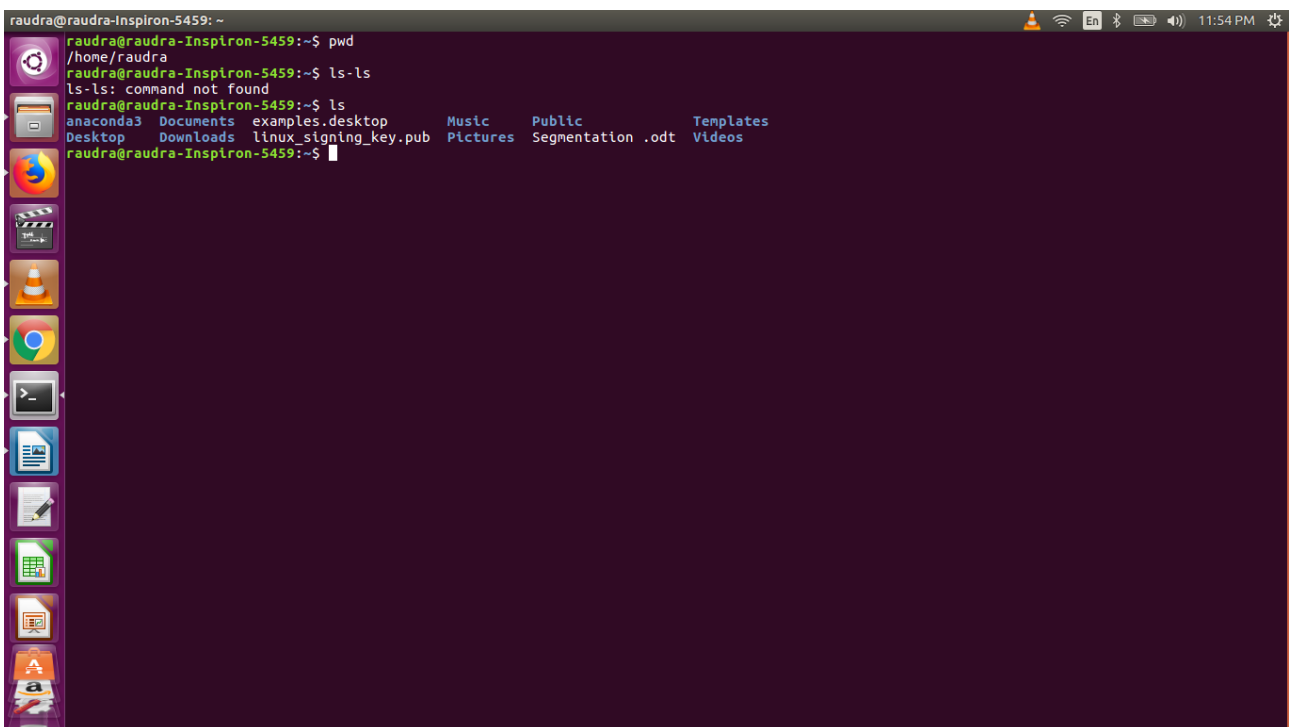


## Assignment – 1

1. **start-all.sh** -> Used to start hadoop daemons all at once. Issuing it on the master machine will start the daemons on all the nodes of a cluster.
2. **jps command** is used to check all the **Hadoop** daemons like NameNode, DataNode, ResourceManager, NodeManager etc. which are running on the machine.

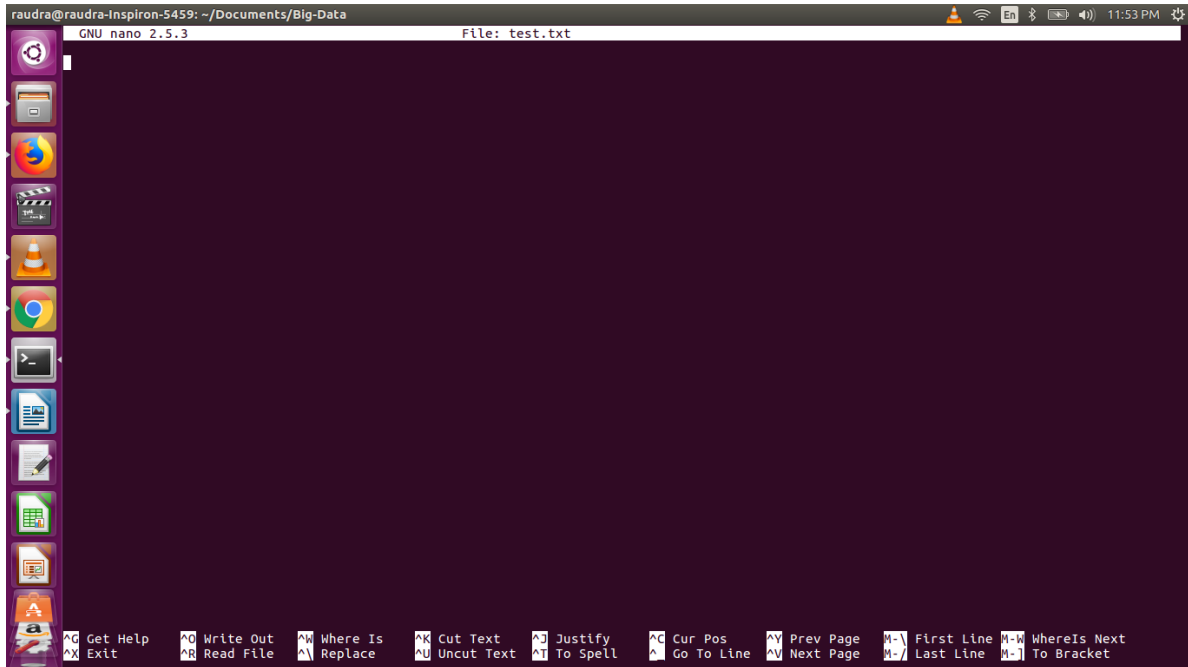

3.