

Setting Up MySQL


Assignment 3 and potentially one of the labs requires you to use MariaDB, the SQL database that comes as part of the XAMPP distribution. Initially, the database server will have a few databases with content for internal use, but none of the databases we will use for labs and assignments. So you will have to populate the database with relevant data. You will also need to create user accounts, so that your PHP application can interact with the database system.

Database Sources

The course textbook (in previous editions) used three running examples: ArtStore, Book CRM, and Sharing Travel Photos. For each of them, the textbook authors provided a SQL file that will create a set of tables and populate them for you. You can download these three files as a single ZIP file from Brightspace.

Loading a Database

To load this database, start up the XAMPP Control Panel, and within XAMPP start up Apache and MySQL.

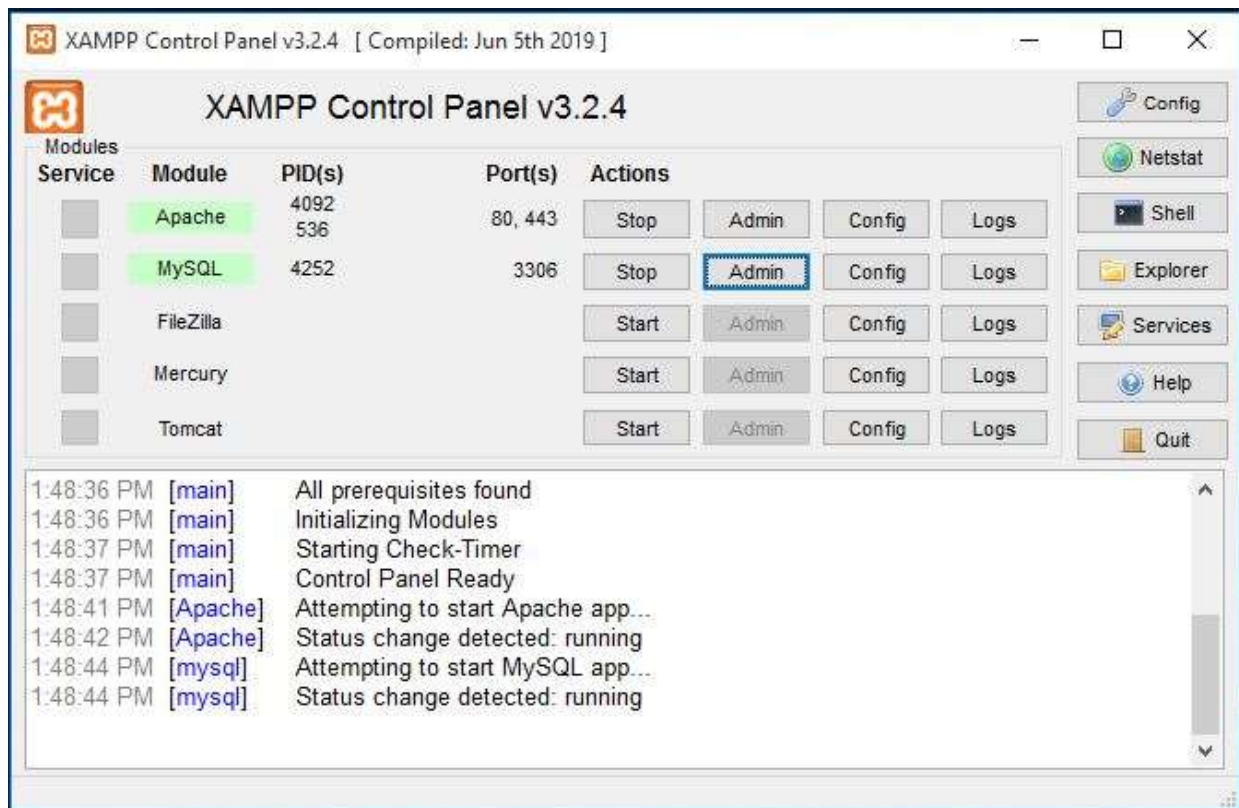


Once both are flagged as running, click on the Admin button next to MySQL, which opens the database GUI, phpMyAdmin, in a web browser.

Carleton University
Department of Systems and Computer Engineering
Fundamentals of Web Development
Setting Up MariaDB

SYSC 4504

Winter 2026

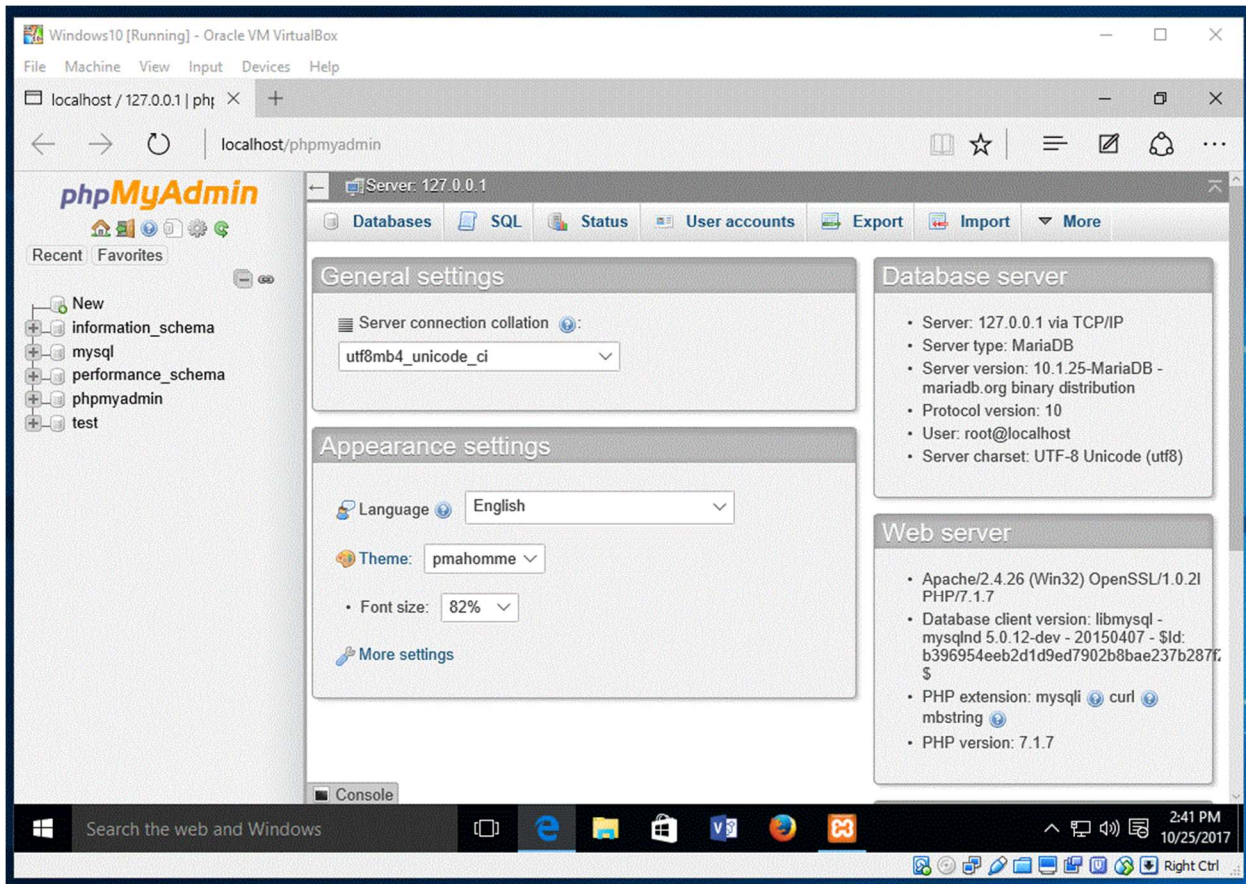


The sequence of steps to load the `art` database with that GUI consists of the following steps:

1. In phpMyAdmin, click on the `Databases` tab.
2. Create a database called `art`. When it is complete, the `art` database will be visible in left-side of phpAdmin window.


Carleton University
Department of Systems and Computer Engineering
Fundamentals of Web Development
Setting Up MariaDB

SYSC 4504

Winter 2026

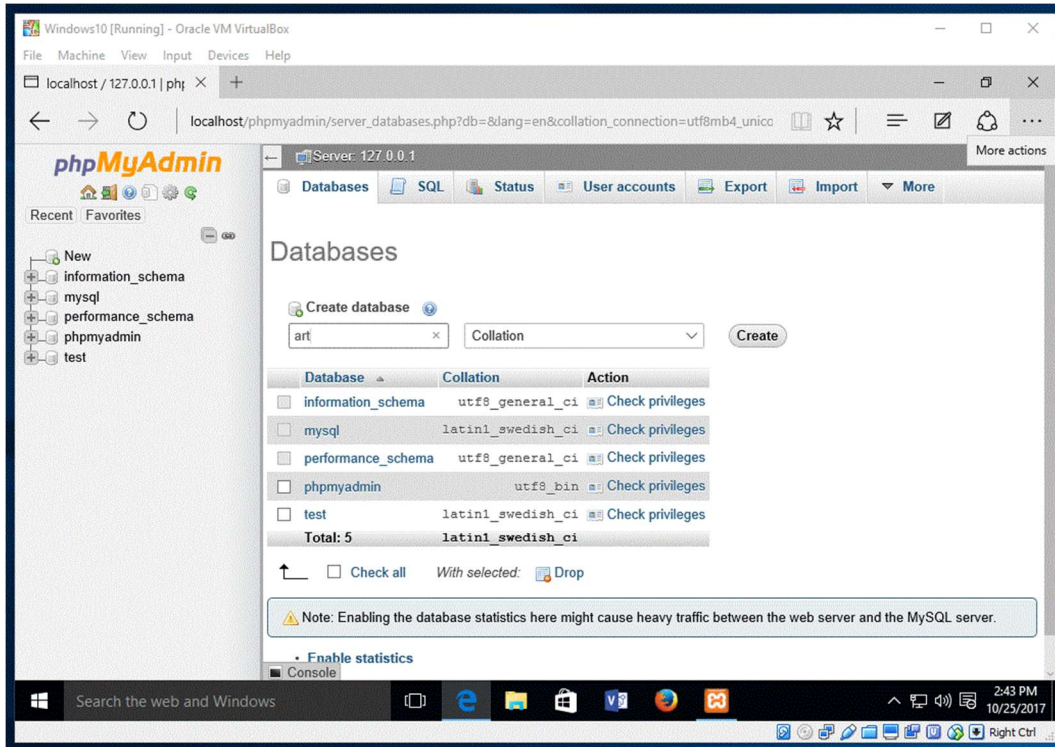

3. Click on the `art` database on the left-side of window. *Currently there are no tables in this database. You can manually create a new table here, or using the `art-small.sql` script to populate the database.*

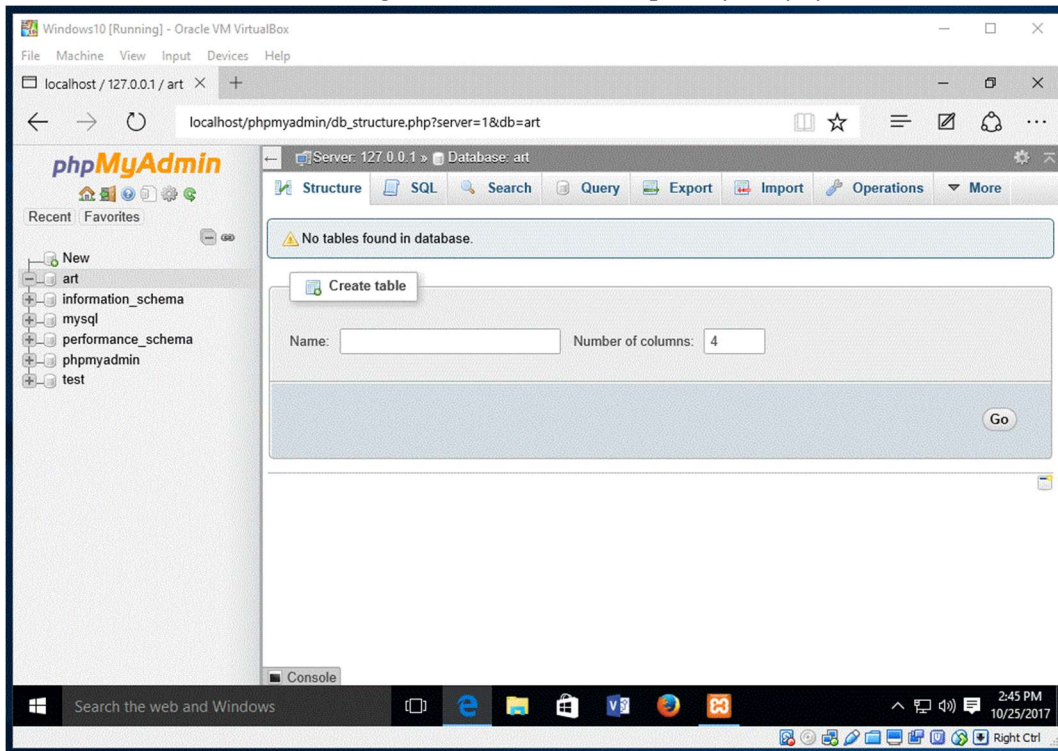

Carleton University
Department of Systems and Computer Engineering
Fundamentals of Web Development
Setting Up MariaDB

SYSC 4504

Winter 2026

- Click on the **Import** tab.
- Use the **Choose File** button to select the `art-small.sql` file. Then click the **Go** button. If import works successfully (after some time), you should be able to examine the tables in the database.


Similarly, you can load the other databases: create the database first, then load its content from the provided file.

Note: with the files provided on Brightspace, you can skip the first step (creating an empty database). Simply import the corresponding `*-small.sql` file, a database with the proper name will be created and populated with tables and data. Please note that some imports may take quite a while to complete. However, all three databases can be loaded, resulting in three databases with names `art`, `book`, and `travel`.

Creating User Accounts

You can use the **SQL** tab to experiment with **SQL** queries on these tables. To access the information from PHP, your server-side code needs to authenticate itself to the database system, so you also need to create a user account. The steps to create a user account are:


- In phpMyAdmin, go to the home page (click on **Server: 127.0.0.1**), and then click on the **User accounts** tab. This will display the users who currently have access to this database.

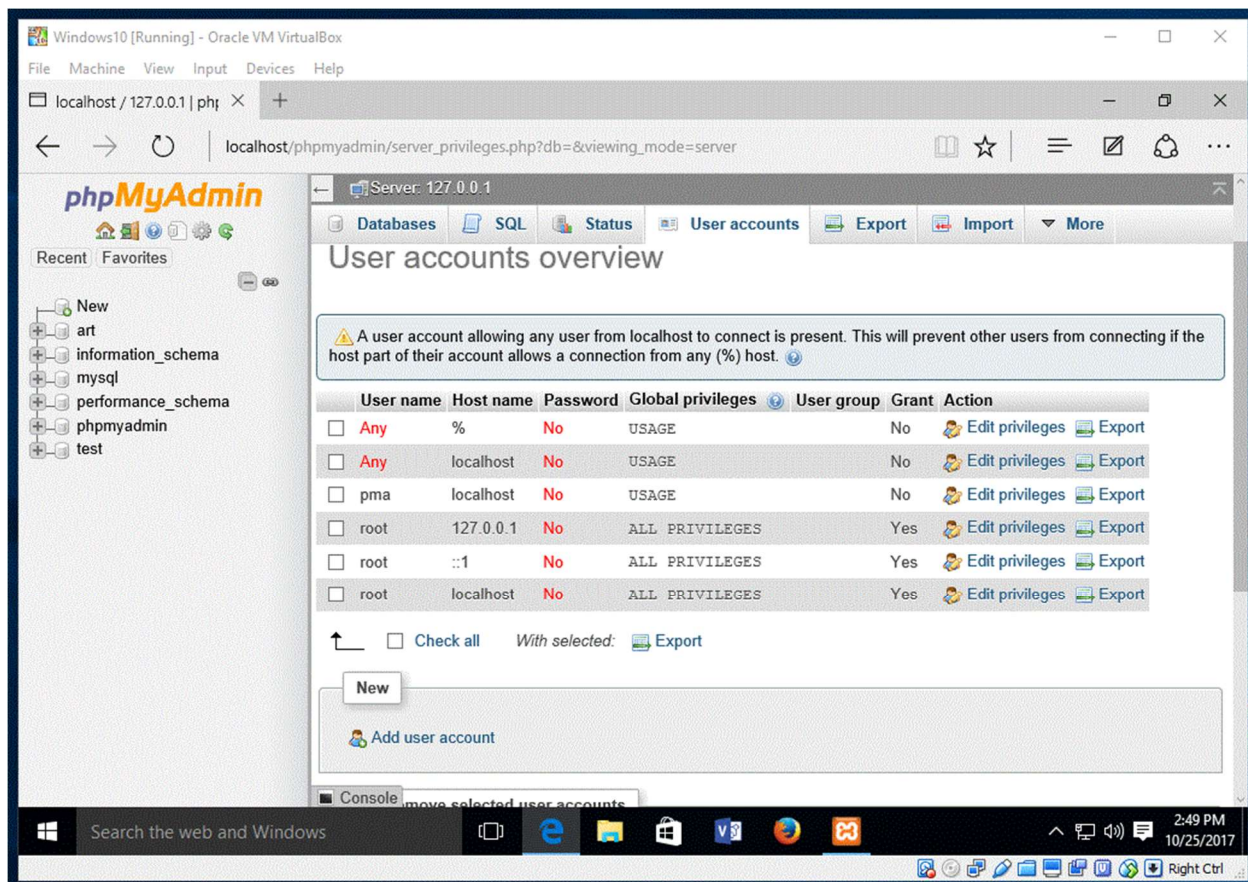

Setting Up MariaDB

2. Click the Add user account link. This will display the Add user page.
3. In the Add user account page, enter the following into the Login information section:
 - User name (use text filed): **testuser**
 - Host (Local): **localhost**
 - Password (use text filed): **mypassword**
 - Re-Type: **mypassword**

You are of course welcome to enter a different user name and password. Assignment and lab handouts will specify what username and password you should use to enable the TA(s) to run and mark your solution. But most likely, it will be a user account with the above credentials (i.e., username and password).

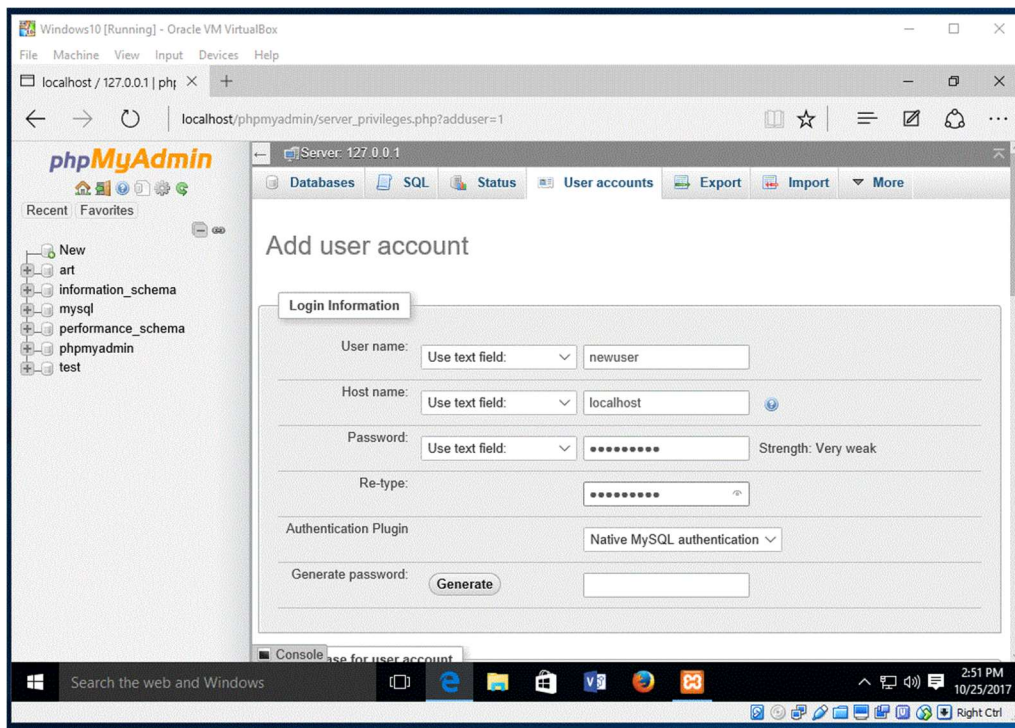

4. In the Global privileges section, check the five Data privileges (select, insert, update, delete, and file) and click the Go button.
5. Once the user account has been created, you can also add more specific privileges for that account for different databases. For example, click on the Database tab, select art, and hit Go.
6. You can now create database-specific privileges, such as granting all privileges

Setting Up MariaDB

