

**MINI PROJECT MID TERM REPORT**  
**(2021-2022)**  
**BLOOD BANK SYSTEM**



**INSTITUTE OF ENGINEERING & TECHNOLOGY**

**Submitted By:**

Vanshika Bansal (191500894)

Harshit Bhardwaj (191500322)

Prankush Jain (191500571)

Surendra Pratap Tomar (191500831)

**Under the Supervision Of**

**Mr. Sharad Gupta**

**Technical Trainer**

**DEPARTMENT OF COMPUTER ENGINEERING AND APPLICATIONS**

### **Student Information :**

Name: Vanshika Bansal	University Roll. No. : 191500894
Mobile: 7452991727	Email : <a href="mailto:vanshika.bansal_cs19@gla.ac.in">vanshika.bansal_cs19@gla.ac.in</a>
Name: Harshit Bhardwaj	University Roll. No. : 191500322
Mobile: 9536304896	Email : <a href="mailto:harshit_bhardwaj_cs19@gla.ac.in">harshit_bhardwaj_cs19@gla.ac.in</a>
Name: Surendra Pratap Tomar	University Roll. No. : 191500831
Mobile: 8290018144	Email : <a href="mailto:surendra.tomar_cs19@gla.ac.in">surendra.tomar_cs19@gla.ac.in</a>
Name: Prankush Jain	University Roll. No. : 191500571
Mobile: 7451031636	Email : <a href="mailto:prankush.jain_cs19@gla.ac.in">prankush.jain_cs19@gla.ac.in</a>

### **Information About Industry/Organization :**

Organization	GLA University, Mathura
Contact Person	Mr. Sharad Gupta

## **Project Information :**

Title Of Project	Blood Bank
Role & Responsibility	
Technical Details	<p>Hardware Requirements:</p> <p>Main Processor                      Core I3</p> <p>Hard-disk Capacity                  1 G.B</p> <p>RAM                                      2 GB</p> <p>Clock Speed                          2.8 Hz</p> <p>Keyboard                                104 Key</p> <p>Software Requirements:</p> <p>Operating System                    Window 10</p> <p>Software                                Wampserver</p> <p>Brackets</p>
Project Implementation Details	Currently in progress



Department of Computer Engineering and Applications  
GLA University, 17 km. Stone NH#2, Mathura-Delhi  
Road,  
Chaumuha, Mathura – 281406 U.P (India)

## **ACKNOWLEDGEMENT**

The project work in this report is an outcome of continuous work over a period and drew intellectual support from various sources. We would like to articulate our profound gratitude and to all those people who extended their wholehearted co-operation and have helped me in completing this project successfully.

We are thankful to [Mr. Sharad Gupta](#) for teaching and assisting us in making the project successful. We would also like to thank our parents & other fellow mates for guiding and encouraging us throughout the duration of the project.

**Vanshika Bansal (191500894)**

**Harshit Bhardwaj (191500322)**

**Prankush Jain (191500571)**

**Surendra Pratap Tomar (191500831)**



Department of Computer Engineering and Applications  
GLA University, 17 km. Stone NH#2, Mathura-Delhi  
Road,  
Chaumuha, Mathura – 281406 U.P (India)

## **DECLARATION**

We here by declare that the project work entitled “Blood Bank” submitted to the GLA University Mathura, is a record of an original work done by us under the guidance of [Mr. Sharad Gupta](#).

Signature of Candidate

**Name of candidate : Vanshika Bansal**

**Roll No. : 191500894**

**Name of candidate : Harshit Bhardwaj**

**Roll No. : 191500322**

**Name of candidate : Surendra Pratap Tomar**

**Roll No. : 191500831**

**Name of candidate : Prankush Jain**

**Roll No.: 191500571**

Course : Computer Science And Engineering

Year : Third

Semester : Fifth

## **ABSTRACT**

Mini Project is the requirement for all engineering students in order to complete their Bachelor of Engineering degree at the GLA University, Mathura. Mini Project is a very important program me, since it complements both the academic and professional aspects of the engineering education. Exposing the students to the practical experience and actual working environment shall open the avenues for developing their skills and capabilities, as well as enhancing their intellectual and emotional personal. The Mini Project also can provide strong linkages between university-industries that shall pave opportunities for "smart partnerships" and industrially driven research. The outcomes of the EIT that are mainly based on the assessment covering the company's and university's evaluation will provide the feedback for student's performance after 75% completion of their engineering study. The remarks from the companies on the students will very much helpful for the university to have a continuous quality improvement especially on curriculum practiced.

## **SYNOPSIS**

### **-> Introduction**

The main objective of the project is to provide the Blood (Specific Group) to the People in a simple way. This project is useful for finding the Blood Bank for getting the Blood in simple manner. To know the Location status there is an application tool for displaying the delivery in secure way.

The system is intended for those who want blood in emergency. And the privileges that are provided to customers to read and execute by providing name, address, contact no. and some specific information for secure delivery as soon as possible and in case of delivery service problem occur then we provided him\her the nearest blood bank address.

The whole delivery analyzer will be under the control of the administrator of blood bank and the customer.

### **-> Motivation**

We are working on this project as this project is helpful for those who's patient needs rare case of blood in emergency. As this project provides efficient facility for the users to get the blood as soon as possible. Therefore we came with this project.

**Advantages**

- This system helps to reduce the waiting time of the Users/hospitals.
- User/hospital can order their Blood according to their preference.

**Disadvantages**

- It requires an internet connection.
- It requires large database.

**Softwares Required**

**Database** : My SQL

**User Interface Design** : HTML, CSS, JAVASCRIPT

**Web Browser** : Mozilla, Google Chrome, Edge, OPERA

**Software** : XAMPP/WAMP Server



## **Table of Content**

1.Introduction To HTML .....	10
2. Introduction to CSS.....	13
3. Introduction to JavaScript .....	15
4. Introduction to PHP .....	18
5. Introduction of Wampserver .....	19
6. Introduction to Brackets.....	20
6.1 Brackets Extension.....	21
7. Responsive Website .....	24
8. Progress till date.....	28
9. Remaining work.....	17
10. Use Case diagram and DFD.....	
11. Conclusion.....	
12. Future Scope.....	
13.Reference .....	40

## **Introduction To HTML**

HTML is an acronym which stands for Hyper Text Markup Language which is used for creating web pages and web applications.

**Hyper Text** : Hyper-Text simply means "Text within Text." A text has a link within it, is a hypertext. Whenever you click on a link which brings you to a new webpage, you have clicked on a hypertext. Hyper-Text is a way to link two or more web pages (HTML documents) with each other.

**Markup language** : A markup language is a computer language that is used to apply layout and formatting conventions to a text document. Markup language makes text more interactive and dynamic. It can turn text into images, tables, links, etc.

**Web Page** : A web page is a document which is commonly written in HTML and translated by a web browser. A web page can be identified by entering an URL. A Web page can be of the static or dynamic type. With the help of HTML only, we can create static web pages.

## **Description of HTML**

**<! DOCTYPE>** : It defines the document type or it instruct the browser about the version of HTML.

**<html >** : This tag informs the browser that it is an HTML document. Text between html tag describes the web document. It is a container for all other elements of HTML except<! DOCTYPE>

**<head>** : It should be the first element inside the <html> element, which contains the metadata (information about the document). It must be closed before the body tag opens.

**<title>** : As its name suggested, it is used to add title of that HTML page which appears at the top of the browser window. It must be placed inside the head tag and should close immediately. (Optional)

**<body>** : Text between body tag describes the body content of the page that is visible to the end user. This tag contains the main content of the HTML document.

**<h1>** : Text between <h1> tag describes the first level heading of the webpage.

**<p>** : Text between <p> tag describes the paragraph of the webpage.

## **Features of HTML**

It is a very easy and simple language. It can be easily understood and modified.

It is very easy to make an effective presentation with HTML because it has a lot of formatting tags.

It is a markup language, so it provides a flexible way to design web pages along with the text.

It facilitates programmers to add a link on the web pages (by html anchor tag), so it enhances the interest of browsing of the user.

It is platform-independent because it can be displayed on any platform like Windows, Linux, and Macintosh, etc.

It facilitates the programmer to add Graphics, Videos, and Sound to the web pages which makes it more attractive and interactive.

HTML is a case-insensitive language, which means we can use tags either in lower- case or upper-case.

## **Introduction to CSS**

CSS stands for Cascading Style Sheets. It is a style sheet language which is used to describe the look and formatting of a document written in markup language. It provides an additional feature to HTML. It is generally used with HTML to change the style of web pages and user interfaces.

### **What does CSS do**

You can add new looks to your old HTML documents.

You can completely change the look of your website with only a few changes in CSS code.

### **Why use CSS**

These are the three major benefits of CSS:

**Solves a big problem** : Before CSS, tags like font, color, background style, element alignments, border and size had to be repeated on every web page. This was a very long process. For example: If you are developing a large website where fonts and color information are added on every single page, it will become a long and expensive process. CSS was created to solve this problem. It was a W3C recommendation.

**Saves a lot of time** : CSS style definitions are saved in external CSS files so it is possible to change the entire website by changing just one file.

**Provide more attributes** : CSS provides more detailed attributes than plain HTML to define the look and feel of the website.

## **Types of CSS**

CSS is added to HTML pages to format the document according to information in the style sheet. There are three ways to insert CSS in HTML documents.

- > **Inline CSS**
- > **Internal CSS**
- > **External CSS**

### **1. Inline CSS**

Inline CSS is used to apply CSS on a single line or element.

For example:

```
<p style="color:blue">Hello CSS</p>
```

### **2. Internal CSS**

Internal CSS is used to apply CSS on a single document or page. It can affect all the elements of the page. It is written inside the style tag within head section of html.

For example :

```
<style>  
p{color:blue}  
</style>
```

### **3.External CSS**

External CSS is used to apply CSS on multiple pages or all pages. Here, we write all the CSS code in a css file. Its extension must be .css for example style.css.

For example :

```
p{color:blue}
```

You need to link this style.css file to your html pages like this:

```
<link rel="stylesheet" type="text/css" href="style.css">
```

## **Introduction to JavaScript**

JavaScript is an object-based scripting language which is lightweight and cross-platform.

JavaScript is not a compiled language, but it is a translated language.

The JavaScript Translator (embedded in the browser) is responsible for translating the JavaScript code for the web browser.

## **Application of JavaScript**

JavaScript is used to create interactive websites. It is mainly used for:

- > Client-side validation,
- > Dynamic drop-down menus,
- > Displaying date and time,
- > Displaying pop-up windows and dialog boxes (like an alert dialog box, confirmdialog box and prompt dialog box),
- > Displaying clocks etc.

## **Advantages of JavaScript:**

### **> JavaScript is a client side language**

The JavaScript code is executed on the user's processor instead of the web server thus it saves bandwidth and load on the web server.

### **> JavaScript is an easy language to learn**

The JavaScript language is easy to learn and offers syntax that is close to English. It uses the DOM model that provides plenty of predefined functionalities to the various objects on pages making it a breeze to develop a script to solve a custom purpose.



### **> JavaScript is comparatively fast for the end user**

As the code is executed on the client side, results and processing is completed almost instantly depending on the task (tasks in JavaScript on web pages are usually simple so as to prevent being a memory hog) as it does not need to be processed in the site's web server and sent back to the user consuming local as well as server bandwidth.

### **> Extended functionality to web pages**

Third party add-ons like Greasemonkey enable JavaScript developers to write snippets of JavaScript which can execute on desired web pages to extend its functionality. If you use a website and require a certain feature to be included, you can write it by yourself and use an add-on like Greasemonkey to implement it on the web page.

### **> No compilation needed**

JavaScript does not require compilation process so no compiler is needed. The browser interprets JavaScript as it HTML tags.

### **> Easy to debug and test**

The understanding syntax of JavaScript is easy. Any person can learn it very easily and use it to develop dynamic and scalable websites.

## **Introduction to PHP**

PHP is an open source, interpreted and object-oriented scripting language i.e. executed at server side. It is used to develop web applications (an application i.e. executed at server side and generates dynamic page).

### **What is PHP**

- > PHP is a server side scripting language.
- > PHP is an interpreted language, i.e. there is no need for compilation.
- > PHP is an object-oriented language.
- > PHP is an open-source scripting language.
- > PHP is simple and easy to learn language.

### **PHP Features**

There are given many features of PHP.

**Performance** : Script written in PHP executes much faster than those scripts written in other languages such as JSP & ASP.

**Open Source Software** : PHP source code is free available on the web, you can develop all the version of PHP according to your requirement without paying any cost.

**Platform Independent** : PHP are available for WINDOWS, MAC, LINUX & UNIX operating system. A PHP application developed in one OS can be easily executed in other OS also.

**Compatibility** : PHP is compatible with almost all local servers used today like Apache, IIS etc.

**Embedded** : PHP code can be easily embedded within HTML tags and script.

## **Introduction to WampServer**

WampServer refers to a software stack for the Microsoft Windows operating system, created by Romain Bourdon and consisting of the Apache web server, OpenSSL for SSL support, MySQL database and PHP programming language.

WampServer is a Web development platform on Windows that allows you to create dynamic Web applications with Apache2, PHP, MySQL and MariaDB. WampServer automatically installs everything you need to intuitively develop Web applications. You will be able to tune your server without even touching its setting files. Best of all, WampServer is available for free (under GPML license) in both 32 and 64 bit versions. Wampserver is not compatible with Windows XP, SP3, or Windows Server 2003.

### **Features**

- > Manage your Apache, MySQL and Maria DB services
- > Install and switch Apache, MySQL, Maria DB and PHP releases
- > Manage your server's settings
- > Access your logs

- > Access your settings files
- > Create alias
- > Use Virtual Host as hosters

## **Introduction to Brackets**

- > Brackets is an open-source, modern text editor crafted for web developers and front-end developers. This app simplifies the process of coding, allowing coders to share their work through various platforms. It is a lightweight yet powerful development tool that blends visual tools into the editor so you can get the help that you want without limiting your creative process.
- > The Brackets app has been specifically designed for working in HTML, CSS, and JavaScript. It comes with a crisp, clean interface to make sure that tools wouldn't get in your way. It has a Quick Edit UI which puts context-specific code and tools inline instead of cluttering up your coding environment.
- > The app also boasts its Live Preview function, a really useful feature that works directly with your browser so that you can push code edits instantly. This feature **syncs** Brackets with your browser, allowing you to jump back and forth between the real source code and the browser view.
- > If you wish to work on the CSS that applies to a specific ID, you may do so using Brackets. You only have to put your mouse cursor in that ID and push Command/CTRL + E. The app will then show you all the CSS selectors with that ID in an inline window. That way, you can work on your code side-by-side without any popups.

- > Brackets works with preprocessors in a new way. It allows you to use Quick Edit and Live Highlight with LESS and SCSS files making working with them easier.
- > Furthermore, the app comes with a strong extension framework. It has an extensionmanager which allows you to browse and install numerous extensions depending on your needs. To locate the extension manager, simply go to the File menu or click the icon in the upper right corner of the main interface.
- > Brackets is a solid editor which has everything you need when you work with files and directories as well as creating new files. Its code completion features let you quickly assemble apps without even knowing the exact syntax. And should you need assistance code syntax and code options, the Quick Edit option will provide help along the way.
- > Overall, Brackets is a great tool that is a pleasure to code in. Its open-source capabilities and feature-rich design is a great help for various developers out there. The app also comes with a user-friendly interface and various extension options to cater to your needs. The only real downside of using the app is that its installation can take ages and may likely test your patience. However, once you get past that hurdle, you will find that the app is exactly what you are looking for.

## **Brackets Extensions**

Brackets has lots of Free Extensions. These extensions help to reduce the manual effort in your code and fixes multiple issues depending on the functionality of the extension.

The Brackets Extension Manager manages all extensions. It is available under the View Menu and is also available in the Right side pane of the Brackets editor.

## 1. Emmet

The Emmet is definitely one of the Brackets top extensions which helps to make coding fast. This works in such a way that you have to simply type some abbreviations and this abbreviation will expand to create tags. This can drastically increase the speed of HTML and CSS coding.

Emmet can automatically use the abbreviations and parse them at run time dynamically to provide the output code. These abbreviations create the structure of code with tags and elements.

It will also work with frameworks like Bootstrap and Foundation.

## 2. Beautify

The Beautify organizes and formats the HTML, CSS, JavaScript files to make them look good, clean, more readable and properly indented.

### Shortcut Key:

Windows – *ctrl + shift + L*

This plugin also removes any extra spaces. To use Beautify, it is better use the shortcuts.

To Clean(Format) up the code, select the entire file or a part of the file which you want to clean.

Right click and click on “Beautify”.

Another way to use Brackets Beautify extension is by navigating to Edit -> Beautify. If you want to clean up the file during save, there is an option “Beautify on Save”.

## 3. Brackets Git

Before installing the Brackets Git extension, you have to first install GIT on your PC/Computer. GIT is a very popular Version control system(VCS) to collaborate and manage your projects.

Once integration is done, you can set the path of your GIT executable file. This allows you to commit your code changes to GIT from Brackets itself.

You can also perform other useful operations such as Push or Pull the changes. It has other options as well such as view file history, total commit history etc.

#### **4. HTML skeleton**

Using the HTML skeleton extension, it is easy to insert HTML elements into your document. It is a quick way of inserting a group of tags and elements. This plugin helps you to quickly create the skeleton of HTML tags like basic/full HTML skeleton, viewport, Image, Internal & External style- sheet etc.

#### **5. QuickdocsJS**

The QuickdocsJS shows quick short documentation for JavaScript functions, summary, syntax and parameters.

You can quickly refer the documents for jQuery, NodeJS and basic ReactJS functions.

#### **6. Brackets Color Picker**

The Brackets Color Picker activates color picker for brackets.

When you type 'color' in brackets editor, it displays a color picker and you can select a particular color of your choice.

This color picker is a handy tool to select the color of your choice from a set of colors. With this, you can select Colors in actual color name, RGB values, HEX Codes, etc.

## 7. Autosave every edit!

Saving the changes continuously is very important if you are making some critical changes. The **Autosave every edit!** saves your work automatically as soon as you type.

The best thing is that you do not need to press any command or type CTRL + S every time. You have to just set the frequency of time-frame when the changes will be automatically saved.

## Responsive website

A responsive website is one that has been designed to respond, or adapt, based on the technology and type of computing device used by the visitor to display the site. It is basically one website design that will look good at any size — from a large desktop LCD monitor to the smaller screens we use on smartphones and tablets. Responsive design ensures visitors to the site have a similar experience that is independent of the size of the device used to view the site.

Responsive website design (RWD) enables site designers to create once and publish the same content everywhere, for all devices. It is a website development philosophy of rendering web pages in an efficient, optimized and easy-to-read format across a variety of devices and web browsers on different platforms.

Rather than the traditional approach of designing web pages for viewing on just desktop or laptop PCs, responsive design utilizes a variety of newer web development features and functionality to deliver an optimal view to users on mobile devices like smartphones and tablets as well as on traditional PCs and other electronic devices.



Because of their smaller display size, mobile devices typically require a modified layout for content to help users navigate through the website more efficiently, and with responsive design, web developers are able to code their web pages with the flexibility to render readable content at a variety of display sizes. This is due largely in part to websites that can continually and fluidly change, based on factors such as the viewport width.

## Three Main Components of Responsive Design

Responsive website design consists of the following three main components:

> **Flexible layouts** - Using a flexible grid to create the website layout that will dynamically resize to any width.

> **Media queries** - An extension to media types when targeting and including styles. Media queries allow designers to specify different styles for specific browser and device circumstances.

> **Flexible media** - Makes media (images, video and other formats) scalable, by changing the size of the media as the size of the viewport changes.

## CSS Media Queries

Media queries can be used to check many things, such as:

- width and height of the viewport
- width and height of the device
- orientation (is the tablet/phone in landscape or portrait mode?)
- Resolution

Using media queries are a popular technique for delivering a tailored style sheet to desktops, laptops, tablets, and mobile phones (such as iPhone and Android phones).

### Media Query Syntax

A media query consists of a media type and can contain one or more expressions, which resolve to either true or false.

```
@media not|only  
mediatype and  
(expressions) {  
  CSS-Code;  
}
```

The result of the query is true if the specified media type matches the type of device the document is being displayed on and all expressions in the media query are true. When a media query is true, the corresponding style sheet or style rules are applied, following the normal cascading rules.

Unless you use the not or only operators, the media type is optional and the all type will be implied.

## **Project Description**

The main objective of the project is to provide the Blood (Specific Group) to the People in a simple way. This project is useful for finding the Blood Bank for getting the Blood in simple manner. To know the Location status there is an application tool for displaying the delivery in secure way.

The system is intended for those who want blood in emergency. And the privileges that are provided to customers to read and execute by providing name, address, contact no. and some specific information for secure delivery as soon as possible and in case of delivery service problem occur then we provided him\her the nearest blood bank address.

The whole delivery analyzer will be under the control of the administrator of blood bank and the customer.

### **Users / Actors of System**

- Donors
- Campaign
- Side menu

### **Donors Features**

- Add Donor details
- Delete Donor details
- Add Donor details
- Delete Donor details
- Update his/her profile details

## Campaign Features

- Add Campaign details
- Change Campaign details
- Update Campaign details
- Delete Campaign details


## Side Bar Features

- View Setting
- Update setting
- Notification Panel

## Progress till date

## Module used-

## Dashboard

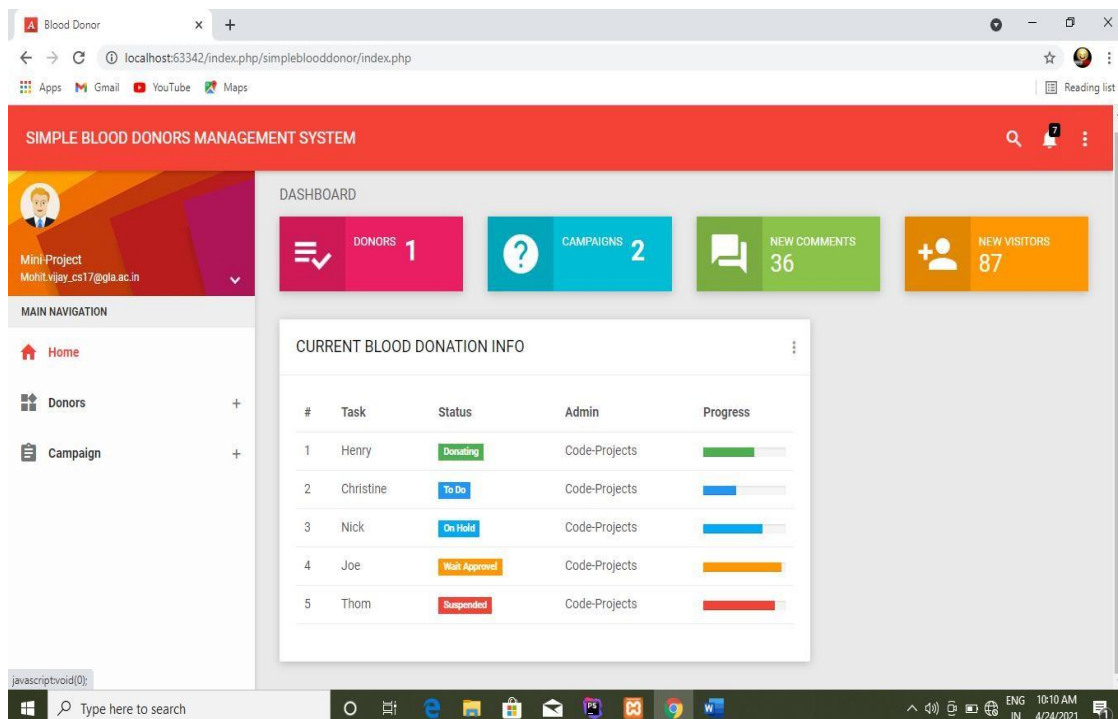

## Code used

```
<!DOCTYPE html>
<html>

<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=Edge">
  <meta content="width=device-width, initial-scale=1, maximum-scale=1, user-scalable=no" name="viewport">
  <title>Blood Donor</title>
  <!-- Favicon-->
  <link rel="icon" href="favicon.ico" type="image/x-icon">

  <!-- Google Fonts -->
  <link
href="https://fonts.googleapis.com/css?family=Roboto:400,700&subset=latin,cyrillic-ext" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/icon?family=Material+Icons"
rel="stylesheet" type="text/css">

  <!-- Bootstrap Core Css -->
  <link href="plugins/bootstrap/css/bootstrap.css" rel="stylesheet">

  <!-- Waves Effect Css -->
  <link href="plugins/node-waves/waves.css" rel="stylesheet" />
```

## Campaign

### Code Used

The screenshot shows a web application titled "SIMPLE BLOOD DONORS MANAGEMENT SYSTEM". The interface includes a sidebar with navigation links: "home", "Donors", and "Campaign". The main content area displays a table with columns: "Full Name", "Gender", "D.O.B", "Weight", "Contact", "Blood Group", and "Operation". The table contains one row for "mohit" with a value of "male" and a date of "2000-02-05". The "Operation" column has an "EDIT" button. The user profile "John Doe" is visible in the top left corner.

Full Name	Gender	D.O.B	Weight	Contact	Blood Group	Operation
mohit	male	2000-02-05	66	6666666	a+	EDIT

```

<!DOCTYPE html>
<html>

<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=Edge">
  <meta content="width=device-width, initial-scale=1, maximum-scale=1,
user-scalable=no" name="viewport">
  <title>Blood Donor</title>
  <!-- Favicon -->
  <link rel="icon" href="favicon.ico" type="image/x-icon">

  <!-- Google Fonts -->
  <link
href="https://fonts.googleapis.com/css?family=Roboto:400,700&subset=latin,c
yrillic-ext" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/icon?family=Material+Icons"
rel="stylesheet" type="text/css">

  <!-- Bootstrap Core Css -->
  <link href="plugins/bootstrap/css/bootstrap.css" rel="stylesheet">

  <!-- Waves Effect Css -->
  <link href="plugins/node-waves/waves.css" rel="stylesheet" />

  <!-- Animation Css -->
  <link href="plugins/animate-css/animate.css" rel="stylesheet" />

  <!-- Morris Chart Css-->
  <link href="plugins/morrisjs/morris.css" rel="stylesheet" />

  <!-- Custom Css -->
  <link href="css/style.css" rel="stylesheet">

  <!-- AdminBSB Themes. You can choose a theme from css/themes instead of
get all themes -->
  <link href="css/themes/all-themes.css" rel="stylesheet" />
</head>

<body class="theme-red">
  <!-- Page Loader -->
  <div class="page-loader-wrapper">
    <div class="loader">
      <div class="preloader">
        <div class="spinner-layer pl-red">
          <div class="circle-clipper left">
            <div class="circle"></div>
          </div>
          <div class="circle-clipper right">
            <div class="circle"></div>
          </div>
        </div>
      </div>
      <p>Please wait...</p>
    </div>
  </div>
  <!-- #END# Page Loader -->
  <!-- Overlay For Sidebars -->
  <div class="overlay"></div>

```

```

<!-- #END# Overlay For Sidebars -->
<!-- Search Bar -->
<div class="search-bar">
  <div class="search-icon">
    <i class="material-icons">search</i>
  </div>
  <input type="text" placeholder="START TYPING...">
  <div class="close-search">
    <i class="material-icons">close</i>
  </div>
</div>
<!-- #END# Search Bar -->
<!-- Top Bar -->
<nav class="navbar">
  <div class="container-fluid">
    <div class="navbar-header">
      <a href="javascript:void(0);" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#navbar-collapse" aria-expanded="false"></a>
      <a href="javascript:void(0);" class="bars"></a>
      <a class="navbar-brand" href="index.php">SIMPLE BLOOD
DONORS MANAGEMENT SYSTEM</a>
    </div>
    <div class="collapse navbar-collapse" id="navbar-collapse">
      <ul class="nav navbar-nav navbar-right">
        <!-- Call Search -->
        <li><a href="javascript:void(0);" class="js-search"
data-close="true"><i class="material-icons">search</i></a></li>
        <!-- #END# Call Search -->
        <!-- Notifications -->
        <li class="dropdown">
          <a href="javascript:void(0);" class="dropdown-
toggle" data-toggle="dropdown" role="button">
            <i class="material-icons">notifications</i>
            <span class="label-count">7</span>
          </a>
          <ul class="dropdown-menu">
            <li class="header">NOTIFICATIONS</li>
            <li class="body">
              <ul class="menu">
                <li>
                  <a href="javascript:void(0);">
                    <div class="icon-circle bg-
light-green">
                      <i class="material-
icons">person_add</i>
                    </div>
                    <div class="menu-info">
                      <h4>12 new members
joined</h4>
                    <p>
                      <i class="material-
icons">access_time</i> 14 mins ago
                    </p>
                  </div>
                </a>
              </li>
            </li>
            <li>
              <a href="javascript:void(0);">
                <div class="icon-circle bg-
cyan">

```

```

icons">add_shopping_cart</i>
                                <i class="material-
                                </div>
                                <div class="menu-info">
                                  <h4>4 sales made</h4>
                                  <p>
                                    <i class="material-
                                    </p>
                                  </div>
                                </a>
                              </li>
                              <li>
                                <a href="javascript:void(0);">
                                  <div class="icon-circle bg-
                                  <i class="material-
                                  </div>
                                  <div class="menu-info">
                                    <h4><b>Nancy Doe</b>
                                    <p>
                                      <i class="material-
                                      </p>
                                    </div>
                                  </a>
                                </li>
                                <li>
                                  <a href="javascript:void(0);">
                                    <div class="icon-circle bg-
                                    <i class="material-
                                    </div>
                                    <div class="menu-info">
                                      <h4><b>Nancy</b> changed
                                      <p>
                                        <i class="material-
                                        </p>
                                      </div>
                                    </a>
                                  </li>
                                  <li>
                                    <a href="javascript:void(0);">
                                      <div class="icon-circle bg-
                                      <i class="material-
                                      </div>
                                      <div class="menu-info">
                                        <h4><b>John</b> commented
                                        <p>
                                          <i class="material-
                                          </p>
                                        </div>

```



```

        </a>
    </li>
    <li>
        <a href="javascript:void(0);">
            <div class="icon-circle bg-
light-green">
                <i class="material-
icons">cached</i>
            </div>
            <div class="menu-info">
                <h4><b>John</b> updated
status</h4>
                <p>
                    <i class="material-
icons">access_time</i> 3 hours ago
                </p>
            </div>
        </a>
    </li>
    <li>
        <a href="javascript:void(0);">
            <div class="icon-circle bg-
purple">
                <i class="material-
icons">settings</i>
            </div>
            <div class="menu-info">
                <h4>Settings updated</h4>
                <p>
                    <i class="material-
icons">access_time</i> Yesterday
                </p>
            </div>
        </a>
    </li>
</ul>
</li>
<li class="footer">
    <a href="javascript:void(0);">View All
Notifications</a>
</li>
</ul>
</li>
<!-- #END# Notifications -->
<!-- Tasks -->

<!-- #END# Tasks -->
<li class="pull-right"><a href="javascript:void(0);"
class="js-right-sidebar" data-close="true"><i class="material-
icons">more_vert</i></a></li>
</ul>
</div>
</div>
</nav>
<!-- #Top Bar -->
<section>
    <!-- Left Sidebar -->
    <aside id="leftsidebar" class="sidebar">
        <!-- User Info -->
        <div class="user-info">
            <div class="image">

```

```

        
    </div>
    <div class="info-container">
        <div class="name" data-toggle="dropdown" aria-
haspopup="true" aria-expanded="false">John Doe</div>
        <div class="email">john.doe@example.com</div>
        <div class="btn-group user-helper-dropdown">
            <i class="material-icons" data-toggle="dropdown"
aria-haspopup="true" aria-expanded="true">keyboard_arrow_down</i>
            <ul class="dropdown-menu pull-right">
                <li><a href="javascript:void(0);"><i
class="material-icons">person</i>Profile</a></li>
                <li role="separator" class="divider"></li>
                <li><a href="javascript:void(0);"><i
class="material-icons">group</i>Followers</a></li>
                <li><a href="javascript:void(0);"><i
class="material-icons">shopping_cart</i>Sales</a></li>
                <li><a href="javascript:void(0);"><i
class="material-icons">favorite</i>Likes</a></li>
                <li role="separator" class="divider"></li>
                <li><a href="javascript:void(0);"><i
class="material-icons">input</i>Sign Out</a></li>
            </ul>
        </div>
    </div>
</div>
<!-- #User Info -->
<!-- Menu -->
<div class="menu">
    <ul class="list">
        <li class="header">MAIN NAVIGATION</li>
        <li class="active">
            <a href="index.php">
                <i class="material-icons">home</i>
                <span>Home</span>
            </a>
        </li>
        <li>
            <a href="javascript:void(0);" class="menu-toggle">
                <i class="material-icons">widgets</i>
                <span>Donors</span>
            </a>
            <ul class="ml-menu">
                <li>
                    <a href="adddonor.html">Add Donors</a>
                </li>
                <li>
                    <a href="viewdonor.php">View Donors</a>
                </li>
                <li>
                    <a href="editdonor.php">Edit Donors</a>
                </li>
                <li>
                    <a href="deletedonor.php">Remove Donors</a>
                </li>
            </ul>
        </li>
    </ul>
</div>

```

```

        <li>
            <a href="javascript:void(0);" class="menu-toggle">
                <i class="material-icons">assignment</i>
                <span>Campaign</span>
            </a>
            <ul class="ml-menu">
                <li>
                    <a href="addcampaign.html">Create
Campaign</a>
                </li>
                <li>
                    <a href="editcampaign.php">Edit Campaign
Details</a>
                </li>
                <li>
                    <a href="viewcampaign.php">View
Campaign</a>
                </li>
                <li>
                    <a href="deletecampaign.php">Remove
Campaign</a>
                </li>
            </ul>
        </li>

    </ul>
</div>
<!-- #Menu -->
<!-- Footer -->

<!-- #Footer -->
</aside>
<!-- #END# Left Sidebar -->
<!-- Right Sidebar -->
<aside id="rightsidebar" class="right-sidebar">
    <ul class="nav nav-tabs tab-nav-right" role="tablist">
        <li role="presentation" class="active"><a href="#skins"
data-toggle="tab">SKINS</a></li>
        <li role="presentation"><a href="#settings" data-
toggle="tab">SETTINGS</a></li>
    </ul>
    <div class="tab-content">
        <div role="tabpanel" class="tab-pane fade in active in
active" id="skins">
            <ul class="demo-choose-skin">
                <li data-theme="red" class="active">
                    <div class="red"></div>
                    <span>Red</span>
                </li>
                <li data-theme="pink">
                    <div class="pink"></div>
                    <span>Pink</span>
                </li>
                <li data-theme="purple">
                    <div class="purple"></div>
                    <span>Purple</span>
                </li>
            </ul>

```

```
<li data-theme="deep-purple">
  <div class="deep-purple"></div>
  <span>Deep Purple</span>
</li>
<li data-theme="indigo">
  <div class="indigo"></div>
  <span>Indigo</span>
</li>
<li data-theme="blue">
  <div class="blue"></div>
  <span>Blue</span>
</li>
<li data-theme="light-blue">
  <div class="light-blue"></div>
  <span>Light Blue</span>
</li>
<li data-theme="cyan">
  <div class="cyan"></div>
  <span>Cyan</span>
</li>
<li data-theme="teal">
  <div class="teal"></div>
  <span>Teal</span>
</li>
<li data-theme="green">
  <div class="green"></div>
  <span>Green</span>
</li>
<li data-theme="light-green">
  <div class="light-green"></div>
  <span>Light Green</span>
</li>
<li data-theme="lime">
  <div class="lime"></div>
  <span>Lime</span>
</li>
<li data-theme="yellow">
  <div class="yellow"></div>
  <span>Yellow</span>
</li>
<li data-theme="amber">
  <div class="amber"></div>
  <span>Amber</span>
</li>
<li data-theme="orange">
  <div class="orange"></div>
  <span>Orange</span>
</li>
<li data-theme="deep-orange">
  <div class="deep-orange"></div>
  <span>Deep Orange</span>
</li>
<li data-theme="brown">
  <div class="brown"></div>
  <span>Brown</span>
</li>
<li data-theme="grey">
  <div class="grey"></div>
  <span>Grey</span>
</li>
<li data-theme="blue-grey">
```

```

        <div class="blue-grey"></div>
        <span>Blue Grey</span>
      </li>
      <li data-theme="black">
        <div class="black"></div>
        <span>Black</span>
      </li>
    </ul>
  </div>
  <div role="tabpanel" class="tab-pane fade" id="settings">
    <div class="demo-settings">
      <p>GENERAL SETTINGS</p>
      <ul class="setting-list">
        <li>
          <span>Report Panel Usage</span>
          <div class="switch">
            <label><input type="checkbox"
checked><span class="lever"></span></label>
          </div>
        </li>
        <li>
          <span>Email Redirect</span>
          <div class="switch">
            <label><input type="checkbox"><span
class="lever"></span></label>
          </div>
        </li>
      </ul>
      <p>SYSTEM SETTINGS</p>
      <ul class="setting-list">
        <li>
          <span>Notifications</span>
          <div class="switch">
            <label><input type="checkbox"
checked><span class="lever"></span></label>
          </div>
        </li>
        <li>
          <span>Auto Updates</span>
          <div class="switch">
            <label><input type="checkbox"
checked><span class="lever"></span></label>
          </div>
        </li>
      </ul>
      <p>ACCOUNT SETTINGS</p>
      <ul class="setting-list">
        <li>
          <span>Offline</span>
          <div class="switch">
            <label><input type="checkbox"><span
class="lever"></span></label>
          </div>
        </li>
        <li>
          <span>Location Permission</span>
          <div class="switch">
            <label><input type="checkbox"
checked><span class="lever"></span></label>
          </div>
        </li>
      </ul>
    </div>
  </div>

```

```

        </ul>
    </div>
</div>
</div>
</aside>
<!-- #END# Right Sidebar -->
</section>

<section class="content">
    <div class="container-fluid">
        <div class="block-header">

            </div>

            <!-- Widgets -->

            <!-- #END# Widgets -->
            <!-- CPU Usage -->
            <!-- -->
            <!-- #END# CPU Usage -->
            <div class="row clearfix">

                </div>
            <!-- /.box-header -->
            <!-- form start -->
            <?php

include "conn.php";

$qry="select * from blooddonor";
$result=mysqli_query($conn,$qry);

echo"<table border='2' id='donor'>
<tr>
    <th>Full Name</th>
    <th>Gender</th>
    <th>D.O.B</th>
    <th>Weight</th>
    <th>Contact</th>
    <th>Blood Group</th>
    <th colspan='2'>Operation</th>
</tr>";

while($row=mysqli_fetch_array($result)){
    echo"<tr>
    <td>".$row['name']. "</td>
    <td>".$row['gender']. "</td>
    <td>".$row['dob']. "</td>
    <td>".$row['weight']. "</td>
    <td>".$row['contact']. "</td>
    <td>".$row['bloodtype']. "</td>
    <td><a href='editdonorform.php?id=".$row['id']."'>EDIT</a></td>
</tr>";
}

?>

            <!-- Visitors -->

            <!-- #END# Visitors -->
            <!-- Latest Social Trends -->

```

```

        <!-- #END# Latest Social Trends -->
        <!-- Answered Tickets -->

        <!-- #END# Answered Tickets -->
    </div>

        <!-- #END# Task Info -->
        <!-- Browser Usage -->

        <!-- #END# Browser Usage -->
    </div>
</div>
</section>

<style>
#donor {
font-family: "Trebuchet MS", Arial, Helvetica, sans-serif;
border-collapse: collapse;
width: 80%;
margin-top:100px;
margin-left:80px;
}

#donor td, #customers th {
border: 3px solid maroon;
padding: 12px;
text-align:center;
}

#donor tr:nth-child(even){background-color: #f2f2f2;}

#donor tr:hover {background-color: #ddd;}

#donor th {
padding-top: 12px;
padding-bottom: 12px;
text-align: center;
background-color: #e7e7e7;
color: black;
}
</style>

<!-- JQuery Core Js -->
<script src="plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap Core Js -->
<script src="plugins/bootstrap/js/bootstrap.js"></script>

<!-- Select Plugin Js -->
<script src="plugins/bootstrap-select/js/bootstrap-select.js"></script>

<!-- Slimscroll Plugin Js -->
<script src="plugins/jquery-slimscroll/jquery.slimscroll.js"></script>

<!-- Waves Effect Plugin Js -->
<script src="plugins/node-waves/waves.js"></script>

<!-- JQuery CountTo Plugin Js -->

```

```
<script src="plugins/jquery-countto/jquery.countTo.js"></script>

<!-- Morris Plugin Js -->
<script src="plugins/raphael/raphael.min.js"></script>
<script src="plugins/morrisjs/morris.js"></script>

<!-- ChartJs -->
<script src="plugins/chartjs/Chart.bundle.js"></script>

<!-- Flot Charts Plugin Js -->
<script src="plugins/flot-charts/jquery.flot.js"></script>
<script src="plugins/flot-charts/jquery.flot.resize.js"></script>
<script src="plugins/flot-charts/jquery.flot.pie.js"></script>
<script src="plugins/flot-charts/jquery.flot.categories.js"></script>
<script src="plugins/flot-charts/jquery.flot.time.js"></script>

<!-- Sparkline Chart Plugin Js -->
<script src="plugins/jquery-sparkline/jquery.sparkline.js"></script>

<!-- Custom Js -->
<script src="js/admin.js"></script>
<script src="js/pages/index.js"></script>

<!-- Demo Js -->
<script src="js/demo.js"></script>
</body>
</html>
```

## Target Audience

Mainly we are trying to target hospitalized Patient ,hospitals as our audience. From this project Users as well as Hospitals get benefited.

## References

<https://w3school.com/>

<https://www.google.com/>

<https://javatpoint.com/>