

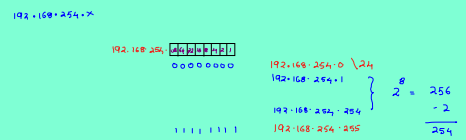
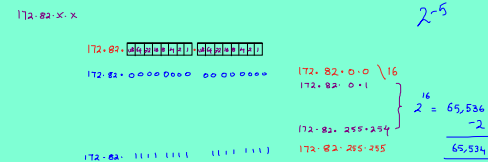


finding host ip in per network

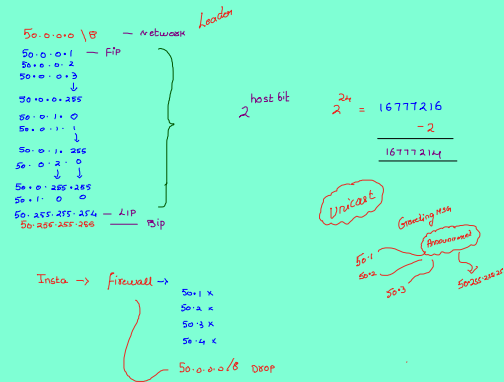

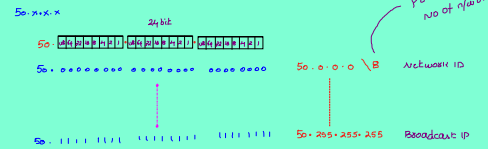

NIC — UTP

50.0.0.10

Subnetmask

It is use to mention n/w position in IP

Condition

Put binary as 1 for n/w bit host=0

128	64	32	16	8	4	2	1
1	1	1	1	1	1	1	1

50.0.0.10

255.0.0.0

172.16.0.10

255.255.0.0

192.168.1.10

255.255.255.0

