Assignment : MangoDB mcp

Task 1: Database Discovery

TASK 1 | DATABASE DISCOVERY

MongoDB MCP connection • Selected database: Agentic_AI

DATABASES FOUND	COLLECTIONS	DOCUMENTS
7	4	6,559

DATA SIZE	STORAGE	INDEXES
93.98 MB	121.95 MB	8

DATABASE INVENTORY

Agentic_AI	122,482,688 B | ~116.8 MiB	Selected for exploration
JobPortal	8,192 B | 8 KiB	
VibeCoding	3,620,864 B | ~3.5 MiB	
chunking_playground	831,488 B | ~813 KiB	
sample_mflix	174,993,408 B | ~166.9 MiB	
admin	0 B	System database
local	0 B	System database

Stats reported for Agentic_AI. Database sizes above are the values returned by list-databases; MiB conversions are approximate.

The configured MongoDB MCP connection returned **7 databases**:

Database	Listed size
`Agentic_AI`	122,482,688 bytes (~116.8 MiB)
`JobPortal`	8,192 bytes (8 KiB)
`VibeCoding`	3,620,864 bytes (~3.5 MiB)
`chunking_playground`	831,488 bytes (~813 KiB)
`sample_mflix`	174,993,408 bytes (~166.9 MiB)
`admin`	0 bytes
`local`	0 bytes

I explored `Agentic_AI`, which appears to hold user stories and generated test cases. Its database stats report **4 collections, 6,559 documents, 93,978,818 bytes of data, 121,946,112 bytes of storage, and 8 indexes.**

Task 2: Collection Discovery:



Task 2 — Collections and inferred purpose

Collection	Documents	Likely purpose
`UserStory`	190	Imported project stories, status, acceptance criteria, and related metadata
`conversation_memory`	7	User prompts and message history associated with sessions
`TestCase`	6,354	Test cases, prerequisites, steps, expected results, and story links
`test_case_generation_history`	8	Prompts, generated test-case results, and generation/retrieval metadata


Purposes are inferred from collection names and sampled fields.

Inferred document structures

Schemas below are inferred from samples, so fields or types may vary in other documents.

- `UserStory` — `_id: ObjectId`; strings include `key`, `summary`, `description`, `created`, `updated`, `project`, `epic`, `acceptanceCriteria`, `businessValue`, `risk`, `dependencies`, `notes`, `url`, `sourceType`, `importedAt`, `sourceFile`; `status` and `priority` are nested documents; `components`, `labels`, `fixVersions`, and `issueLinks` are arrays; `embedding` is a numeric array; `createdAt` is a Date; `embeddingMetadata` is a nested document. `assignee`, `reporte`

Task 3 — Sample records

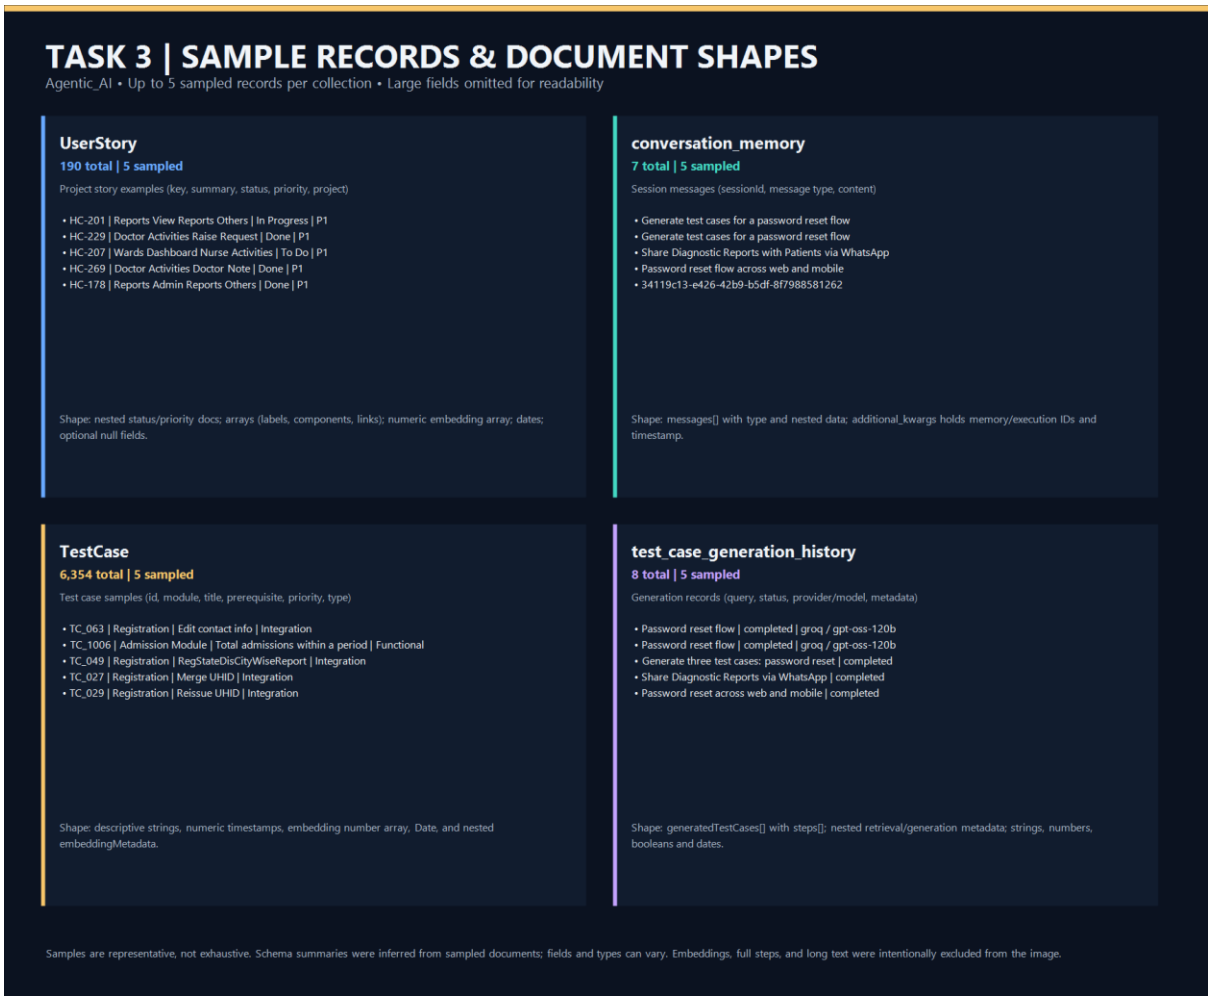

Task 3 — Sample records

These are **up to five records from each collection**. To keep the samples readable, large fields such as embeddings and full test steps are omitted; the inferred structures above describe those fields.

`UserStory` — **5 of 190**

Key	Summary	Status	Priority	Project
HC-201	Reports View Reports Others	In Progress	P1	Health Care
HC-229	Doctor Activities Raise Request	Done	P1	Health Care
HC-207	Wards Dashboard Nurse Activities	To Do	P1	Health Care
HC-269	Doctor Activities Doctor Note	Done	P1	Health Care
HC-178	Reports Admin Reports Others	Done	P1	Health Care

The sampled records also include acceptance criteria; for example, `HC-207` expects the dashboard to show relevant data and visualizations correctly.

and visualizations correctly.

`conversation_memory` — **5 of 7**

Session (shortened)	Message type	Sample content
2338538d…	human	Generate test cases for a password reset flow
defe2589…	human	Generate test cases for a password reset flow
fdf2c594…	human	Share Diagnostic Reports with Patients via WhatsApp
f9624223…	human	Password reset flow across web and mobile
34119c13…	human	`34119c13-e426-42b9-b5df-8f7988581262`

Each sample has a `messages` array containing message data and metadata such as memory-record ID, execution ID, and timestamp.

`TestCase` — **5 of 6,354**

ID	Module	Title	Prerequisite	Priority	Type
TC_063	Registration	Edit contact info	Valid From and to Date	P1	Integratio n
TC_100	AT (Admission	Total admissions within a			

3 Artifacts

Sampled records also have story links; the collection schema includes descriptions, steps, and expected results.

`test_case_generation_history` — 5 of 8

Conversation	User query	Status	Provider / model
`2338538d…`	Generate test cases for a password reset flow	completed	groq / `openai/gpt-oss-120b`
`defe2589…`	Generate test cases for a password reset flow	completed	groq / `openai/gpt-oss-120b`
`defe2589…`	Generate three test cases for a password reset flow	completed	groq / `openai/gpt-oss-120b`
`fdf2c594…`	Share Diagnostic Reports with Patients via WhatsApp	completed	groq / `openai/gpt-oss-120b`
`f9624223…`	Password reset flow across web and mobile	completed	groq / `openai/gpt-oss-120b`

These records also include retrieval metadata (source collection, selected source IDs, retrieval method and counts), token counts, and timestamps.