

SPCA 112N

**MASTER OF
COMPUTER APPLICATIONS**

FIRST YEAR

SECOND SEMESTER

CORE PAPER - X

PRACTICAL-IV

**WEB BASED APPLICATION
DEVELOPMENT LAB**



**INSTITUTE OF DISTANCE EDUCATION
UNIVERSITY OF MADRAS**

**MASTER OF COMPUTER APPLICATIONS
FIRST YEAR - SECOND SEMESTER**

**CORE PAPER - X
PRACTICAL-IV: WEB BASED
APPLICATION
DEVELOPMENT LAB**

WELCOME

Warm Greetings.

It is with a great pleasure to welcome you as a student of Institute of Distance Education, University of Madras. It is a proud moment for the Institute of Distance education as you are entering into a cafeteria system of learning process as envisaged by the University Grants Commission. Yes, we have framed and introduced as per AICTE Choice Based Credit System(CBCS) in Semester pattern from the academic year 2020-21. You are free to choose courses, as per the Regulations, to attain the target of total number of credits set for each course and also each degree programme. What is a credit? To earn one credit in a semester you have to spend 30 hours of learning process. Each course has a weightage in terms of credits. Credits are assigned by taking into account of its level of subject content. For instance, if one particular course or paper has 4 credits then you have to spend 120 hours of self-learning in a semester. You are advised to plan the strategy to devote hours of self-study in the learning process. You will be assessed periodically by means of tests, assignments and quizzes either in class room or laboratory or field work. In the case of PG (UG), Continuous Internal Assessment for 20(25) percentage and End Semester University Examination for 80 (75) percentage of the maximum score for a course / paper. The theory paper in the end semester examination will bring out your various skills: namely basic knowledge about subject, memory recall, application, analysis, comprehension and descriptive writing. We will always have in mind while training you in conducting experiments, analyzing the performance during laboratory work, and observing the outcomes to bring out the truth from the experiment, and we measure these skills in the end semester examination. You will be guided by well experienced faculty.

I invite you to join the CBCS in Semester System to gain rich knowledge leisurely at your will and wish. Choose the right courses at right times so as to erect your flag of success. We always encourage and enlighten to excel and empower. We are the cross bearers to make you a torch bearer to have a bright future.

With best wishes from mind and heart,

DIRECTOR

**MASTER OF COMPUTER APPLICATIONS
FIRST YEAR - SECOND SEMESTER**

**CORE PAPER - X
PRACTICAL-IV: WEB BASED
APPLICATION
DEVELOPMENT LAB**

COURSE WRITER

Dr. S. SASIKALA

Associate Professor in Computer Science
Institute of Distance Education
University of Madras
Chepauk, Chennai - 600 005.

CO-ORDINATION & EDITING

Dr. S. SASIKALA

Associate Professor in Computer Science
Institute of Distance Education
University of Madras
Chepauk, Chennai - 600 005.

MASTER COMPUTER APPLICATIONS
FIRST YEAR
SECOND SEMESTER
CORE PAPER - X
PRACTICAL-IV
WEB BASED APPLICATION DEVELOPMENT LAB
SYLLABUS

Objective of the course: To understand the importance of the web as an effective medium of communication. To develop basic skills in analyzing the usability of a web site. To develop hands on experience using open source technologies such as HTML, CSS, JavaScript, PHP and MySQL.

Course Outcomes: After successful completion of this course, the students should be able to Design, develop and host a user-friendly website, Know the usage of APIs and Layout management in line with current trend.

1. Create a Multilevel inheritance for Employee using appropriate data members and methods using C#.
2. Create an application form to apply for a new course in a college, fill the information and submit it (Use Basic Web Server controls).
3. Create a web application using Global.asax file which will count the number of visitors on web page.
4. Design a web page to implement upload and download files functionality using File Upload Control.
5. Develop a web page to implement the concept of state management using Cookies
6. Develop a web page to implement the concept of state management using Session and Application

7. Develop a web page to implement the concept of state management using ViewState and QueryString.
8. Design Sign Up form and validate User Name (Minimum 8 character Maximum 15 and only characters and underscore), Password (Minimum 8 Characters) and Confirm_Password (Both should be same), Phone No (Only digits), Email-id etc. (Use Validation controls).
9. Create a web site using Master Page Concept having two content pages.
10. Write sample application to connect to database, Fetching and inserting data from database and using Data Reader
11. Create Employee database and develop a web application to Add, Update, View and Delete records from database using in Gridview control.
12. Create Student database and develop a web application to Add, Update, View and Delete records from database using in Gridview control.
13. Create a web form for Online Library data entry and manipulate records using C#.NET.
14. Design a web page to display the XML content.
15. Design a web application to demonstrate form authentication and authorization. on to demonstrate form authentication and authorization.

INSTITUTE OF DISTANCE EDUCATION

RECORD OF PRACTICALS



MCA THIRD YEAR SIXTH SEMESTER

2020-2021

Practical - IV

WEB BASED APPLICATION DEVELOPMENT LAB

Name :

Enrolment Number :

Group No :

UNIVERSITY OF MADRAS

CHENNAI - 600 005

INSTITUTE OF DISTANCE EDUCATION UNIVERSITY OF MADRAS

CHENNAI - 600 005.

Certified that this is the Bonafide Record of work done by _____
with Enrolment Number _____ of MCA Third Year - Sixth Semester
Degree Course in the Institute of Distance Education, University of Madras during the year
2020-2021 in respect of **Subject Code - SPCA 112N / Practical - IV - WEB BASED
APPLICATION DEVELOPMENT LAB**

Date:

Co-ordinator

Submitted for Third Year M.C.A. Degree Course Practical Examination held on
_____ at IDE, University of Madras.

Date:

Examiners

1. **Name:**

Signature:

2. **Name:**

Signature:

MASTER COMPUTER APPLICATIONS
FIRST YEAR - SECOND SEMESTER
CORE PAPER - X
PRACTICAL-IV
WEB BASED APPLICATION DEVELOPMENT LAB
SCHEME OF LESSONS

Sl.No.	Title	Page
1.	(a) Single Inheritance (b) Multilevel Inheritance	001
2.	Web Form	010
3.	Counting Number Of Visitors Using Global.asax File	021
4.	Uploading And Downloading File	026
5	Cookies	034
6	(a) State Management- Session (b) State Management- Application	042
7.	(a) State Management- View state (b) State Management- Query String	056
8.	Validation Controls	066
9.	Master Page Concept With Two Content Pages	076
10	Database Connectivity Using Data reader	082
11	Employee Database	091
12	Student Database	108
13	Online Library Form	120
14	Displaying Xml Content	128
15	Web Application To Demonstrate Authentication And Authorization	134

LESSON: 1

(A) SINGLE INHERITANCE

AIM:

Program to implement Single Inheritance in C#.

ALGORITHM:

Step 1: Create a C# console Application in Visual Studio.

Step 2: Create a Class 'Branch' declare branchcode, branchname, branch address and method 'GetBranch, DisplayBranch', assign the variables with passed values.

Step 3: Get the data in one method and display the data in another method.

Step 4: Create a class 'Employee' extends 'Branch' declare empid, empname, empadd and method 'GetEmployee, DisplayEmployee', assign the variables with passed values.

Step 5: Get the data in one method and display the data in another method.

Step 6: In the main method create an object of class 'Employee' with object's and pass the respective parameter values or method using object of an class.

Step 7: Run the application

a. Single Inheritance

```
using System;
```

```
using System.Collections.Generic; using System.Linq;
```

```
using System.Text;
```

```
namespace ConsoleApplication2
```

```
{
```

```
class Branch
```

2

```
{
```

```
int branchcode;
```

```
string branchname, branchaddress;
```

```
public void getbranchdata()
```

```
{
```

```
Console.WriteLine("—————ENTER THE BRANCH DETAILS ————— ");
```

```
Console.WriteLine("ENTER BRANCH CODE");
```

```
branchcode = int.Parse(Console.ReadLine());
```

```
Console.WriteLine("ENTER BRANCH NAME");
```

```
branchname = Console.ReadLine();
```

```
Console.WriteLine("ENTER BRANCH ADDRESS");
```

```
branchaddress = Console.ReadLine();
```

```
}
```

```
public void displaybranchdata()
```

```
{
```

```
Console.WriteLine("BRANCH CODE IS: "+branchcode);
```

```
Console.WriteLine("BRANCH NAME IS: "+branchname);
```

```
Console.WriteLine("BRANCH ADDRESS IS: "+branchaddress);
```

```
}
```

```
}
```

```
class employe : Branch
```

```

{

int empid, empage;
string empname, empaddress;
public void getemployeedata()
{
Console.WriteLine("————ENTER EMPLOYEE DETAILS ———— ");
Console.WriteLine("ENTER EMPLOYEE ID");
empid = int.Parse(Console.ReadLine());
Console.WriteLine("ENTER EMPLOYEE AGE");
empage = int.Parse(Console.ReadLine());
Console.WriteLine("ENTER EMPLOYEE NAME");
empname = Console.ReadLine();
Console.WriteLine("ENTER EMPLOYEE ADDRESS");
empaddress=Console.ReadLine();
}

public void displayemployeedata()
{
Console.WriteLine("EMPLOYEE ID IS: " + empid);
Console.WriteLine("EMPLOYEE NAME IS: " + empname);
Console.WriteLine("EMPLOYEE ADDRESS IS: " + empaddress);
Console.WriteLine("EMPLOYEE AGE IS: " + empage);
}

}

class Program

```

4

```
{  
  
staticvoid Main(string[] args)  
  
{  
  
    employye s = newemployye();  
    s.getbranchdata();  
    s.getemployeedata();  
    s.displaybranchdata();  
    s.displayemployeedata();  
  
    Console.ReadLine();  
  
}  
  
}  
  
}
```

OUTPUT

```
-----ENTER THER BRANCH DETAILS-----  
ENTER BRANCH CODE  
12  
ENTER BRANCH NAME  
MCA  
ENTER BRANCH ADDRESS  
Royapettah  
-----ENTER EMPLOYEE DETAILS-----  
ENTER EMPLOYEE ID  
12  
ENTER EMPLOYEE AGE  
30  
ENTER EMPLOYEE NAME  
Saistha  
ENTER EMPLOYEE ADDRESS  
Pallavaram  
BRANCH CODE IS: 12  
BRANCH NAME IS: MCA  
BRANCH ADDRESS IS: Royapettah  
EMPLOYEE ID IS: 12  
EMPLOYEE NAME IS: Saistha  
EMPLOYEE ADDRESS IS: Pallavaram  
EMPLOYEE AGE IS: 30
```

Result:

Thus, the above application has been implemented and executed successfully.

(B) MULTILEVEL INHERITANCE

AIM:

Program to implement multilevel inheritance using C# console application.

ALGORITHM:

Step 1: Create a C# console Application in Visual Studio.

Step 2: Create a Class 'Employee' declare eid, ename, gender, add and method 'GetEmp, DisplayEmp', assign the variables with passed values.

Step 3: Get the data in one method and display the data in another method.

Step 4: Create a class 'Dept' extends 'Employee' declare dep_name, desig and method 'GetDept, DisplayDept', assign the variables with passed values.

Step 5: Get the data in one method and display the data in another method.

Step 6: Create a class 'Salary' extends 'Dept' declare basic, hr, total and method 'GetSalary, DisplaySalary', assign the variables with passed values.

Step 7: Get the data in one method and display the data in another method.

Step 8: In the main method create an object of class 'Salary' with object's and pass the respective parameter values or method using object of an class.

Step 9: Run the application

b. Multilevel Inheritance

```
using System;
```

```
using
```

```
System.Collections.Generic;
```

```
using System.Linq;
```

```
using System.Text;
```

6

```
namespace ConsoleApplication1

{

    classemployee

    {

        inteid;

        string ename, gender,
        address;


        publicvoid getemployee()

        {

            Console.WriteLine("ENTER THE EMPLOYEE ID");

            eid=int.Parse(Console.ReadLine());

            Console.WriteLine("ENTE THE NAME");

            ename=Console.ReadLine();

            Console.WriteLine("ENTER THE GENDER");

            gender=Console.ReadLine();

            Console.WriteLine("ENTER THE ADDRESS");

            address=Console.ReadLine();

        }

        publicvoid displayemployee()

        {
```

```
Console.WriteLine("EMP ID =" + eid);

Console.WriteLine("EMP NAME =" + ename);

Console.WriteLine("EMP GENDER =" + gender);

Console.WriteLine("EMP ADDRESS =" + address);

}

}

classdept : employee

{

    string dep_name, desig;

    publicvoid getdept()

    {

        Console.WriteLine("ENTER THE DEPT NAME");

        dep_name=Console.ReadLine();

        Console.WriteLine("ENTE THE DESIG");

        desig=Console.ReadLine();

    }

    publicvoid displaydept()

    {

        Console.WriteLine("DEPT NAME =" + dep_name);

        Console.WriteLine("EMP DESIGNATION = " + desig);

    }

}
```

8

}

class salary:dept

{

int basic,hr,total;

public void salarygetdata()

{

Console.WriteLine("ENTER THE EMPLOYEE SALARY");

basic=int.Parse(Console.ReadLine()); hr=basic*10/100;

total=basic+hr;

}

public void salarydisplaydata()

{

Console.WriteLine("BASIC PAY = "+basic);

Console.WriteLine("HR = "+hr); Console.WriteLine("TOTAL = "+total);

}

}

class emp1

{

static void Main(string[] args)

{

salary s = newsalary();


```
s.getemployee();  
s.getdept();  
s.salarygetdata();  
s.displayemployee();  
s.displaydept();  
s.salarydisplaydata();  
Console.ReadLine();  
  
}  
  
}  
  
}
```

OUTPUT



```
file:///C:/Users/20it01/Documents/Visual Studio 2008/Projects/ConsoleApplication1/ConsoleApplication1/bin/Debug/ConsoleApplication1.EXE  
ENTER THE EMPLOYEE ID  
12  
ENTE THE NAME  
Arshiya  
ENTER THE GENDER  
Female  
ENTER THE ADDRESS  
Royapettah  
ENTER THE DEPT NAME  
MCA  
ENTE THE DESIG  
AP  
ENTER THE EMPLOYEE SALARY  
25000  
EMP ID =12  
EMP NAME =Arshiya  
EMP GENDER =Female  
EMP ADDRESS =Royapettah  
DEPT NAME =MCA  
EMP DESIGNATION = AP  
BASIC PAY = 25000  
HR = 2500  
TOTAL = 27500
```

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 2

WEB FORM

AIM:

Program to create application form using basic web server controls.

ALGORITHM:

Step1: Create a Web form on Asp.net in Visual Studio.

Step2: Insert Label, Text Box, Drop Down List, Radio Button and Checkbox from toolbar.

Step3: Double click the button.

Step4: Enter a code in Default.aspx file under button section to perform operation.

Step5: Save the program.

Step6: Run the program and display the result on web page.

WebForm Creation

Default.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="formcontrols._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title>Untitled Page</title>
```

```
<styletype="text/css">
```

```
.auto-style1 { width: 100%;
```

```
}
```

```
.auto-style2 { width: 278px;
```

```
}
```

```
.auto-style3 { width: 278px; height: 23px;
```

```
}
```

```
.auto-style4 { height: 23px;
```

```
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<formid="form1"runat="server">
```

```
<div>
```

```
<tableclass="auto-style1">
```

```
<tr>
```

```
<td>
```

```
<asp:LabelID="label1"runat="server"Text="USERNAME"></asp:Label>
```

```
</td>
```

12

<td>

<asp:TextBoxID="username"runat="server"></asp:TextBox>

</td>

</tr>

<tr>

<td>

<asp:LabelID="label2"runat="server"Text="EMAIL ID"></asp:Label>

</td>

<td>

<asp:TextBoxID="emailid"runat="server"></asp:TextBox>

</td>

</tr>

<tr>

<td>

<asp:LabelID="label3"runat="server"Text="ADDRESS"></asp:Label>

</td>

<td>

<asp:TextBoxID="Address"runat="server"></asp:TextBox>

</td>

</tr>

```

<tr>

<td>

<asp:LabelID="label4"runat="server"Text="CITY"></asp:Label>

</td>

<td>

<asp:DropDownListID="drop1"runat="server">

<asp:ListItemValue="01">Chennai</asp:ListItem>

<asp:ListItemValue="01">PARIS</asp:ListItem>

<asp:ListItemValue="01">NEW YORK</asp:ListItem>

<asp:ListItemValue="01">SAN ANDREAS</asp:ListItem>

<asp:ListItemValue="01">LOS SANTOS</asp:ListItem>

</asp:DropDownList>

</td>

</tr>

<tr>

<td>

<asp:LabelID="label5"runat="server"Text="GENDER"></asp:Label>

</td>

<td>

<asp:RadioButtonID="radio1"runat="server"GroupName="gender"Text="Male"/>

<asp:RadioButtonID="radio2"runat="server"GroupName="gender"Text="Female"/>

```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>
```

```
<asp:LabelID="label6"runat="server"Text="Select Course"></asp:Label>
```

```
</td>
```

```
<td>
```

```
<asp:CheckBoxID="check1"runat="server"Text="MCA"/>
```

```
<asp:CheckBoxID="check2"runat="server"Text="MBA"/>
```

```
<asp:CheckBoxID="check3"runat="server"Text="MSC"/>
```

```
</td>
```

```
</tr>
```

```
<tr><td><asp:ButtonID="button1"runat="server"Text="Submit"OnClick="Button1_Click"/>
```

```
<br/>
```

```
<br/>
```

```
</td>
```

```
</tr>
```

```
<asp:LabelID="message"runat="server"Font-Size="Medium"ForeColor="Red"></asp:Label>
```

```
<br/></table>
```

```
<tableclass="auto-style1">
```

```
<br/><br/>
```

```
<tr>
```

```
<tdclass="auto- style2"><asp:LabelID="ShowUserNameLabel"runat="server"></asp:Label></td>
```

```
<td><asp:LabelID="ShowUserName"runat="server"></asp:Label></td>
```

```
</tr>
```

```
<tr> ,
```

```
<tdclass="auto-style2"><asp:LabelID="ShowEmailIDLabel"runat="server"></asp:Label></td>
```

```
<td><asp:LabelID="ShowEmail"runat="server"></asp:Label></td>
```

```
</tr>
```

```
<tr>
```

```
<tdclass="auto-style2"><asp:LabelID="ShowAddressLabel"runat="server"></asp:Label></td>
```

```
<td><asp:LabelID="ShowAddress"runat="server"></asp:Label></td>
```

```
</tr>
```

```
<tr>
```

```
<tdclass="auto-style3"><asp:LabelID="ShowGenderLabel"runat="server"></asp:Label></td>
```

```
<tdclass="auto-style4">
```

```
<asp:LabelID="ShowGender"runat="server"></asp:Label></td>
```

```
</tr>
```

```
<tr>

<tdclass="auto-style2"><asp:LabelID="ShowCourseLabel"runat="server"></asp:Label></td>

<td><asp:LabelID="ShowCourses"runat="server"></asp:Label></td>

</tr>

<tr>

<tdclass="auto-style2"><asp:LabelID="ShowCityLabel"runat="server"></asp:Label></td>

<td><asp:LabelID="ShowCity"runat="server"></asp:Label></td>

</tr>

</table>

</div>

</form>

</body>

</html>
```

Default.aspx.cs

```
using System;

using System.Collections;

using System.Configuration;

using System.Data;

using System.Linq;
```



```
using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;

namespace formcontrols
{

    public partial class _Default : System.Web.UI.Page
    {

        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            message.Text = "HELLO " + username.Text + "!";

            message.Text = message.Text + " <br/> You have successfully Registered with the following details.";

            ShowUserName.Text =

            username.Text; ShowEmail.Text =

            emailid.Text; ShowAddress.Text =

            Address.Text;
```

18

```
if (radio1.Checked)

{

    ShowGender.Text = radio1.Text;

}

else

{

    ShowGender.Text = radio2.Text;

}

var courses = "";

if (check1.Checked)

{

    courses = check1.Text + "";

}

if (check2.Checked)

{

    courses = check2.Text + "";

}

if (check3.Checked)

{

    courses = check3.Text;

}
```

```
var city = "";

city = drop1.SelectedItem.Text;

ShowCourses.Text = courses;

ShowCity.Text = city;

ShowUserNameLabel.Text = "Username";

ShowEmailIDLabel.Text = "Emailid";

ShowGenderLabel.Text = "Gender";

ShowCourseLabel.Text = "Courses";

ShowAddressLabel.Text = "Address";

ShowCityLabel.Text = "City";

username.Text = "";

emailid.Text = "";

radio1.Checked = false;

radio2.Checked = false;

check1.Checked = false;

check2.Checked = false;

check3.Checked = false;          {

}

}

}
```

OUTPUT

← → ↻ ⚠ Not secure | localhost:44300/Default

USERNAME

EMAIL ID

ADDRESS

CITY

GENDER ☐ Male ☒ Female

Select Course ☒ MCA ☐ MBA ☐ MSC

← → ↻ ⚠ Not secure | localhost:44300/Default

HELLO Arshiya!
You have successfully Registered with the following details.

USERNAME

EMAIL ID

ADDRESS

CITY

GENDER ☐ Male ☐ Female

Select Course ☐ MCA ☐ MBA ☐ MSC

Username	Arshiya
Emailid	mca@gmail.com
Address	Royapettah
Gender	Female
Courses	MCA
City	Chennai

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 3

COUNTING NUMBER OF VISITORS USING GLOBAL.asax FILE

AIM:

Program to count number of visitors using global.asax file.

ALGORITHM:

Step 1: Create a Web form on Asp.net in Visual Studio.

Step 2: Insert Label from toolbar.

Step 3: Add Global.asax file in a project and type a coding under Application and session section to store the number of visits.

Step 4: Enter a coding in Default.aspx file in page load section to display on a web that how many times u have visited the web page.

Step 5: Save the program.

Step 6: Run the program and display the result on web page.

Counting number of Visitors using global.asax file

Default.aspx

```
<%@PageTitle="Home
Page"Language="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="WebAp
plication4._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">

<title></title>

</head>

<body>

<formid="form1"runat="server">

<table>

<tr>

<td>

<b>No of Visits:</b>

</td>

<td>

<asp:LabelID="lblCount"runat="server"ForeColor="Red"/>

</td>

</tr>

</table>

</form>

</body>

</html>
```

Default.aspx.cs

```
using System;
```

```
using System.Collections.Generic;
```

```
using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

namespace WebApplication4
{

    public partial class _Default : Page
    {

        protected void Page_Load(object sender, EventArgs e)
        {

            lblCount.Text = Application["NoOfVisitors"].ToString();

        }

    }

}
```

Global.asax

```
using System;

using System.Collections.Generic;

using System.Linq;
```

```

using System.Web;

using System.Web.Optimization;

using System.Web.Routing;

using System.Web.Security;

using System.Web.SessionState;

namespace WebApplication4
{
    public class Global : HttpApplication
    {
        void Application_Start(object sender, EventArgs e)
        {
            Application["NoOfVisitors"] = 0;
        }



        void Session_Start(object sender, EventArgs e)
        {
            // Code that runs when a new session is
            // started
            Application.Lock();

            Application["NoOfVisitors"] = (int)Application["NoOfVisitors"]
            + 1; Application.Unlock();

        }
    }
}

```


OUTPUT

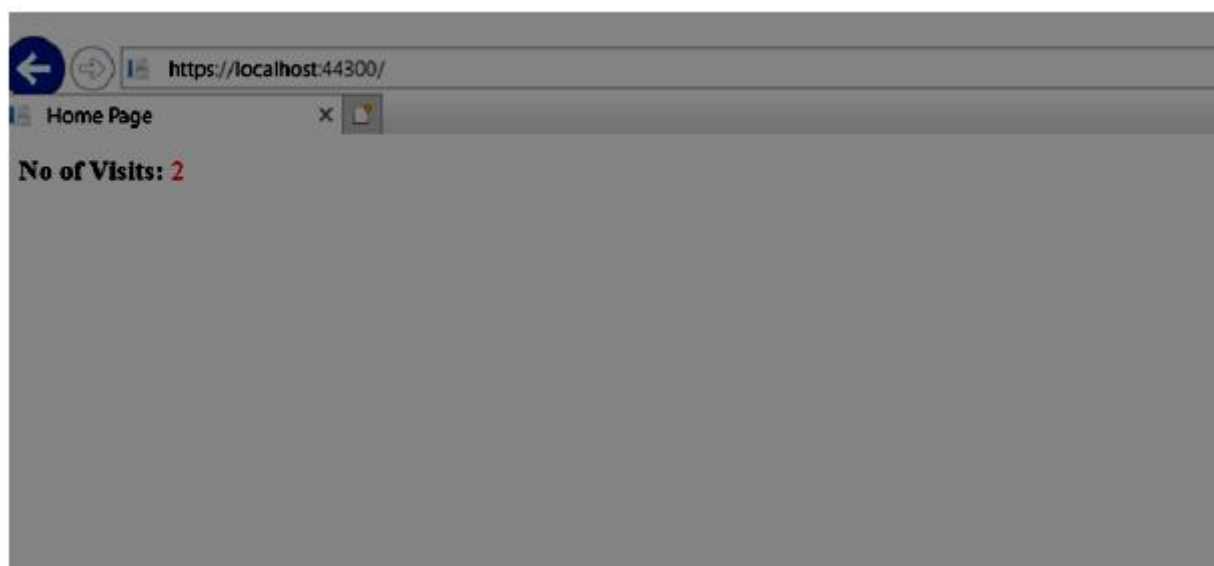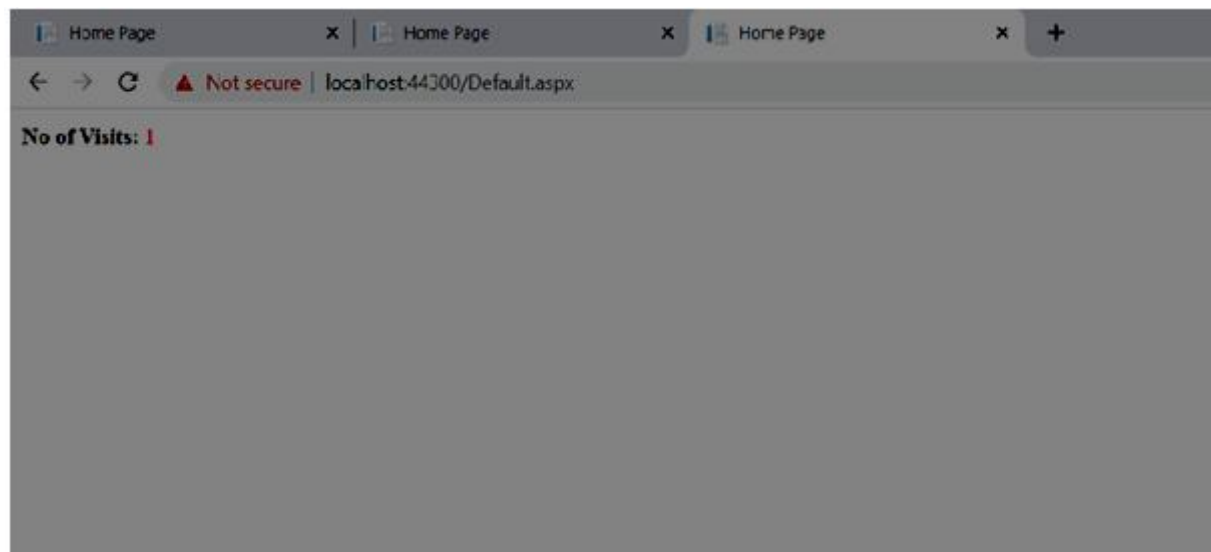

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 4

UPLOADING AND DOWNLOADING FILE

AIM:

Program to design a web page to implement upload and download files functionality using File Upload Control.

ALGORITHM:

Step 1: Create a Web form on Asp.net in Visual Studio.

Step 2: Insert File Upload, Button and GridView from toolbar.

Step 3: Add the necessary columns to perform an operation in GridView Box.

Step 4: Enter a coding in Default.aspx file in Button section to run the program.

Step 5: Save the program.

Step 6: Run the program and display the result on web page..

Uploading And Downloading File

Default.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="file
upload._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```



```

</ItemTemplate>

</asp:TemplateField>

<asp:BoundFieldDataField="Size"HeaderText="Size in Bytes"/>

<asp:BoundFieldDataField="Type"HeaderText="File Type"/>

</Columns>

<FooterStyleBackColor="#5D7B9D"Font-Bold="True"ForeColor="White"/>

<PagerStyleBackColor="#284775"ForeColor="White"HorizontalAlign="Center"/>

<SelectedRowStyleBackColor="#E2DED6"Font-Bold="True"ForeColor="#333333"/>

<HeaderStyleBackColor="#5D7B9D"Font-Bold="True"ForeColor="White"/>

<EditRowStyleBackColor="#999999"/>

<AlternatingRowStyleBackColor="White"ForeColor="#284775"/>

</asp:GridView>

<br/>

</div>

</form>

</body>

</html>

```

Default.aspx.cs

```

using System;

using System.Collections;

```

```
using System.Configuration;

using System.Data;

using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;

using System.IO;

namespace fileupload
{
    publicpartialclass_Default : System.Web.UI.Page
    {
        protectedvoid Page_Load(object sender, EventArgs e)
        {

        }

        protectedvoid Button1_Click(object sender, EventArgs e)
        {
```

```

if (FileUpload1.HasFile)

    {

string fileName = FileUpload1.FileName;
        FileUpload1.PostedFile.SaveAs(Server.MapPath("~/Data/") + fileName);

    }

```

```

DataTable dt = new DataTable();

dt.Columns.Add("File", typeof(string));

dt.Columns.Add("Size", typeof(string));

dt.Columns.Add("Type", typeof(string));

foreach (string strFile in Directory.GetFiles(Server.MapPath("~/Data")))

    {

FileInfo fi = new FileInfo(strFile);

        dt.Rows.Add(fi.Name, fi.Length, GetFileByExtension(fi.Extension));

    }

GridView1.DataSource = dt;

GridView1.DataBind();

}

private string GetFileByExtension(string extension)

    {

switch (extension.ToLower())

```

```

        {
            case ".doc":
                return "Microsoft word";
            case ".docx":
                return "Microsoft word";
            case ".xls":
                return "Microsoft Excel";
            case ".xlsx":
                return "Microsoft Excel";
            case ".jpg": return "image";
            default:
                return "Unknown";
        }
    }

    protected void GridView1_RowCommand1(object sender, GridViewCommandEventArgs e)
    {
        if (e.CommandName == "Download")
        {
            Response.Clear();

            Response.ContentType = "application/octet-stream";
            Response.AppendHeader("content-disposition", "filename=" +
                e.CommandArgument); Response.TransmitFile(Server.MapPath("~/Data/") +
                e.CommandArgument); Response.End();
        }
    }
}

```

32


}



}

}

}

OUTPUT

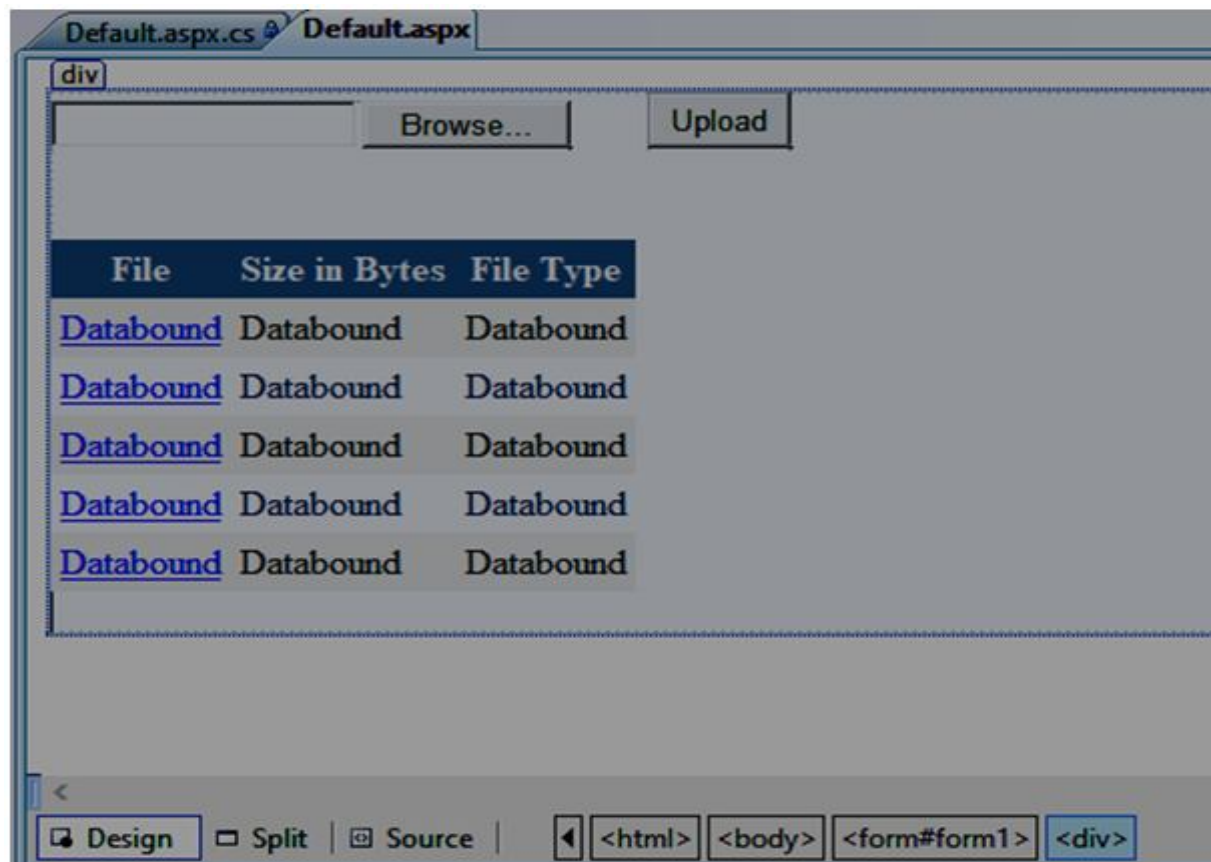

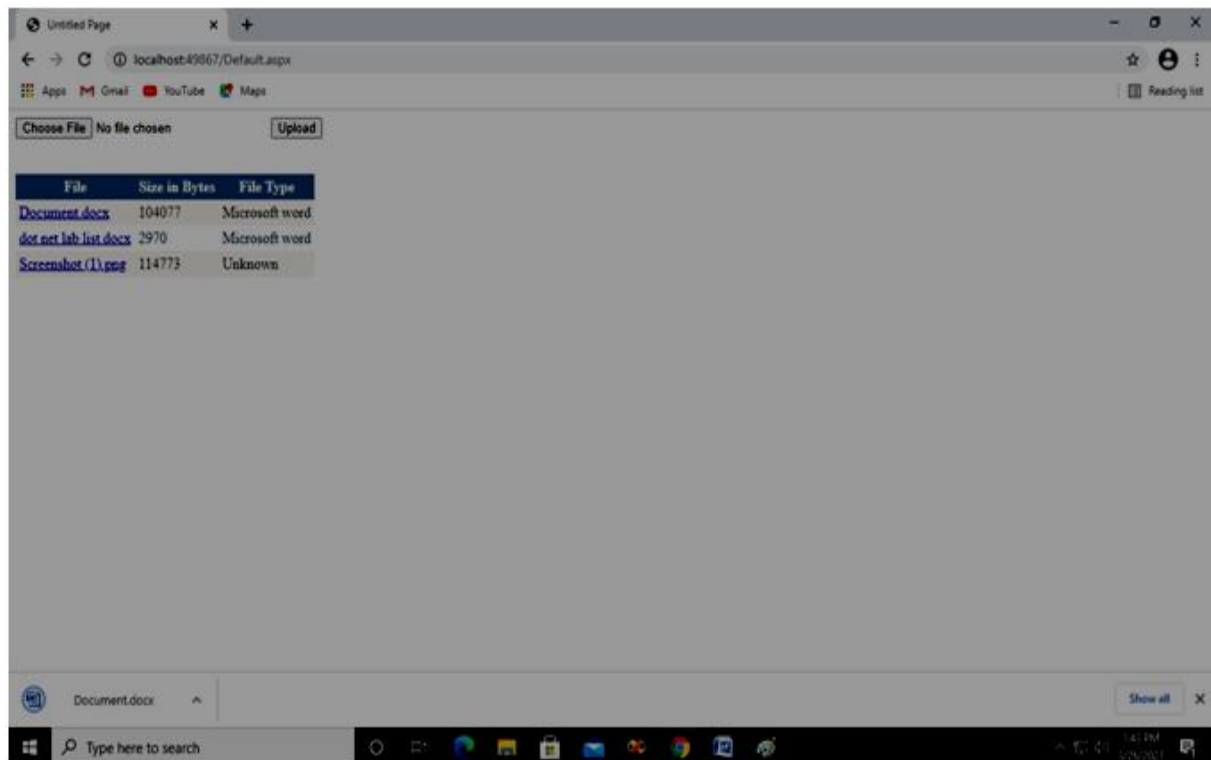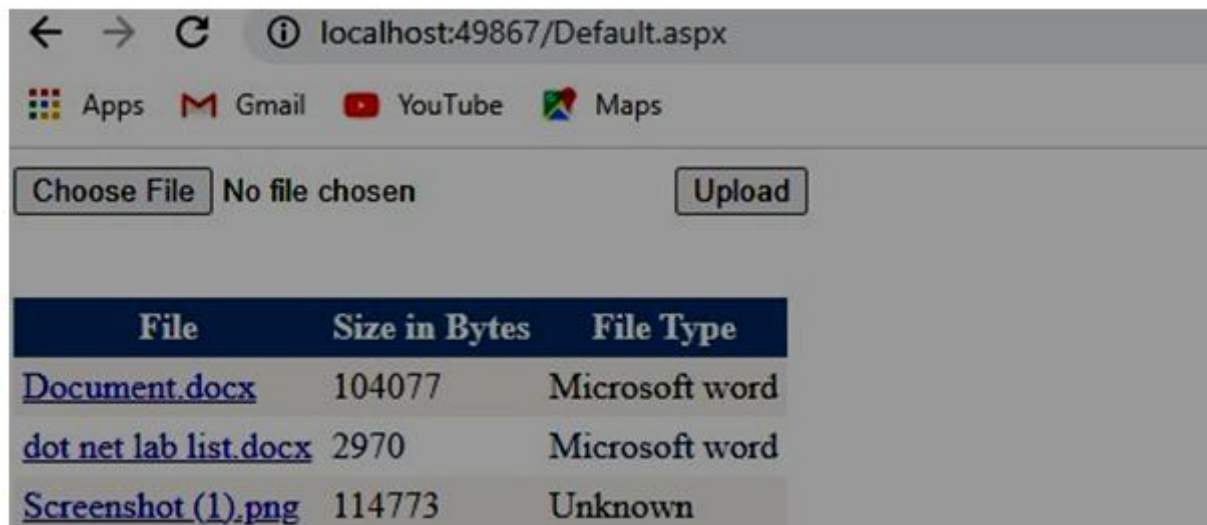

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 5

COOKIES

AIM:

Program to develop a web page to implement the concept of state management using Cookies.

ALGORITHM:

Step 1: Open Visual Studio and create new project under C# (Asp.net Web Application)

Step 2: In design part, add two labels, two textbox and one button.

Step 3: Change the name of the label and textbox.

Step 4: Add another form and in design part, add two labels.

Step 5: In properties change the ID name of two labels and leave the label name empty.

Step 6: Double click on the button in first form design part to write code in button click event

Step 7: Double click the second form and add the coding in the page load.

Step 8: Run the program and give inputs to get the output.

Step 9: Stop the Program.

Cookies

Default.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="cookiesnew._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">

<title>Untitled Page</title>

</head>

<body>

<formid="form1"runat="server">

<divstyle="font-family: Arial">

<table>

<tr>

<tdcolspan="2">

<h1>

    This is WebForm1</h1>

</td>

</tr>

<tr>

<td><b>Name</b></td>

<td>

    :<asp:TextBoxID="txtName"runat="server"></asp:TextBox>5.

</td>

</tr>

<tr>

<td><b>Email</b></td>

<td>
```

```
        :<asp:TextBoxID="txtEmail"runat="server">

</asp:TextBox>

</td>

</tr>

<tr>

<tdcolspan="2">

<asp:ButtonID="btnSendData"runat="server"Text="Go
to WebForm2"onclick="btnSendData_Click"/>

</td>

</tr>

</table>

</div>

</form>

</body>

</html>
```

Default.aspx.cs

```
using System;

using System.Collections;

using System.Configuration;

using System.Data;

using System.Linq;

using System.Web;
```

```
using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;

namespace cookiesnew
{
    public partial class _Default : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void btnSendData_Click(object sender, EventArgs e)
        {
            HttpCookie cookie =
                new HttpCookie("UserDetails");
            cookie["Name"] = txtName.Text;
            cookie["Email"] = txtEmail.Text;

            // Cookie will be persisted for 30 days

            cookie.Expires = DateTime.Now.AddDays(30);

            // Add the cookie to the client machine
```

```

        Response.Cookies.Add(cookie);

        Response.Redirect("WebForm1.aspx");

    }

}

}

```

Webform1.aspx

```

<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="WebForm1.aspx.cs"Inherits=
"cookiesnew.WebForm1"%>

<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<htmlxmlns="http://www.w3.org/1999/xhtml">

<headrunat="server">

<title>Untitled Page</title>

</head>

<body>

<formid="form1"runat="server">

<divstyle="font-family: Arial">

<table>

<tr>

<tdcolspan="2">

<h1>This is WebForm2</h1>

</td>

```

```

</tr>

<tr>

<td><b>Name</b></td>

<td>

        :<asp:LabelID="lblName"runat="server"></asp:Label>

</td>

</tr>

<tr>

<td><b>Email</b></td>

<td>

        :<asp:LabelID="lblEmail"runat="server">

</asp:Label>

</td>

</tr>

</table>

</div>

</form>

</body>

</html>

```

Webform1.aspx.cs

```



using System;

using System.Collections;

```

```
using System.Configuration;
using System.Data;
using System.Linq;
using System.Web;
using System.Web.Security;
using System.Web.UI;
using System.Web.UI.HtmlControls;
using System.Web.UI.WebControls;
using System.Web.UI.WebControls.WebParts;
using System.Xml.Linq;
namespace cookiesnew
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            HttpCookie cookie =
            Request.Cookies["UserDetails"]; if (cookie !=
            null)
            {
                lblName.Text =
                cookie["Name"];
                lblEmail.Text =
                cookie["Email"];
            }
        }
    }
}
```


OUTPUT

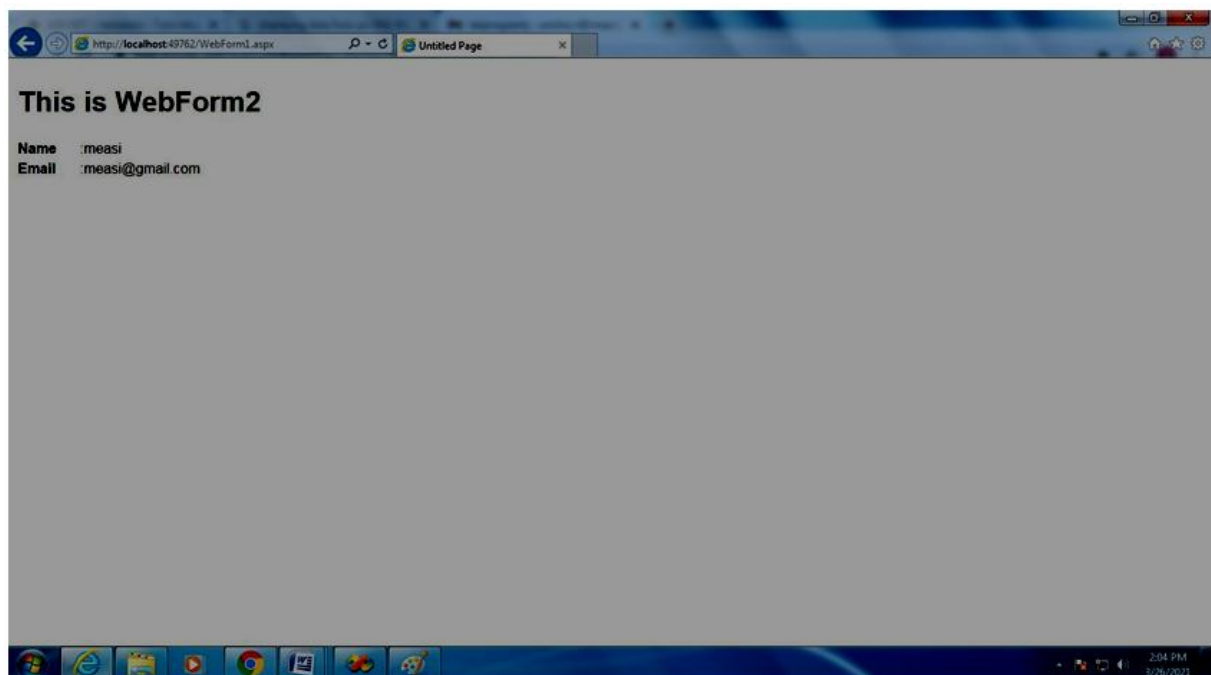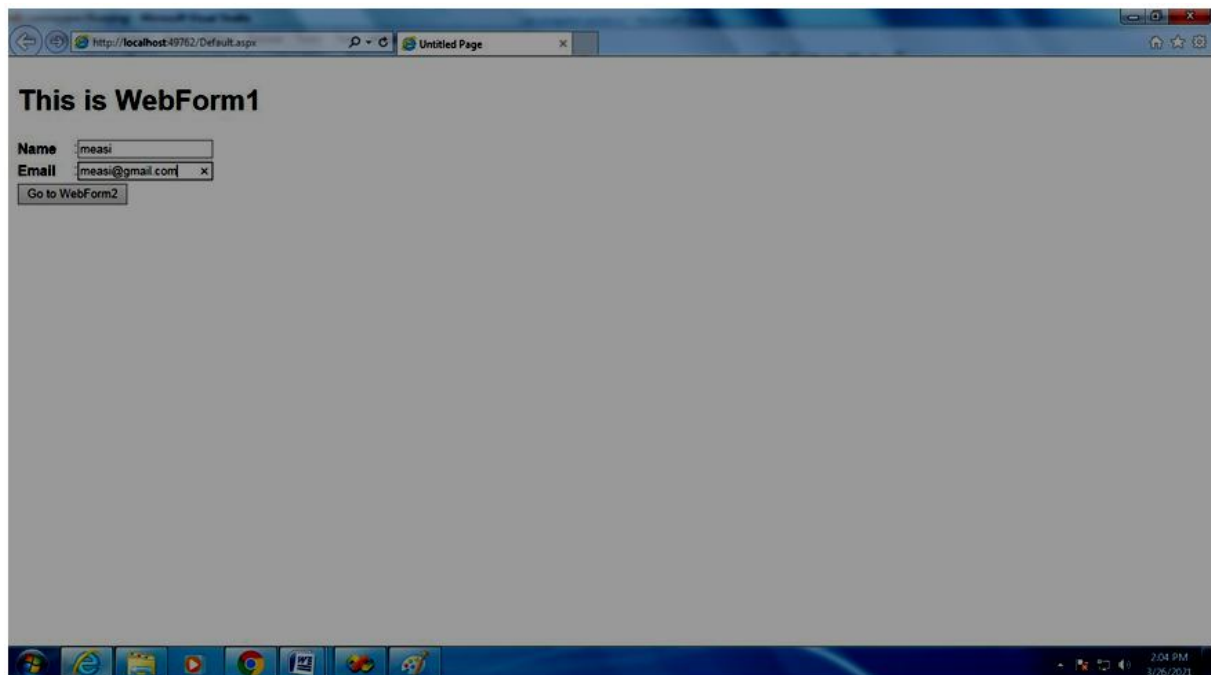

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 6

(A) STATE MANAGEMENT- SESSION

AIM:

Develop a web page to implement the concept of state management using Session and Application

ALGORITHM:

- Step 1:** Open Visual Studio and create new project under C# (Asp.net Web Application)
- Step 2:** In design part, add two labels, two textbox and one button.
- Step 3:** Change the name of the label and textbox.
- Step 4:** Add another form and in design part, add two labels.
- Step 5:** In properties change the ID name of two labels and leave the label name empty.
- Step 6:** Double click on the button in first form design part to write code in button click event
- Step 7:** Double click the second form and add the coding in the page load.
- Step 8:** Run the program and give inputs to get the output.
- Step 9:** Stop the Program.

(a) Session state

Default.aspx

```
<%@PageLanguage="C#"EnableSessionState="true"AutoEventWireup="true"CodeBehind="Default.aspx.cs" Inherits="sessionstate. Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```

<title>Untitled Page</title>

</head>

<body>

<formid="form1"runat="server">

<div>

<asp:LabelID="Label1"runat="server"Text="Name"></asp:Label>

<asp:TextBoxID="txtName"runat="server"></asp:TextBox>

<br/>

<br/>

<br/>

<asp:LabelID="Label2"runat="server"Text="Email"></asp:Label>

<asp:TextBoxID="txtEmail"runat="server"></asp:TextBox>

<asp:ButtonID="Button1"runat="server"onclick="Button1_Click"
Text="Webform2"/>

<br/>

</div>

</form>

</body>

</html>

```

Default.aspx.cs

```

using System;

using System.Collections;

using System.Configuration;

```

```
using System.Data;
using System.Linq;
using System.Web;
using System.Web.Security;
using System.Web.UI;
using System.Web.UI.HtmlControls;
using System.Web.UI.WebControls;
using System.Web.UI.WebControls.WebParts;
namespace sessionstate
{
    publicpartialclass_Default : System.Web.UI.Page
    {
        protectedvoid Page_Load(object sender, EventArgs e)
        {
        }
        protectedvoid Button1_Click(object sender, EventArgs e)
        {
            Session["Name"] =
            txtName.Text; Session["Email"] =
            txtEmail.Text;
            Response.Redirect("WebForm2.aspx");
        }
    }
}
```

Webform2.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="WebForm2.aspx.cs"Inherits=
"sessionstate.WebForm2"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title>Untitled Page</title>
```

```
</head>
```

```
<body>
```

```
<formid="form1"runat="server">
```

```
<div>
```

```
<table>
```

```
<tr>
```

```
<tdcolspan="2">
```

```
<h1>This is WebForm2</h1>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>
```

```
<b>Name</b>
```

```
</td>
```

```
<td>
```

```
:<asp:LabelID="lblName"runat="server">
```

```
</asp:Label>

</td>

</tr>

<tr>

<td>

<b>Email</b>

</td>

<td>

:<asp:LabelID="lblEmail"runat="server">

</asp:Label>

</td>

</tr>

</table>

</div>

</form>

</body>

</html>
```

Webform2.aspx.cs

```
using System;

using System.Collections;

using System.Configuration;



using System.Data;

using System.Linq;

using System.Web;
```

```
using System.Web.Security;
using System.Web.UI;
using System.Web.UI.HtmlControls;
using System.Web.UI.WebControls;
using System.Web.UI.WebControls.WebParts;
using System.Xml.Linq;
namespace sessionstate
{
    public partial class WebForm2 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (Session ["Name"] != null)
            {
                lblName.Text = Session["Name"].ToString();
            }
            if (Session["Email"] != null)
            {
                lblEmail.Text = Session["Email"].ToString();
            }
        }
    }
}
```

OUTPUT

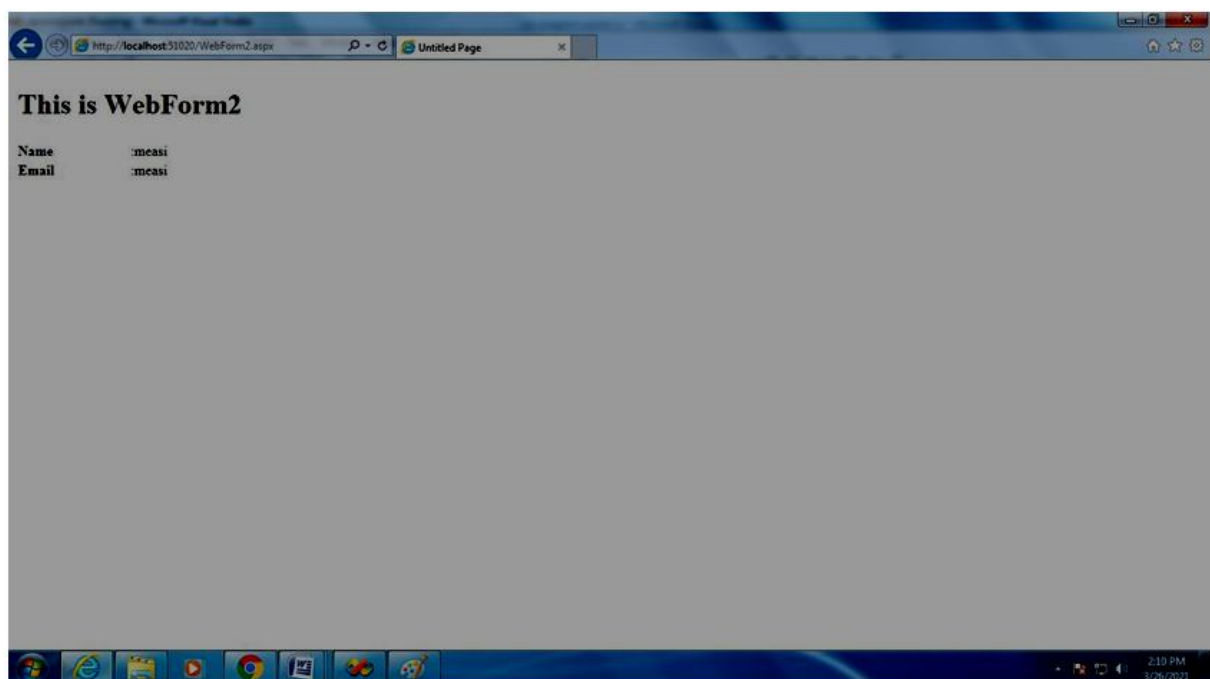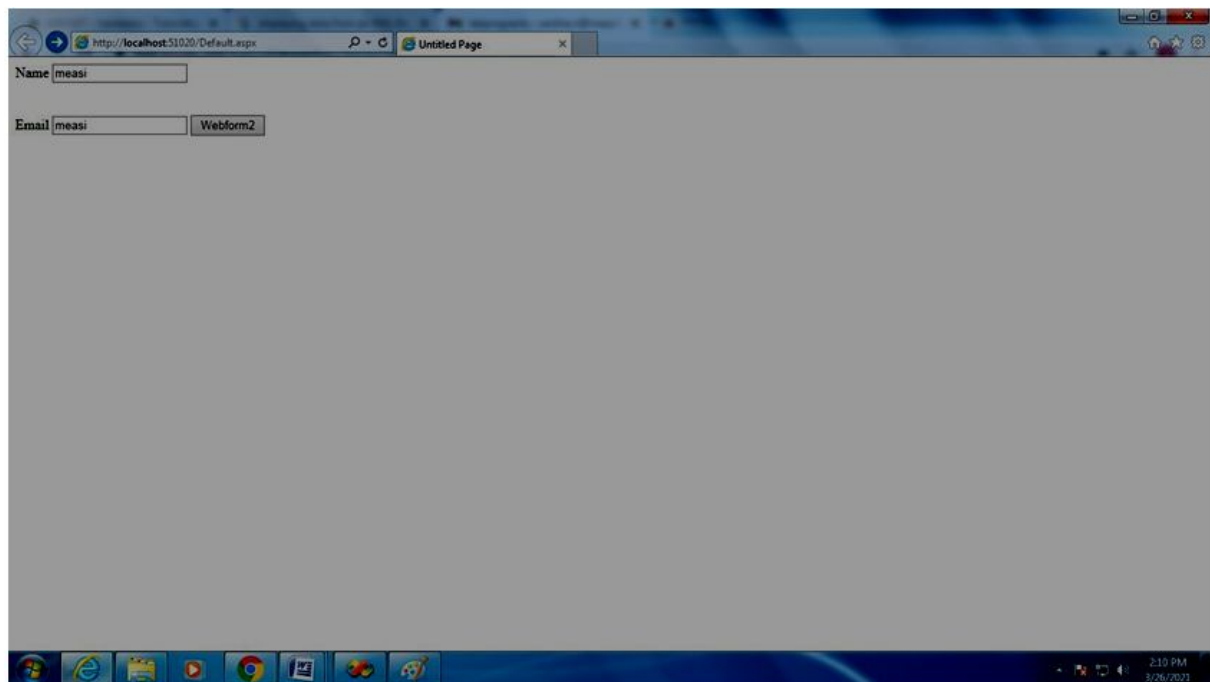

Result:

Thus, the above application has been implemented and executed successfully.

(B)STATE MANAGEMENT- APPLICATION

AIM:

Develop a web page to implement the concept of state management using Session and Application

ALGORITHM:

- Step 1:** Open Visual Studio and create new project under C# (Asp.net Web Application)
- Step 2:** In design part, add two labels, two textbox and one button.
- Step 3:** Change the name of the label and textbox.
- Step 4:** Add another form and in design part, add two labels.
- Step 5:** In properties change the ID name of two labels and leave the label name empty.
- Step 6:** Double click on the button in first form design part to write code in button click event
- Step 7:** Double click the second form and add the coding in the page load.
- Step 8:** Run the program and give inputs to get the output.
- Step 9:** Stop the Program.

(b) Application State

Default.aspx

```
<%@PageLanguage="C#"EnableSessionState="true"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="sessionstate._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title>Untitled Page</title>

</head>

<body>

<formid="form1"runat="server">

<div>

<asp:LabelID="Label1"runat="server"Text="Name"></asp:Label>

<asp:TextBoxID="txtName"runat="server"></asp:TextBox>

<br/>

<br/>

<br/>

<asp:LabelID="Label2"runat="server"Text="Email"></asp:Label>

<asp:TextBoxID="txtEmail"runat="server"></asp:TextBox>

<asp:ButtonID="Button1"runat="server"onclick="Button1_Click"

Text="Webform2"/><br/>

</div>

</form>

</body>

</html>
```

Default.aspx.cs

```
using System;

using System.Collections;

using System.Configuration;
```

```
using System.Data;

using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;

namespace sessionstate
{
    public partial class _Default : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            Application["Name"] = txtName.Text; Application["Email"] = txtEmail.Text;
            Response.Redirect("WebForm2.aspx");
        }
    }
}
```

Webform2.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="WebForm2.aspx.cs"Inherits=
"sessionstate.WebForm2"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title>Untitled Page</title>
```

```
</head>
```

```
<body>
```

```
<formid="form1"runat="server">
```

```
<div>
```

```
<table>
```

```
<tr>
```

```
<tdcolspan="2">
```

```
<h1>This is WebForm2</h1>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>
```

```
<b>Name</b>
```

```
</td>
```

```
<td>

:<asp:LabelID="lblName"runat="server">

</asp:Label>

</td>

</tr>

<tr>

<td>

<b>Email</b>

</td>

<td>

:<asp:LabelID="lblEmail"runat="server">

</asp:Label>

</td>

</tr>

</table>

</div>

</form>

</body>

</html>
```



Webform2.aspx.cs

```
using System;

using System.Collections;
```

```
using System.Configuration;
using System.Data;
using System.Linq;
using System.Web;
using System.Web.Security;
using System.Web.UI;
using System.Web.UI.HtmlControls;
using System.Web.UI.WebControls;
using System.Web.UI.WebControls.WebParts;
using System.Xml.Linq;
namespace sessionstate
{
    public partial class WebForm2 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (Application["Name"] != null)
            {
                lblName.Text = Application["Name"].ToString();
            }
            if (Application["Email"] != null)
            {
                lblEmail.Text = Application["Email"].ToString();
            }
        }
    }
}
```

OUTPUT

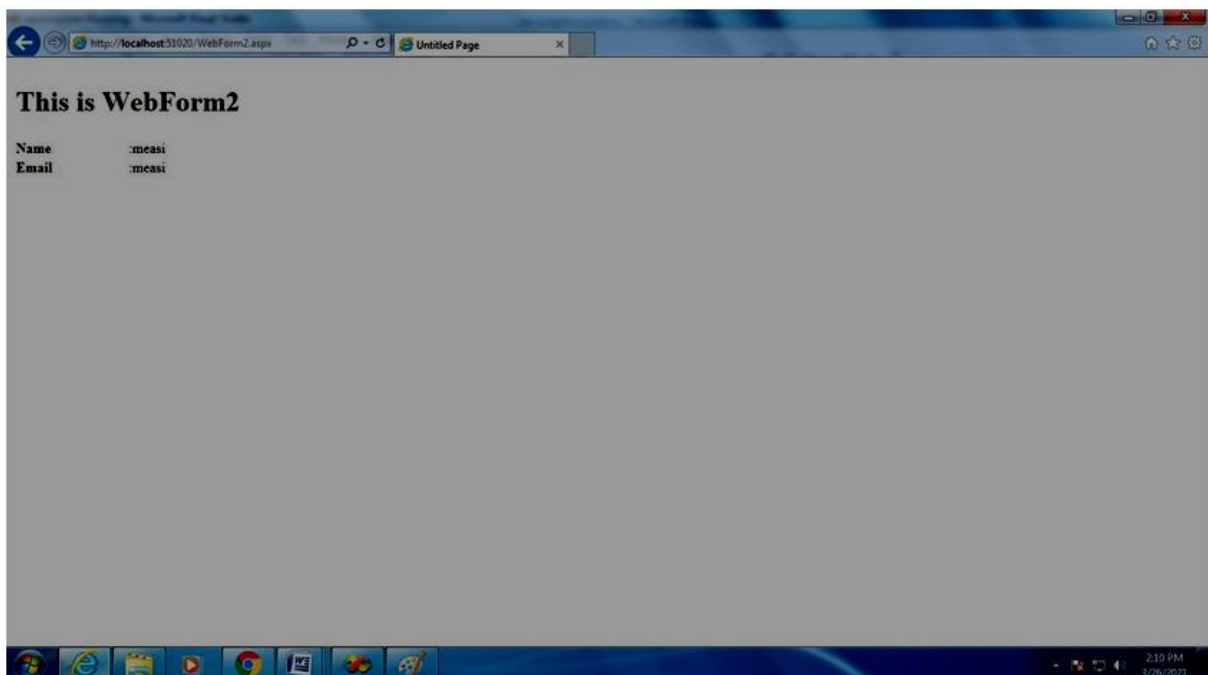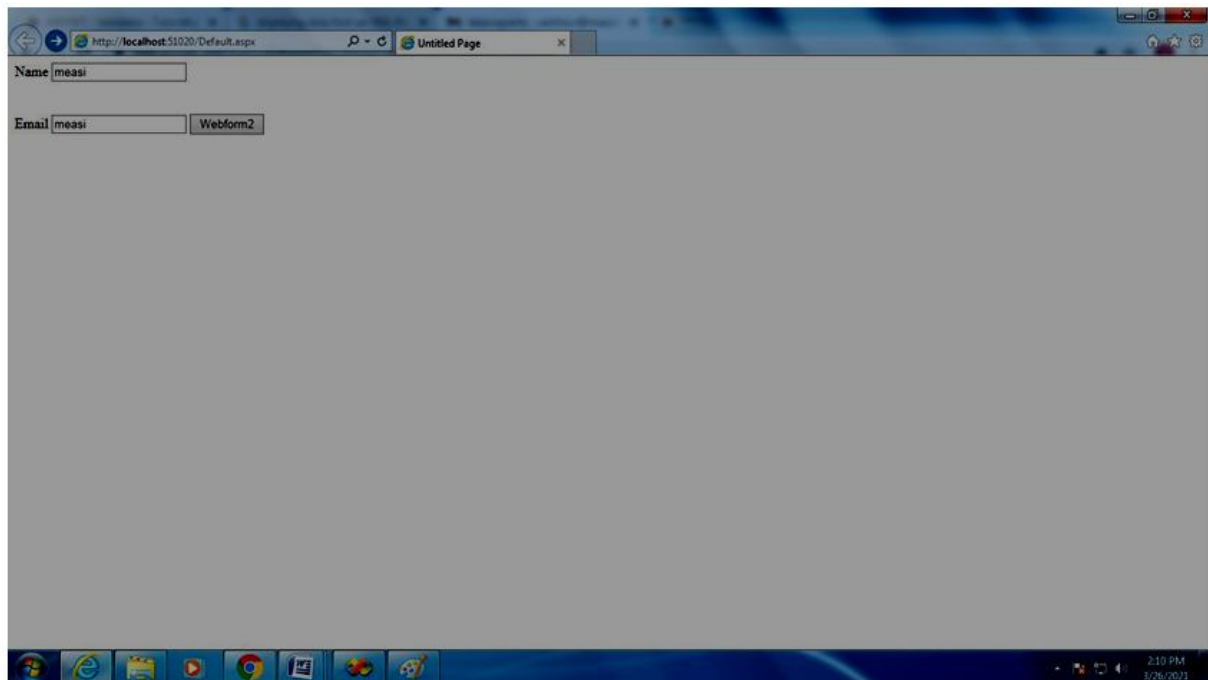

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 7

(A).STATE MANAGEMENT- VIEW STATE

AIM:

Develop a web page to implement the concept of state management using view state

ALGORITHM:

Step 1: Open Visual Studio and create new project under C# (Asp.net Web Application)

Step 2: In design part, add two labels, two textbox and one button.

Step 3: Change the name of the label and textbox.

Step 4: Add another form and in design part, add two labels.

Step 5: In properties change the ID name of two labels and leave the label name empty.

Step 6: Double click on the button in first form design part to write code in button click event

Step 7: Double click the second form and add the coding in the page load.

Step 8: Run the program and give inputs to get the output.

Step 9: Stop the Program.

(a) VIEW STATE

Default.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="WebApplication5._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```



```
<headrunat="server">

<title>Untitled Page</title>

</head>

<body>

<formid="form1"runat="server">

<div>

<asp:LabelID="Label1"runat="server"Text="NAME"></asp:Label>

<asp:TextBoxID="txtName"runat="server"></asp:TextBox>

<br/>

<br/>

    EMAIL

<asp:TextBoxID="txtEmail"runat="server"></asp:TextBox>

<br/>

<br/>

<asp:ButtonID="btnSendData"runat="server"onclick="Button1_Click"

Text="Goto web form2"/>

</div>

</form>

</body>

</html>
```

Default.aspx.cs

```
namespace WebApplication5
{
    public partial class _Default : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            ViewState["Name"] = txtName.Text;
            ViewState["Email"] = txtEmail.Text;
            Response.Redirect("WebForm1.aspx");
        }
    }
}
```


Webform1.aspx.cs

```
using System;
using System.Collections;
using System.Configuration;
using System.Data;
using System.Linq;
using System.Web;
using System.Web.Security;
using System.Web.UI;
using System.Web.UI.HtmlControls;
```

```
using System.Web.UI.WebControls;
using System.Web.UI.WebControls.WebParts;
using System.Xml.Linq;
namespace WebApplication5
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (ViewState["Name"] != null)
            {
                lblName.Text = ViewState["Name"].ToString();
            }
            if (ViewState["Email"] != null)
            {
                lblEmail.Text = ViewState["Email"].ToString();
            }
        }
    }
}
```

60

OUTPUT

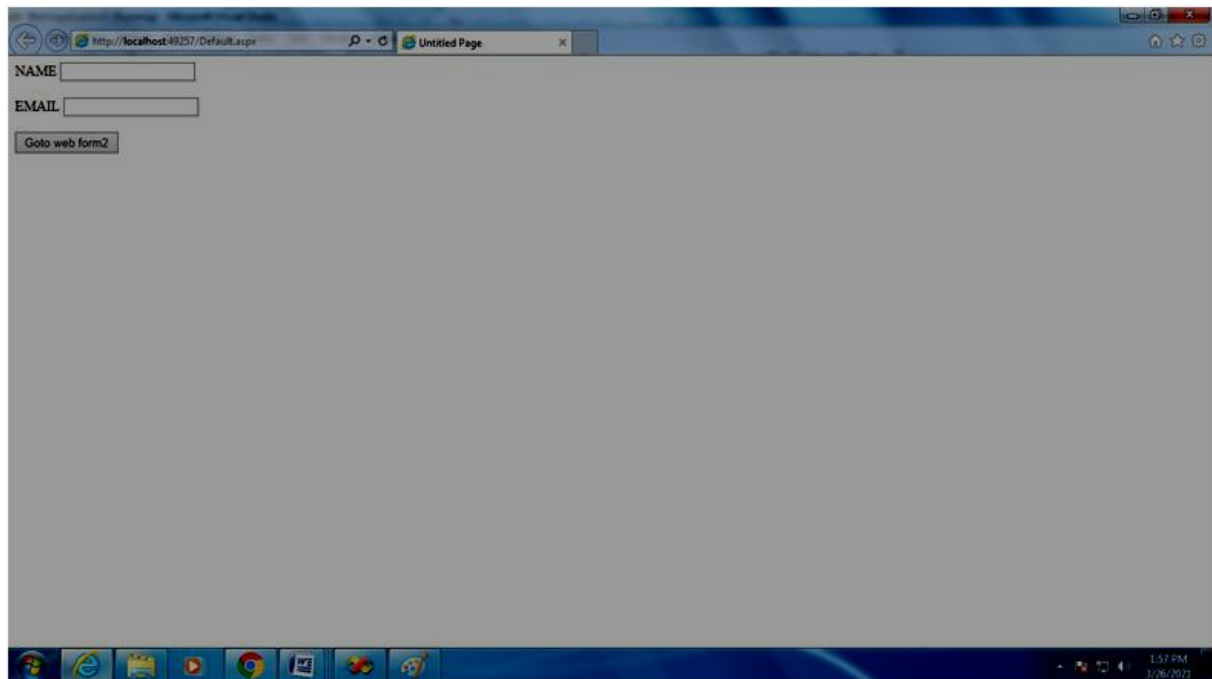

Result:

Thus, the above application has been implemented and executed successfully.

(B).STATE MANAGEMENT- QUERY STRING

AIM:

Develop a web page to implement the concept of state management using Query String

ALGORITHM:

- Step1:** Open Visual Studio and create new project under C# (Asp.net Web Application)
- Step 2:** In design part, add two labels, two textbox and one button.
- Step 3:** Change the name of the label and textbox.
- Step 4:** Add another form and in design part, add two labels.
- Step 5:** In properties change the ID name of two labels and leave the label name empty.
- Step 6:** Double click on the button in first form design part to write code in button click event
- Step 7:** Double click the second form and add the coding in the page load.
- Step 8:** Run the program and give inputs to get the output.
- Step 9:** Stop the Program.

(b).Query String

Default.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="WebApplication5._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title>Untitled Page</title>
```

```
</head>
```

```
<body>
```

```
<formid="form1"runat="server">
```

```
<div>
```

```
<asp:LabelID="Label1"runat="server"Text="NAME"></asp:Label>
```

```
<asp:TextBoxID="txtName"runat="server"></asp:TextBox>
```

```
<br/>
```

```
<br/>
```

EMAIL

```
<asp:TextBoxID="txtEmail"runat="server"></asp:TextBox>
```

```
<br/>
```

```
<br/>
```

```
<asp:ButtonID="btnSendData"runat="server"onclick="Button1_Click"
```

```
Text="Goto web form2"/>
```

```
</div>
```

```
</form>
```

```
</body>
```

```
</html>
```

Default.aspx.cs

```
using System;

using System.Collections;

using System.Configuration;

using System.Data;

using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;

namespace WebApplication5

{

    public partial class _Default : System.Web.UI.Page

    {

        protected void Page_Load(object sender, EventArgs e)

        {

        }

    }

    protected void Button1_Click(object sender, EventArgs e)
```

```

    {
        Response.Redirect("webForm1.aspx?UserName=" + txtName.Text.Replace("& ", "%26")
+ "&UserEmail=" + txtEmail.Text.Replace("& ", "%26"));
    }
}
}

```

Webform1.aspx.cs

```

using System;

using System.Collections;

using System.Configuration;

using System.Data;

using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;


namespace WebApplication5
{

```



```
public partial class WebForm1 : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        lblName.Text = Request.QueryString["UserName"];
        lblEmail.Text = Request.QueryString["UserEmail"];
    }
}
```

OUTPUT

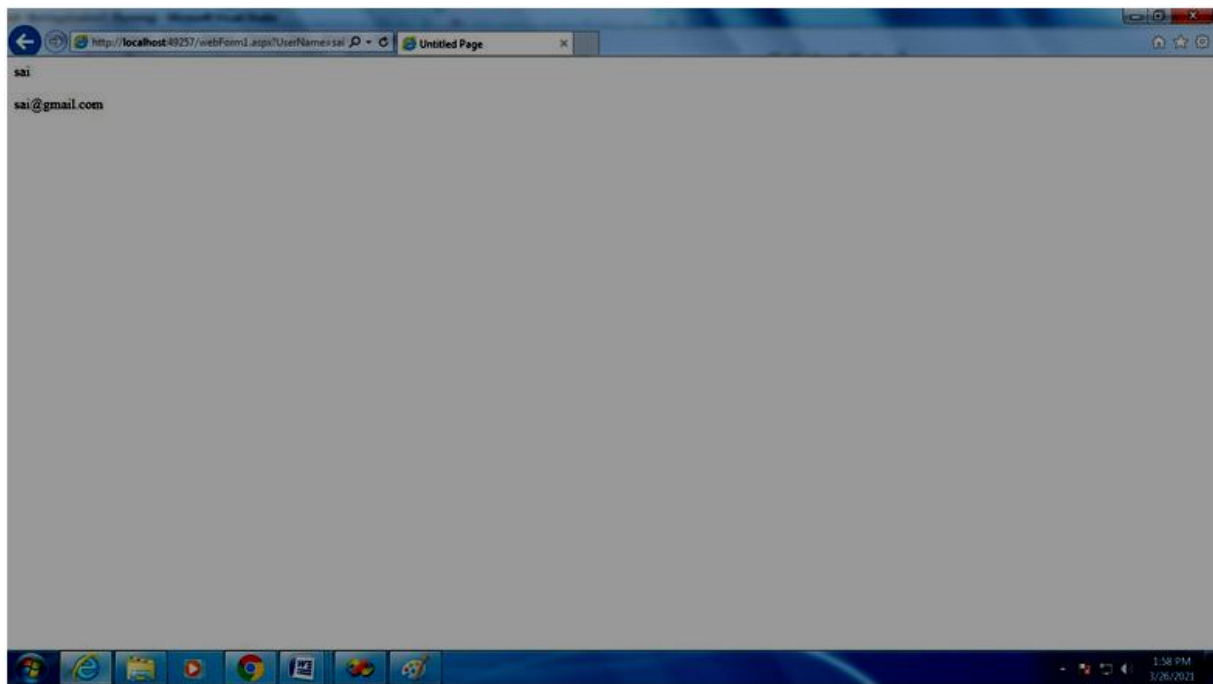

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 8

VALIDATION CONTROLS

AIM:

Program to design sign-up form using validation controls.

ALGORITHM:

Step 1: Open Visual Studio and create new project under C# (Asp.net Web Application)

Step 2: Design controls for a signup form.

Step 3: In Source part, enter the coding for validating the user name, password, Phone number and Email ID using validation controls.

Step 4: Run the program and give inputs to get the output.

Step 5: Stop the Program.

VALIDATION CONTROLS

Default.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="validationnew._Default"%>

<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<htmlxmlns="http://www.w3.org/1999/xhtml">

<headrunat="server">

<title></title>

<styletype="text/css">

.auto-style1 { width: 100%;

}
```

```

.auto-style2 { width: 144px;
}

.auto-style3 { width: 144px; text-align: right;
}

.auto-style4 { width: 136px;
}

.auto-style5 { width: 144px; text-align: right; height: 26px;
}

.auto-style6 { width: 136px; height: 26px;
}

.auto-style7 { height: 26px;
}

</style>

</head>

<body>

<formid="form1"runat="server">

<h1>&nbsp;  VALIDATION CONTROLS</h1>

<tableclass="auto-style1">

<tr>

<tdclass="auto-style3">User Name</td>

<tdclass="auto-style4">

<asp:TextBoxID="txtname"runat="server"Width="180px"></asp:TextBox>

</td>

<td>

```

```
<asp:RequiredFieldValidatorID="RequiredFieldValidator1"runat="server"ControlToValidate="txtname"ErrorMessage="Plz Enter
```

```
UserName"ForeColor="Fuchsia"></asp:RequiredFieldValidator>
```

```
<asp:RegularExpressionValidatorID="UserNameText"runat="server"ControlToValidate="txtname"ErrorMessage="user Name Must be Minimum of 8 and Maximum 15 Characters and Special Characters only _ is allowed"ValidationExpression="[a-zA-Z0-9_
```

```
+]{8,15}"></asp:RegularExpressionValidator>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<tdclass="auto-style3">Enter Password</td>
```

```
<tdclass="auto-style4">
```

```
<asp:TextBoxID="txtpass"runat="server"Width="180px"TextMode="Password"></asp:TextBox>
```

```
</td>
```

```
<td>
```

```
<asp:RequiredFieldValidatorID="RequiredFieldValidator3"runat="server"ControlToValidate="txtpass"ErrorMessage="Plz Enter Password"ForeColor="Fuchsia"><asp:RequiredFieldValidator>
```

```
<asp:RegularExpressionValidatorID="Passvalid"runat="server"ControlToValidate="txtpass"ErrorMessage="Password should be Minimumm 8
```

```
Characters"ValidationExpression="^[s\S]{8,}$"></asp:RegularExpressionValidator>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<tdclass="auto-style5">Confirm Password</td>
```

```
<tdclass="auto-style6">
```

```

<asp:TextBoxID="txtrepass"runat="server"Width="180px"TextMode="Password"></
asp:TextB ox>

</td>

<tdclass="auto-style7">

<asp:RequiredFieldValidatorID="RequiredFieldValidator4"runat="server"ControlToVali
date="txtrepass"ErrorMessage="ReEnter Password"ForeColor="Fuchsia"></
asp:RequiredFieldValidator>

<br/>

<asp:CompareValidatorID="CompareValidator1"runat="server"ControlToCompare="txtpass"C
ontrolToValidate="txtrepass"ErrorMessage="Password must me
same"ForeColor="Fuchsia"></asp:CompareValidator>

</td>

</tr>

<tr>

<tdclass="auto-style3">Enter Email</td>

<tdclass="auto-style4">

<asp:TextBoxID="txtemail"runat="server"Width="180px"></asp:TextBox>

</td>

<td>

<asp:RequiredFieldValidatorID="RequiredFieldValidator2"runat="server"ControlToValidate="t
xtemail"ErrorMessage="Enter EmailID"ForeColor="Fuchsia"></asp:RequiredFieldValidator>

<br/>

<asp:RegularExpressionValidatorID="RegularExpressionValidator1"runat="server"ControlToV
alidate="txtemail"ErrorMessage="Plz Enter Correct
EmailID"ForeColor="Fuchsia"ValidationExpression="([a-zA-Z0-9_-.]+)@([a-zA-Z]+)([.])([a-
zA-Z]+)">

```

```
</asp:RegularExpressionValidator>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<tdclass="auto-style3">Phone Number</td>
```

```
<tdclass="auto-style4">
```

```
<asp:TextBoxID="phonetxt"runat="server"Width="180px"></asp:TextBox>
```

```
</td>
```

```
<td>
```

```
<asp:RequiredFieldValidatorID="RequiredFieldValidator5"runat="server"ControlToValidate="
phonetxt"ErrorMessage="Plz Enter Phone Number"ForeColor="Fuchsia"></
asp:RequiredFieldValidator>
```

```
<asp:RegularExpressionValidatorID="Phoneval"runat="server"ControlToValidate="phonetxt"Er
rorMessage=" Max 10 Digits only allowed"ValidationExpression="[0- 9]{10}"></
asp:RegularExpressionValidator>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<tdclass="auto-style3">Select Your Country</td>
```

```
<tdclass="auto-style4">
```

```
<asp:DropDownListID="ddlCity"runat="server"Width="187px">
```

```
<asp:ListItemValue="0"Selected="True">—Select—</asp:ListItem>
```

```
<asp:ListItemValue="1">India</asp:ListItem>
```

```

<asp:ListItemValue="2">Australia</asp:ListItem>

<asp:ListItemValue="3">America</asp:ListItem>

<asp:ListItemValue="4">South Africa</asp:ListItem>

<asp:ListItemValue="5">England</asp:ListItem>

<asp:ListItemValue="6">Kenya</asp:ListItem>

<asp:ListItemValue="7">WestIndies</asp:ListItem>

</asp:DropDownList>

</td>

<td>

<asp:RequiredFieldValidatorID="RequiredFieldValidator6"runat="server"InitialValue="0"Contr
olToValidate="ddlCity"ErrorMessage="Plz Select Your Country"ForeColor="Fuchsia">
</asp:RequiredFieldValidator>

</td>

</tr>

<tr>

<tdclass="auto-style2"></td>

<tdclass="auto-style4"></td>

<td></td>

</tr>

<tr>

<tdclass="auto-style2"></td>

<tdclass="auto-style4">

```

```

<asp:ButtonID="Button1"runat="server"Text="Submit"ForeColor="#FF66FF"OnClick="Button
1_Click"/>

</td>

</tr>

<tr></tr>

<tr></tr>

<tr>

<td>

<asp:LabelID="Label1"runat="server"Text="Label"Visible="False"
BackColor="#003300"BorderColor="#FF3300"BorderStyle="Double"Font-
Bold="True" Font-Names="Cambria"Font-Size="XX-
Large"ForeColor="#0099FF"></asp:Label>

</td>

</tr>

<asp:LiteralID="PopupBox"runat="server"></asp:Literal>

</table>

<div>

</div>

</form>

</body></html>

```

Default.aspx.cs

```

using System;

using System.Collections;

```




```

using System.Configuration;
using System.Data;
using System.Linq;
using System.Web;
using System.Web.Security;
using System.Web.UI;
using System.Web.UI.HtmlControls;
using System.Web.UI.WebControls;
using System.Web.UI.WebControls.WebParts;
using System.Xml.Linq;
using System.Windows.Forms;
namespace validationnew
{
    public partial class _Default : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            Label1.Visible = true;
            Label1.Text = "ALL VALIDATIONS ARE CORRECT";
            MessageBox.Show("ALL VALIDATIONS ARE CORRECT");
        }
    }
}

```

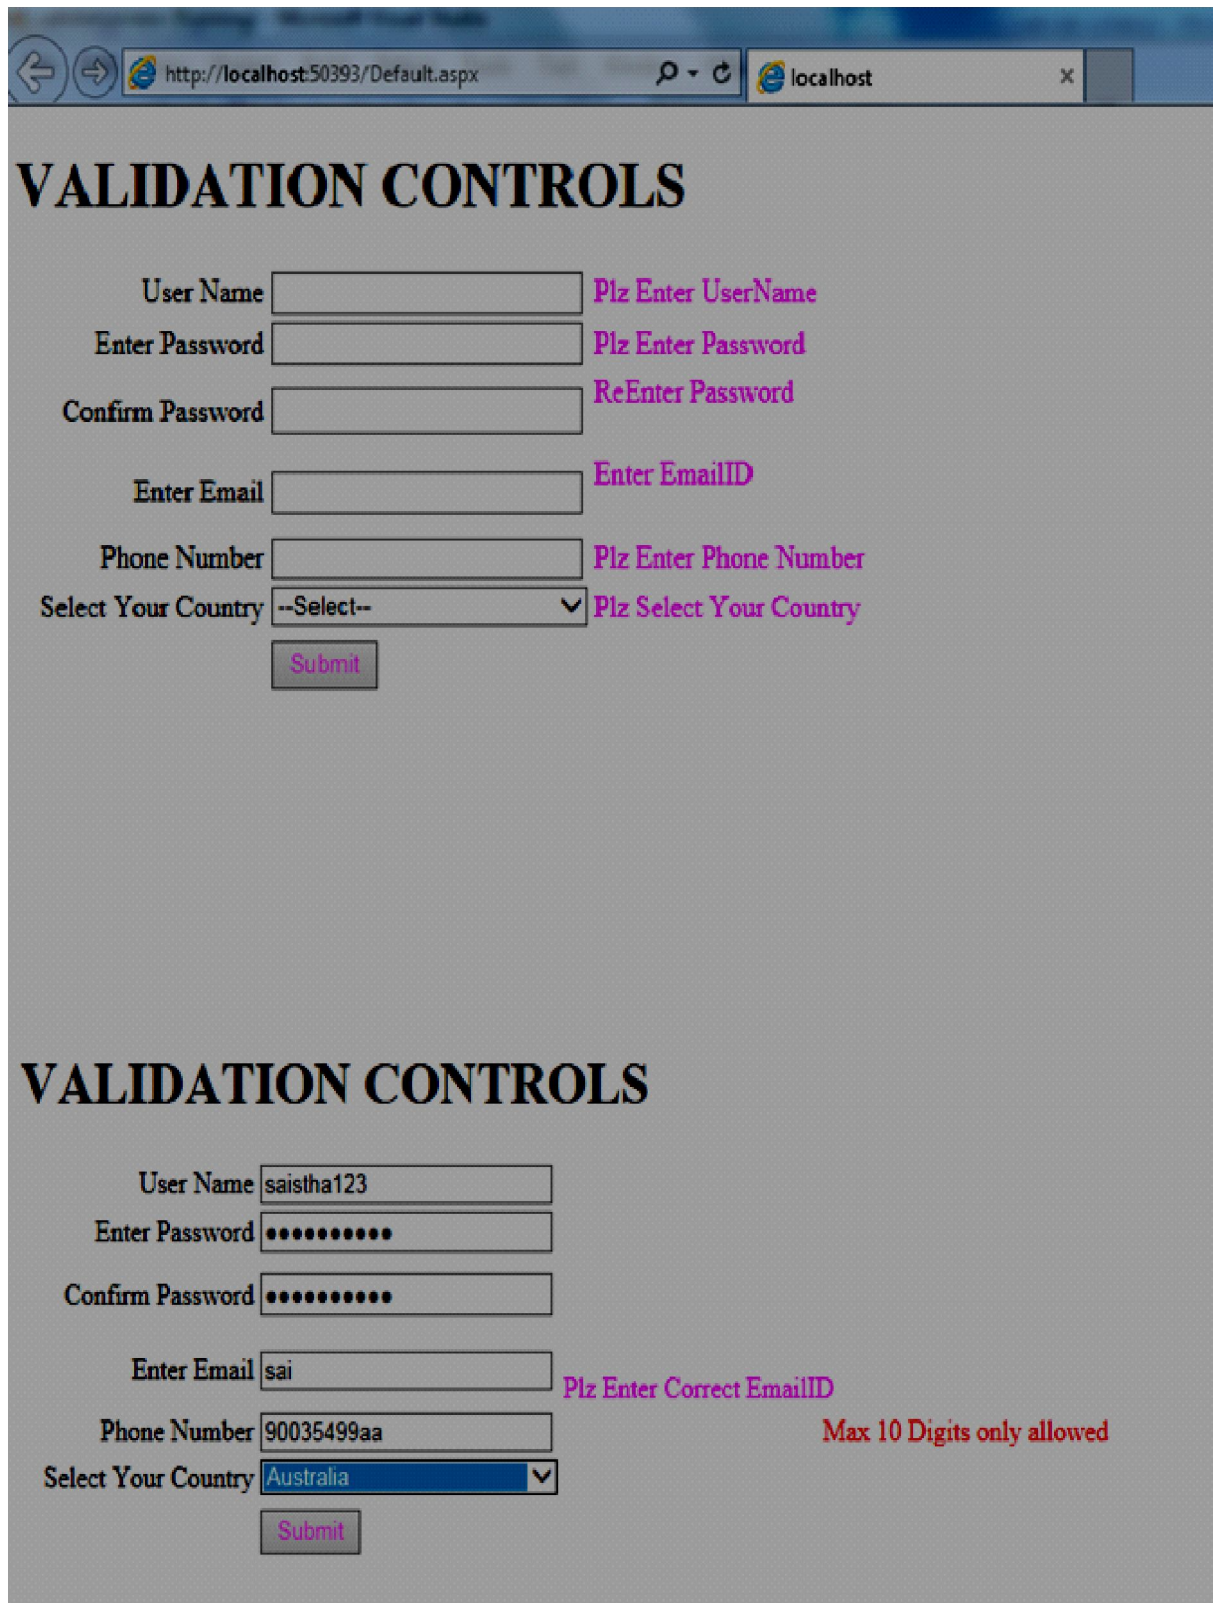OUTPUT

VALIDATION CONTROLS

User Name Plz Enter UserName

Enter Password Plz Enter Password

Confirm Password ReEnter Password

Enter Email Enter EmailID

Phone Number Plz Enter Phone Number

Select Your Country --Select-- Plz Select Your Country

VALIDATION CONTROLS

User Name


Enter Password

Confirm Password

Enter Email Plz Enter Correct EmailID

Phone Number Max 10 Digits only allowed

Select Your Country

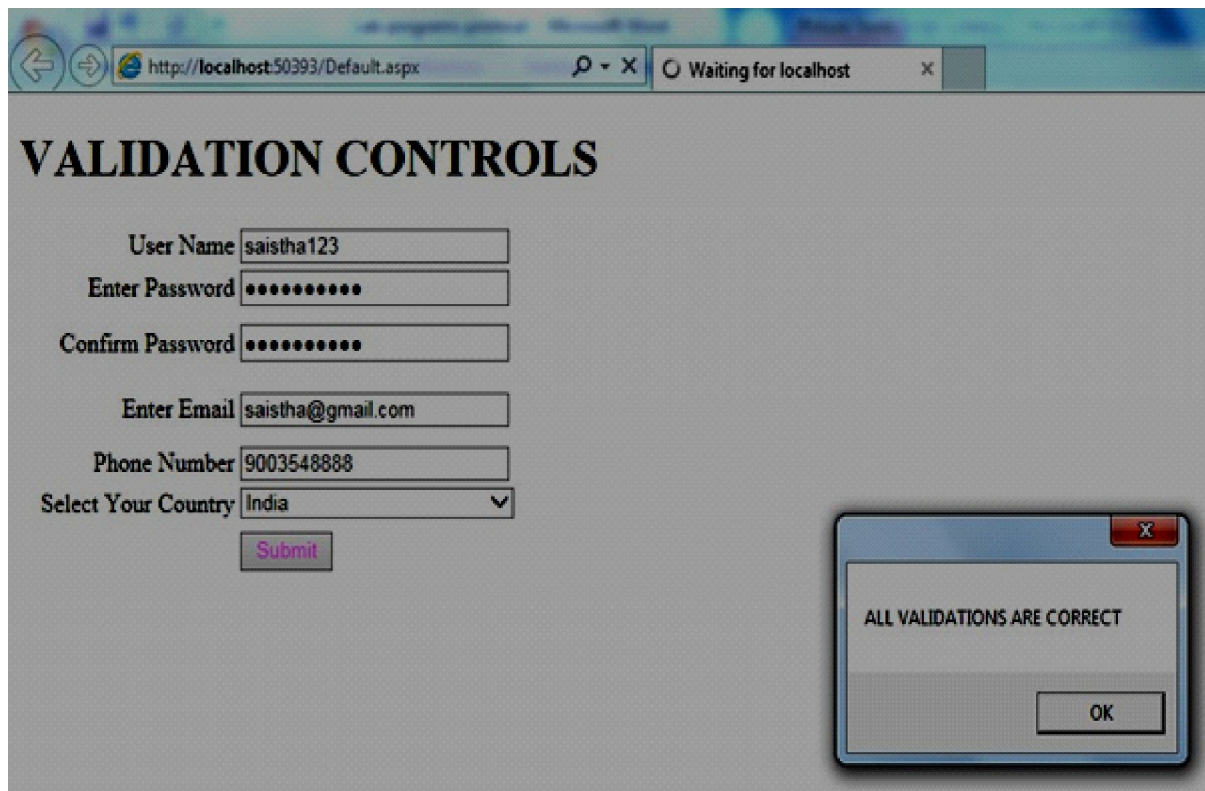

The screenshot shows a web browser window with the address bar displaying `http://localhost:50393/Default.aspx`. The page title is "VALIDATION CONTROLS". The form contains the following fields and values:

- User Name: saistha123
- Enter Password: [masked with dots]
- Confirm Password: [masked with dots]
- Enter Email: saistha@gmail.com
- Phone Number: 9003548888
- Select Your Country: India (dropdown menu)

A "Submit" button is located below the "Select Your Country" field. A modal dialog box is displayed on the right side of the page with the text "ALL VALIDATIONS ARE CORRECT" and an "OK" button.

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 9

MASTER PAGE CONCEPT WITH TWO CONTENT PAGES

AIM:

Program to create a web site using Master Page Concept with two content pages.

ALGORITHM:

Step 1: Open Visual Studio and create new project under C# (Asp.net Web Application)

Step 2: Add the master site and design the page.

Step 3: Insert two new web forms and create Content placeholder in site master page.

Step 4: Run the program and give inputs to get the output.

Step 5: Stop the Program.

Master Page Concept Having Two Content Pages

Default.aspx

```
<%@MasterLanguage="C#"AutoEventWireup="true"CodeBehind="Site.master.cs"Inherits="master.Site"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title>Untitled Page</title>
```

```
</head>
```

```
<body>
```

```
<formid="form1"runat="server">

<div>

<tablestyle="font-family: Arial">

<tr>

<tdcolspan="2"style="width: 800px; height: 80px; text-
align: center; background-color: #00FF00;">

<h1>

        WebSite Header

</h1>

</td>

</tr>

<tr>

<tdstyle="height: 500px; background-color: #800080; width: 150px">

<h3>

        Menu</h3>

<ulstyle="list-style-type:none;">

<li>Home</li>

<li>Contact</li>

<li>Apply</li>

</ul>

</td>
```

```

<tdstyle="height: 500px; background-color: #5C4033; width: 650px">

<asp:ContentPlaceHolderID="MainContentPlaceHolder"runat="server">

<h1>Section for content page</h1>

</asp:ContentPlaceHolder>

```

```

</td>

</tr>

<tr>

<tdcolspan="2"style="background-color: #BDBDBD; text-align: center">

<b>Website Footer</b>

</td>

</tr>

</table>

</div>

</form>

</body>

</html>

```

Web Form1

```

<%@PageLanguage="C#"MasterPageFile="~/
Site.Master"AutoEventWireup="true"CodeBehin
d="WebForm1.aspx.cs"Inherits="master.WebForm1"Title="Untitled Page"%>

<asp:ContentID="Content1"ContentPlaceHolderID="MainContentPlaceHolder"runat="server">

```

```

<center><table><tr><th><h2> Student Information </h2></th></tr>

<tr><td><b> Name: MEASI </b></td></tr><tr><td><b> College: MIIT </b></td>

</tr>

<tr><td><b> City: Chennai </b></td></tr></table>

<br/>

<br/>

<a href="webform2.aspx">Go to next form </a>

</center>

</asp:Content>

```

WebForm2

```

<%@PageLanguage="C#"MasterPageFile="~/
Site.Master"AutoEventWireup="true"CodeBehin
d="WebForm2.aspx.cs" Inherits="master.WebForm2"Title="Untitled Page"%>

<asp:ContentID="Content1"ContentPlaceHolderID="MainContentPlaceHolder"runat="server">

<center>

<asp:CalendarID="Calendar1"runat="server"></asp:Calendar><br/>

<asp:ButtonID="Button1"runat="server"Text="Click
Me" onclick="Button1_Click"/>

<br/>

<a href="webform3.aspx">Go to next form </a>

</center>

</asp:Content>

```

Webform3

```

<%@PageLanguage="C#"MasterPageFile=~/  

Site.Master"AutoEventWireup="true"CodeBehin  

d="WebForm3.aspx.cs"Inherits="master.WebForm3"Title="Untitled Page"%>  

<asp:ContentID="Content1"ContentPlaceHolderID="MainContentPlaceHolder"runat="server">  

<p>Hello</p>  

</asp:Content>

```

WebForm2 Aspx.cs

```



using System.Web;
using System.Web.Security;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Web.UI.WebControls.WebParts;
using System.Web.UI.HtmlControls;
using System.Xml.Linq;
using System.Windows.Forms;

namespace master
{
    publicpartialclassWebForm2 : System.Web.UI.Page
    {
        protectedvoid Page_Load(object sender, EventArgs e)
        {
        }

        protectedvoid Button1_Click(object sender, EventArgs e)
        {
            MessageBox.Show("Welcome");
        }
    }
}

```


OUTPUT

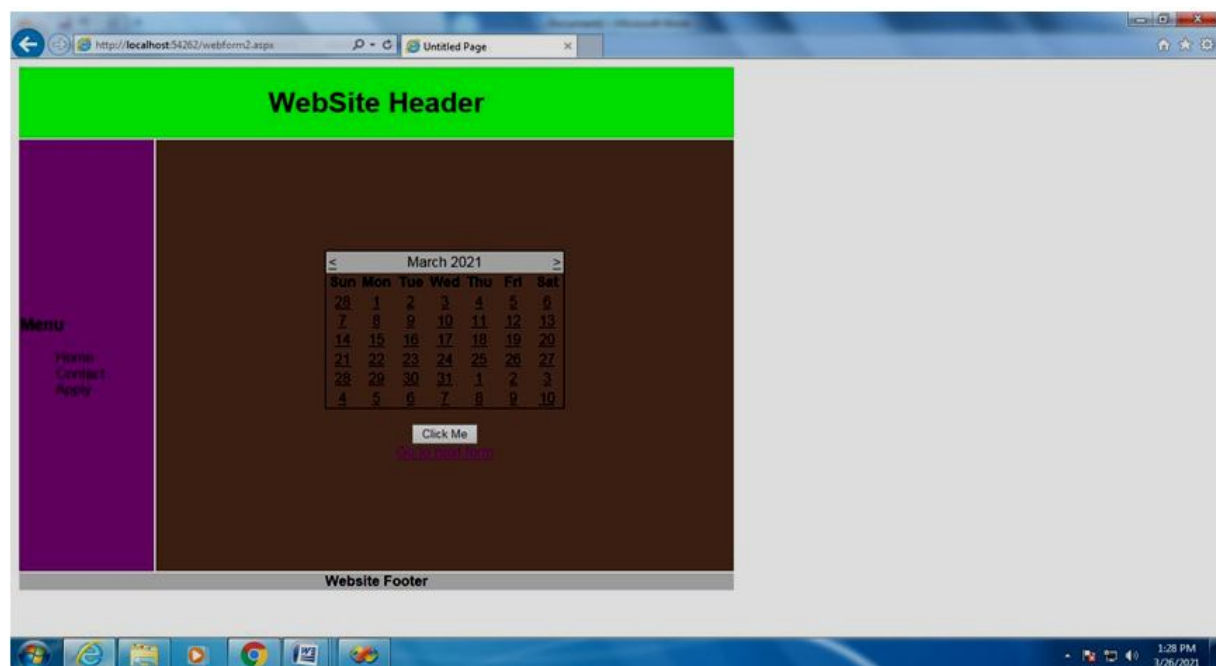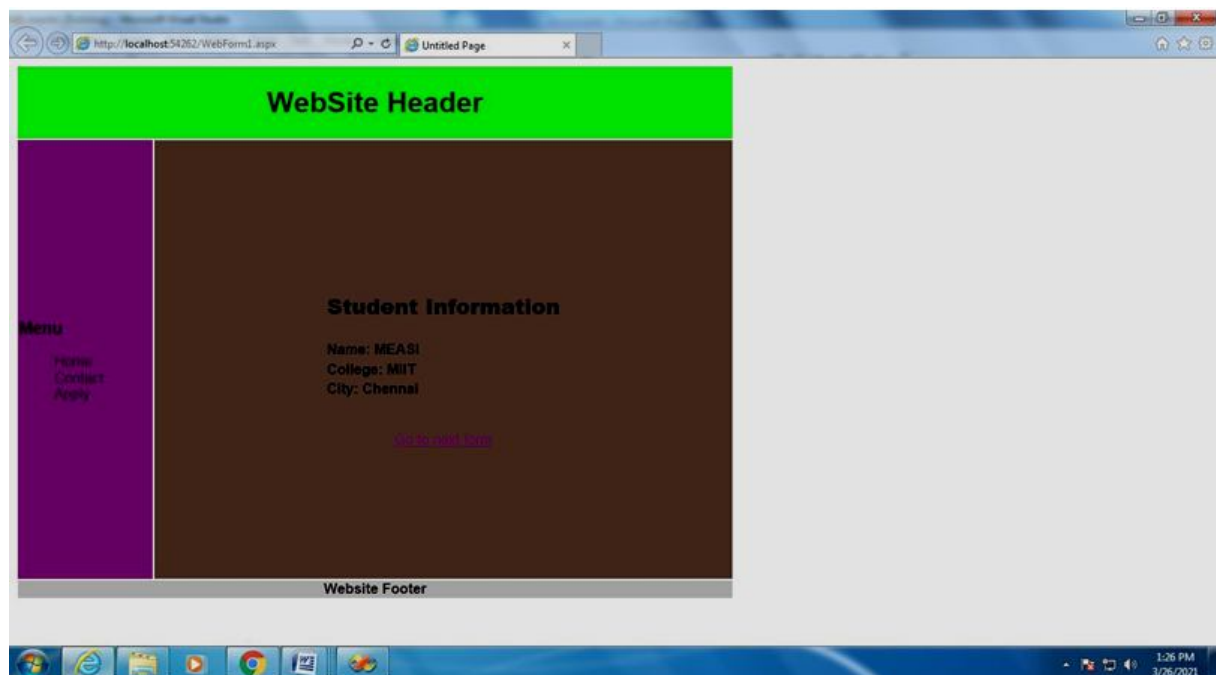

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 10

DATABASE CONNECTIVITY USING DATA READER

AIM:

Program to create windows application to connect to database, fetching and inserting data from database and using Data Reader

ALGORITHM:

Step1: Open Visual Studio and create new project under C# (Asp.net Windows form Application)

Step 2: Design form with necessary controls.

Step 3: Insert the Data grid view control and connect the database using create new datasource.

Step 4: To connect with database include systems.data.oracleclient namespace.

Step 5: Include coding for appropriate button.

Step 6: Save and run the application.

Step 7: Stop the program

Fetching Data From Database Using Data Reader

Form1.cs

```
using System;
```

```
using System.Collections.Generic;
```

```
using System.ComponentModel;
```

```
using System.Data;
```

```
using System.Drawing;
```

```
using System.Linq;
```

```
using System.Text;
```

```
using System.Windows.Forms;

using System.Data.OracleClient;

using Microsoft.VisualBasic;

using System.IO;

namespace WindowsFormsApplication2

{

    public partial class Form1 : Form

    {

        public Form1()

        {

            InitializeComponent();

        }


        private void Form1_Load(object sender, EventArgs e)

        {

            // TODO: This line of code loads data into the 'dataSet1.TELEPHONEDIRECTORY' table. You
            can move, or remove it, as needed.
            this.tELEPHONEDIRECTORYTableAdapter.Fill(this.dataSet1.TELEPHONEDIRECTORY);

        }


        private void button1_Click(object sender, EventArgs e)

        {

            try
```

84

```
{  
  
this.tELEPHONEDIRECTORYTableAdapter.Fill(this.dataSet1.TELEPHONEDIRECTORY);  
  
}
```

```
catch (Exception ex)
```

```
{
```

```
}
```

```
}
```

```
private void btnAdd_Click(object sender, EventArgs e)
```

```
{
```

```
try
```

```
{
```

```
OracleConnection con = new OracleConnection("Data Source=miit;User  
ID=staff;Password=staff");
```

```
OracleCommand cmd = new OracleCommand(); cmd.CommandType = CommandType.Text;  
cmd.Connection = con;
```

```
cmd.CommandText = "INSERT INTO telephonedirectory VALUES(" + txtID.Text + "," +  
txtName.Text + "," + txtPhone.Text + "," + txtDesignation.Text + "," + txtAddress.Text + "," +  
txtPincode.Text + ")";
```

```
con.Open();
```

```
int issave = cmd.ExecuteNonQuery(); if (issave == 0)
```

```
{
    MessageBox.Show("Record not inserted");
}
```

```
else
```

```
{
    MessageBox.Show("Success!");
    //clear();
}
```

```
}
```

```
}
```

```
catch (Exception ex)
```

```
{ }
```

```
}
```

```
private void btnSearch_Click(object sender, EventArgs e)
```

```
{
```

```
    String ip = Interaction.InputBox("Enter the id to search :", "Search", "", 0, 0); try
```

```
{
```

```
    OracleConnection con = new OracleConnection("Data Source=miit;User ID=staff;Password=staff");
```

```
    con.Open();
```

```
    string sql = " select * from telephonedirectory where id=" + ip; // C# OracleCommand cmd =
    new OracleCommand(sql, con);
```

```
cmd.CommandType = CommandType.Text;

OracleDataReader dr = cmd.ExecuteReader(); dr.Read();

if (dr.HasRows)

{

    txtID.Text = dr["id"].ToString();

    txtName.Text = dr["Name"].ToString();

    txtPhone.Text = dr["Phone"].ToString();

    txtAddress.Text = dr["Address"].ToString();

    txtDesignation.Text = dr["Designation"].ToString();

    txtPincode.Text = dr["Pincode"].ToString();

}

else

{

    MessageBox.Show("No such Record");

}

}

catch (Exception ex)

{

}

}

private void btnDelete_Click(object sender, EventArgs e)
```

```

{
    string ip = Interaction.InputBox("Enter the id to delete :", "Search", "", 0, 0); try
    {
        OracleConnection con = newOracleConnection("Data Source=miit;User
        ID=staff;Password=staff");

        con.Open();

        string sql1 = " select * from telephonedirectory where id=" + ip; // C# OracleCommand cmd =
        newOracleCommand(sql1, con);

        cmd.CommandType = CommandType.Text; OracleDataReader dr = cmd.ExecuteReader();

        dr.Read(); if (dr.HasRows)
        {

            string sql = " delete from telephonedirectory where Id=" + ip; // C# OracleCommand cmd1 =
            newOracleCommand();

            cmd1.CommandText = sql; cmd1.Connection = con; cmd1.ExecuteNonQuery(); cmd1.Dispose();

            MessageBox.Show(" 1 RECORD DELETED click on Grid Display to check changes in
            GridView");
        }

        else

        {

            MessageBox.Show("No such Record");

        }

    }

    catch (Exception ex)

```

88

```
{
```

```
}
```

```
}
```

```
private void btnExit_Click_1(object sender, EventArgs e)
```

```
{
```

```
    this.Close();
```

```
}
```

```
private void btnClear_Click_1(object sender, EventArgs e)
```

```
{
```

```
    txtID.Text = "";
```

```
    txtName.Text = "";
```

```
    txtPhone.Text = "";
```

```
    txtAddress.Text = "";
```

```
    txtDesignation.Text = "";
```

```
    txtPincode.Text = "";
```

```
}
```

```
private void btnUpdate_Click_1(object sender, EventArgs e)
```

```
{
```

```
    try
```

```
    {
```

```
        OracleConnection con = new OracleConnection("Data Source=miit;User ID=staff;Password=staff");
```



```
con.Open();

string sql = "update telephonedirectory set name=" + txtName.Text + ",phone=" + txtPhone.Text
+ ",designation=" + txtDesignation.Text + ",address=" + txtAddress.Text + ",pincode=" +
txtPincode.Text + " where id=" + txtID.Text + ";

OracleCommand cmd = new OracleCommand(); cmd.CommandText = sql; cmd.Connection =
con;

int issave = cmd.ExecuteNonQuery(); if (issave == 0)

{

    MessageBox.Show("Record not updated");

}

else

{

    MessageBox.Show("Record updated.. Click on GridView to see the Updated Record");

    //clear();

}

}

catch (Exception ex)

{

}

}

}

}
```

90

OUTPUT

ID	NAME	PHONE	DESIGNATION	ADDRESS	PINCODE
101	saatha	9003548849	AP	Chromepet	600044
102	mr saifdar ali	123456789	student	roy	600004

Search dialog: Enter the id to search : [OK] [Cancel]

Form fields: ID: 101, NAME: saatha, PHONE: 9003548849, DESIGNATION: AP, ADDRESS: Chromepet, PINCODE: 600044

Buttons: GRID DISPLAY, SEARCH, ADD, DELETE, UPDATE, CLEAR, EXIT

ID	NAME	PHONE	DESIGNATION	ADDRESS	PINCODE
101	saatha	9003548849	AP	Chromepet	600044
102	mr saifdar ali	123456789	student	royapettah	600004

Message dialog: Record updated.. Click on GridView to see the Updated Record [OK]

Form fields: ID: 102, NAME: mr saifdar ali, PHONE: 123456789, DESIGNATION: student, ADDRESS: royapettah, PINCODE: 600004

Buttons: GRID DISPLAY, SEARCH, ADD, DELETE, UPDATE

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 11

EMPLOYEE DATABASE

AIM:

Create Employee database and develop a web application to Add, Update, View and Delete records from database using in Grid view control.

ALGORITHM:

Step 1: Open Visual Studio and create new project under C# (Asp.net Web Application)

Step 2: Design form with necessary controls.

Step 3: Insert the Data grid view control and connect the database using create new data source.

Step 4: To connect with database include systems.data.oracleclient namespace.

Step 5: Include coding for appropriate button.

Step 6: Save and run the application.

Step 7: Stop the program

EMPLOYEE DATABASE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs"
Inherits="WebApplication8._Default" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml" >
```

```
<head runat="server">
```

```
<title>Untitled Page</title>
```

```
</head>
```



```
<asp:TextBox ID="tnpay" runat="server" Width="140px"></asp:TextBox>
```


[illegible]

```
<asp:TextBox ID="tta" runat="server" Width="140px"></asp:TextBox>
```



```
<asp:GridView ID="GridView1" runat="server" AutoGenerateColumns="False"
DataSourceID="SqlDataSource1">
```

<Columns>

```
<asp:BoundField DataField="ID" HeaderText="ID" SortExpression="ID" />
```

```
<asp:BoundField DataField="NAME" HeaderText="NAME" SortExpression="NAME" />
```

```
<asp:BoundField DataField="DESIG" HeaderText="DESIG" SortExpression="DESIG" />
```

```
<asp:BoundField DataField="DEPT" HeaderText="DEPT" SortExpression="DEPT"
```

/>

```
<asp:BoundField DataField="BPAY" HeaderText="BPAY" SortExpression="BPAY"
```

/ >

```
<asp:BoundField DataField="PF" HeaderText="PF" SortExpression="PF" />
```

```
<asp:BoundField DataField="HRA" HeaderText="HRA" SortExpression="HRA" />
```

```
<asp:BoundField DataField="ESI" HeaderText="ESI" SortExpression="ESI" />
```

```
<asp:BoundField DataField="DA" HeaderText="DA" SortExpression="DA" />
```


</div>

<p>

 </p>

<p>

 </p>

</form>

</body>

</html>

CS CODING

using System;

using System.Collections;

using System.Configuration;

using System.Data;

using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

```

using System.Xml.Linq;

using System.Windows.Forms;

using Microsoft.VisualBasic;

using System.Data.OracleClient;

namespace WebApplication8

{

    public partial class _Default : System.Web.UI.Page

    {

        protected void Page_Load(object sender, EventArgs e)

        {

            OracleConnection con = new OracleConnection("Data Source=miit;User
            ID=staff;Password=staff");

            con.Open();

            OracleCommand cmd = new OracleCommand(); cmd.CommandType = CommandType.Text;
            cmd.Connection = con;

        }

        protected void Add_Click(object sender, EventArgs e)

        {

            try

            {

                OracleConnection con = new OracleConnection("Data Source=miit;User
                ID=staff;Password=staff");

```

100

```
con.Open();
```

```
OracleCommand cmd = new OracleCommand(); cmd.CommandType = CommandType.Text;  
cmd.Connection = con;
```

```
MessageBox.Show("Success!");
```

```
cmd.CommandText = "INSERT INTO payroll VALUES(" + tid.Text + "," + tname.Text + "," +  
tdesig.Text + "," + tdept.Text + "," + tbpay.Text + "," + tpf.Text + "," + thra.Text + "," + tesi.Text  
+ "," + tda.Text + "," + tgpay.Text + "," + tnpay.Text + "," + tta.Text + ")";
```

```
int issave = cmd.ExecuteNonQuery(); if (issave == 0)
```

```
{
```

```
    MessageBox.Show("Record not inserted");
```

```
}
```

```
else
```

```
{
```

```
    MessageBox.Show("Record Inserted!");
```

```
    //clear();
```

```
}
```

```
}
```

```
catch (Exception ex)
```

```
{
```

```
}
```

```
}
```

```
protected void Search_Click(object sender, EventArgs e)
```

```

{

String ip = Interaction.InputBox("Enter the id to search :", "Search", "", 0, 0); try

{

OracleConnection con = newOracleConnection("Data Source=miit;User
ID=staff;Password=staff");

con.Open();

string sql = " select * from payroll where id=" + ip; // C# OracleCommand cmd =
newOracleCommand(sql, con);

cmd.CommandType = CommandType.Text; OracleDataReader dr = cmd.ExecuteReader();

dr.Read(); if (dr.HasRows)

else

{

tid.Text = dr["id"].ToString();

tname.Text = dr["name"].ToString();

tdesig.Text = dr["desig"].ToString();

tdept.Text = dr["dept"].ToString();

tbpay.Text = dr["bpay"].ToString();

tpf.Text = dr["pf"].ToString();

thra.Text = dr["hra"].ToString();

tesi.Text = dr["esi"].ToString();

tda.Text = dr["da"].ToString();

tgpay.Text = dr["gpay"].ToString();

```

```

tnpay.Text = dr["npay"].ToString();

tta.Text = dr["ta"].ToString();

}

{
    MessageBox.Show("No such Record");
}

}

catch (Exception ex)

{

}

}

protected void Delete_Click(object sender, EventArgs e)

{

    string ip = Interaction.InputBox("Enter the id to delete :", "Search", "", 0, 0); try

    {

        OracleConnection con = new OracleConnection("Data Source=miit;User
        ID=staff;Password=staff");

        con.Open();

        string sql1 = " select * from payroll where id=" + ip; // C# OracleCommand cmd =
        new OracleCommand(sql1, con);

        cmd.CommandType = CommandType.Text; OracleDataReader dr = cmd.ExecuteReader();

        dr.Read(); if (dr.HasRows)

```

```

{

string sql = " delete from payroll where Id=" + ip; // C# OracleCommand cmd1 =
newOracleCommand();

cmd1.CommandText = sql; cmd1.Connection = con;

cmd1.ExecuteNonQuery(); cmd1.Dispose();

MessageBox.Show(" 1 RECORD DELETED click on Grid Display to check changes in
GridView");

}

else

{

MessageBox.Show("No such Record");

}

}

catch (Exception ex)

{

}

}

protectedvoid Update_Click(object sender, EventArgs e)

{

try

{

OracleConnection con = newOracleConnection("Data Source=miit;User
ID=staff;Password=staff");

```

```
con.Open();
```

```
string sql = "update payroll set name=" + tname.Text + ",desig=" + tdesig.Text + ",dept=" +
tdept.Text + ",bpay=" + tbpay.Text + ",pf=" + tpf + ", hra= " + thra.Text + ", esi=" + tesi + ", da="
+ tda.Text + ", gpay=" + tgpay + ", npay=" + tnpay + ", ta=" + tta.Text + " where id=" + tid.Text +
"";
```

```
OracleCommand cmd =
```

```
newOracleCommand();
```

```
cmd.CommandText = sql;
```

```
cmd.Connection = con;
```

```
int issave = cmd.ExecuteNonQuery(); if (issave == 0)
```

```
{
```

```
MessageBox.Show("Record not updated");
```

```
}
```

```
else
```

```
{
```

```
MessageBox.Show("Record updated.. Click on GridView to see the Updated Record");
```

```
//clear();
```

```
}
```

```
}
```

```
catch (Exception ex)
```

```
{
```

```
}
```



```
}

protectedvoid Clear_Click1(object sender, EventArgs e)

{

tid.Text = "";

tname.Text = "";

tdesig.Text = "";

tdept.Text = "";

tbpay.Text = "";

tpf.Text = "";

thra.Text = "";

tesi.Text = "";

tda.Text = "";

tgpay.Text = "";

tnpay.Text = "";

tta.Text = "";

}

protectedvoid Refresh_Click(object sender, EventArgs e)

{

Response.Redirect(Request.RawUrl);

}

}

}
```

Table creation

create table payroll(id number(5), name varchar2(10), desig varchar2(10), dept varchar2(10), bpay number(5), pf(number(5), hra number(5), esi number(5), da number(5), gpay number(5), npay number(5), ta number(5));

OUTPUT

EMP ID: 4 ESI: 700 Search

EMP NAME: Ajwadh DA: 700 Update Delete

DESIGNATION: AP Clear GridViewDisplaya

DEPARTMENT: MCA Add

BPAY: 60000

PF: 600

HRA: 700

GPAY: 67000

NPAY: 70000

TA: 800

Record Inserted!

OK

ID	NAME	DESIG	DEPT	BPAY	PF	HRA	ESI	DA	GPAY	NPAY	TA
2	Saistha	AP	MCA	30000	567	673	4556	45	40000	50000	345
3	Usha	AP	MCA	50000	500	600	600	700	55000	60000	600
1	Arshiya	Lecture	MBA	5555	200	200	209	567	23434	40000	34

EMP ID	1	ESI	209	Search
EMP NAME	Arshiya	DA	567	Update Delete
DESIGNATION	Lecture			Clear GridViewDisplaya
DEPARTMENT	MBA			
BPAY	5555			
PF	200			
HRA	200			
GPAY	23434			
NPAY	40000			
TA	34			

Search

Enter the id to search :

3

OK Cancel

ID	NAME	DESIG	DEPT	BPAY	PF	HRA	ESI	DA	GPAY	NPAY	TA
2	Saistha	AP	MCA	30000	567	673	4556	45	40000	50000	345
3	Usha	AP	MCA	50000	500	600	600	700	55000	60000	600
4	Ajwadh	AP	MCA	60000	600	700	700	700	67000	70000	800
1	Arshiya	Lecture	MBA	5555	200	200	209	567	23434	40000	34

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 12

STUDENT DATABASE

AIM:

Create student database and develop a web application to Add, Update, View and Delete records from database using in Grid view control.

ALGORITHM:

Step 1: Open Visual Studio and create new project under C# (Asp.net Web Application)

Step 2: Design form with necessary controls.

Step 3: Insert the Data grid view control and connect the database using create new data source.

Step 4: To connect with database include `systems.data.oracleclient` namespace.

Step 5: Include coding for appropriate button.

Step 6: Save and run the application.

Step 7: Stop the program

STUDENT DATABASE

Webform.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="EmployeeDB._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```



```
<asp:LabelID="Label4"runat="server"Text="Semester"></asp:Label>  
&nbsp;&nbsp;&nbsp;
```

```
<asp:TextBoxID="tsemester"runat="server"></asp:TextBox>  
&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;
```


<asp:LabelID="Label5"runat="server"Text="Year"></asp:Label>

`<asp:TextBoxID="tyear"runat="server"></asp:TextBox>`


```
<asp:GridViewID="GridView1"runat="server"AutoGenerateColumns="False"  
DataSourceID="SqlDataSource1">
```

<Columns>

```
<asp:BoundFieldDataField="REG"HeaderText="REG"SortExpression="REG"/>
```

```
<asp:BoundField DataField="NAME" HeaderText="NAME" SortExpression="NAME"/>
```

```
<asp:BoundFieldDataField="COLLEGE"HeaderText="COLLEGE"  
SortExpression="COLLEGE"/>
```

```
<asp:BoundFieldDataField="COURSE"HeaderText="COURSE" SortExpression="COURSE"/>
```

```
<asp:BoundFieldDataField="SEMESTER"HeaderText="SEMESTER"
SortExpression="SEMESTER"/>
```

```
<asp:BoundFieldDataField="YEAR"HeaderText="YEAR"SortExpression="YEAR"/>
```

</Columns>

</asp:GridView>

112

</body>

</html>

CS CODING

using System;

using System.Collections;

using System.Configuration;

using System.Data;

using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;

using System.Windows.Forms;

using Microsoft.VisualBasic;

using System.Data.OracleClient;

namespace EmployeeDB

{

public partial class _Default : System.Web.UI.Page


```

{

protectedvoid Page_Load(object sender, EventArgs e)

{

OracleConnection con = newOracleConnection("Data Source=miit;User
ID=staff;Password=staff");

con.Open();

OracleCommand cmd = newOracleCommand(); cmd.CommandType =
CommandType.Text; cmd.Connection = con;

}

protectedvoid Add_Click(object sender, EventArgs e)

{

try

{

OracleConnection con = newOracleConnection("Data Source=miit;User
ID=staff;Password=staff");

con.Open();

OracleCommand cmd = newOracleCommand(); cmd.CommandType =
CommandType.Text; cmd.Connection = con;

cmd.CommandText = "INSERT INTO studentdb VALUES(" + treg.Text + "," +
tname.Text + "," + tcollege.Text + "," + tcourse.Text + "," + tsemester.Text + "," + tyear.Text
+ ")";

int issave = cmd.ExecuteNonQuery(); if (issave == 0)

{

```

114

```
MessageBox.Show("Record not inserted");
```

```
}
```

```
else
```

```
{
```

```
MessageBox.Show("Record Inserted");
```

```
//clear();
```

```
}
```

```
}
```

```
catch (Exception ex)
```

```
{
```

```
}
```

```
}
```

```
protectedvoid Delete_Click(object sender, EventArgs e)
```

```
{
```

```
string ip = Interaction.InputBox("Enter the id to delete :", "Search", "", 0, 0); try
```

```
{
```

```
OracleConnection con = newOracleConnection("Data Source=miit;User  
ID=staff;Password=staff");
```

```
con.Open();
```

```
string sql1 = " select * from studentdb where reg=" + ip; // C# OracleCommand cmd =  
newOracleCommand(sql1, con);
```

```
cmd.CommandType = CommandType.Text; OracleDataReader dr =
```

```

cmd.ExecuteReader();

        dr.Read(); if (dr.HasRows)

        {

string sql = " delete from studentdb where reg=" + ip; // C# OracleCommand cmd1 =
newOracleCommand();

        cmd1.CommandText = sql;
        cmd1.Connection = con;
        cmd1.ExecuteNonQuery();
        cmd1.Dispose();

        MessageBox.Show(" 1 RECORD DELETED click on Grid Display to check changes in
        GridView");

        }

else

        {

        MessageBox.Show("No such Record");

        }

        }

catch (Exception ex)

        {

        }

        }

protectedvoid Search_Click(object sender, EventArgs e)

```

```

    {

String ip = Interaction.InputBox("Enter the id to search :", "Search", "", 0, 0); try

    {

OracleConnection con = new OracleConnection("Data Source=miit;User
ID=staff;Password=staff");

        con.Open();

string sql = " select * from studentdb where reg=" + ip; // C# OracleCommand cmd =
new OracleCommand(sql, con);

        cmd.CommandType = CommandType.Text; OracleDataReader dr =
cmd.ExecuteReader();

        dr.Read();

        if (dr.HasRows)

            {

else

            treg.Text = dr["reg"].ToString(); tname.Text = dr["name"].ToString(); tcollege.Text =
dr["college"].ToString(); tcourse.Text = dr["course"].ToString(); tsemester.Text =
dr["semester"].ToString(); tyear.Text = dr["year"].ToString();

            }

        {

MessageBox.Show("No such Record");

            }

        }

catch (Exception ex)

```

```

        {
        }
    }

protected void Update_Click(object sender, EventArgs e)
{
    try
    {
        OracleConnection con = new OracleConnection("Data Source=miit;User
        ID=staff;Password=staff");

        con.Open();

        string sql = "update studentdb set name=" + tname.Text + ",college=" + tcollege.Text +
        ",course=" + tcourse.Text + ",semester=" + tsemester.Text + ",year=" + tyear.Text + "
        where reg=" + treg.Text + ";

        OracleCommand cmd = new OracleCommand(); cmd.CommandText = sql; cmd.Connection
        = con;

        int issave = cmd.ExecuteNonQuery(); if (issave == 0)
        {
            MessageBox.Show("Record not updated");
        }
    }
    else
    {
        MessageBox.Show("Record updated.. Click on GridView to see the Updated Record");
    }

    //clear();
}

```

```

        }
    }
catch (Exception ex)
{
}
}

protectedvoid Clear_Click(object sender, EventArgs e)
{
    treg.Text = "";
    tname.Text = "";
    tcollege.Text = "";
    tcourse.Text = "";
    tsemester.Text = "";
    tyear.Text = "";
}

protectedvoid Refresh_Click1(object sender, EventArgs e)
{
    Response.Redirect(Request.RawUrl);
}
}
}

```

Table Creation

Create table studentdb (reg number (5), name varchar2 (10), college varchar2 (10), course varchar2 (10), semester number (5), year number (5));

OUTPUT

Register No

Name

College

Course

Semester

Year

REG	NAME	COLLEGE	COURSE	SEMESTER	YEAR
28	Sultan	Measi	MCA	2	1
222	ajwadh	Measi	MCA	2	1
120	Veera	GSS	MCA	2	1
28	Saistha	Measi	MCA	2	1

Record Inserted

← → × ⓘ localhost:49525/Default.aspx

Register No

Name

College

Course

Semester

Year

REG	NAME	COLLEGE	COURSE	SEMESTER	YEAR
28	Sultan	Measi	MCA	2	1
222	ajwadh	Measi	MCA	2	1
120	Veera	GSS	MCA	2	1
12	Arshiya	Measi	MCA	2	1
28	Saistha	Measi	MCA	2	1

Search

Enter the id to search :

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 13

ONLINE LIBRARY FORM

AIM:

Create a web form for Online Library data entry and manipulate records using C#.NET.

ALGORITHM:

Step 1: Open Visual Studio and create new project under C# (Asp.net Web Application)

Step 2: Design form with necessary controls.

Step 3: Insert the Data grid view control and connect the database using create new datasource.

Step 4: To connect with database include systems.data.oracleclient namespace.

Step 5: Include coding for appropriate button.

Step 6: Save and run the application.

Step 7: Stop the program

Online Library Form

Webform.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"EnableEventValidation="false"CodeBehind
="WebForm1.aspx.cs" Inherits="WebApplication16.WebForm1"%>

<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<htmlxmlns="http://www.w3.org/1999/xhtml">

<headrunat="server">

<title>Untitled Page</title>
```



```

</head>

<body>

<formid="form1"runat="server">

<div>

<asp:LabelID="Label1"runat="server"Text="Book ID"></asp:Label>

<asp:DropDownListID="DropDownList1"runat="server"
DataSourceID="SqlDataSource1"DataTextField="BOOKID"
DataValueField="BOOKID"ontextchanged="DropDownList1_TextChanged">

</asp:DropDownList>

<asp:SqlDataSourceID="SqlDataSource1"runat="server"
ConnectionString="<%%$ ConnectionStrings:ConnectionString2 %>"
ProviderName="<%%$
ConnectionStrings:ConnectionString2.ProviderName %>"

SelectCommand="SELECT &quot;BOOKID&quot; FROM &quot;LIBBOOK&quot;,>

</asp:SqlDataSource>

<asp:ButtonID="BtnDisplay"runat="server"onclick="BtnDisplay_Click"
Text="display book name"/>

<br/>

<br/>

<br/>

<asp:LabelID="Label2"runat="server"Text="Book Name"></asp:Label>

<asp:TextBoxID="txtbookname"runat="server"

></asp:TextBox>

```


CS CODING

```
using System;

using System.Collections;

using System.Configuration;

using System.Data;

using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;

using System.Data.OracleClient;

using Microsoft.VisualBasic;

using System.Windows.Forms;

namespace WebApplication16

{

    public partial class WebForm1 : System.Web.UI.Page

    {

        protected void Page_Load(object sender, EventArgs e)
```

```

    {
        txtDate.Text = System.DateTime.Now.ToShortDateString();
    }

protectedvoid DropDownList1_TextChanged(object sender, EventArgs e)
    {
        }

protectedvoid BtnDisplay_Click(object sender, EventArgs e)
    {
        string str = "User Id=staff;Password=staff;Data Source=miit";

        OracleConnection con =
            newOracleConnection();
            con.ConnectionString = str;

            con.Open();
        OracleDataReader
        myReader = null;

        string str1 = "select * from libbook where bookid=" +
        DropDownList1.Text; OracleCommand myCommand =
        newOracleCommand(str1, con);

        myReader =
        myCommand.ExecuteReader(); while
        (myReader.Read())
        {
            txtbookname.Text = myReader["bookname"].ToString();
        }
    }

```

```

    }

protectedvoid Button1_Click(object sender, EventArgs e)

    {

string str = "User Id=staff;Password=staff;Data
Source=miit"; OracleConnection con =
newOracleConnection();

        con.ConnectionString =
        str; con.Open();

OracleCommand
        cmd=newOracleCommand();
        cmd.CommandType =
        CommandType.Text;
        cmd.Connection = con;

                cmd.CommandText = "Insert into libissue values(" + DropDownList1.Text +
                " ,
+ txtbookname.Text + " , " + DropDownList2.Text + " , '02-feb-2021')";

//Calendar1.SelectedDate + " ");

int issave =
cmd.ExecuteNonQuery(); if
(issave == 0)

        {

MessageBox.Show("Record notInserted");

        }

else

        {

```

```

MessageBox.Show("Record Inserted");

    }

        con.Close();

    }

protectedvoid Delete_Click(object sender, EventArgs e)

    {

string ip = Interaction.InputBox("Enter the id to delete :", "Search",
"", 0, 0); try

    {

OracleConnection con = newOracleConnection("Data Source=miit;User
ID=staff;Password=staff");

        con.Open();

string sql1 = " select * from libissue where bookid=" +
ip; // C# OracleCommand cmd =
newOracleCommand(sql1, con);

        cmd.CommandType = CommandType.Text;
OracleDataReader dr = cmd.ExecuteReader();

dr.Read(); if (dr.HasRows)

    {

string sql = " delete from libissue where bookid=" + ip; //
C# OracleCommand cmd1 = newOracleCommand();


        cmd1.CommandText = sql;
        cmd1.Connection = con;
        cmd1.ExecuteNonQuery();
        cmd1.Dispose();

MessageBox.Show(" RECORD DELETED");

```

```
    }  
else  
{  
    MessageBox.Show("No such Record");  
}  
}  
catch (Exception ex)  
{  
}  
}  
}  
}
```

OUTPUT

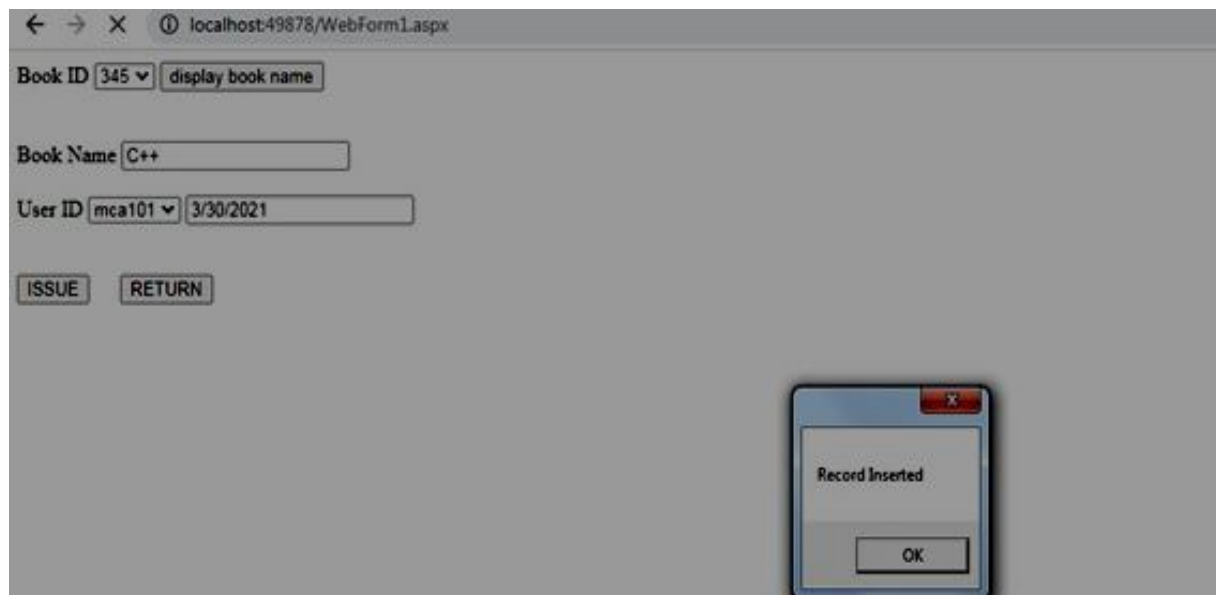

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 14

DISPLAYING XML CONTENT

AIM:

Program to design a web page to display the XML content.

ALGORITHM:

Step1: Open Visual Studio

Step 2: Search for web form in the search bar

Step 3: Then click on select and click empty form and press ok

Step 4: In the top left you will see your created file name, right click on that and select add item and select web form

Step 5: Web form will be open, after that design your form by dragging Gridview and place it in the design page

Step 6: Create an xml file using filename.xml inside that file, type necessary coding of our own

Step 7: Now click on the webform.aspx.cs file in the visual studio and give necessary coding and correct path of xml file we have created already

Step 8: Run the program

Step 9: Show the output.

Web Page to Display The Xml Content

Default.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="displayxml._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```



```
<htmlxmlns="http://www.w3.org/1999/xhtml">

<headrunat="server">

<linkrel="stylesheet"href="Rule.css">

<title>Untitled Page</title>

</head>

<body>

<formid="form1"runat="server">

<div>

<heading>

    Welcome To MEASI LIBRARY

</heading>

<br/>

<br/>

<asp:GridViewID="GridView1"runat="server">

</asp:GridView>

</div>

</form>

</body>

</html>

Rule.css

heading { color: green;
```

130

```
font-size : 40px;  
  
background-color : lightblue;  
  
}
```

Default.aspx.cs

```
using System;  
  
using System.Collections;  
  
using System.Configuration;  
  
using System.Data;  
  
using System.Linq;  
  
using System.Web;  
  
using System.Web.Security;  
  
using System.Web.UI;  
  
using System.Web.UI.HtmlControls;  
  
using System.Web.UI.WebControls;  
  
using System.Web.UI.WebControls.WebParts;  
  
using System.Xml.Linq;  
  
namespace displayxml  
{  
  
    public partial class _Default : System.Web.UI.Page  
    {  
  
        protected void Page_Load(object sender, EventArgs e)
```

```

    {
DataSet ds = newDataSet();
        ds.ReadXml(Server.MapPath("~/
XMLFile1.xml"));
        GridView1.DataSource=ds;

        GridView1.DataBind ();

    }
}
}

```

XMLFile1.xml

```

<?xmlversion="1.0"encoding="utf-8" ?>

<books>

<book>

<Title>Title -: Web Based Application Programming</Title>

<Author>Author -: Chrisbates</Author>

<Publisher>Publisher -: Wiley</Publisher>

<Edition>Edition -: 3</Edition>

<Price> Price -: 300</Price>

</book>

<book>

<Title>Title -: Internet world-wide-web</Title>

<Author>Author -: Ditel</Author>

<Publisher>Publisher -: Pearson</Publisher>

<Edition>Edition -: 3</Edition>

<Price>Price -: 400</Price>

```

</book>

<book>

<Title>Title -: Computer Networks</Title>

<Author>Author -: Foruouzan</Author>

<Publisher>Publisher -: Mc Graw Hill</Publisher>

<Edition>Edition -: 5</Edition>

<Price>Price -: 700</Price>

</book>

<book>

<Title>Title -: DBMS Concepts</Title>

<Author>Author -: Navath</Author>

<Publisher>Publisher -: Oxford</Publisher>

<Edition>Edition -: 5</Edition>

<Price>Price -: 600</Price>

</book>

<book>

<Title>Title -: Linux Programming</Title>

<Author>Author -: Subhitab Das</Author>

<Publisher>Publisher -: Oxford</Publisher>

<Edition>Edition -: 8</Edition>



<Price>Price -: 300</Price>

</book>

</books>

OUTPUT

Design: Default.aspx

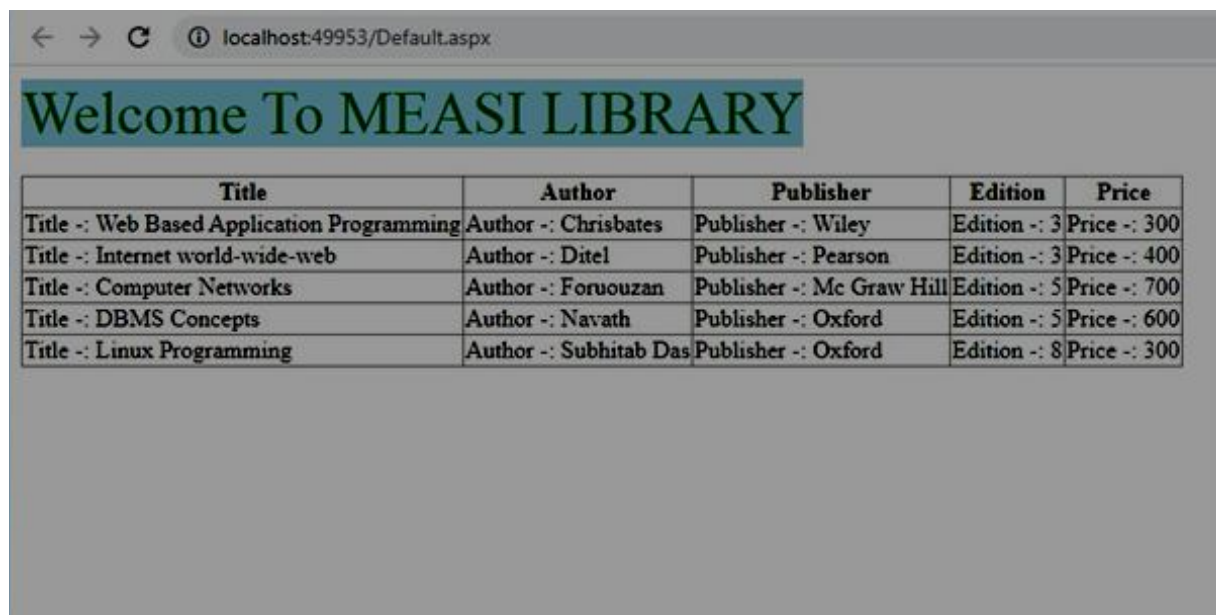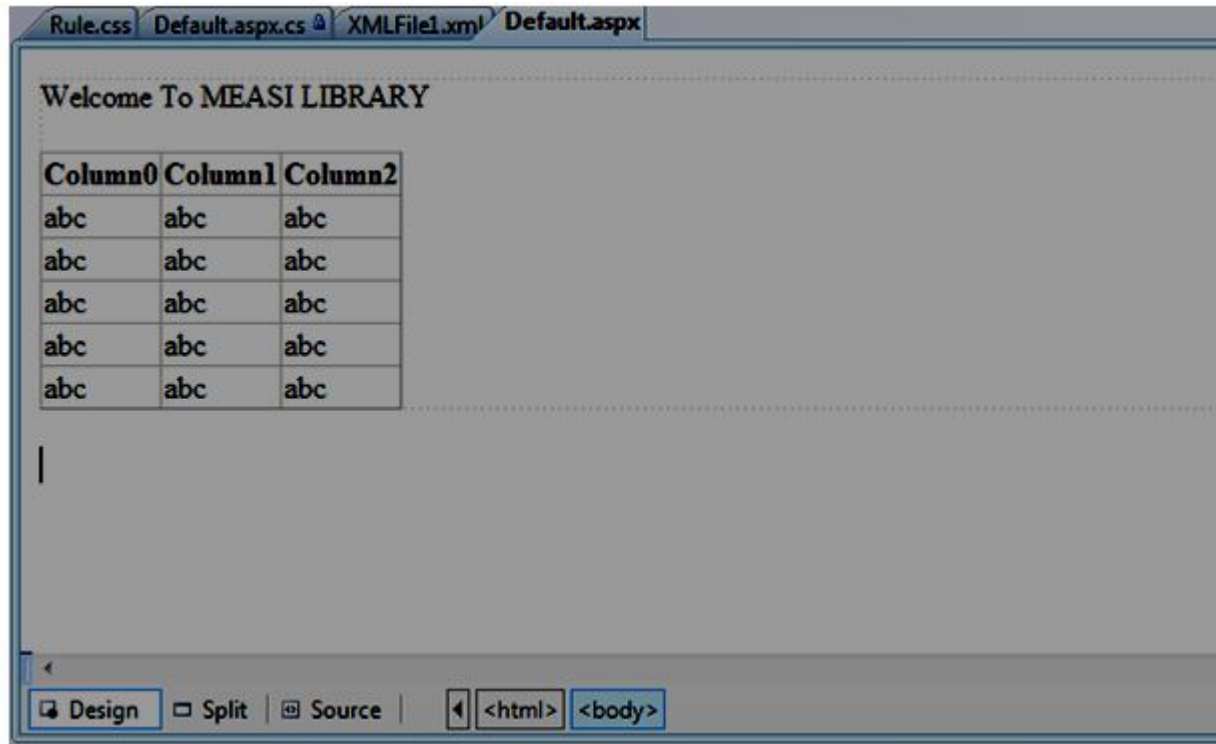

Result:

Thus, the above application has been implemented and executed successfully.

LESSON: 15**WEB APPLICATION TO DEMONSTRATE
AUTHENTICATION AND AUTHORIZATION****AIM:**

Program to design a Web Application to demonstrate authentication and authorization

ALGORITHM:

Step1: Open Visual Studio

Step 2: Search for web form in the search bar

Step 3: Then click on select and click empty form and press ok

Step 4: In the top left you will see your created file name, right click on that and select add item and select web form

Step 5: Web form will be open, after that design your form by creating the login page.

Step 6: Now click on the webform.aspx.cs file in the visual studio and give coding to authenticate the form.

Step 7: Now click on the web.config file in the visual studio and change the configuration setting by adding the authentication and authorization mode

Step 8: Now add another web form as register.aspx to design the web page if the user need to register for first time

Step 9: Now click on the web.config file in the visual studio and give coding to authorize the register form

Step 8: Run the program

Step 9: Show the output.

Web Application To Demonstrate Authentication And Authorization

Default.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="Default.aspx.cs"Inherits="form_authentication._Default"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title>Untitled Page</title>
```

```
</head>
```

```
<body>
```

```
<formid="form1"runat="server">
```

```
<divstyle="font-family:Arial">
```

```
<tablestyle="border: 1pxsolidblack">
```

```
<tr>
```

```
<tdcolspan="2">
```

```
<b>Login</b>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>
```

136

</td>

<td>

User Name

:<asp:TextBoxID="txtUserName"runat="server">

</asp:TextBox>

</td>

</tr>

<tr>

<td>

</td>

<td>

Password

:<asp:TextBoxID="txtPassword"TextMode="Password"runat="server">

</asp:TextBox>

</td>

</tr>

<tr>

<td>

<asp:CheckBoxID="chkBoxRememberMe"Font-Size="Small"Text="Remember
Me"runat="server"/>

</td>

<td>


```
<asp:ButtonID="btnLogin"runat="server"Text="Login"
onclick="btnLogin_Click"/>

</td>

</tr>

<tr>

<tdcolspan="2">

<asp:LabelID="lblMessage"runat="server"ForeColor="Red"/>

</td>

</tr>

</table>

<br/>

<a href="Registration/Register.aspx">Click here to
register</a> if you do not have a user name and
password.

</div>

</form>

</body>

</html>
```

Default.aspx.cs

```
using System;

using System.Collections;

using System.Configuration;

using System.Data;
```

138

```
using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.HtmlControls;

using System.Web.UI.WebControls;

using System.Web.UI.WebControls.WebParts;

using System.Xml.Linq;

namespace form_authentication
{

    public partial class _Default : System.Web.UI.Page

    {

        protected void Page_Load(object sender, EventArgs e)

        {

        }

        protected void btnLogin_Click(object sender, EventArgs e)

        {

            if (FormsAuthentication.Authenticate(txtUserName.Text, txtPassword.Text))

            {

                // Create the authentication cookie and redirect the user to
                welcome page
                FormsAuthentication.RedirectFromLoginPage(txtUserName.Text,
```

```

chkBoxRememberMe.Checked);

        }

else

{

    lblMessage.Text = "Invalid UserName and/or password";

}

}}

```

WebForm1.aspx

```

<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="WebForm1.aspx.cs"Inherits=
"form_authentication.WebForm1"%>

<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<htmlxmlns="http://www.w3.org/1999/xhtml">

<headrunat="server">

<title>Untitled Page</title>

</head>

<body>

<formid="form1"runat="server">

<div>

<h1>Welcome User</h1>

</div>

</form>

```

```
</body>
```

```
</html>
```

Web.config

```
<?xmlversion="1.0"?>
```

```
<configuration>
```

```
<system.web>
```

```
<compilationdebug="true"/>
```

```
<authenticationmode="Forms">
```

```
<formsloginUrl="Default.aspx"timeout="30"
```

```
defaultUrl="WebForm1.aspx"protection="All">
```

```
<credentialspasswordFormat="Clear">
```

```
<username="miit"password="miit"/>
```

```
<username="measi"password="measi"/>
```

```
</credentials>
```

```
</forms>
```

```
</authentication>
```

```
<authorization>
```

```
<denyusers="?"/>
```

```
</authorization>
```

```
</system.web>
```

```
</configuration>
```

Register.aspx

```
<%@PageLanguage="C#"AutoEventWireup="true"CodeBehind="register.aspx.cs"Inherits="for
m_authentication.Registration.register"%>
```

```
<!DOCTYPEhtmlPUBLIC"-//W3C//DTD XHTML 1.0
```

```
Transitional//EN""http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<htmlxmlns="http://www.w3.org/1999/xhtml">
```

```
<headrunat="server">
```

```
<title>Untitled Page</title>
```

```
</head>
```

```
<body>
```

```
<formid="form1"runat="server">
```

```
<divstyle="font-family:Arial">
```

```
<tablestyle="border: 1pxsolidblack">
```

```
<tr>
```

```
<tdcolspan="2">
```

```
<b>User Registration</b>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>
```

```
</td>
```

```
<td>
```

User Name

```
:<asp:TextBoxID="txtUserName"runat="server">
```

```
</asp:TextBox>
```

```
<asp:RequiredFieldValidatorID="RequiredFieldValidatorusername"
```

```
runat="server"ErrorMessage="User Name required"Text="*"
```

```
ControlToValidate="txtUserName"ForeColor="Red">
```

```
</asp:RequiredFieldValidator>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>
```

```
</td>
```

```
<td>
```

Password

```
:<asp:TextBoxID="txtPassword"TextMode="Password"runat="server">
```

```
</asp:TextBox>
```

```
<asp:RequiredFieldValidatorID="RequiredFieldValidatorPassword"
```

```
runat="server"ErrorMessage="Password required"Text="*"
```

```
ControlToValidate="txtPassword"ForeColor="Red">
```

```
</asp:RequiredFieldValidator>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>
```

</td>

<td>

Confirm Password

```
:<asp:TextBoxID="txtConfirmPassword"TextMode="Password"runat="server">
```

```
</asp:TextBox>
```

```
<asp:RequiredFieldValidatorID="RequiredFieldValidatorConfirmPassword"
runat="server"ErrorMessage="Confirm Password required"Text="*"
```

```
ControlToValidate="txtConfirmPassword"ForeColor="Red" Display="Dynamic"></
asp:RequiredFieldValidator>
```

```
<asp:CompareValidatorID="CompareValidatorPassword"runat="server"
ErrorMessage="Password and Confirm Password must match"
ControlToValidate="txtConfirmPassword"ForeColor="Red"
ControlToCompare="txtPassword"Display="Dynamic"
Type="String"Operator="Equal"Text="*">
```

```
</asp:CompareValidator>
```

</td>

</tr>

<tr>

<td>

</td>

<td>

Email

```
:<asp:TextBoxID="txtEmail"runat="server">
```

```
</asp:TextBox>
```

```
<asp:RequiredFieldValidatorID="RequiredFieldValidatorEmail"
```

```
runat="server"ErrorMessage="Email required"Text="**"
```

```
ControlToValidate="txtEmail"ForeColor="Red" Display="Dynamic"></
```

```
asp:RequiredFieldValidator>
```

```
<asp:RegularExpressionValidatorID="RegularExpressionValidatorEmail"
```

```
runat="server"ErrorMessage="Invalid Email"ControlToValidate="txtEmail"
```

```
ForeColor="Red"Display="Dynamic"Text="**" ValidationExpression="\w+([-+.']\w+)*@\w+([-
```

```
.]\w+)*\.\w+([-.\]\w+)*">
```

```
</asp:RegularExpressionValidator>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>
```

```
</td>
```

```
<td>
```

```
<asp:ButtonID="btnRegister"runat="server"Text="Register"
```

```
onclick="btnRegister_Click"/>
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<tdcolspan="2">
```



```
<asp:LabelID="lblMessage"runat="server"ForeColor="Red">

</asp:Label>

</td>

</tr>

<tr>

<tdcolspan="2">

<asp:ValidationSummaryID="ValidationSummary1"ForeColor="Red"runat="server"/>

</td>

</tr>

</table>

</div>

</div>

</form>

</body>

</html>
```

Web.config

```
<?xmlversion="1.0"?>

<configuration>

<appSettings/>

<connectionStrings/>

<system.web>
```

```
<authorization>  
  
<allowusers="*" />  
  
</authorization>  
  
</system.web>  
  
</configuration>
```



Register.aspx.cs


```
using System;  
  
using System.Collections;  
  
using System.Configuration;  
  
using System.Data;  
  
using System.Linq;  
  
using System.Web;  
  
using System.Web.Security;  
  
using System.Web.UI;  
  
using System.Web.UI.HtmlControls;  
  
using System.Web.UI.WebControls;  
  
using System.Web.UI.WebControls.WebParts;  
  
using System.Xml.Linq;  
  
using System.Windows.Forms;  
  
namespace form_authentication.Registration  
{
```

```
public partial class register : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
    }

    protected void btnRegister_Click(object sender, EventArgs e)
    {
        MessageBox.Show("Data Entered");
    }
}
```

OUTPUT

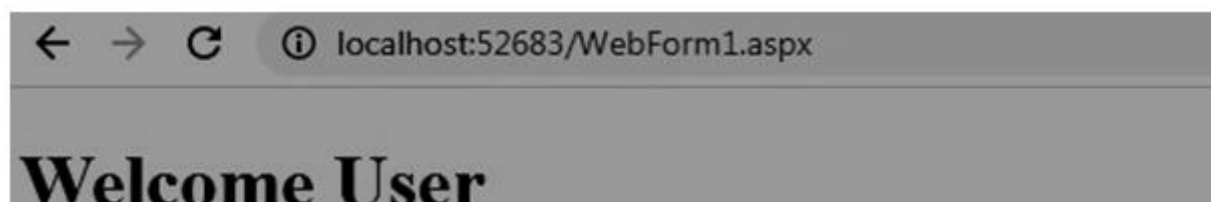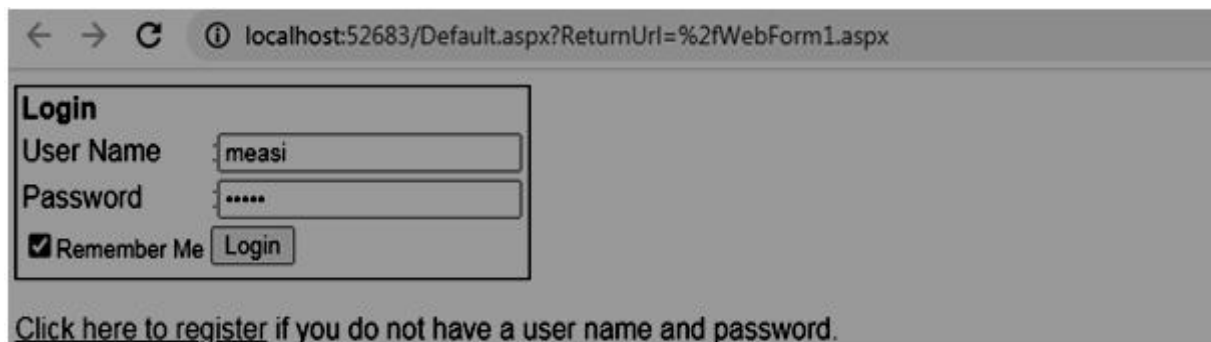

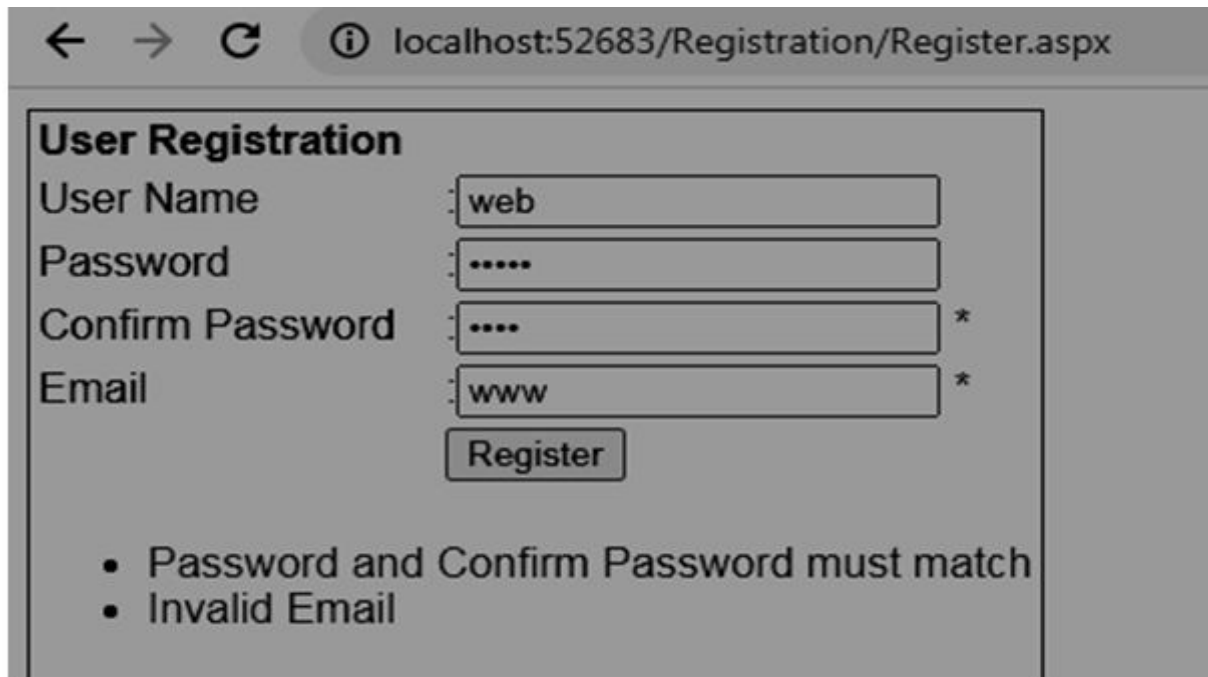


The screenshot shows a web browser window with the address bar displaying `localhost:52683/Registration/Register.aspx`. The page contains a "User Registration" form with the following fields and values:

Field	Value	Validation
User Name	web	
Password		
Confirm Password		*
Email	www	*

Below the form is a "Register" button. At the bottom of the form, there are two bullet points indicating validation errors:

- Password and Confirm Password must match
- Invalid Email

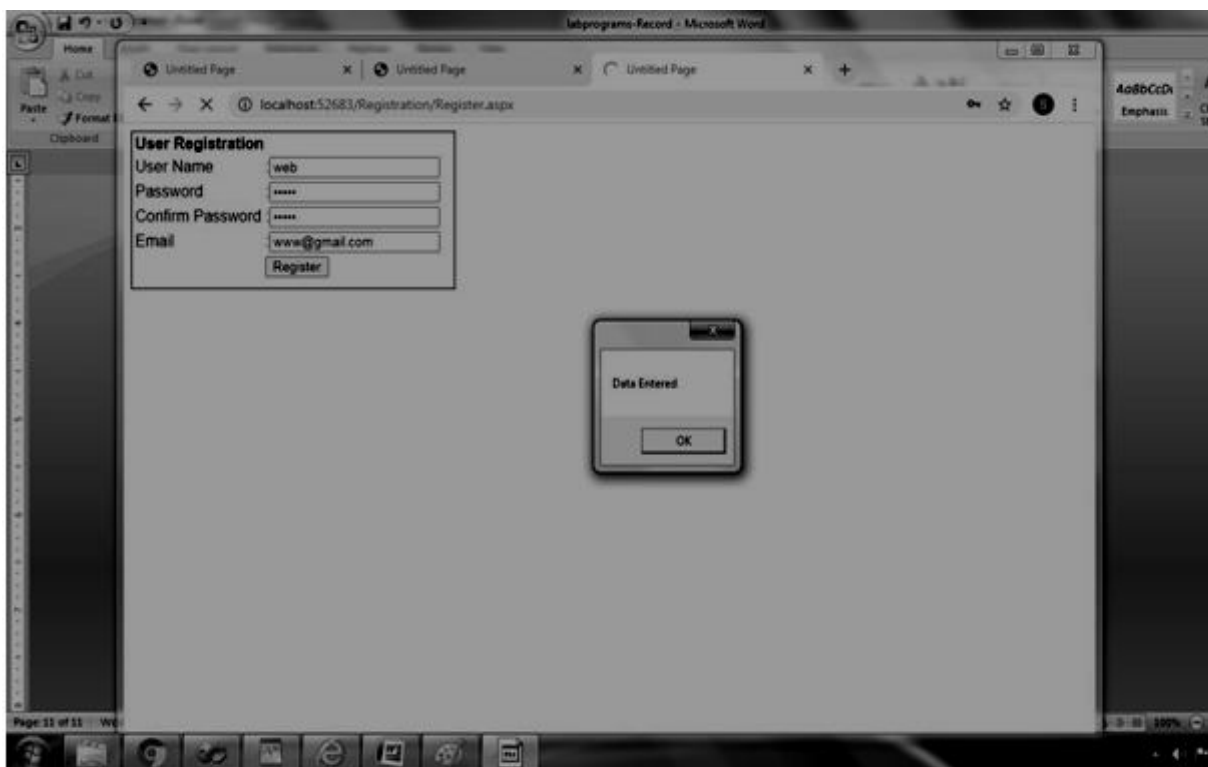**Result:**

Thus, the above application has been implemented and executed successfully.