

CLASS -10 (2026-27)
INPUT IN JAVA
CHAPTER 5

Assignments:-

A. Tick (✓) the correct answer

Q1. Which of the following types of error will give the following code?

```
for(int i=1; i>10; i++)
```

- a. Syntax
- b. Runtime
- c. Logical
- d. None of these

Answer: c. Logical

Q2. The scanner `sc = new Scanner(System.in)` code will give a/an _____ error.

- a. Syntax
- b. Runtime
- c. Logical
- d. None of these

Answer: a. Syntax (*missing semicolon*)

Q3. _____ are non-executable statements used to explain the code.


- a. Comments
- b. Errors
- c. Logical
- d. Keywords

Answer: a. Comments

Q4. Which of the following is NOT used to write a comment?

- a. `/**`
- b. `//`
- c. `/`
- d. `/*`

Answer: c. `/`



Q5. Which of the following is used to input a float value using Scanner class?

- a. next()
- b. nextInt()
- c. nextDouble()
- d. nextFloat()

Answer: d. nextFloat()

Q6. Which of the following is the correct way to initialize an integer variable x with value 10 in Java?

- a. int x = 10;
- b. int x := 10;
- c. let x = 10;
- d. x = 10;

Answer: a. int x = 10;

Q7. Which of the following methods in Java is used to receive command-line arguments?

- a. public static void start(int[] args)
- b. public static void start(String args)
- c. public static void main(int args)
- d. public static void main(String[] args)

Answer: d. public static void main(String[] args)

Q8. Which package do you need to import to use the Scanner class in Java?

- a. java.io
- b. java.util
- c. java.lang
- d. java.net

Answer: b. java.util

Q9. What is the output of the following code if input is: "25 4.5 Hello"

```
Scanner sc = new Scanner(System.in);  
int a = sc.nextInt();  
double b = sc.nextDouble();  
String c = sc.next();
```

Answer:

a = 25
b = 4.5
c = Hello

B. Fill in the blanks

Q1. Forgetting to put a semicolon at the end of a statement is a type of _____ error.

Answer: Syntax

Q2. An _____ is a situation in which the execution of a program stops abnormally.

Answer: Runtime error

Q3. _____ errors are also called semantic errors.

Answer: Logical

Q4. In Java, the _____ class is commonly used to read input from the user, and it includes methods such as _____ and _____ for reading different types of data.

Answer:
Scanner, nextInt(), nextDouble()

Q5. We use _____ arguments to input values in String format in the main() method.

Answer: Command-line

C. Answer the following questions

Q1. What is the difference between multiline comments and documentation comments?

Answer:

- **Multiline comment:** Used to comment multiple lines → `/* ... */`
- **Documentation comment:** Used for documentation of classes/methods → `/** ... */`

Q2. Write the syntax to input a short type value using Scanner class.

Answer:

```
short x = sc.nextShort();
```

Q3. What are the three types of errors?

Answer:

1. Syntax error
2. Runtime error
3. Logical error

Q4. Define error. Give an example.

Answer:

An error is a mistake in a program that causes incorrect or abnormal execution.

Example: Missing semicolon → Syntax error

Q5. Write the difference between next() and nextLine().

Answer:

- **next():** Reads only one word
- **nextLine():** Reads full line including spaces

D. Assertion and Reasoning based questions

Q1.

Assertion: Comments in Java are compiled into bytecode

Reason: Comments are included for explanation

Answer: c. A is false, but R is true

Q2.

Assertion: java.lang package is automatically imported

Reason: It contains fundamental classes

Answer: a. Both true and correct

Q3.

Assertion: Scanner class is in java.util package

Reason: It must be imported

Answer: a. Both true and correct

Q4.


Assertion: Comments do not affect execution

Reason: Comments are ignored by compiler

Answer: a. Both true and correct

E. Case-based questions

Q1. What type of comment is Jake using and what is its purpose?

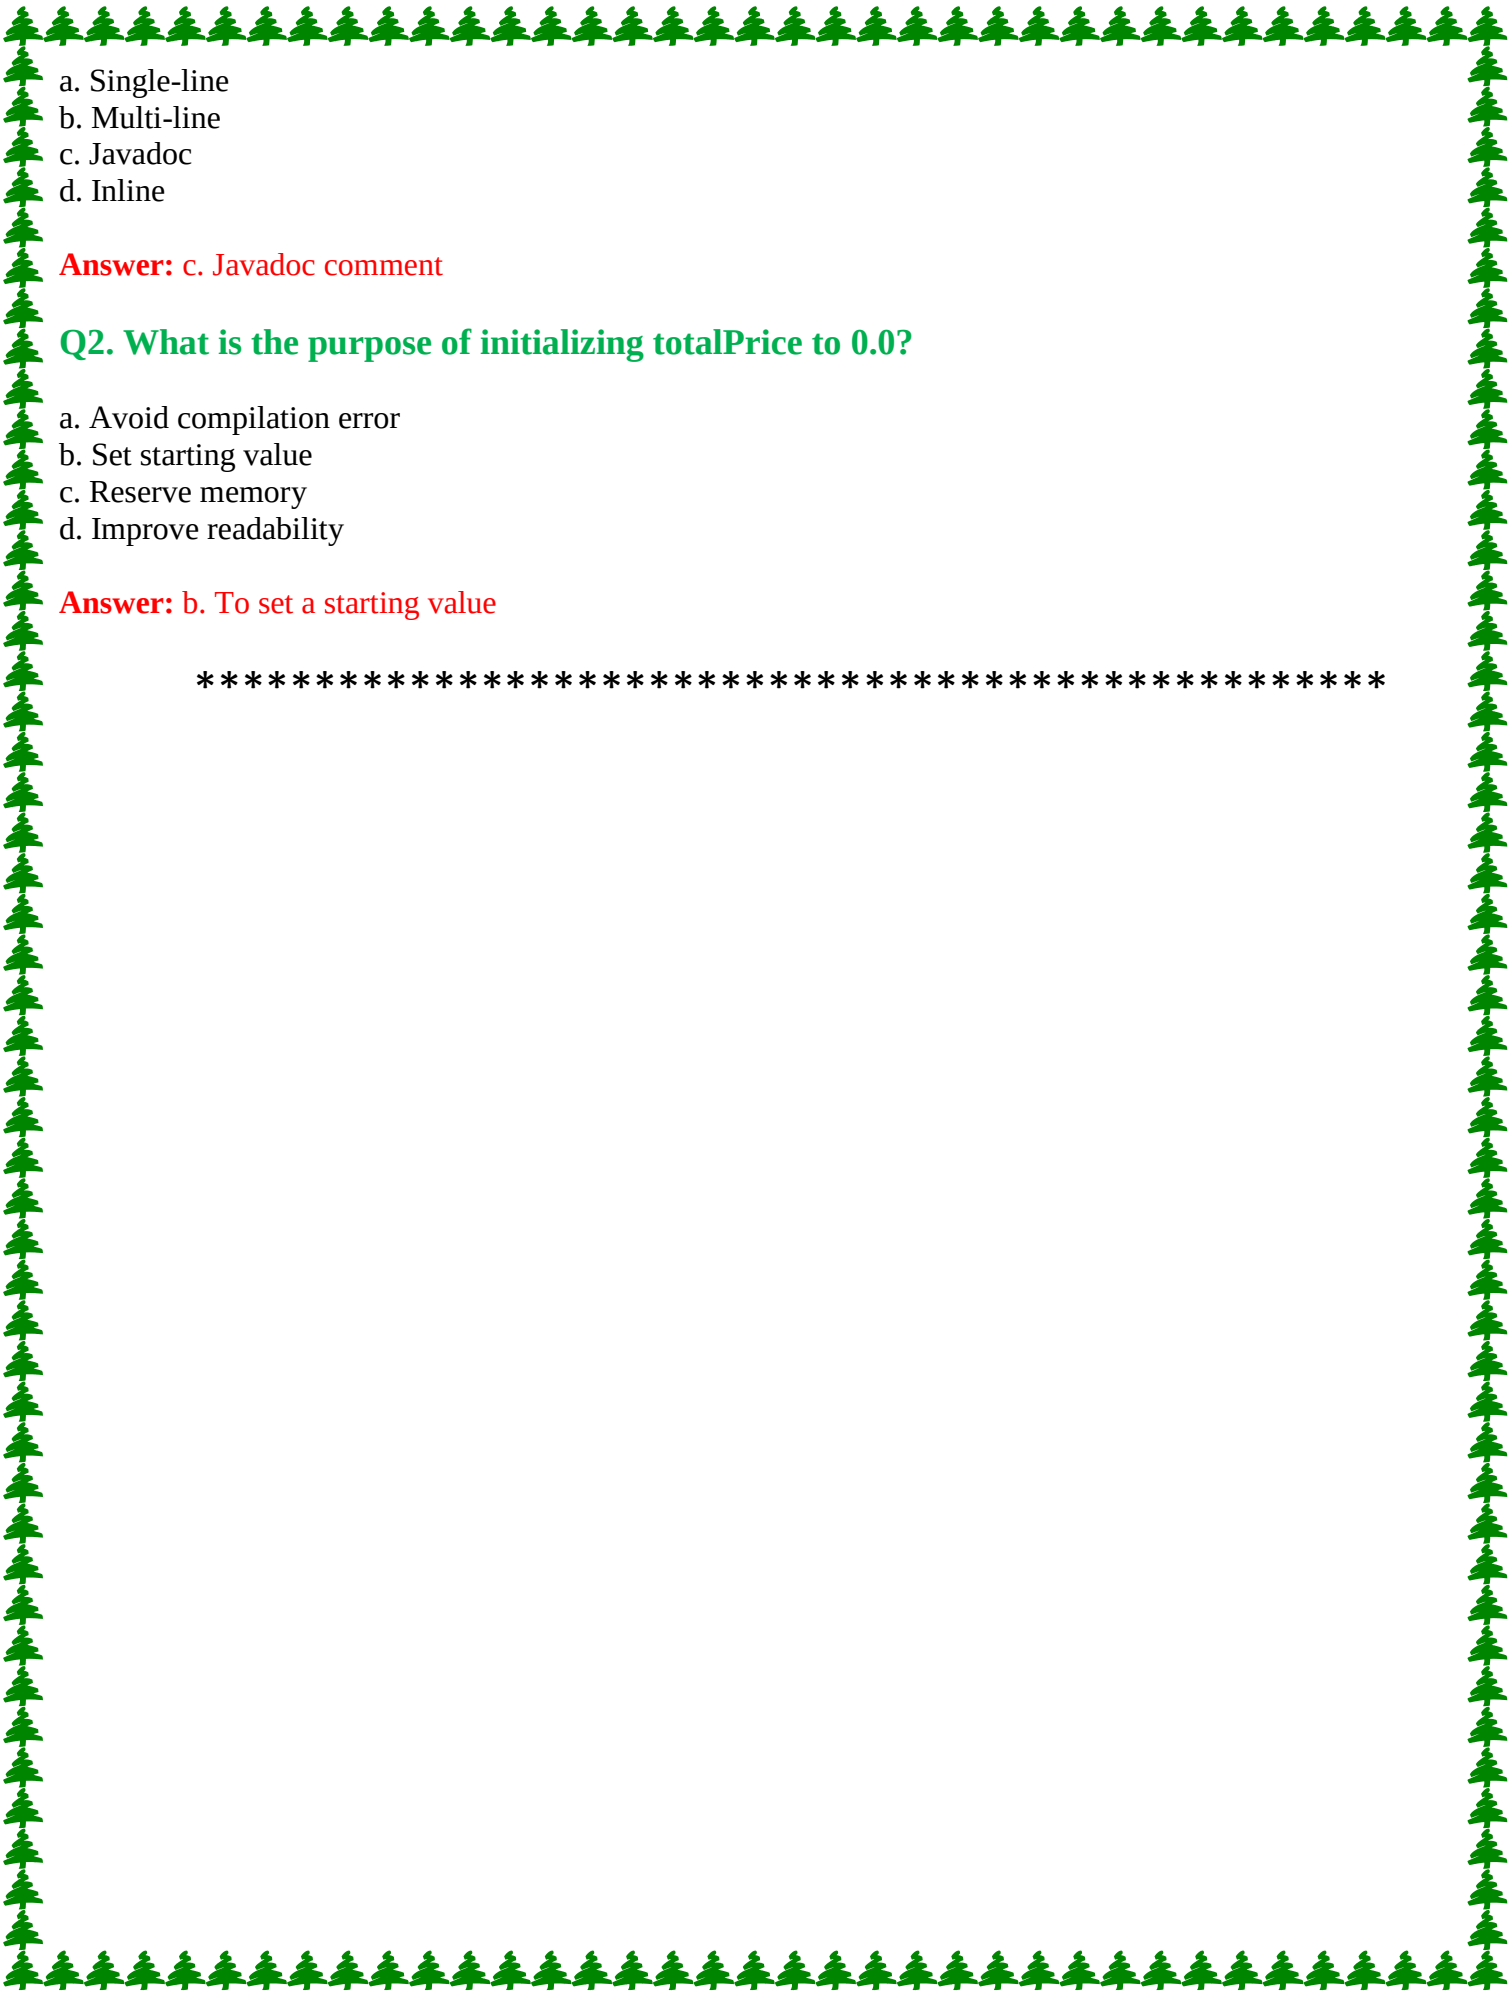- 
- a. Single-line
 - b. Multi-line
 - c. Javadoc
 - d. Inline

Answer: c. Javadoc comment

Q2. What is the purpose of initializing totalPrice to 0.0?

- a. Avoid compilation error
- b. Set starting value
- c. Reserve memory
- d. Improve readability

Answer: b. To set a starting value
