

Start: Mar 23, 9:34:21.673 AM **Duration: 17.694s** End: Mar 23, 9:34:39.367 AM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 106 12 53 159 40 50 60 40 50 60 40 50 60 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 100

FEATURES SUMMARY -- 2 --

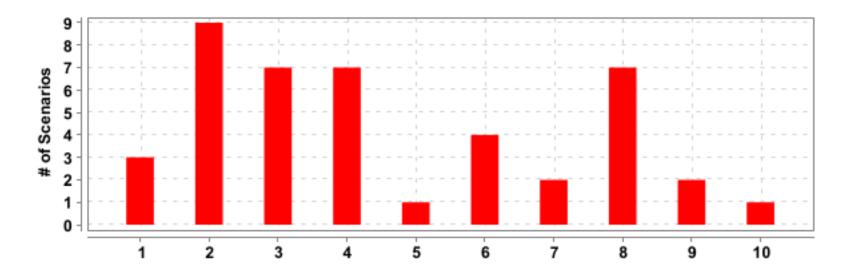


| # | Feature Name | T | P | F | S | Duration |
|----|--|---|---|---|---|----------|
| 1 | Assignment functions performed by User | 3 | 0 | 3 | 0 | 2.010 s |
| 2 | Assignment functions performed by Admin | 9 | 0 | 9 | 0 | 0.153 s |
| 3 | Different Batches function Performed by Admin | 7 | 0 | 7 | 0 | 2.211 s |
| 4 | View classs by Admin | 7 | 0 | 7 | 0 | 5.196 s |
| 5 | Launch Web Application | 1 | 0 | 1 | 0 | 0.923 s |
| 6 | Login functions(Admin/User) | 4 | 0 | 4 | 0 | 2.730 s |
| 7 | <u>Pagination</u> | 2 | 0 | 2 | 0 | 0.013 s |
| 8 | Different Program functions Performed by Admin | 7 | 0 | 7 | 0 | 0.066 s |
| 9 | Upload recordings and resources by Admin | 2 | 0 | 2 | 0 | 1.367 s |
| 10 | Submit(send) notifcation by Admin | 1 | 0 | 1 | 0 | 0.710 s |

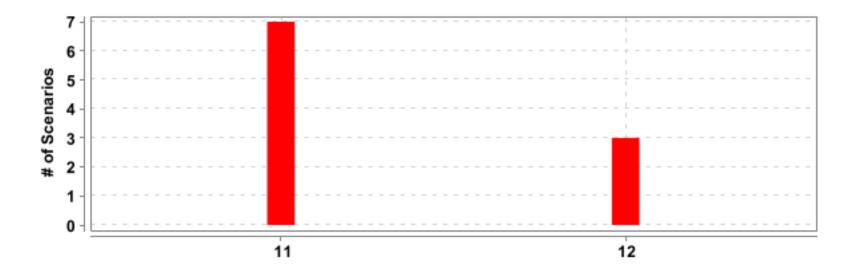


| # | Feature Name | T | P | F | S | Duration |
|----|--|---|---|---|---|----------|
| 11 | LMS Admin User page | 7 | 0 | 7 | 0 | 0.065 s |
| 12 | View the attendance details of the students by Admin | 3 | 0 | 3 | 0 | 2.102 s |

SCENARIOS SUMMARY -- 4 -

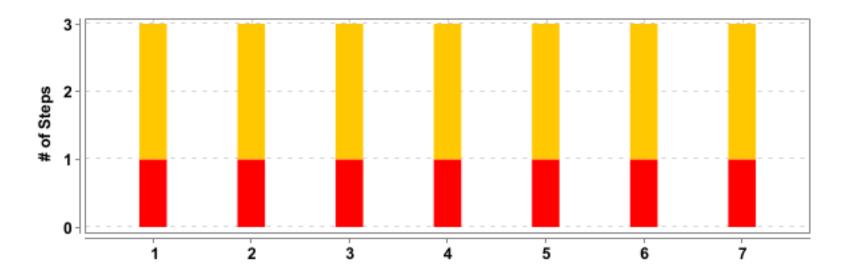


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|----------|
| 1 | Assignment functions performed by User | Check whether user can submit assignment | 3 | 0 | 1 | 2 | 1.901 s |
| 2 | Assignment functions performed by User | Check whether user can edit a particular assignment | 3 | 0 | 1 | 2 | 0.003 s |
| 3 | Assignment functions performed by User | Check whether user can delete a particular assignment | 3 | 0 | 1 | 2 | 0.004 s |
| 4 | Assignment functions performed by Admin | Check whether Newly Added assignments details are visible to Admin | 3 | 0 | 1 | 2 | 0.003 s |
| 5 | Assignment functions performed by Admin | Check whether Edited assignments details are visible to Admin | 3 | 0 | 1 | 2 | 0.002 s |
| 6 | Assignment functions performed by Admin | Check whether Deleted assignments details are removed from Admin view | 3 | 0 | 1 | 2 | 0.004 s |
| 7 | Assignment functions performed by Admin | Check whether Admin can able to see all existing assignment details | 3 | 0 | 1 | 2 | 0.001 s |

SCENARIOS SUMMARY -- 5 --

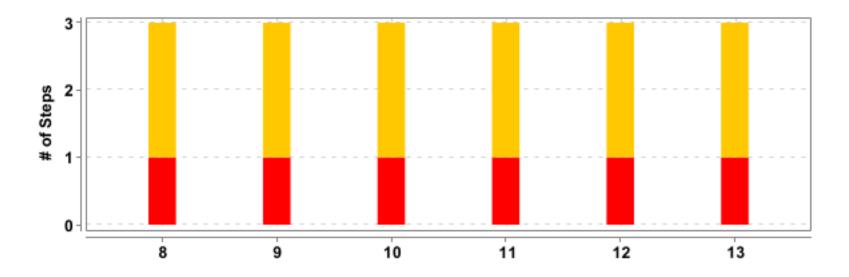


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---|--|---|---|---|---|----------|
| 8 | Assignment functions performed by Admin | Check whether Admin can add New assignments for particular Batch | 3 | 0 | 1 | 2 | 0.002 s |
| 9 | Assignment functions performed by Admin | Check whether Admin can Edit existing assignments for particular Batch | 3 | 0 | 1 | 2 | 0.005 s |
| 10 | Assignment functions performed by Admin | Check whether Admin can Delete existing assignments for particular Batch | 3 | 0 | 1 | 2 | 0.003 s |
| 11 | Assignment functions performed by Admin | Check whether Admin can manage students submission by selecting Make Grade Visible | 3 | 0 | 1 | 2 | 0.002 s |
| 12 | Assignment functions performed by Admin | Check whether Admin can manage students submission by unselecting Make Grade Viisble | 3 | 0 | 1 | 2 | 0.002 s |
| 13 | Different Batches function Performed by Admin | Check whetherNewly Added batches details are visible to <u>Admin</u> | 3 | 0 | 1 | 2 | 0.001 s |

SCENARIOS SUMMARY -- 6 --

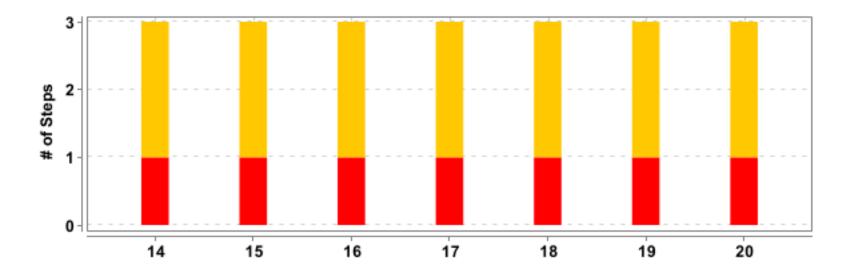


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---|--|---|---|---|---|----------|
| 14 | Different Batches function Performed by Admin | Check whether Edited batches details arevisible to Admin | 3 | 0 | 1 | 2 | 0.002 s |
| 15 | Different Batches function Performed by Admin | Check whether Deleted batches details are removed from Admin view | 3 | 0 | 1 | 2 | 0.002 s |
| 16 | Different Batches function Performed by Admin | Check whether Admin can able to see all existing batches details | 3 | 0 | 1 | 2 | 0.003 s |
| 17 | Different Batches function Performed by Admin | Check whether Admin can add batch to batches list | 3 | 0 | 1 | 2 | 0.714 s |
| 18 | Different Batches function Performed by Admin | Check whether Admin can edit particular batch in batches list | 3 | 0 | 1 | 2 | 0.713 s |
| 19 | Different Batches function Performed by Admin | Check whether Admin can delete particular batch in batches list | 3 | 0 | 1 | 2 | 0.713 s |
| 20 | View classs by Admin | Check whether Newly Added Class details are visible to <u>Admin</u> | 3 | 0 | 1 | 2 | 0.726 s |

SCENARIOS SUMMARY -- 7 -

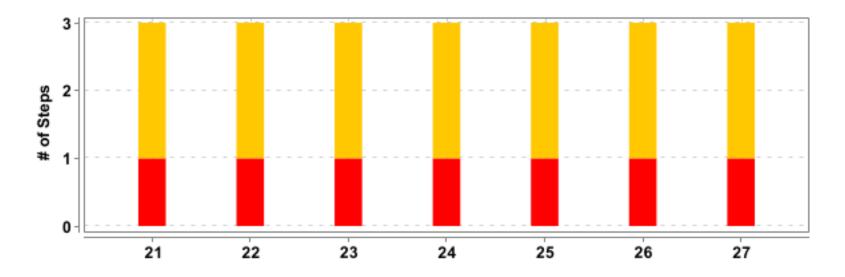


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------|--|---|---|---|---|----------|
| 21 | View classs by Admin | Check whether Edited classes details are visible to Admin | 3 | 0 | 1 | 2 | 0.707 s |
| 22 | View classs by Admin | Check whether Deleted classes is removed from Admin view | 3 | 0 | 1 | 2 | 0.733 s |
| 23 | View classs by Admin | Check whether Admin is able to see all existing classes details | 3 | 0 | 1 | 2 | 0.795 s |
| 24 | <u>View classs by Admin</u> | Check whether Admin can add New Class for particular Batch | 3 | 0 | 1 | 2 | 0.801 s |
| 25 | <u>View classs by Admin</u> | Check whether Admin can Edit existing Class for particular Batch | 3 | 0 | 1 | 2 | 0.701 s |
| 26 | <u>View classs by Admin</u> | Check whether Admin can Delete existing Class for particular Batch | 3 | 0 | 1 | 2 | 0.667 s |
| 27 | Launch Web Application | Check whether Admin or user could able to navigate to Log- In Screen page | 3 | 0 | 1 | 2 | 0.923 s |

SCENARIOS SUMMARY -- 8 --

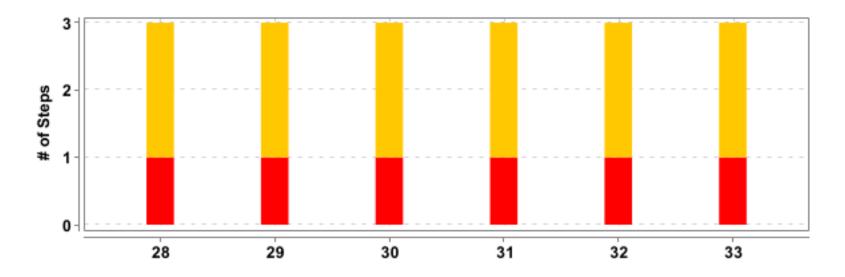


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------|---|---|---|---|---|----------|
| 28 | Login functions(Admin/User) | Check whether Admin/user could able to login with valid Credentialse | 3 | 0 | 1 | 2 | 0.662 s |
| 29 | Login functions(Admin/User) | Check whether Admin/user could able to login with Invalid Credentialse | 3 | 0 | 1 | 2 | 0.688 s |
| 30 | Login functions(Admin/User) | Check whether Admin/User could able to receive reset password link for the Registered Email Address | 3 | 0 | 1 | 2 | 0.671 s |
| 31 | Login functions(Admin/User) | Check whether Admin/User could able to receive reset password link for Unregistered Email ID | 3 | 0 | 1 | 2 | 0.681 s |
| 32 | <u>Pagination</u> | Check functionality of Pagination at Manage user Admin page | 3 | 0 | 1 | 2 | 0.002 s |
| 33 | <u>Pagination</u> | Check functionality of Pagination at Manage Attendance Admin and Class Staff page | 3 | 0 | 1 | 2 | 0.002 s |

SCENARIOS SUMMARY -- 9 --

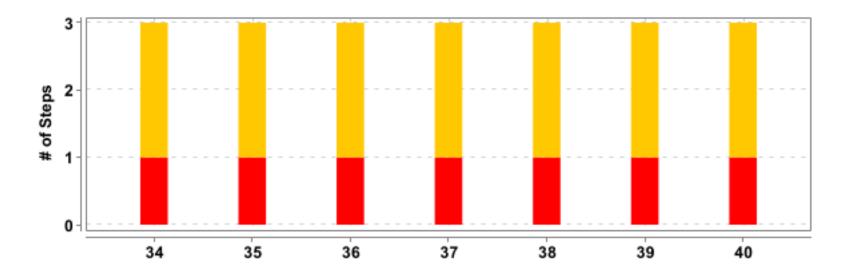


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|--|---|---|---|---|----------|
| 34 | Different Program functions Performed by Admin | Check whether Newly Added program details are visible to Admin | 3 | 0 | 1 | 2 | 0.002 s |
| 35 | Different Program functions Performed by Admin | Check Edited program details are visible to Admin | 3 | 0 | 1 | 2 | 0.002 s |
| 36 | Different Program functions Performed by Admin | Check Deleted program details is removed from Admin view | 3 | 0 | 1 | 2 | 0.002 s |
| 37 | Different Program functions Performed by Admin | Check Admin can able to see all existing program details | 3 | 0 | 1 | 2 | 0.002 s |
| 38 | Different Program functions Performed by Admin | Check whether Admin can Add Program details | 3 | 0 | 1 | 2 | 0.001 s |
| 39 | Different Program functions Performed by Admin | Check whether Admin can Edit Program details for Program | 3 | 0 | 1 | 2 | 0.002 s |
| 40 | Different Program functions Performed by Admin | Check whether Admin can Delete the program | 3 | 0 | 1 | 2 | 0.002 s |

SCENARIOS SUMMARY -- 10 --

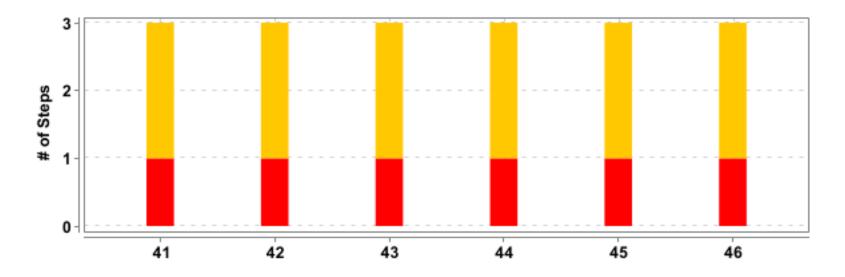

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|---|---|---|---|---|----------|
| 41 | Upload recordings and resources by Admin | Check whether Admin can upload Recording | 3 | 0 | 1 | 2 | 0.675 s |
| 42 | Upload recordings and resources by Admin | Check whether Admin can Upload Resources | 3 | 0 | 1 | 2 | 0.682 s |
| 43 | Submit(send) notifcation by Admin | Check whether Admin can create notification | 3 | 0 | 1 | 2 | 0.710 s |
| 44 | LMS Admin User page | Check whether Admin can search users by giving Email or Batch or Skill or program | 3 | 0 | 1 | 2 | 0.001 s |
| 45 | LMS Admin User page | Check whether Admin can edit registered user in Manage users(admin) page | 3 | 0 | 1 | 2 | 0.002 s |
| 46 | LMS Admin User page | Check whether Admin can delete particular registered user in Manage users(admin) page | 3 | 0 | 1 | 2 | 0.002 s |

SCENARIOS SUMMARY -- 11 --

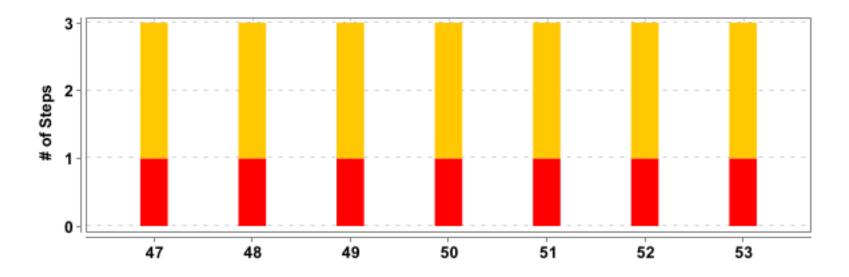


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|--|---|---|---|---|----------|
| 47 | LMS Admin User page | Check whether Admin will be navigated to manage users(admin) page when clicked on eye icon | 3 | 0 | 1 | 2 | 0.001 s |
| 48 | LMS Admin User page | Check whether Admin can be able to view New Unassigned user | 3 | 0 | 1 | 2 | 0.001 s |
| 49 | LMS Admin User page | Check whether Admin can be able to edit Unregistered user | 3 | 0 | 1 | 2 | 0.001 s |
| 50 | LMS Admin User page | Check whether Admin can be able to delete Unregistered user | 3 | 0 | 1 | 2 | 0.002 s |
| 51 | View the attendance details of the students by Admin | Check whether Admin can view the attendance details | 3 | 0 | 1 | 2 | 0.698 s |
| 52 | View the attendance details of the students by Admin | Check whether Admin can save the attendance details | 3 | 0 | 1 | 2 | 0.697 s |
| 53 | View the attendance details of the students by Admin | Check whether Admin can reset the attendance details | 3 | 0 | 1 | 2 | 0.675 s |

DETAILED SECTION -- 12 --

(F)- Assignment functions performed by User

| FAILED | DURATION - 2.010 s | Scenarios | | Steps | |
|------------------|-----------------------|-----------|---|-----------|---|
| | | Total - 3 | | Total - 9 | |
| / 9:34:21.673 AI | M // 9:34:23.683 AM / | Pass - 0 | 3 | Pass - 0 | 9 |
| | | Fail - 3 | | Fail - 3 | |
| | | Skip - 0 | | Skip - 6 | |

(S)- Check whether user can submit assignment

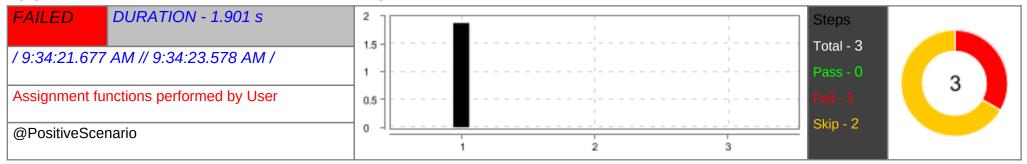


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User is on Manage Submissions user page | FAILED | 1.873 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.AssignmentUser at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:149) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.AbstractGlueDefinition.execute(JavaStepDefinition.java:47) at io.cucumber.core.runner.CoreStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:104) at io.cucumber.core.runner.Runner.runChild(FeatureRunner.java:135) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | PAILED | 1.873 \$ |

DETAILED SECTION -- 13 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepder.Login. (Login.java:25">at stepder.Login.(Login.java:25">at stepder.Login.(Login.java:25">at stepder.Login.java:25) | | |
| _ | , , , | 0.055 | 10001 |
| 2 | When User clicks on submit button after selecting Batch, Assignment Name, Assignment Date, add comments | SKIPPED | 0.001 s |
| 3 | Then Assignment will be submitted succesfully | SKIPPED | 0.000 s |


DETAILED SECTION -- 14 --

(S)- Check whether user can edit a particular assignment

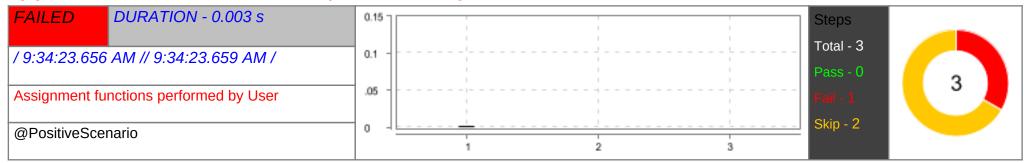

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given User is on Manage Submissions(user) page | FAILED | 0.002 s |
| | Step undefined | | |
| 2 | When User clicks on submit button after clicking on Edit icon to edit the required details | SKIPPED | 0.000 s |
| 3 | Then Updated Assignment will be submitted successfully | SKIPPED | 0.000 s |

(S)- Check whether user can delete a particular assignment

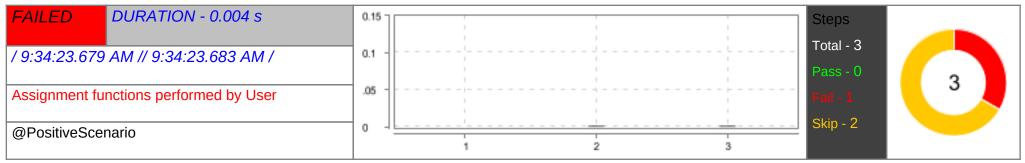


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given User is on Manage Submissions(user) page | | 0.000 s |
| | Step undefined | | |
| 2 | When User clicks on Trash icon after the assignment | SKIPPED | 0.001 s |
| 3 | Then Assignment will be deleted successfully | SKIPPED | 0.001 s |

DETAILED SECTION -- 15 --

(F)- Assignment functions performed by Admin


| FAILED | DURATION - 0.153 s | Scenarios | | Steps | |
|------------------|-----------------------|-----------|---|------------|----|
| | | Total - 9 | | Total - 27 | |
| / 9:34:23.711 Al | M // 9:34:23.864 AM / | Pass - 0 | 9 | Pass - 0 | 27 |
| | | Fail - 9 | | Fail - 9 | |
| | | Skip - 0 | | Skip - 18 | |

(S)- Check whether Newly Added assignments details are visible to Admin

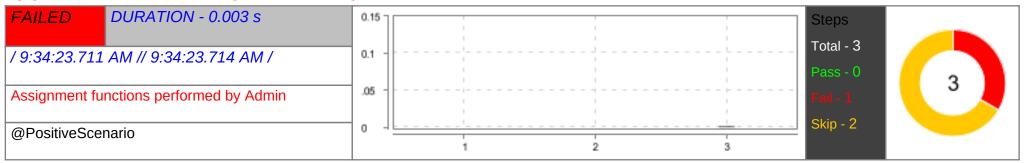


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage Assignments Page(admin) by clicking on Manage Assignments tab | FAILED | 0.000 s |
| | Step undefined | | |
| 2 | When Admin Add an Assignment to Existing Batch | SKIPPED | 0.000 s |
| 3 | Then Newly Added assignment Details will be displayed in Manage Assignments Page(Admin) | SKIPPED | 0.001 s |

(S)- Check whether Edited assignments details are visible to Admin

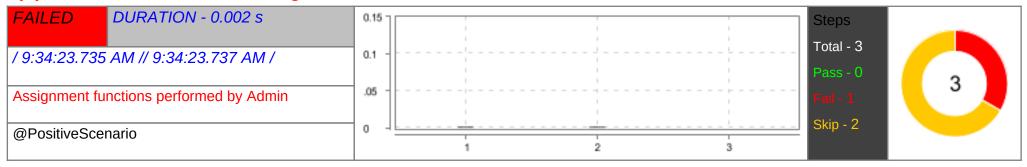

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given Admin is on Manage Assignments Page(admin) by clicking on Manage Assignments tab | FAILED | 0.001 s |
| | Step undefined | | |
| 2 | When Admin Edit an existing assignment | SKIPPED | 0.001 s |
| 3 | Then Updated assignment details will be displayed in Manage Assignments Page(Admin) | SKIPPED | 0.000 s |

(S)- Check whether Deleted assignments details are removed from Admin view

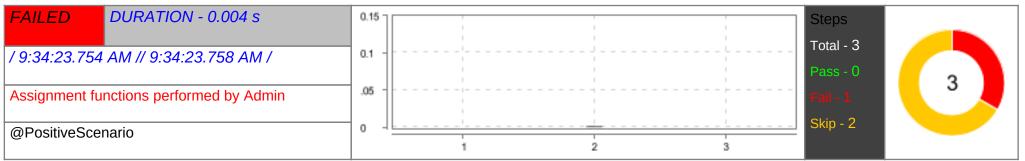

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given Admin is on Manage Assignments Page(admin) by clicking on Manage Assignments tab | FAILED | 0.000 s |
| | Step undefined | | |
| 2 | When Admin Delete an existing assignment | SKIPPED | 0.001 s |
| 3 | Then Deleted assignment details will be removed from Manage Assignments Page(Admin) | SKIPPED | 0.000 s |


(S)- Check whether Admin can able to see all existing assignment details

| FAILED DURATION - 0.001 s | 0.15 | | | | Steps | |
|---|------|---|---|---|-----------|---|
| / 9:34:23.777 AM // 9:34:23.778 AM / | | | | | Total - 3 | |
| 7 3.54.25.777 AW // 3.54.25.776 AW / | | | | | Pass - 0 | 3 |
| Assignment functions performed by Admin | | | | | Fail - 1 | |
| @PositiveScenario | 0 - | | | | Skip - 2 | |
| | | 1 | 2 | 3 | | |

| | # | Step / Hook Details | Status | Duration |
|---|---|--|--------|----------|
| [| 1 | Given Admin is on Manage Assignments Page(admin) by clicking on Manage Assignments tab | FAILED | 0.000 s |
| | | Step undefined | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 2 | When Admin tries to view exisiting assignment details | SKIPPED | 0.000 s |
| 3 | Then All the existing assignment details will be displayed in Manage Assignments Page(Admin) | SKIPPED | 0.000 s |

(S)- Check whether Admin can add New assignments for particular Batch

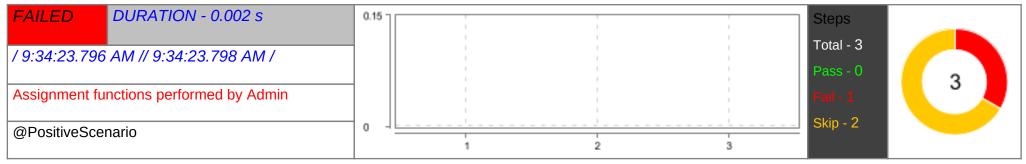

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given Admin is on Add tab of manage Assignments page(admin view) by clicking on Add Assignment in Manage Assignments | FAILED | 0.000 s |
| | Page(admin) | | |
| | Step undefined | | |
| 2 | When Admin clicks on submit button after selecting Batch and enters Assignment name, Assignment Description , Assignment | SKIPPED | 0.000 s |
| | Due, Upload assignments | | |
| 3 | Then Created assignments will be displayed in Manage Assignments Page(admin) and Manage Assignment page(User View) | SKIPPED | 0.000 s |


(S)- Check whether Admin can Edit existing assignments for particular Batch

| FAILED | DURATION - 0.005 s | 0.15 | Steps | |
|---------------|-----------------------------|------|-----------|---|
| / 9:34:23.818 | 3 AM // 9:34:23.823 AM / | 0.1 | Total - 3 | |
| Assignment fu | unctions performed by Admin | .05 | Pass - 0 | 3 |
| @PositiveSce | nario | 0 | Skip - 2 | |
| 33,1170000 | nano | | 1 2 3 | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Edit tab of manage Assignments page(admin view) by clicking on Add Assignment in Manage Assignments | FAILED | 0.001 s |
| | Page(admin) | | |
| | Step undefined | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 2 | When Admin clicks on submit button after updating one or more assignment details | SKIPPED | 0.000 s |
| 3 | Then Updated assignment details will be displayed in Manage Assignments Page(admin) and Manage Assignment page(User | SKIPPED | 0.000 s |
| | View) | | |

(S)- Check whether Admin can Delete existing assignments for particular Batch

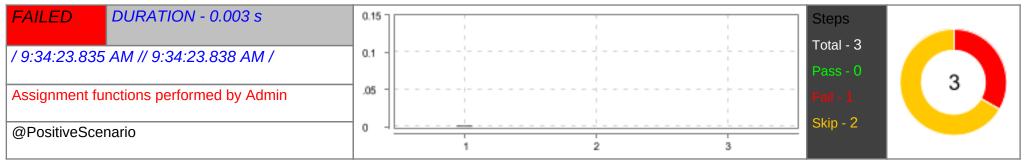

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage Assignments Page(admin) | FAILED | 0.001 s |
| | Step undefined | | |
| 2 | When Admin clicks on Trash icon after selecting existing assignments | SKIPPED | 0.000 s |
| 3 | Then Deleted assignment will be removed from Admin View in Manage Assignments Page(admin) and Manage Assignment | SKIPPED | 0.000 s |
| | page(User View) | | |


(S)- Check whether Admin can manage students submission by selecting Make Grade Visible

| FAILED DURATION - 0.002 s | 0.15 | | Steps |
|---|------|-------|-----------|
| / 9:34:23.848 AM // 9:34:23.850 AM / | 1 | | Total - 3 |
| 7 9.34.23.040 AW // 9.34.23.030 AW / | | | Pass - 0 |
| Assignment functions performed by Admin | | | Fail - 1 |
| @PositiveScenario | 0 - | | Skip - 2 |
| G : 33 3233 | | 1 2 3 | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage Submissions(Admin) page by clicking on Manage button in Manage assignments page(admin) | FAILED | 0.000 s |
| | Step undefined | | |
| 2 | When Admin clicks on submit button after selecting all th details like Batch, Assignment Name, Assignment Date , Grade By , | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | Grade ,Make Garde Visible and add comments | | |
| 3 | Then Grade Details will be visible to both Admin and User View | SKIPPED | 0.000 s |

(S)- Check whether Admin can manage students submission by unselecting Make Grade Viisble

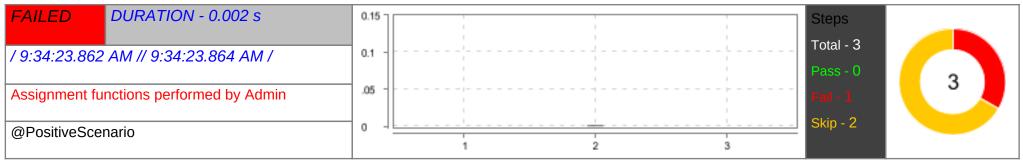


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given Admin is on Manage Submissions(Admin) page by clicking on Manage button in Manage assignments page(admin) | FAILED | 0.000 s |
| | Step undefined | | |
| 2 | When Admin clicks on Submit button after selecting all the details like Batch, Assignment Name, Assignment Date, Grade By, | SKIPPED | 0.001 s |
| | Grade ,add comments | | |
| 3 | Then Grade Details will be visible only to Admin | SKIPPED | 0.000 s |

(F)- Different Batches function Performed by Admin

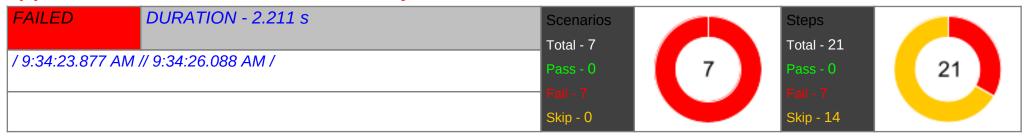


DETAILED SECTION -- 20 --

(S)- Check whetherNewly Added batches details are visible to Admin

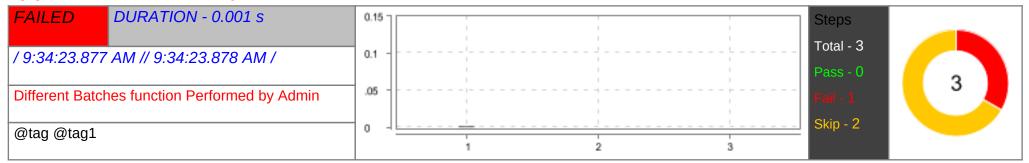

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage Batches Page(admin) screen, by clicking on batches tab | FAILED | 0.001 s |
| | Step undefined | | |
| 2 | When Admin Adds Batch to Existing Batch | SKIPPED | 0.000 s |
| 3 | Then Newly Added Batch Details will be displayed in Manage Batches Page(Admin) | SKIPPED | 0.000 s |

(S)- Check whether Edited batches details arevisible to Admin

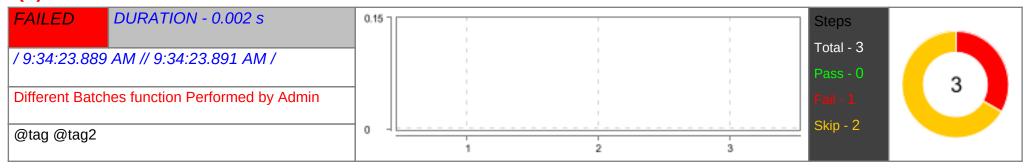

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage Batches Page(admin) screen, by clicking on batches tab | FAILED | 0.000 s |
| | Step undefined | | |
| 2 | When Admin Edits an existing Batch | SKIPPED | 0.000 s |
| 3 | Then Updated Batch details will be displayed in Manage Batches Page(Admin) | SKIPPED | 0.000 s |


DETAILED SECTION -- 21 --

(S)- Check whether Deleted batches details are removed from Admin view



| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage Batches Page(admin) screen, by clicking on batches tab | FAILED | 0.000 s |
| | Step undefined | | |
| 2 | When Admin Delete an existing Batch | SKIPPED | 0.000 s |
| 3 | Then Deleted Batch details will be removed from Manage Batches Page(Admin) | SKIPPED | 0.000 s |


(S)- Check whether Admin can able to see all existing batches details

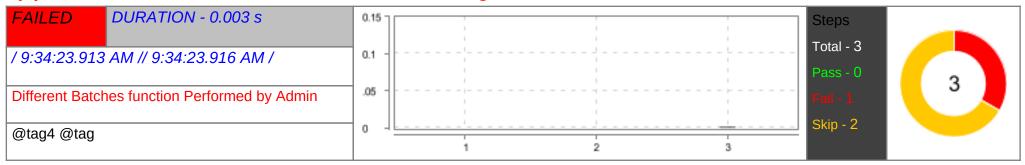

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage Batches Page(admin) screen, by clicking on batches tab | FAILED | 0.000 s |
| | Step undefined | | |
| 2 | When Admin tries to view exisiting Batch details | SKIPPED | 0.000 s |
| 3 | Then All the existing Batch details details will be displayed in Manage Batches Page(Admin) | SKIPPED | 0.001 s |

DETAILED SECTION -- 22 --

(S)- Check whether Admin can add batch to batches list

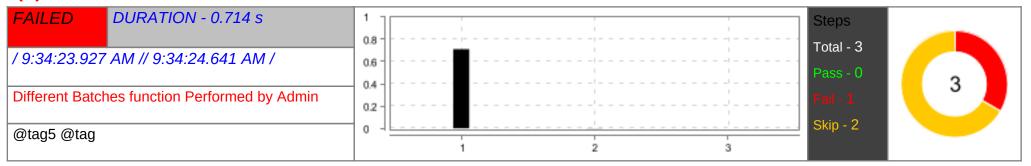


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Add tab of ADD/Edit batches page (admin) by clicking on Add Batch in Manage Batches Page(admin) | FAILED | 0.711 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Batch | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

DETAILED SECTION -- 23 --

| # | Step / Hook Details | Status | Duration |
|---|---|------------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Batch. <init>(Batch.java:15)</init> | | |
| 2 | When Admin clicks on submit button after entering Batch Name, Batch Description, select Batch Status, enters BatchNo. of | SKIPPED | 0.001 s |
| - | | JOKII I LD | 0.0013 |
| _ | classes. | | |
| 3 | Then Created Batch details will be displayed in Manage Batches Page(Admin) with auto generated Created Date and Modified date in MM/DD/YY format. | SKIPPED | 0.000 s |
| | uale in Min/DU/YY Tormal. | | |

(S)- Check whether Admin can edit particular batch in batches list

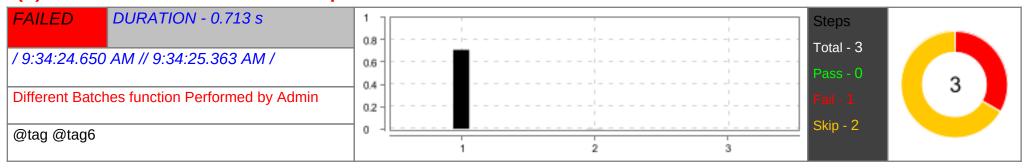


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| L | Given Admin is on Edit tab of ADD/Edit batches page (admin) by clicking on edit icon | FAILED | 0.710 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Batch | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |

DETAILED SECTION -- 25 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. java:141) 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is null at stepdef.Login. <init>(Login.java:25) at stepdef.Batch.<init>(Batch.java:15)</init></init> | | |
| 2 | When Admin clicks on submit button after updating Batch Name, Batch Description, select Batch Status, Baych No. of classes | SKIPPED | 0.001 s |
| 3 | Then Updated Batch details will be displayed in Manage Batches Page(Admin) screen with same autogenerated creation date and different Modified date in MM/DD/YY format | SKIPPED | 0.000 s |

(S)- Check whether Admin can delete particular batch in batches list

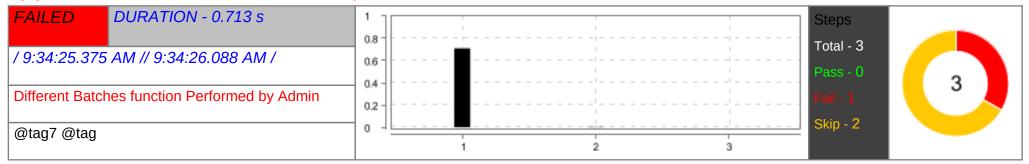

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Batches Page(admin) screen | FAILED | 0.709 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Batch at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. java:149) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.executeStep.run(TestStep.java:64) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |

DETAILED SECTION -- 26 --


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Batch. <init>(Batch.java:15)</init> | | |
| 2 | When Admin clicks on particular batch trash icon | SKIPPED | 0.003 s |
| 3 | Then Batch will be deleted from the Batches List in Manage Batches Page(admin) | SKIPPED | 0.000 s |

DETAILED SECTION -- 27 --

(F)- View classs by Admin

| FAILED | DURATION - 5.196 s | Scenarios | | Steps | |
|-----------------|-----------------------|-----------|---|------------|----|
| | | Total - 7 | | Total - 21 | |
| / 9:34:26.100 A | M // 9:34:31.296 AM / | Pass - 0 | 7 | Pass - 0 | 21 |
| | | Fail - 7 | | Fail - 7 | |
| | | Skip - 0 | | Skip - 14 | |

(S)- Check whether Newly Added Class details are visible to Admin

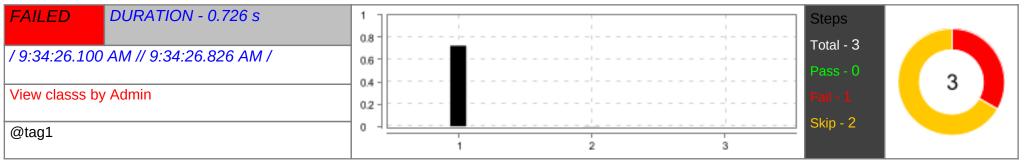


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Classes Page(admin) by clicking on Manage Classes tab | FAILED | 0.725 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Classes | 7 | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |

DETAILED SECTION -- 28 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Classes. <init>(Classes.java:16)</init> | | |
| 2 | When Admin Add a Class to Existing Batch | SKIPPED | 0.001 s |
| 3 | Then Newly Added Class details should display in Manage Classes Page(Admin) | SKIPPED | 0.000 s |

DETAILED SECTION -- 29 --

(S)- Check whether Edited classes details are visible to Admin

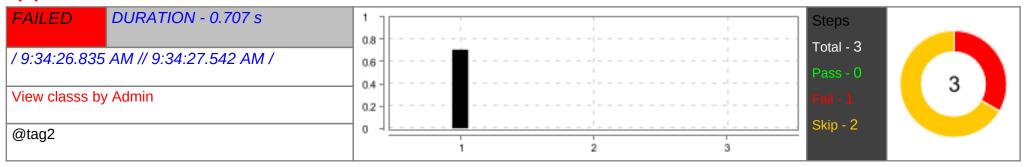


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Classes Page(admin) by clicking on Manage Classes tab | FAILED | 0.706 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Classes | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

DETAILED SECTION -- 30 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Classes. <init>(Classes.java:16)</init> | | |
| 2 | When Admin Edit an existing Class | SKIPPED | 0.000 s |
| 3 | Then Updated class details should display in Manage Classes Page(Admin) | SKIPPED | 0.000 s |

(S)- Check whether Deleted classes is removed from Admin view

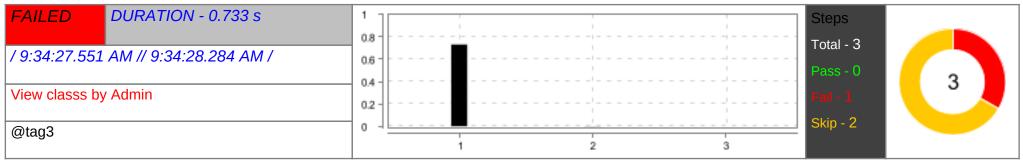


| | # | Step / Hook Details | Status | Duration |
|---|---|---|--------|----------|
| 1 | 1 | Given Admin is on Manage Classes Page(admin) by clicking on Manage Classes tab | FAILED | 0.732 s |
| | | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Classes | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |

DETAILED SECTION -- 32 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Classes. <init>(Classes.java:16)</init> | | |
| 2 | When Admin Delete an existing Class | SKIPPED | 0.001 s |
| 3 | Then Deleted Class details will be removed from Manage Classes Page(Admin) | SKIPPED | 0.000 s |

(S)- Check whether Admin is able to see all existing classes details

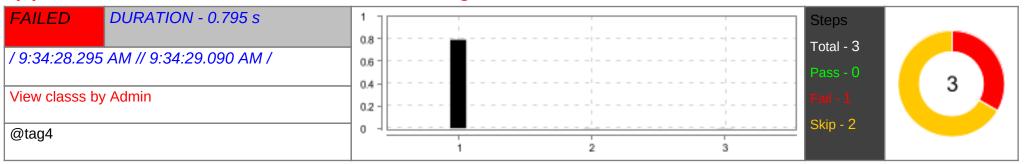


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Classes Page(admin) by clicking on Manage Classes tab | FAILED | 0.792 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Classes | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |

DETAILED SECTION -- 33 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Classes. <init>(Classes.java:16)</init> | | |
| 2 | When Admin try to view exisiting Class details | SKIPPED | 0.001 s |
| 3 | Then All the existing Classes details are displayed in Manage Classes Page(Admin) | SKIPPED | 0.001 s |

DETAILED SECTION -- 34 --


(S)- Check whether Admin can add New Class for particular Batch

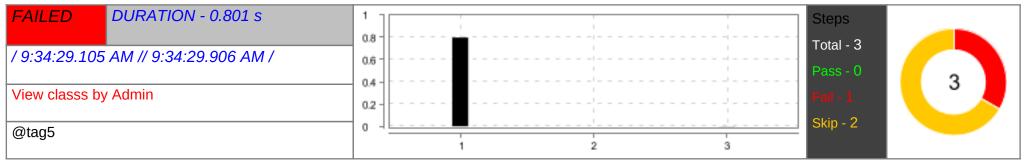

| ŧ | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | Given Admin is on Add tab of Add/Edit Classes Page(Admin) by clicking on Add Class in Manage Classes page(admin) | FAILED | 0.798 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Classes | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Classes. <init>(Classes.java:16)</init> | | |
| 2 | When Admin clicks on submit button after entering the details | SKIPPED | 0.000 s |
| 3 | Then Created Classwill be displayed in Manage Classes Page(admin) | SKIPPED | 0.001 s |

(S)- Check whether Admin can Edit existing Class for particular Batch

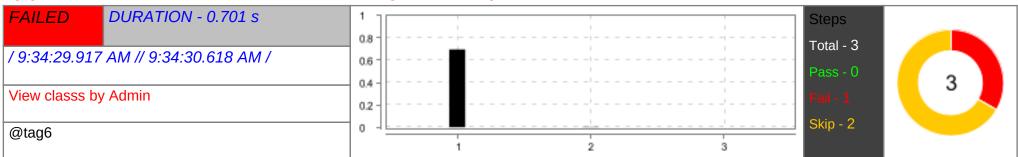


| | # | Step / Hook Details | Status | Duration |
|---|---|---|--------|----------|
| 1 | L | Given Admin is on Edit tab of Add/Edit Classes Page by cliking on Edit icon in Manage Classes page(admin) | FAILED | 0.696 s |
| | | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Classes | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |

DETAILED SECTION -- 37 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Classes. <init>(Classes.java:16)</init> | | |
| 2 | When Admin clicks on submit button after updating class details | SKIPPED | 0.003 s |
| 3 | Then Updated Class details will be displayedin Manage Classes Page(admin) | SKIPPED | 0.000 s |

(S)- Check whether Admin can Delete existing Class for particular Batch

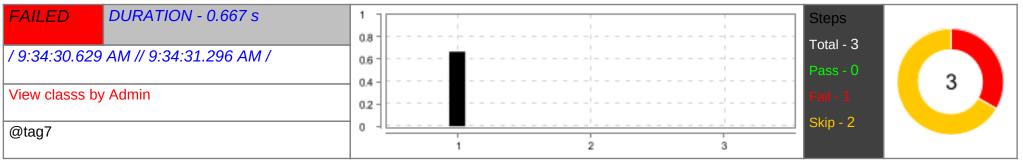

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Classes Page(admin) | FAILED | 0.667 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Classes | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |

DETAILED SECTION -- 38 --


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Classes. <init>(Classes.java:16)</init> | | |
| 2 | When Admin clicks on Trash icon of existing Class for particular Batch | SKIPPED | 0.000 s |
| 3 | Then Deleted Class will be removed from Manage Classes Page(admin) | SKIPPED | 0.000 s |

DETAILED SECTION -- 39 --

(F)- Launch Web Application

| FAILED | DURATION - 0.923 s | Scenarios | | Steps | |
|------------------|-----------------------|-----------|---|-----------|---|
| | | Total - 1 | | Total - 3 | |
| / 9:34:31.306 AI | M // 9:34:32.229 AM / | Pass - 0 | 1 | Pass - 0 | 3 |
| | | Fail - 1 | | Fail - 1 | |
| | | Skip - 0 | | Skip - 2 | |

(S)- Check whether Admin or user could able to navigate to Log-In Screen page

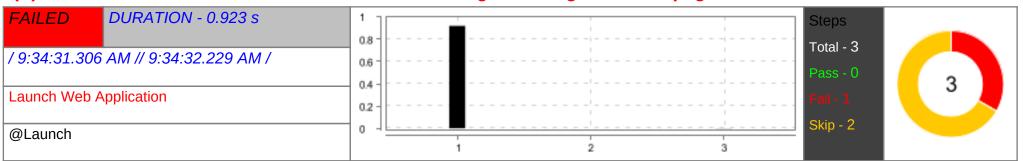

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Admin or User is on LMS portal with Login button Link | FAILED | 0.921 s |
| | org.openqa.selenium.WebDriverException: unknown error: net::ERR_NAME_NOT_RESOLVED (Session info: chrome=99.0.4844.82) Build info: version: '4.1.0', revision: '87802e897b' System info: host: 'GORANTLAS-LAPTO', ip: '192.168.1.98', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [7147138c3e778ac9a0e8d3f0a6f6f456, get {url=https://www.LMS-UI.com/home}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ramba\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:64855}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:64855/devtoo, se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 7147138c3e778ac9a0e8d3f0a6f6f456 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceConstructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.httpCommandExecutor.execute(HttpCommandExecutor.java:184) | | |

DETAILED SECTION -- 40 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:328) at stepdef.Launch.admin_user_is_on_lms_portal_with_login_button_link(Launch.java:34) at ?.Admin or User is on LMS portal with Login button Link(file:///C:/Users/ramba/eclipse-workspace2/LMS_UI_HACKTHON/src/test/resources/lms_ui_features/Launch.feature:5) * Not displayable characters are replaced by '?'. | | |
| 2 | When Admin or User clicks on Login button link | SKIPPED | 0.000 s |
| 3 | Then Admin or user navigates to Log-In Screen page | SKIPPED | 0.001 s |

(F)- Login functions(Admin/User)

| FAILED | DURATION - 2.730 s | Scenarios | | Steps | |
|---------------|------------------------|-----------|---|------------|----|
| | | Total - 4 | | Total - 12 | |
| / 9:34:32.253 | AM // 9:34:34.983 AM / | Pass - 0 | 4 | Pass - 0 | 12 |
| | | Fail - 4 | | Fail - 4 | |
| | | Skip - 0 | | Skip - 8 | |

(S)- Check whether Admin/user could able to login with valid Credentialse


| FAILED | DURATION - 0.662 s | 1 - | | 1 | | Steps | |
|-----------------|------------------------|-------|--------------|---|---|-----------|---|
| / 9:34:32 253 | AM // 9:34:32.915 AM / | 0.8 | | - | | Total - 3 | |
| | | 0.6 - | | | | Pass - 0 | 3 |
| Login functions | s(Admin/User) | 0.2 - | | - | | Fail - 1 | |
| @tag @tag1 | | 0 - | <u> </u> | | 1 | Skip - 2 | |
| | | | 1 | 2 | 3 | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin/User is on LMS Log-In Screen | FAILED | 0.661 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Login at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. java:149) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | java:141) 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is null at stepdef.Login. <init>(Login.java:25)</init> | | |
| 2 | When Admin/User enters Login Name and Password | SKIPPED | 0.000 s |
| 3 | Then Admin/user navigates to LMS Home Page | SKIPPED | 0.000 s |


(S)- Check whether Admin/user could able to login with Invalid Credentialse

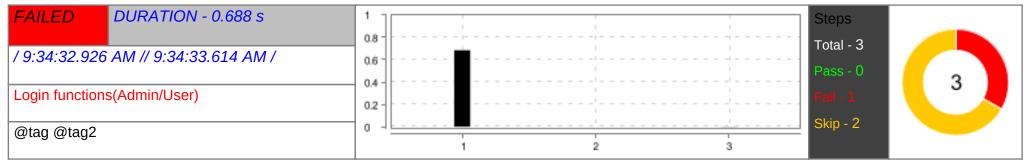

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin/User is on LMS Log-In Screen | FAILED | 0.684 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Login | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| 2 | When Admin/User enters Invalid Login Name and Password | SKIPPED | 0.000 s |
| 3 | Then Admin/user will not login successfully with invalid credentials error message | SKIPPED | 0.002 s |


(S)- Check whether Admin/User could able to receive reset password link for the Registered Email Address

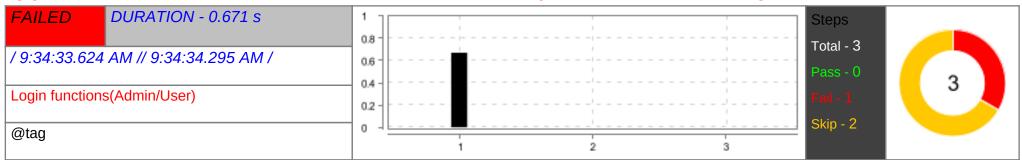

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin/User is on Answer Security Question page by clikcing on Forgot password link | FAILED | 0.670 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Login | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| 2 | When Admin/User enters Email Address and clicks on Next button. Admin/User enters the Answer for security Question | SKIPPED | 0.000 s |
| 3 | Then Message will be displayed | SKIPPED | 0.000 s |

(S)- Check whether Admin/User could able to receive reset password link for Unregistered Email ID

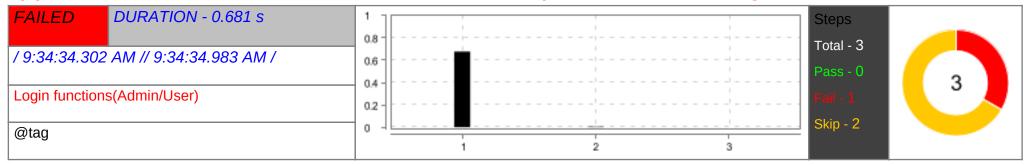

| | # | Step / Hook Details | Status | Duration |
|---|---|---|--------|----------|
| 1 | 1 | Given Admin/User is on Answer Security Question page by clikcing on Forgot password link | FAILED | 0.677 s |
| | | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Login at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:141) 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is null at stepdef.Login. <init>(Login.java:25)</init> | | |
| 2 | When Admin/User enters Email Address and clicks on Next button. Admin/User enters the Answer for security Question | SKIPPED | 0.004 s |
| 3 | Then Error Message will be displayed | SKIPPED | 0.000 s |

(F)- Pagination

| FAILED | DURATION - 0.013 s | Scenarios | | Steps | |
|---------------|------------------------|-----------|---|-----------|---|
| | | Total - 2 | | Total - 6 | |
| / 9:34:34.991 | AM // 9:34:35.004 AM / | Pass - 0 | 2 | Pass - 0 | 6 |
| | | Fail - 2 | | Fail - 2 | |
| | | Skip - 0 | | Skip - 4 | |

(S)- Check functionality of Pagination at Manage user Admin page

| FAILED DURATION - 0.002 s | 15 Steps | |
|--------------------------------------|---------------|---|
| / 9:34:34.991 AM // 9:34:34.993 AM / | 1 - Total - 3 | |
| Pagination | Pass - 0 | 3 |
| @tag1 | Skip - 2 | |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Admin is on Manage users admin page of User list Unregistered | FAILED | 0.001 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Pagination at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |

| | Step / Hook Details | Status | Duration |
|----|---|--------|----------|
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| ja | ava:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElements(org.openqa.selenium. | | |

DETAILED SECTION -- 49 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | By)" because "this.driver" is null at stepdef.Pagination. <init>(Pagination.java:18)</init> | | |
| 2 | When result is containing many Student records | SKIPPED | 0.000 s |
| 3 | Then Large number of Student records will be divided into smaller discrete pages | SKIPPED | 0.000 s |

(S)- Check functionality of Pagination at Manage Attendance Admin and Class Staff page

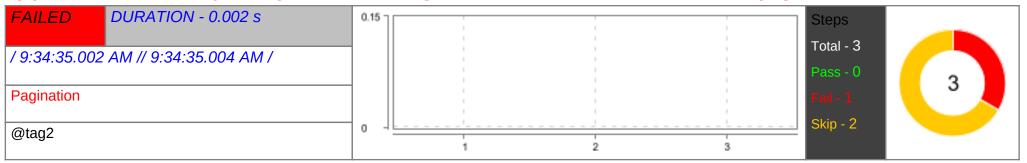


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Admin is on Manage Attendance Admin and Class Staff page ogf Manage Attendance admin | FAILED | 0.000 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Pagination at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.java.savastepDefinition.execute(SavastepDefinition.java.29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |

DETAILED SECTION -- 50 --


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElements(org.openqa.selenium. | | |
| | By)" because "this.driver" is null | | |
| | at stepdef.Pagination. <init>(Pagination.java:18)</init> | | |
| 2 | When result is containing many Student records | SKIPPED | 0.000 s |
| 3 | Then Large number of Student records will be divided into smaller discrete pages | SKIPPED | 0.000 s |

(F)- Different Program functions Performed by Admin

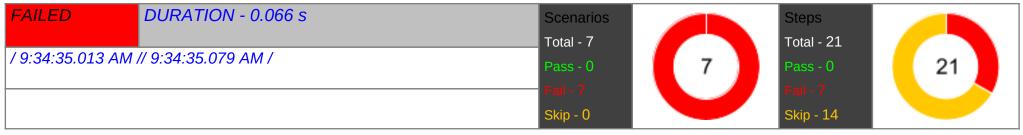

DETAILED SECTION -- 51 --


(S)- Check whether Newly Added program details are visible to Admin

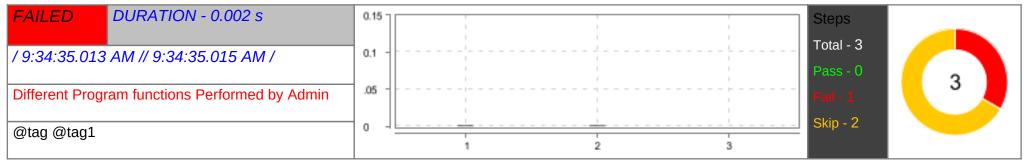

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Programs Page(admin) by clicking on Programs Tab | FAILED | 0.001 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Programfunctions | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium. | | |
| | By)" because "this.driver" is null | | |
| | at stepdef.Programfunctions. <init>(Programfunctions.java:33)</init> | | |
| 2 | When Admin Add a program to Existing programs list | SKIPPED | 0.001 s |
| 3 | Then Newly Added program details will be displayed in Manage Programs Page(admin) | SKIPPED | 0.000 s |

(S)- Check Edited program details are visible to Admin

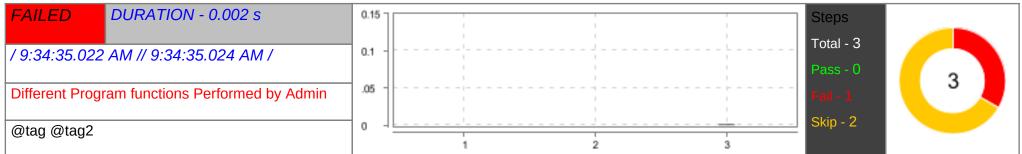


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Admin is on Manage Programs Page(admin) by clicking on Programs Tab | FAILED | 0.000 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Programfunctions at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:141) 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium.By)" because "this.driver" is null at stepdef.Programfunctions. <init>(Programfunctions.java:33)</init> | | |
| 2 | When Admin Edits an existing program | SKIPPED | 0.000 s |
| 3 | Then Updated program details will be displayed in Manage Programs Page(admin) | SKIPPED | 0.001 s |

(S)- Check Deleted program details is removed from Admin view

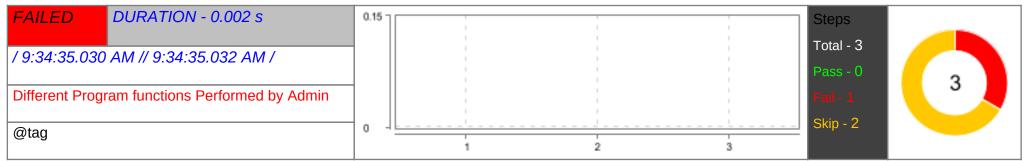


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Programs Page(admin) by clicking on Programs Tab | FAILED | 0.000 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Programfunctions | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |

DETAILED SECTION -- 55 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium. | | |
| | 37 more Caused by, java.iang.NullPointerException. Cannot invoke org.openqa.selenium.webbriver.iindElement(org.openqa.selenium. | | |
| | at stepdef.Programfunctions. <init>(Programfunctions.java:33)</init> | | |
| 2 | When Admin Delete an existing program | SKIPPED | 0.000 s |
| | | | |
| 3 | Then Deleted program details will be removed from Manage Programs Page(admin) | SKIPPED | 0.000 s |

DETAILED SECTION -- 56 --


(S)- Check Admin can able to see all existing program details

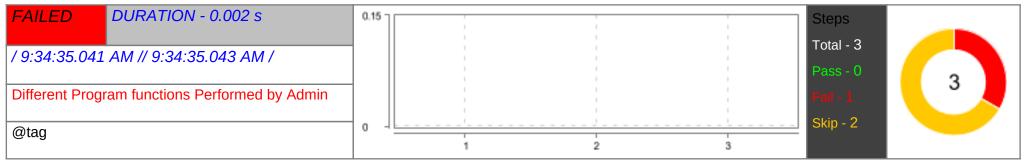

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Programs Page(admin) by clicking on Programs Tab | FAILED | 0.000 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Programfunctions | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium. | | |
| | By)" because "this.driver" is null | | |
| | at stepdef.Programfunctions. <init>(Programfunctions.java:33)</init> | | |
| 2 | When Admin tries to view exisiting program details | SKIPPED | 0.000 s |
| 3 | Then All the existing program details will be displayed in Manage Programs Page(admin) | SKIPPED | 0.000 s |

(S)- Check whether Admin can Add Program details

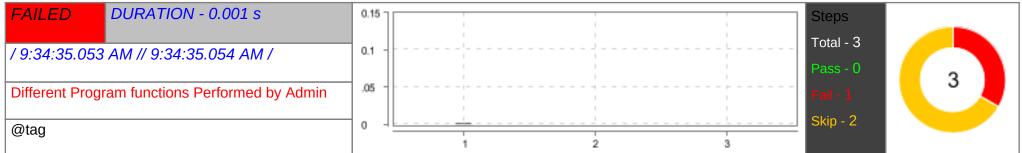


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Admin is on Add tab in Add/Edit Programs page by clicking Add Program in Manage Programs Page(admin) | FAILED | 0.001 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Programfunctions at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |

DETAILED SECTION -- 59 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:141) 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium.By)" because "this.driver" is null at stepdef.Programfunctions. <init>(Programfunctions.java:33)</init> | | |
| 2 | When Admin clicks on submit button after entering the Program Name ,Program Description,Program Status | SKIPPED | 0.000 s |
| 3 | Then All the program details will be added to Programs List in Manage Programs Page(admin) with auto generated same | SKIPPED | 0.000 s |
| | ProgramCreationtime and ProgramModifiedtime in MM/DD/YY HH:MM format | | |

(S)- Check whether Admin can Edit Program details for Program

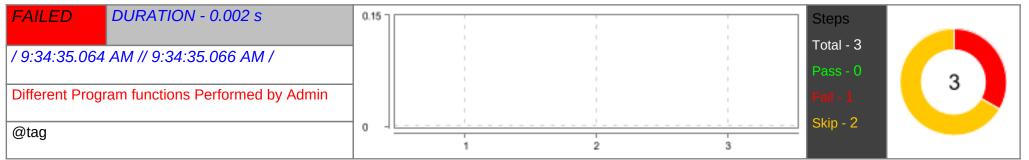


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Edit tab in Add/Edit Programs page by clicking Edit icon in Manage Programs Page(admin) | FAILED | 0.000 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Programfunctions at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |

DETAILED SECTION -- 60 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium. | | |
| | By)" because "this.driver" is null | | |
| | at stepdef.Programfunctions. <init>(Programfunctions.java:33)</init> | | |
| 2 | When Admin clicks on submit button after updating the required fields like Program Name ,Program Description,Program Status | SKIPPED | 0.000 s |
| 3 | Then All the updated program details will be added to Programs List in Manage Programs Page(admin) with auto generated | SKIPPED | 0.000 s |
| | same ProgramCreationtime and modified Programtime MM/DD/YY HH:MM format | 1 | |

DETAILED SECTION -- 61 --

(S)- Check whether Admin can Delete the program

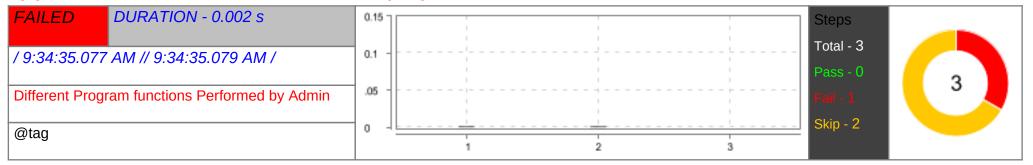


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Programs Page(admin) by clicking on Programs Tab | FAILED | 0.001 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Programfunctions | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

DETAILED SECTION -- 62 --


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium. | | |
| | By)" because "this.driver" is null | | |
| | at stepdef.Programfunctions. <init>(Programfunctions.java:33)</init> | | |
| 2 | When Admin clicks on Trash icon for any program in Programs List | SKIPPED | 0.001 s |
| 3 | Then Program will be deleted from the Programs List in Manage Programs Page(admin) | SKIPPED | 0.000 s |

(F)- Upload recordings and resources by Admin

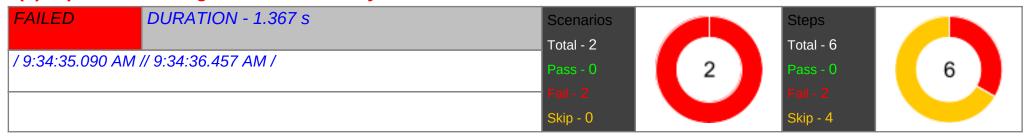

DETAILED SECTION -- 63 --

(S)- Check whether Admin can upload Recording

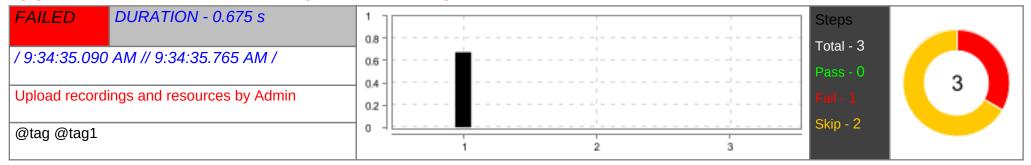


| ŧ | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | Given Admin is on Manage Recording(Admin) page by clicking Manage Recordings tab | FAILED | 0.674 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.ResourceandRecord | | |
| | $at\ io. cucumber. core. runtime. Object Factory Service Loader \$Default Java Object Factory. cache New Instance (Object Factory Service Loader.) at\ io. cucumber. core. runtime. Object Factory Service Loader \$Default Java Object Factory. cache New Instance (Object Factory Service Loader.) at\ io. cucumber. core. runtime. Object Factory Service Loader \$Default Java Object Factory. cache New Instance (Object Factory Service Loader.) at\ io. cucumber. core. runtime. Object Factory Service Loader. The results of $ | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

DETAILED SECTION -- 64 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.ResourceandRecord. <init>(ResourceandRecord.java:15)</init> | | |
| 2 | When Admin upload recording after selecting Batch and topic | SKIPPED | 0.000 s |
| 3 | Then Uploaded recording will be displayed in Manage Classes page(Admin View) for selected topic | SKIPPED | 0.000 s |

(S)- Check whether Admin can Upload Resources

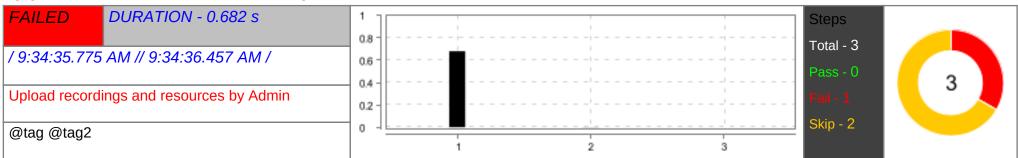

| # | # | Step / Hook Details | Status | Duration |
|---|---|---|--------|----------|
| 1 | | Given Admin is on Manage Recording(Admin) page by clicking Manage Recordings tab | | 0.680 s |
| | | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.ResourceandRecord | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |

DETAILED SECTION -- 66 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is null at stepdef.Login. <init>(Login.java:25) at stepdef.ResourceandRecord.<init>(ResourceandRecord.java:15)</init></init> | | |
| 2 | When Admin upload resources after selecting Batch and topic | SKIPPED | 0.001 s |
| 3 | Then Upload resources will be displayed in Manage Classes page(Admin View) for selected topic | SKIPPED | 0.000 s |

(F)- Submit(send) notifcation by Admin

| FAILED | DURATION - 0.710 s | Scenarios | | Steps | |
|---------------|------------------------|-----------|---|-----------|---|
| | | Total - 1 | | Total - 3 | |
| / 9:34:36.469 | AM // 9:34:37.179 AM / | Pass - 0 | 1 | Pass - 0 | 3 |
| | | Fail - 1 | | Fail - 1 | |
| | | Skip - 0 | | Skip - 2 | |

(S)- Check whether Admin can create notification

| FAILED DURATION - 0.710 s | 1] Steps | |
|--------------------------------------|-----------------|----------|
| / 9:34:36.469 AM // 9:34:37.179 AM / | 0.8 - Total - 3 | |
| 7 9.34.30.409 AW // 9.34.37.179 AW / | 0.6 - Pass - 0 | |
| Submit(send) notification by Admin | 02- Fall-1 | . |
| @PositiveScenario | Skip - 2 | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Notification page | FAILED | 0.710 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Submitnotification at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |

DETAILED SECTION -- 68 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is null at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Submitnotification. <init>(Submitnotification.java:22)</init> | | |
| 2 | When Admin clicks on submit button after selectingProgram Name from dropdown and enter details Hackathon Name, | SKIPPED | 0.000 s |
| | hackathon description, Hackathon date and Hackathon comments | | |
| 3 | Then Notifications will be submitted successfully | SKIPPED | 0.000 s |

(F)- LMS Admin User page

| FAILED | DURATION - 0.065 s | Scenarios | | Steps | |
|---------------|--------------------------|-----------|---|------------|----|
| | | Total - 7 | | Total - 21 | |
| / 9:34:37.190 | O AM // 9:34:37.255 AM / | Pass - 0 | 7 | Pass - 0 | 21 |
| | | Fail - 7 | | Fail - 7 | |
| | | Skip - 0 | | Skip - 14 | |


(S)- Check whether Admin can search users by giving Email or Batch or Skill or program

| FAILED DURATION - 0.001 s | 0.15 Steps | |
|--------------------------------------|-----------------|---|
| / 9:34:37.190 AM // 9:34:37.191 AM / | n.1 - Total - 3 | |
| | Pass - 0 | 3 |
| LMS Admin User page | Fail - I | |
| @tag @tag1 | Skip - 2 | |

| | # | Step / Hook Details | Status | Duration |
|---|-----|--|--------|----------|
| 1 | . [| Given Admin is on LMS Admin User Page | FAILED | 0.001 s |
| | | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium.By)" because "stepdef. Users.driver" is null at stepdef.Users.admin_is_on_lms_admin_user_page(Users.java:23) at ?.Admin is on LMS Admin User Page(file:///C:/Users/ramba/eclipse-workspace2/LMS_UI_HACKTHON/src/test/resources/lms_ui_features/Users.feature:6) * Not displayable characters are replaced by '?'. | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 2 | When Admin clicks on search button after entering Email or Batch or Skill or program | SKIPPED | 0.000 s |
| 3 | Then Admin will be navigated to Manage users(admin) page and Registered User list will be displayed | SKIPPED | 0.000 s |

(S)- Check whether Admin can edit registered user in Manage users(admin) page

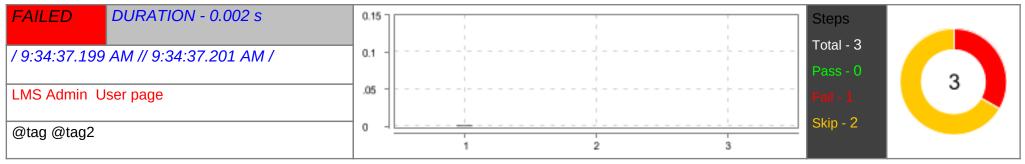

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given Admin is on Manage users(admin) page, Registered User list, and clicks on edit icon | FAILED | 0.001 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium.By)" because "stepdef. Users.driver" is null at stepdef.Users.admin_is_on_manage_users_admin_page_registered_user_list_and_clicks_on_edit_icon(Users.java:61) at ?.Admin is on Manage users(admin) page, Registered User list,and clicks on edit icon(file:///C:/Users/ramba/eclipse-workspace2/LMS_UI_HACKTHON/src/test/resources/lms_ui_features/Users.feature:13) * Not displayable characters are replaced by '?'. | | |
| 2 | When Admin will be navigated to Manage users(admin) page where User details will be displayed | SKIPPED | 0.000 s |
| 3 | Then Admin will be able to edit User details like Time zone, User role, batch, Program and click on save | SKIPPED | 0.000 s |

(S)- Check whether Admin can delete particular registered user in Manage users(admin) page


| FAILED DURATION - 0.002 s | 0.15 | Steps |
|--------------------------------------|-------|----------------------|
| / 9:34:37.211 AM // 9:34:37.213 AM / | 0.1 | Total - 3 |
| LMS Admin User page | .05 | Pass - 0 3 |
| | | Fail • 1 Skip - 2 |
| @tag3 @tag | 1 2 3 | |

| # | # Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage users(admin) page, Registered Users list | FAILED | 0.001 s |

DETAILED SECTION -- 70 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium.By)" because "stepdef. Users.driver" is null at stepdef.Users.admin_is_on_manage_users_admin_page_registered_users_list(Users.java:106) at ?.Admin is on Manage users(admin) page, Registered Users list(file:///C:/Users/ramba/eclipse-workspace2/LMS_UI_HACKTHON/src/test/resources/lms_ui_features/Users.feature:20) * Not displayable characters are replaced by '?'. | | |
| 2 | When Admin clicks on trash icon of particular registered user | SKIPPED | 0.000 s |
| 3 | Then Deleted registered user will be removed from Registered users list | SKIPPED | 0.000 s |


(S)- Check whether Admin will be navigated to manage users(admin) page when clicked on eye icon

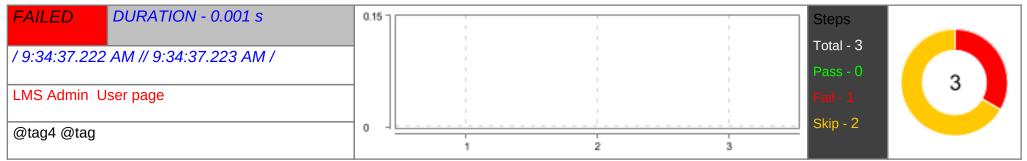

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage users(admin) page, Registered Users list | FAILED | 0.000 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium.By)" because "stepdef. Users.driver" is null at stepdef.Users.admin_is_on_manage_users_admin_page_registered_users_list(Users.java:106) at ?.Admin is on Manage users(admin) page, Registered Users list(file:///C:/Users/ramba/eclipse-workspace2/LMS_UI_HACKTHON/src/test/resources/lms_ui_features/Users.feature:26) * Not displayable characters are replaced by '?'. | | |
| 2 | When Admin clicks on eye icon for particular user | SKIPPED | 0.000 s |
| 3 | Then Admin will be navigated to Manage users (admin) page and view the User details only in read only format | SKIPPED | 0.000 s |


DETAILED SECTION -- 71 --

(S)- Check whether Admin can be able to view New Unassigned user

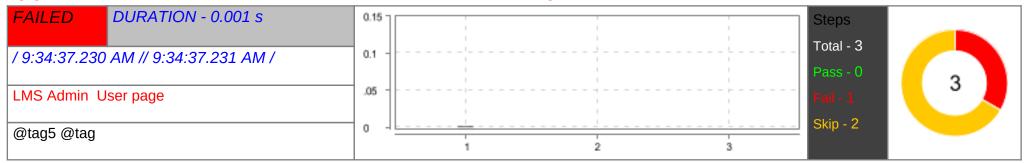


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given Admin is on LMS Admin User Page | FAILED | 0.001 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.findElement(org.openqa.selenium.By)" because "stepdef. Users.driver" is null at stepdef.Users.admin_is_on_lms_admin_user_page(Users.java:23) at ?.Admin is on LMS Admin User Page(file:///C:/Users/ramba/eclipse-workspace2/LMS_UI_HACKTHON/src/test/resources/lms_ui_features/Users.feature:32) * Not displayable characters are replaced by '?'. | | |
| 2 | When Admin clicks on New Unassigned User hyperlink | SKIPPED | 0.000 s |
| 3 | Then Admin will be navigated to Manage user(admin) page, Unregistered User list will be displayed | SKIPPED | 0.000 s |

(S)- Check whether Admin can be able to edit Unregistered user

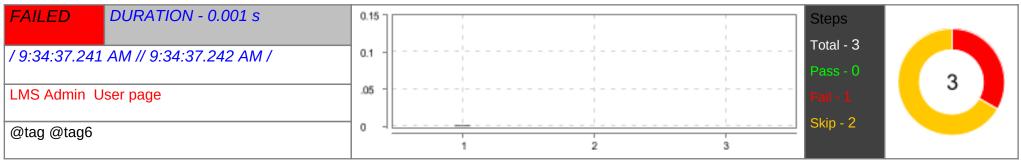

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given Admin is on Manage user(admin) page, Unregistered User list | FAILED | 0.001 s |
| | Step undefined | | |
| 2 | When Admin clicks on edit icon of particular unregistered user and admin will be navigated to manage users(admin) page | SKIPPED | 0.000 s |
| 3 | Then Admin will be able to edit User details like Time zone, User role batch, Program and click on save | SKIPPED | 0.000 s |

(S)- Check whether Admin can be able to delete Unregistered user

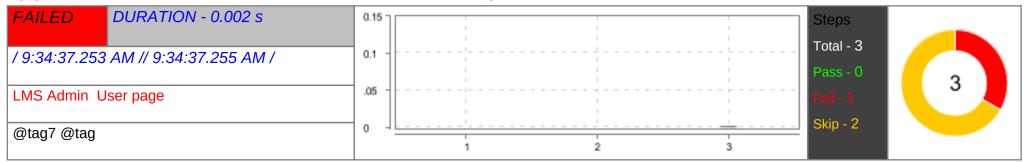


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given Admin is on Manage user(admin) page, Unregistered User list | FAILED | 0.000 s |
| | Step undefined | | |
| 2 | When Admin clicks on trash icon of particular unregistered user | SKIPPED | 0.000 s |
| 3 | Then Deleted unregistered user will be removed from Unregistered users list | SKIPPED | 0.001 s |

(F)- View the attendance details of the students by Admin

| FAILED | DURATION - 2.102 s | Scenarios | | Steps | |
|---------------|------------------------|-----------|---|-----------|---|
| | | Total - 3 | | Total - 9 | |
| / 9:34:37.265 | AM // 9:34:39.367 AM / | Pass - 0 | 3 | Pass - 0 | 9 |
| | | Fail - 3 | | Fail - 3 | |
| | | Skip - 0 | | Skip - 6 | |


(S)- Check whether Admin can view the attendance details

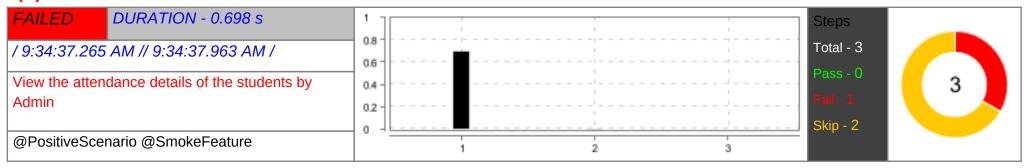

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Admin is on Manage Attendance(Admin and Class Staff) page | FAILED | 0.695 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Attendence | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is null | | |
| | at stepdef.Login. <init>(Login.java:25) at stepdef.Attendence.<init>(Attendence.java:22)</init></init> | | |
| 2 | When Admin Selects Batch, Class and Class Date | SKIPPED | 0.002 s |
| 3 | Then Student attendance can be viewed succesfully based on the selected criteria | SKIPPED | 0.000 s |

(S)- Check whether Admin can save the attendance details

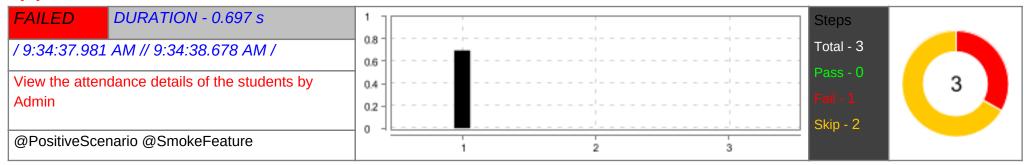


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Attendance(Admin and Class Staff) page | FAILED | 0.696 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Attendence at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. java:149) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | 0.000 0 |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | null | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Attendence. <init>(Attendence.java:22)</init> | | |
| 2 | When Admin clicks on save button after selecting batch and class and marks the student as either "Present, Absent, Late, Excused, Unknown". | SKIPPED | 0.000 s |
| 2 | Then Student attendance details will be saved succeesfully. | SKIPPED | 0.000 s |
| 3 | Then Student attenuance details will be saved Succeesfully. | SKIFFED | 0.000 5 |

DETAILED SECTION -- 76 --

(S)- Check whether Admin can reset the attendance details

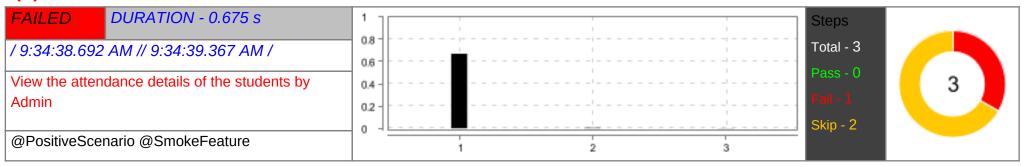

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Admin is on Manage Attendance(Admin and Class Staff) page | FAILED | 0.670 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdef.Attendence | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader. | | |
| | java:149) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |

DETAILED SECTION -- 77 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.iava:141) | | |
| | 37 more Caused by: java.lang.NullPointerException: Cannot invoke "java.util.Properties.getProperty(String)" because "this.properties" is | | |
| | | | |
| | at stepdef.Login. <init>(Login.java:25)</init> | | |
| | at stepdef.Attendence. <init>(Attendence.java:22)</init> | | |
| 2 | When Admin clicks on reset button after selecting batch , class and class date | SKIPPED | 0.004 s |
| 3 | Then Default radio button "Unknown" will be selected for all the displayed students | SKIPPED | 0.001 s |