

1.Create a Telephone directory using JSP and store all the information within a database, so that later could be retrieved as per the requirement. Make your own assumptions.

postgres

### Creating a Table:

```
CREATE TABLE telephone_directory (  
    id SERIAL PRIMARY KEY,  
    name VARCHAR(100) NOT NULL,  
    phone_number VARCHAR(20) NOT NULL,  
    address VARCHAR(200),  
    email VARCHAR(100)  
);
```

### Main.jsp

```
<%@page import="java.sql.*" %>
```

```
<%
```

```
    String driver = "org.postgresql.Driver";
```

```
    String url = "jdbc:postgresql://localhost:5432/postgres";
```

```
    String username = "postgres";
```

```
    String password = "password";
```

```
    Connection con = null;
```

```
    try {
```

```
        Class.forName(driver).newInstance();
```

```
        con = DriverManager.getConnection(url, username, password);
```

```
        if(request.getParameter("delete") != null) {
```

```
            int id = Integer.parseInt(request.getParameter("delete"));
```

```
            PreparedStatement pstmt = con.prepareStatement("delete from telephone_directory where id=?");
```

```
            pstmt.setInt(1, id);
```

```
            pstmt.executeUpdate();
```

```
            pstmt.close();
```

```

    }

    } catch(Exception e) {

        out.println(e);

    }

    // After delete, fetch and display records

    PreparedStatement pstmt = null;

    ResultSet rs = null;

%>

<html><head><title>Telephone Directory</title></head><body>

    <center><h1><a href="add.jsp">Add Entry</a></h1></center>

    <table border="1">

        <tr><th>ID</th>

        <th>Name</th>

        <th>Phone Number</th>

        <th>Address</th>

        <th>Email</th>

        <th>Update</th>

        <th>Delete</th>

    </tr>

    <%

    try {

        pstmt = con.prepareStatement("select * from telephone_directory");

        rs = pstmt.executeQuery();

        while(rs.next()) {

%>

        <tr>

            <td><%= rs.getInt("id") %></td>

            <td><%= rs.getString("name") %></td>

            <td><%= rs.getString("phone_number") %></td>

            <td><%= rs.getString("address") %></td>

```

```

<td><%= rs.getString("email") %></td>

<td><a href="update.jsp?edit=<%= rs.getInt("id") %>">Edit</a></td>

<td><a href="delete=<%= rs.getInt("id") %>">Delete</a></td>

</tr>

<%

}

} catch (Exception e) {

    out.println(e);

} finally {

    if(rs != null) rs.close();

    if(pstmt != null) pstmt.close();

    if(con != null) con.close();

}

%>

</table></body></html>

```

## Add.jsp

```

<%@ page import="java.sql.*" %>

<%

try {

    String driver ="org.postgresql.Driver";

    String url ="jdbc:postgresql://localhost:5432/postgres";

    String username ="postgres";

    String password ="password";

    Connection con =null;

    Class.forName(driver).newInstance();

    con = DriverManager.getConnection(url,username,password);

    if(request.getParameter("btn_add")!=null) {

        String name = request.getParameter("txt_name");
    }
}

```

```

String phone = request.getParameter("txt_phone");

String address = request.getParameter("txt_address");

String email = request.getParameter("txt_email");


PreparedStatement pstmt = con.prepareStatement("insert into
telephone_directory(name,phone_number,address,email) values(?,?,?,?)");

pstmt.setString(1, name);

pstmt.setString(2, phone);

pstmt.setString(3, address);

pstmt.setString(4, email);

pstmt.executeUpdate();

con.close();

out.println("Insert Successfully...! Click Back link.");

}

} catch(Exception e) {

    out.println(e);

}

%>

<html>

<head>

<title>Add Telephone Entry</title>

</head>

<body>

<form method="post" name="myform">

<table>

<tr><td>Name</td><td><input type="text" name="txt_name"></td></tr>

<tr><td>Phone Number</td><td><input type="text" name="txt_phone"></td></tr>

<tr><td>Address</td><td><input type="text" name="txt_address"></td></tr>

<tr><td>Email</td><td><input type="text" name="txt_email"></td></tr>

<tr><td><input type="submit" name="btn_add" value="Insert"></td></tr>

</table>

```

```
<center><h1><a href="main.jsp">Back</a></h1></center>

</form>

</body>

</html>
```

## Update.jsp

```
<%@ page import="java.sql.*" %>

<%

try {

    String driver ="org.postgresql.Driver";

    String url ="jdbc:postgresql://localhost:5432/postgres";

    String username ="postgres";

    String password ="password";

    Connection con =null;

    Class.forName(driver).newInstance();

    con = DriverManager.getConnection(url,username,password);

    if(request.getParameter("btn_update")!=null) {

        int hide = Integer.parseInt(request.getParameter("txt_hide"));

        String name_up = request.getParameter("txt_name");

        String phone_up = request.getParameter("txt_phone");

        String address_up = request.getParameter("txt_address");

        String email_up = request.getParameter("txt_email");

        PreparedStatement pstmt = con.prepareStatement("update telephone_directory set name=?, phone_number=?,
address=?, email=? where id=?");

        pstmt.setString(1, name_up);

        pstmt.setString(2, phone_up);

        pstmt.setString(3, address_up);

        pstmt.setString(4, email_up);

        pstmt.setInt(5, hide);

        pstmt.executeUpdate();

    }

}
```

```

        con.close();

        out.println("Update Successfully...! Click Back link.");
    }

} catch(Exception e) {

    out.println(e);

}

%>

<html><head><title>Update Telephone Entry</title></head><body>

    <form method="post" name="myform">

        <%

            try {

                Connection con = DriverManager.getConnection(url,username,password);

                if(request.getParameter("edit")!=null) {

                    int id = Integer.parseInt(request.getParameter("edit"));

                    PreparedStatement pstmt = con.prepareStatement("select * from telephone_directory where id=?");

                    pstmt.setInt(1, id);

                    ResultSet rs = pstmt.executeQuery();

                    while(rs.next()) {

                        id = rs.getInt(1);

                        String name = rs.getString(2);

                        String phone = rs.getString(3);

                        String address = rs.getString(4);

                        String email = rs.getString(5);

                        %>

                        <table>

                            <tr><td>Name</td><td><input type="text" name="txt_name" value="<%=name%>"></td></tr>

                            <tr><td>Phone Number</td><td><input type="text" name="txt_phone" value="<%=phone%>"></td></tr>

                            <tr><td>Address</td><td><input type="text" name="txt_address" value="<%=address%>"></td></tr>

                            <tr><td>Email</td><td><input type="text" name="txt_email" value="<%=email%>"></td></tr>

                            <tr><td><input type="submit" name="btn_update" value="Update"></td></tr>

```

```

<input type="hidden" name="txt_hide" value="<%=id%>"></table>

<%

}}

} catch(Exception e) {

out.println(e);}

%>

<center><h1><a href="main.jsp">Back</a></h1></center>

</form></body></html>

```

## Output:

### Telephone Directory

[Add Entry](#)

| ID | Name    | Phone Number | Address | Email             | Update               | Delete                 |
|----|---------|--------------|---------|-------------------|----------------------|------------------------|
| 1  | sahil   | 481941       | Nerul   | sahil@gmail.com   | <a href="#">Edit</a> | <a href="#">Delete</a> |
| 2  | rohan   | 414122       | Thane   | rohan@gmail.com   | <a href="#">Edit</a> | <a href="#">Delete</a> |
| 3  | susmit  | 414531       | panvel  | susmit@gmail.com  | <a href="#">Edit</a> | <a href="#">Delete</a> |
| 4  | atharv  | 434212       | Vashi   | atharv@gmail.com  | <a href="#">Edit</a> | <a href="#">Delete</a> |
| 5  | gautam  | 424514       | Seawood | gautam@gmail.com  | <a href="#">Edit</a> | <a href="#">Delete</a> |
| 6  | aniket  | 414212       | belapur | aniket@gmail.com  | <a href="#">Edit</a> | <a href="#">Delete</a> |
| 7  | student | 241415       | delhi   | student@gmail.com | <a href="#">Edit</a> | <a href="#">Delete</a> |

### Add Telephone Entry

Name:

Phone Number:

Address:

Email:

2. Write a JSP page to display the Registration form (Make your own assumptions).

***Create a Database Table***

```
CREATE TABLE studentreg1 (  
  
    id SERIAL PRIMARY KEY,  
    first_name varchar(50),  
    last_name varchar(50),  
    phn_number varchar(20),  
    address varchar(20), course  
    varchar(20), college_name  
    varchar(20)  
);
```



## Add.jsp

```
<%@ page import="java.sql.*" %>

<%

    try {
        String driver = "org.postgresql.Driver";
        String url = "jdbc:postgresql://localhost:5432/postgres";
        String username = "postgres";
        String password = "admin";

        Connection con = null;

        Class.forName(driver).newInstance();
        con = DriverManager.getConnection(url, username, password); System.out.println("Opened
        database successfully");

        // Check button click event
        if (request.getParameter("btn_add") != null) {
            String first_name, last_name, phn_number, address, course, college_name;
            first_name = request.getParameter("txt_first_name");
            last_name = request.getParameter("txt_last_name");
            phn_number = request.getParameter("txt_phn_number");
            address = request.getParameter("txt_address");
            course = request.getParameter("txt_course");
            college_name = request.getParameter("txt_college_name");

            PreparedStatement pstmt = null;

            pstmt = con.prepareStatement(
                "INSERT INTO studentreg1 " +
                "(first_name, last_name, phn_number, address, course, college_name) " + "VALUES
                (?, ?, ?, ?, ?, ?)"
            );

            pstmt.setString(1, first_name);
            pstmt.setString(2, last_name);
            pstmt.setString(3, phn_number);
            pstmt.setString(4, address);
            pstmt.setString(5, course);
            pstmt.setString(6, college_name);

            pstmt.executeUpdate();

            con.close();

            out.println("Insert Successfully...!");
        }
    } catch (Exception e) {
        out.println(e);
    }
}
```

```

    }

%>

<html>
<head>
    <title>Student Registration</title>

    <!-- JavaScript for form validation -->
    <script>
        function validate() {
            var first_name = document.myform.txt_first_name;
            var last_name = document.myform.txt_last_name;
            var phn_number = document.myform.txt_phn_number;
            var address = document.myform.txt_address;
            var course = document.myform.txt_course;
            var college_name = document.myform.txt_college_name;

            if (first_name.value == "") {
                window.alert("Please enter a first name");
                first_name.focus();
                return false;
            }

            if (last_name.value == "") { window.alert("Please
                enter a last name"); last_name.focus();
                return false;
            }

            if (phn_number.value == "") { window.alert("Please
                enter a mobile number"); phn_number.focus();
                return false;
            }

            if (address.value == "") {
                window.alert("Please enter address");
                address.focus();
                return false;
            }

            if (course.value == "") {
                window.alert("Please enter course");
                course.focus();
                return false;
            }

            if (college_name.value == "") {
                window.alert("Please enter college name");
                college_name.focus();
            }
        }
    </script>

```

```
        return false;
    }

    return true;
}

</script>
</head>

<body bgcolor="deea94">
    <div align="center">
        <form method="post" name="myform" onsubmit="return validate();">

            <h1><u>STUDENT REGISTRATION FORM</u></h1>
            <br>

            <table>
                <tr>
                    <td><b>First Name:</b></td>
                    <td><input type="text" name="txt_first_name"></td>
                </tr>

                <tr>
                    <td><b>Last Name:</b></td>
                    <td><input type="text" name="txt_last_name"></td>
                </tr>

                <tr>
                    <td><b>Phone Number:</b></td>
                    <td><input type="text" name="txt_phn_number"></td>
                </tr>

                <tr>
                    <td><b>Address:</b></td>
                    <td><input type="text" name="txt_address"></td>
                </tr>

                <tr>
                    <td><b>Course:</b></td>
                    <td><input type="text" name="txt_course"></td>
                </tr>

                <tr>
                    <td><b>College Name:</b></td>
                    <td><input type="text" name="txt_college_name"></td>
                </tr>

                <tr>
                    <td colspan="2" align="center">
                        <br>
                        <input type="submit" name="btn_add" value="Submit">
                    </td>
                </tr>
            </table>
        </div>
    </body>
</html>
```

```
<br>
</td>
</tr>
</table>
```

```
<br>
```

```
<p>
  <span>#8595;</span>
  <u>Click Below to list all the</u>
  <span>#8595;</span>
</p>
```

```
<p>
  <a href="index.jsp">Registered Students Details</a>
</p>
```

```
</form>
</div>
</body>
</html>
```

## Index.jsp

```
<%@ page import="java.sql.*" %>

<%

    try {
        String driver = "org.postgresql.Driver";
        String url = "jdbc:postgresql://localhost:5432/postgres";
        String username = "postgres";
        String password = "admin";

        Connection con = null;

        Class.forName(driver).newInstance();
        con = DriverManager.getConnection(url, username, password);

        System.out.println("Opened database successfully");

        if (request.getParameter("delete") != null) {
            int id = Integer.parseInt(request.getParameter("delete"));

            PreparedStatement pstmt = null;
            pstmt = con.prepareStatement(
                "DELETE FROM studentreg1 WHERE id = ?"
            );

            pstmt.setInt(1, id);
            pstmt.executeUpdate();
        }
    }
}
```

```

        con.close();
    }

    } catch (Exception e) {
        out.println(e);
    }
}

%>

<html>
<head>
    <title>JSP: Insert, Update, Delete</title>
</head>

<body bgcolor="F9CDAD">

    <br><br><br>

    <center>
        <h1><u>DETAILS OF REGISTERED STUDENTS</u></h1>
    </center>

    <br><br>

    <center>
        <table border="1" cellpadding="23">
            <tr>
                <th>ID</th>
                <th>First Name</th>
                <th>Last Name</th>
                <th>Mobile Number</th>
                <th>Address</th>
                <th>Course</th>
                <th>College Name</th>
            </tr>

            <%

                try {
                    String driver = "org.postgresql.Driver";
                    String url = "jdbc:postgresql://localhost:5432/postgres";
                    String username = "postgres";
                    String password = "admin";

                    Connection con = null;

                    Class.forName(driver).newInstance();
                    con = DriverManager.getConnection(url, username, password);

                    PreparedStatement pstmt = null; pstmt
                    = con.prepareStatement(
                        "SELECT * FROM studentreg1"
                    );

```

```

        ResultSet rs = pstmt.executeQuery();

        while (rs.next()) {
    %>

            <tr>
                <td><%= rs.getInt(1) %></td>
                <td><%= rs.getString(2) %></td>
                <td><%= rs.getString(3) %></td>
                <td><%= rs.getString(4) %></td>
                <td><%= rs.getString(5) %></td>
                <td><%= rs.getString(6) %></td>
                <td><%= rs.getString(7) %></td>
            </tr>

    <%
        }

        } catch (Exception e) {
            out.println(e);
        }
    %>

</table>
</center>

</body>
</html>

```

### Output:

Successfully...!

## **STUDENT REGISTRATION FORM**

**First Name:** John  
**Last Name:** Cena  
**Phone number** 9000123456  
**Address:** Belapur  
**Course:** MCA  
**College Name** BVIMIT

Submit

↓ Click Below to list all the ↓

[Registered Students Details](#)

## DETAILS OF REGISTERED STUDENTS

| ID | First Name | Last Name | Mobile Number | Address | College Name |
|----|------------|-----------|---------------|---------|--------------|
| 1  | John       | Cena      | 9000123456    | Belapur | MCA          |

3. Write a JSP program to add, delete and display the records from StudentMaster (RollNo, Name, Semester, Course) table.

```
CREATE TABLE StudentMaster (  
    RollNo INTEGER PRIMARY KEY,  
    Name VARCHAR(100) NOT NULL,  
    Semester VARCHAR(20),  
    Course VARCHAR(100)  
);
```

```
<%@page import="java.sql.*" %>  
  
<%  
  
    String driver = "org.postgresql.Driver";  
  
    String url = "jdbc:postgresql://localhost:5432/postgres";  
  
    String username = "postgres";  
  
    String password = "password";  
  
    Connection con = null;  
  
    PreparedStatement pstmt = null;  
  
    ResultSet rs = null;
```



```

try {

    Class.forName(driver).newInstance();

    con = DriverManager.getConnection(url, username, password);

    if(request.getParameter("delete") != null) {

        int rollNo = Integer.parseInt(request.getParameter("delete"));

        pstmt = con.prepareStatement("DELETE FROM StudentMaster WHERE RollNo=?");

        pstmt.setInt(1, rollNo);

        pstmt.executeUpdate();

    }

    pstmt = con.prepareStatement("SELECT * FROM StudentMaster");

    rs = pstmt.executeQuery();

%>

<html>

<head><title>StudentMaster Records</title></head>

<body>

<center><h1><a href="StudentAdd.jsp">Add Student</a></h1></center>

<table border="1">

    <tr><th>RollNo</th><th>Name</th><th>Semester</th><th>Course</th><th>Delete</th></tr>

    <% while(rs.next()) { %>

    <tr>

        <td><%= rs.getInt("RollNo") %></td>

        <td><%= rs.getString("Name") %></td>

        <td><%= rs.getString("Semester") %></td>

        <td><%= rs.getString("Course") %></td>

        <td><a href="?deLete=<%= rs.getInt("RollNo") %>">Delete</a></td>

    </tr>

```

```

        <% } %>

    </table>

</body>

</html>

<%

    } catch(Exception e) { out.println(e); }

    finally {

        if(rs != null) rs.close();

        if(pstmt != null) pstmt.close();

        if(con != null) con.close();

    }

%>

```

```

<%@ page import="java.sql.*" %>

<%

    String driver = "org.postgresql.Driver";

    String url = "jdbc:postgresql://localhost:5432/postgres";

    String username = "postgres";

    String password = "password";

    Connection con = null;

    try {

        Class.forName(driver).newInstance();

        con = DriverManager.getConnection(url, username, password);

        if(request.getParameter("btn_add") != null) {

```

```

        int rollNo = Integer.parseInt(request.getParameter("txt_roll"));

        String name = request.getParameter("txt_name");

        String semester = request.getParameter("txt_semester");

        String course = request.getParameter("txt_course");


        PreparedStatement pstmt = con.prepareStatement("INSERT INTO StudentMaster
VALUES(?,?,?,?)");

        pstmt.setInt(1, rollNo);

        pstmt.setString(2, name);

        pstmt.setString(3, semester);

        pstmt.setString(4, course);

        pstmt.executeUpdate();

        out.println("Student added successfully!");

    }

} catch (Exception e) { out.println(e); }

%>

<html>

<head><title>Add Student</title></head>

<body>

    <form method="post">

        <table>

            <tr><td>Roll No:</td><td><input type="text" name="txt_roll"></td></tr>

            <tr><td>Name:</td><td><input type="text" name="txt_name"></td></tr>

            <tr><td>Semester:</td><td><input type="text" name="txt_semester"></td></tr>

            <tr><td>Course:</td><td><input type="text" name="txt_course"></td></tr>

            <tr><td colspan="2"><input type="submit" name="btn_add" value="Add
Student"></td></tr>

        </table>

        <center><a href="StudentMain.jsp">Back</a></center>

```



```

</form>

</body>

</html>

```

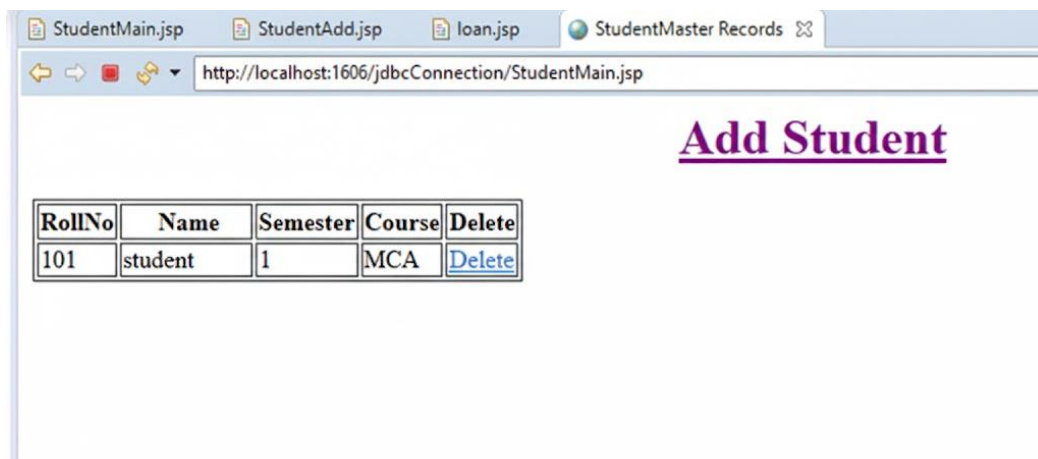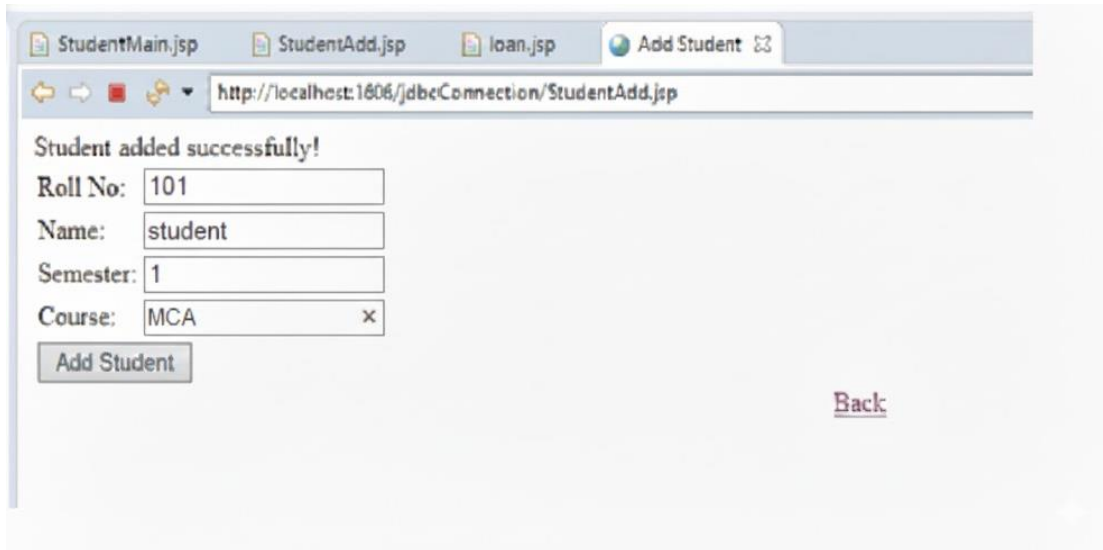

4.Design a loan calculator using JSP which accepts Period offline (in years) and Principal Loan Amount. Display the repayment amount for each loan and then list the loan balance and interest paid for each payment over the term of the loan for the following time period and interest rate:

- 1 to 7 year at 5.35\%
- 8 to 15 year at 5.5\%
- 16 to 30 year at 5.6\%

```
<%@ page import="java.text.DecimalFormat" %>
```

```
<%
```

```
DecimalFormat df = new DecimalFormat("0.00");
```

```
double principal = 0, rate = 0, years = 0;
```

```
if(request.getParameter("calculate") != null) {
```

```
    principal = Double.parseDouble(request.getParameter("principal"));
```

```
    years = Double.parseDouble(request.getParameter("years"));
```

```
    // Interest rate based on years
```

```
    if(years >= 1 && years <= 7)
```

```
        rate = 5.35;
```

```
    else if(years <= 15)
```

```
        rate = 5.5;
```

```
    else if(years <= 30)
```

```
        rate = 5.75;
```

```
    else
```

```
        out.println("<p style='color:red;'>Enter a loan period between 1 and 30  
years.</p>");
```

```
    }
```

```
%>
```

```
<html>
```

```
<head>
```

```
    <title>Simple Loan Calculator</title>
```

```
</head>
```

```
<body>
```

```
    <h2>Loan Calculator</h2>
```

```
    <form method="post">
```

```
        <label>Principal (₹): </label>
```

```
<input type="text" name="principal" value="<%= request.getParameter("principal") !=
null ? request.getParameter("principal") : "" %>"><br><br>
```

```
<label>Years: </label>
```

```
<input type="text" name="years" value="<%= request.getParameter("years") != null ?
request.getParameter("years") : "" %>"><br><br>
```

```
<input type="submit" name="calculate" value="Calculate">
```

```
</form>
```

```
<%
```

```
if(rate > 0) {
```

```
    double monthlyRate = rate / 100 / 12;
```

```
    int months = (int)(years * 12);
```

```
    double monthlyPayment = principal * monthlyRate / (1 - Math.pow(1 + monthlyRate, -
months));
```

```
%>
```

```
<h3>Loan Summary</h3>
```

```
<p>Principal: ₹<%= df.format(principal) %></p>
```

```
<p>Years: <%= years %></p>
```

```
<p>Rate: <%= rate %>%</p>
```

```
<p>Monthly Payment: ₹<%= df.format(monthlyPayment) %></p>
```

```
<h3>Amortization Schedule</h3>
```

```
<table border="1" cellpadding="5">
```

```
    <tr>
```

```
        <th>Month</th>
```

```
        <th>Payment (₹)</th>
```

```

        <th>Interest (₹)</th>

        <th>Principal (₹)</th>

        <th>Balance (₹)</th>

    </tr>

<%

    double balance = principal;

    for(int i = 1; i <= months; i++) {

        double interest = balance * monthlyRate;

        double principalPaid = monthlyPayment - interest;

        balance -= principalPaid;

        if(balance < 0) balance = 0;

    %>

    <tr>

        <td><%= i %></td>

        <td><%= df.format(monthlyPayment) %></td>

        <td><%= df.format(interest) %></td>

        <td><%= df.format(principalPaid) %></td>

        <td><%= df.format(balance) %></td>

    </tr>

<%

    }

}


%>

</table>

</body>

</html>

```



## Loan Calculator

Principal (â,¹):

Years:

### Loan Summary

Principal: â,¹241660.00

Years: 8.0

Rate: 5.5%

Monthly Payment: â,¹3117.25

### Amortization Schedule

| Month | Payment (â,¹) | Interest (â,¹) | Principal (â,¹) | Balance (â,¹) |
|-------|---------------|----------------|-----------------|---------------|
| 1     | 3117.25       | 1107.61        | 2009.64         | 239650.36     |
| 2     | 3117.25       | 1098.40        | 2018.85         | 237631.51     |
| 3     | 3117.25       | 1089.14        | 2028.11         | 235603.40     |
| 4     | 3117.25       | 1079.85        | 2037.40         | 233566.00     |
| 5     | 3117.25       | 1070.51        | 2046.74         | 231519.26     |

5. Write a program using JSP that displays a webpage consisting of an Application form for change of Study Center which can be filled by a student who wants to change his/her study center. Make necessary assumptions.

```
CREATE TABLE StudyCenterChange (  
    ApplicationID SERIAL PRIMARY KEY,  
    RollNo INTEGER NOT NULL,  
    Name VARCHAR(100) NOT NULL,  
    CurrentCenter VARCHAR(100),  
    RequestedCenter VARCHAR(100),  
    Reason TEXT,
```



```
SubmissionDate TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);
```

change\_center\_application.jsp

Code:

```
<%@ page import="java.sql.*" %>

<html>

<head><title>Change of Study Center Form</title></head>

<body>

    <h2>Application for Change of Study Center</h2>

    <form method="post" action="submit_application.jsp">

        <table>

            <tr><td>Roll No:</td><td><input type="text" name="rollno" required></td></tr>

            <tr><td>Name:</td><td><input type="text" name="name" required></td></tr>

            <tr><td>Current Study Center:</td><td><input type="text" name="current_center"
required></td></tr>

            <tr><td>Requested Study Center:</td><td><input type="text"
name="requested_center" required></td></tr>

            <tr><td>Reason for Change:</td><td><textarea name="reason" rows="4"
cols="40"></textarea></td></tr>

            <tr><td colspan="2"><input type="submit" value="Submit Application"></td></tr>

        </table>

    </form>

    <center><a href="view_application.jsp">View Submitted Applications</a></center>

</body>

</html>
```

submit\_application.jsp

Code:

```
<%@ page import="java.sql.*" %>

<%

    String driver = "org.postgresql.Driver";

    String url = "jdbc:postgresql://localhost:5432/postgres";

    String username = "postgres";

    String password = "password";

    try {

        Class.forName(driver).newInstance();

        Connection con = DriverManager.getConnection(url, username, password);

        int rollNo = Integer.parseInt(request.getParameter("rollno"));

        String name = request.getParameter("name");

        String currentCenter = request.getParameter("current_center");

        String requestedCenter = request.getParameter("requested_center");

        String reason = request.getParameter("reason");

        PreparedStatement pstmt = con.prepareStatement(

            "INSERT INTO StudyCenterChange (RollNo, Name, CurrentCenter, RequestedCenter, Reason) VALUES (?, ?, ?, ?, ?)"

        );

        pstmt.setInt(1, rollNo);

        pstmt.setString(2, name);

        pstmt.setString(3, currentCenter);

        pstmt.setString(4, requestedCenter);

        pstmt.setString(5, reason);
```

```

        pstmt.executeUpdate();

        out.println("<h3>Application submitted successfully!</h3>");

        out.println("<a href='change_center_form.jsp'>Submit Another</a> | <a  
href='view_applications.jsp'>View Applications</a>");

        pstmt.close();

        con.close();

    } catch (Exception e) {

        out.println("<p style='color:red;'>Error: " + e.getMessage() + "</p>");

    }

%>

```

view\_application.jsp

Code:

```

<%@ page import="java.sql.*" %>

<%

    String driver = "org.postgresql.Driver";

    String url = "jdbc:postgresql://localhost:5432/postgres";

    String username = "postgres";

    String password = "password";

    Connection con = null;

    PreparedStatement pstmt = null;

    ResultSet rs = null;

```

```

try {
    Class.forName(driver).newInstance();

    con = DriverManager.getConnection(url, username, password);

    pstmt = con.prepareStatement("SELECT * FROM StudyCenterChange ORDER BY SubmissionDate
DESC");

    rs = pstmt.executeQuery();

%>

<html>

<head><title>Submitted Applications</title></head>

<body>

<h2>Submitted Applications for Study Center Change</h2>

<table border="1">

    <tr>

        <th>Application ID</th>

        <th>Roll No</th>

        <th>Name</th>

        <th>Current Center</th>

        <th>Requested Center</th>

        <th>Reason</th>

        <th>Submission Date</th>

    </tr>

    <% while(rs.next()) { %>

    <tr>

        <td><%= rs.getInt("ApplicationID") %></td>

        <td><%= rs.getInt("RollNo") %></td>

        <td><%= rs.getString("Name") %></td>

        <td><%= rs.getString("CurrentCenter") %></td>

        <td><%= rs.getString("RequestedCenter") %></td>

```

```

        <td><%= rs.getString("Reason") %></td>

        <td><%= rs.getTimestamp("SubmissionDate") %></td>

    </tr>

    <% } %>

</table>

<center><a href="change_center_form.jsp">Back to Form</a></center>

</body>

</html>

<%

    } catch(Exception e) {

        out.println("<p style='color:red;'>Error: " + e.getMessage() + "</p>");

    } finally {

        if(rs != null) rs.close();

        if(pstmt != null) pstmt.close();


        if(con != null) con.close();

    }

%>

```


Output:

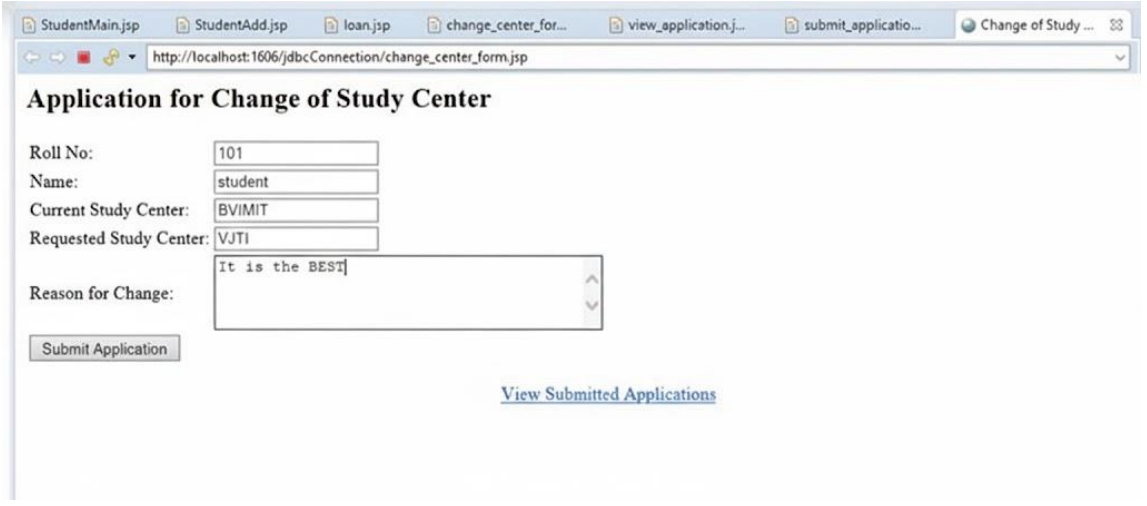

The screenshot shows a web browser window with the URL `http://localhost:1606/jdbcConnection/change_center_form.jsp`. The page title is "Application for Change of Study Center". The form contains the following fields and values:

- Roll No: 101
- Name: student
- Current Study Center: BVIMIT
- Requested Study Center: VJTI
- Reason for Change: It is the BEST

At the bottom left of the form is a button labeled "Submit Application". At the bottom right is a link labeled "View Submitted Applications".

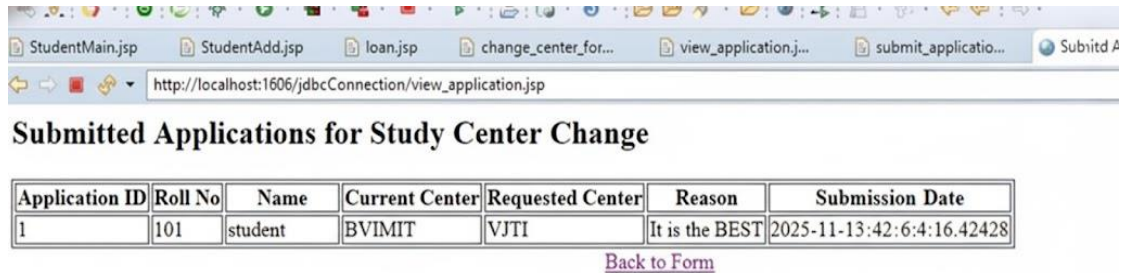

6. Write a JSP program that demonstrates the use of JSP declaration, scriptlet, directives, expression, header and footer.

### Scriptlet program

```
<%@ page language="java" contentType="text/html;
charset=ISO-8859-1"

    pageEncoding="ISO-8859-1"%>

<%String string1="JSP scriptlet"; %>

<%!String string2 = " ";%>

<!DOCTYPE html>

<html>
```

```
<head>

<meta charset="ISO-8859-1">

<title>Insert title here</title>

</head>

<body>

<h1>

<%-- --%>

Welcome to <%=string1 %>

</h1>

<%if(string1.equals("jsp scriptlet"))
out.println("hi"+string2);

else

out.println("hello");

%>

</body>

</html>
```



# Cookies

## Main.jsp :

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>

<!DOCTYPE html>

<html>

<head>

<meta charset="ISO-8859-1">

<title>JSP EXAMPLE</title>

</head>

<body>

<%@ include file = "header.jsp" %>

<center>

<%! int data=50; %>

<%= "Value of the variable is:"+data %> <%!
double circle(int n){ return 3.14*n*n;}

%></br>

<%= "Area of circle is:"+ circle(3) %></br> <%! int
rectangle(int l,int b){ return l*b;}

%>

<%= "Area of rectangle is:"+rectangle(3,4

) %></br> <%!

int perimeter(int x,int y){
int peri=2*(x+y);

return peri;}

%>

<%= "Perimeter of rectanlge:"+perimeter(5,6

) %></br>

<p>Thanks for visiting my page.</p>

</center>

<%@ include file = "footer.jsp" %>
```



```
</body>
```

```
</html>
```

## **Header.jsp :**

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"  
pageEncoding="ISO-8859-1"%>
```

```
<!DOCTYPE html>
```

```
<%!
```

```
int pageCount = 0;
```

```
void addCount() {
```

```
pageCount++;
```

```
}
```

```
%>
```

```
<% addCount(); %>
```

```
<html>
```

```
<head>
```

```
<title>JSP declaration, scriptlet, directives, expression, header and footer Example</title> </head>
```

```
<body>
```

```
<center>
```

```
<h2><u>The include Directive Example</u></h2>
```

```
<p><b>This site has been visited <%= pageCount %> times.</b></p>
```

```
</center>
```

```
<br/><br/>
```

```
</body>
```

```
</html>
```

### **Footer.jsp:**

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>
```

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<meta charset="ISO-8859-1">
```

```
<title>Insert title here</title>
```

```
</head>
```

```
<body>
```

```
<br/><br/>
```

```
<center><p><b>student </b></p></center></body></html>
```

### **Output:**

localhost:1234/directives/main.jsp

ader.jsp footer.jsp

## **The include Directive Example**

**This site has been visited 1 times.**

Value of the variable is:50  
Area of circle is:28.255999999999998  
Area of rectangele is:112  
Perimeter of rectangle:2:2'

Thanks for visiting my page.

**Student**

7. Write a JSP program that demonstrates the use of Cookies and session tracking in Java.

#### **form.html**

```
<!DOCTYPE html>
<html>
<head>
<meta charset="ISO-8859-1">
<title>Insert title here</title>
</head>
<body>
<form action="cookie_main.jsp"
method="GET">
Username: <input type="text"
name="username"> <br />
Email: <input type="text" name="email" />
<input type="submit" value="Submit" />
</form>
</body>
</html>
```


#### **cookie\_main.jsp**

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="ISO-8859-1">
<title>Cookie JSP</title>
<body>
<%
Cookie username= new Cookie("username", request.getParameter("username"));
Cookie email= new Cookie("email", request.getParameter("email"));
username.setMaxAge(60*60*10);
email.setMaxAge(60*60*10);

// Add both the cookies in the response header.

response.addCookie( username );
response.addCookie( email );
%>
</head>
<body>
<b>Username:</b>
<%= request.getParameter("username") %>
<b>Email:</b>
<%= request.getParameter("email") %>
```

```
</body>
</html>
```

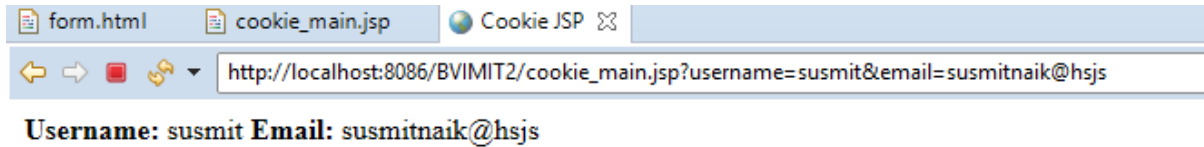

### session.jsp

```
<%@page import = "java.io.*,java.util.*"%>

<%
    Date creationTime = new Date(session.getCreationTime());
    Date lastaccessTime = new Date(session.getLastAccessedTime());
    String title = "My website";
    Integer visit = new Integer(0);
    String visitCount = new String("visit");


    String userID = new String("XYZ");

    String userIDCount = new String("userID");

    if (session.isNew()) {

        title = "My website";
        session.setAttribute(userIDCount, userID);
        session.setAttribute(visitCount, visit);
    }
    visit = (Integer) session.getAttribute(visitCount);
    visit = visit+1;
    userID =(String) session.getAttribute(userIDCount);
    session.setAttribute(visitCount, visit);
%>
<html>
<head><title>Session</title>
</head>
<body>
    <h2>Session tracking</h2>
    <%out.print(session.getId());%>
    Session Creation Time <%out.print(creationTime);%>
    Last Access Time <%out.print(lastaccessTime);%>
    User ID <%out.print(userID);%>
    No. of Visits <%out.print(visit);%>
```

</body>  
</html>



## Session tracking

69EFEF43C3F2C41624C3194BE80B8169  
Session Creation Time Thu Oct 16 12:25:02 IST 2025  
Last Access Time Thu Oct 16 12:44:40 IST 2025  
User ID XYZ  
No. of Visits 8