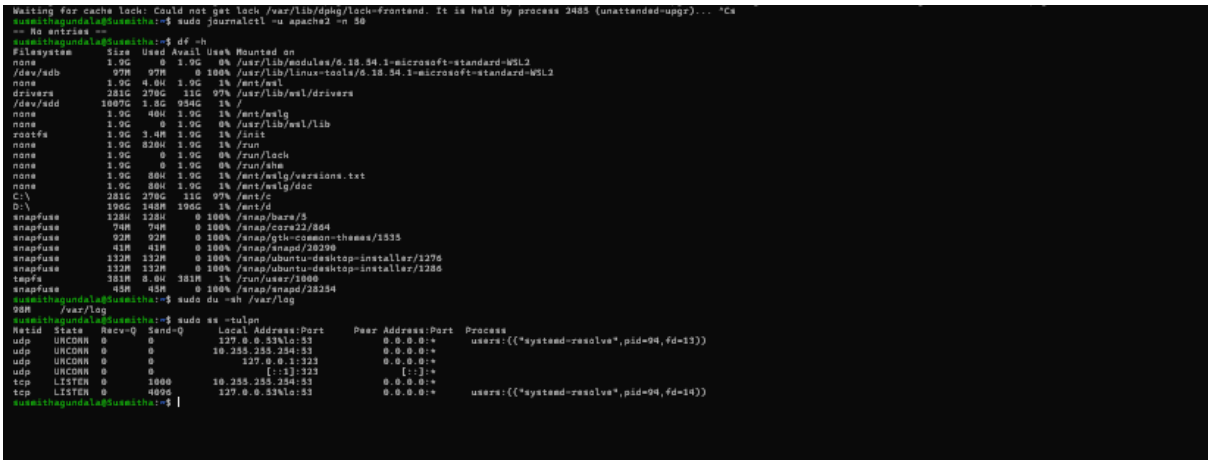
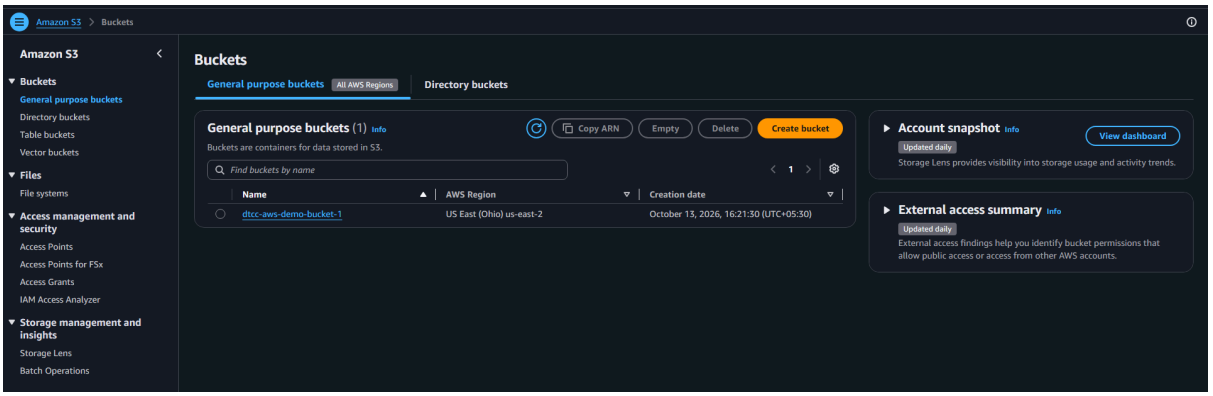
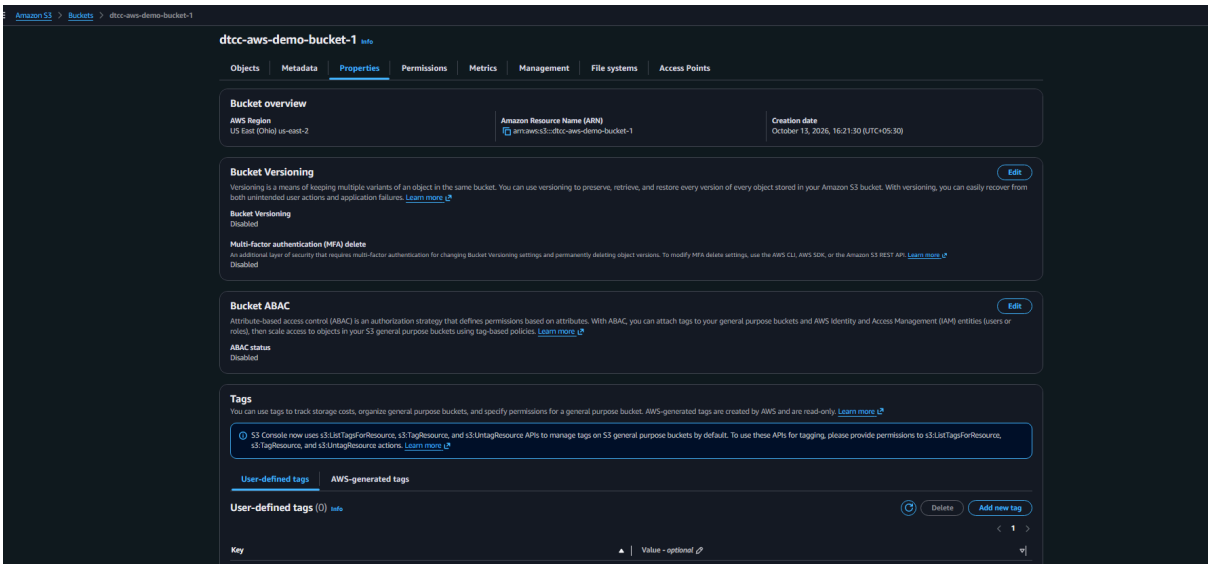
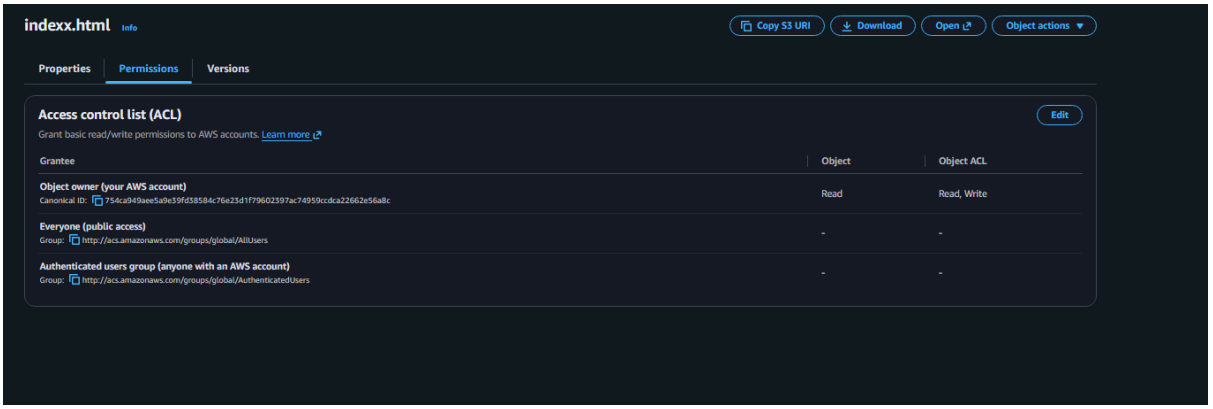
DAY 3 Linux Commands

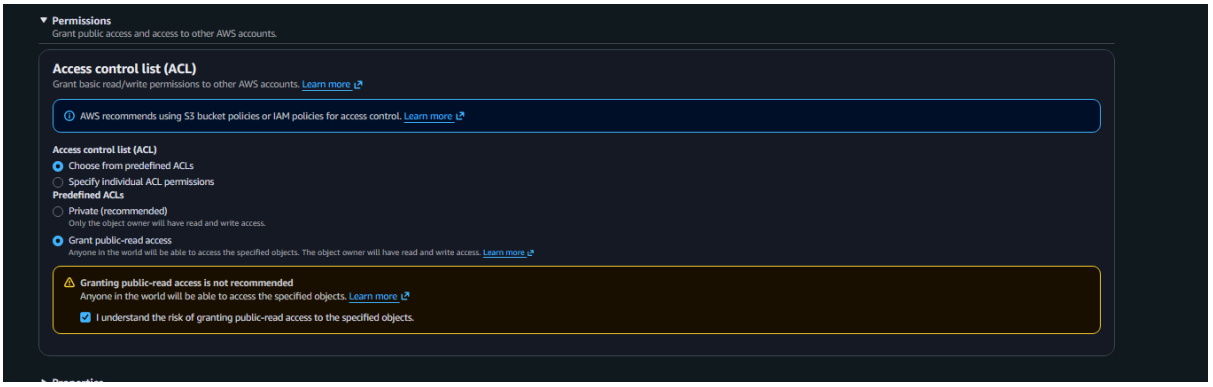


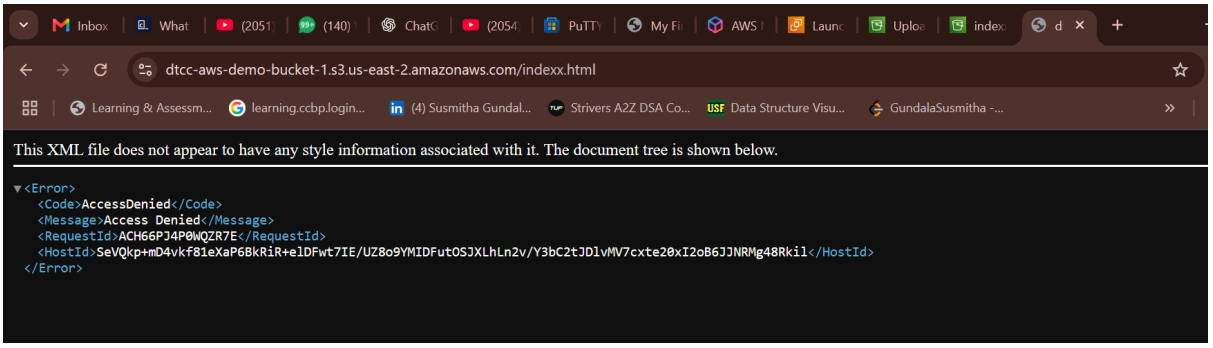
S3 Usage

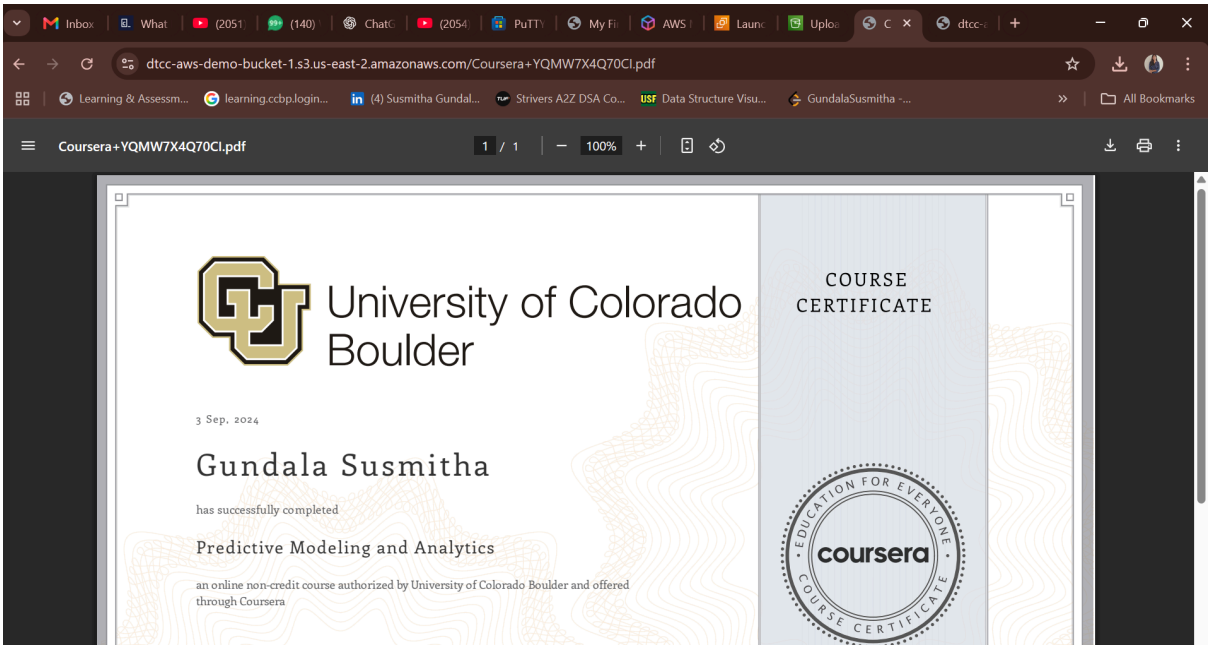




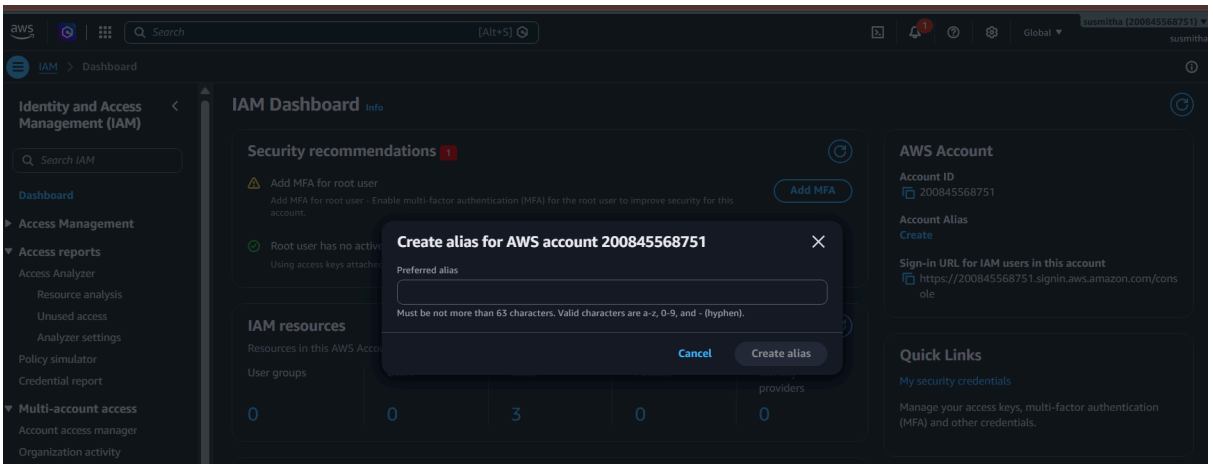

indexx.html Info
Copy S3 URI
Download
Open
Object actions
Properties
Permissions
Versions
Access control list (ACL)
Edit
Grant basic read/write permissions to AWS accounts. Learn more
Grantee
Object
Object ACL
Object owner (your AWS account)
Canonical ID: 754ca949aee5a9e39fd38584c76e25d1f79602397ac74959ccdca22662e56a8c
Read
Read, Write
Everyone (public access)
Group: http://acs.amazonaws.com/groups/global/AllUsers
Authenticated users group (anyone with an AWS account)
Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers

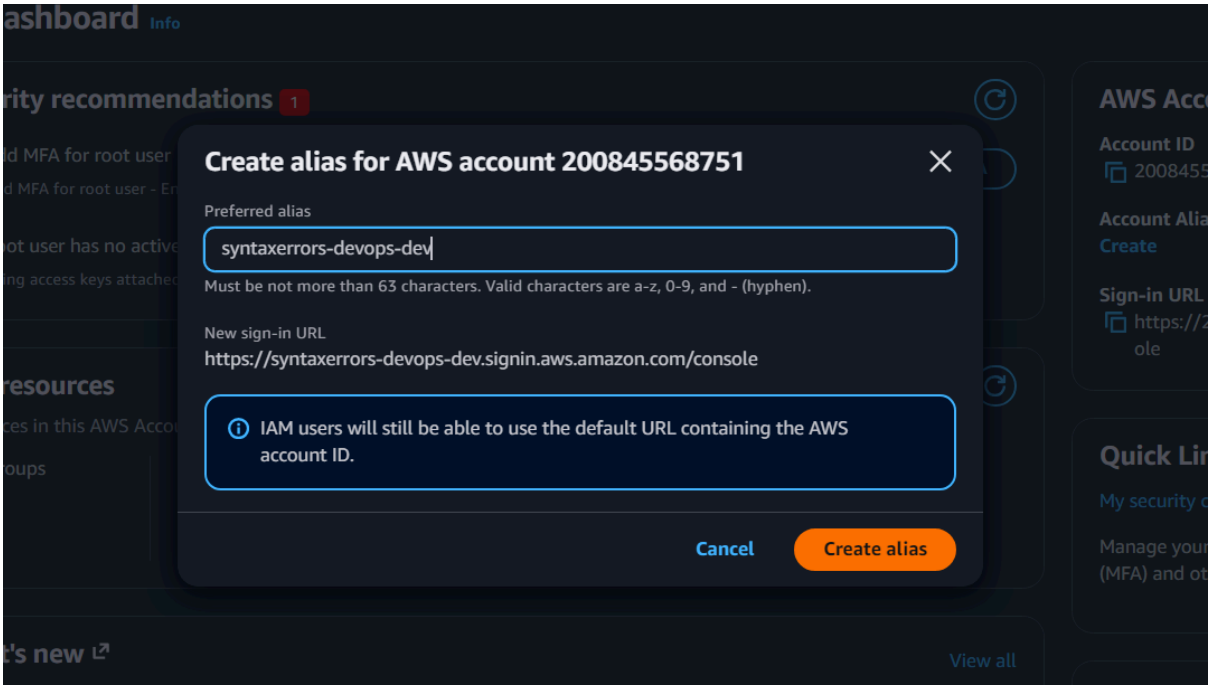

Permissions
Grant public access and access to other AWS accounts.
Access control list (ACL)
Grant basic read/write permissions to other AWS accounts. Learn more
AWS recommends using S3 bucket policies or IAM policies for access control. Learn more
Access control list (ACL)
Choose from predefined ACLs
Specify individual ACL permissions
Predefined ACLs
Private (recommended)
Only the object owner will have read and write access.
Grant public-read access
Anyone in the world will be able to access the specified objects. The object owner will have read and write access. Learn more
Granting public-read access is not recommended
Anyone in the world will be able to access the specified objects. Learn more
I understand the risk of granting public-read access to the specified objects.

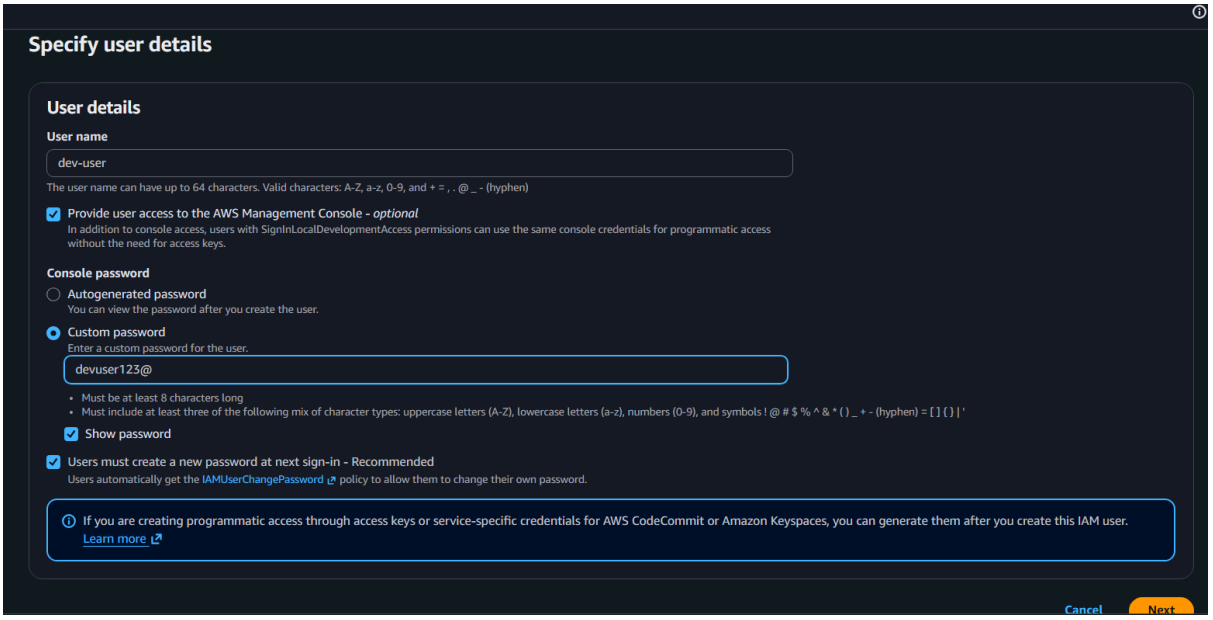

dtcc-aws-demo-bucket-1.s3.us-east-2.amazonaws.com/indexx.html
This XML file does not appear to have any style information associated with it. The document tree is shown below.
<Error>
<Code>AccessDenied</Code>
<Message>Access Denied</Message>
<RequestId>ACH66PJ4P0WQZR7E</RequestId>
<HostId>SeVQkp+mD4vkf81eXaP6BkRiR+elDFwt7IE/UZ8o9YMIDFutOSJXLhLn2v/Y3bC2tJDlvMV7cxte20xI2oB6JJNRMg48Rkil</HostId>
</Error>


dtcc-aws-demo-bucket-1.s3.us-east-2.amazonaws.com/Coursera+YQMW7X4Q70CI.pdf
Coursera+YQMW7X4Q70CI.pdf
1 / 1
100%
University of Colorado Boulder
COURSE CERTIFICATE
3 Sep, 2024
Gundala Susmitha
has successfully completed
Predictive Modeling and Analytics
an online non-credit course authorized by University of Colorado Boulder and offered through Coursera
EDUCATION FOR EVERYONE
coursera
COURSE CERTIFICATE

AWS IAM – Create Groups, Users, Policies, Roles, and Permissions







Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. Learn more

Permissions options

- (•) **Add user to group** — Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.
- ( ) **Copy permissions** — Copy all group memberships, attached managed policies, and inline policies from an existing user.
- ( ) **Attach policies directly** — Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

User groups (1/2)

Create group

Search

1

Group name	Users	Attached policies	Created
Admin	0	AdministratorAccess	2026-10-13 (2 minutes ago)
Developers	0	AmazonS3ReadOnlyAccess	2026-10-13 (3 minutes ago)

▸ **Set permissions boundary - *optional***

Cancel | Previous | Next

Review and create

Review your choices. After you create the user, you can view and download the autogenerated password, if enabled.

User details

User name	Console password type	Require password reset
dev-user	Custom password	Yes

Permissions summary

1

Name	Type	Used as
Developers	Group	Permissions group
IAMUserChangePassword	AWS managed	Permissions policy

Tags - *optional*

Tags are key-value pairs you can add to AWS resources to help identify, organize, or search for resources. Choose any tags you want to associate with this user.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags.

Cancel | Previous | Create user

Retrieve password

You can view and download the user's password below or email users instructions for signing in to the AWS Management Console. This is the only time you can view and download this password.

Console sign-in details

Email sign-in instructions

Console sign-in URL
https://syntaxerrors-devops-dev.signin.aws.amazon.com/console

User name
dev-user

Console password
********** Show

Cancel | Download .csv file | Return to users list

Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. Learn more

Permissions options

- (•) **Add user to group** — Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.
- ( ) **Copy permissions** — Copy all group memberships, attached managed policies, and inline policies from an existing user.
- ( ) **Attach policies directly** — Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

User groups (1/2)

Create group

Search

1

Group name	Users	Attached policies	Created
Admin	0	AdministratorAccess	2026-10-13 (3 minutes ago)
Developers	0	AmazonS3ReadOnlyAccess	2026-10-13 (4 minutes ago)

▸ **Set permissions boundary - *optional***

Cancel | Previous | Next

Review and create

Review your choices. After you create the user, you can view and download the autogenerated password, if enabled.

User details

User name	Console password type	Require password reset
admin	None	No

Permissions summary

1

Name	Type	Used as
Admin	Group	Permissions group

Tags - *optional*

Tags are key-value pairs you can add to AWS resources to help identify, organize, or search for resources. Choose any tags you want to associate with this user.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags.

Cancel | Previous | Create user

IAM users (2) Info

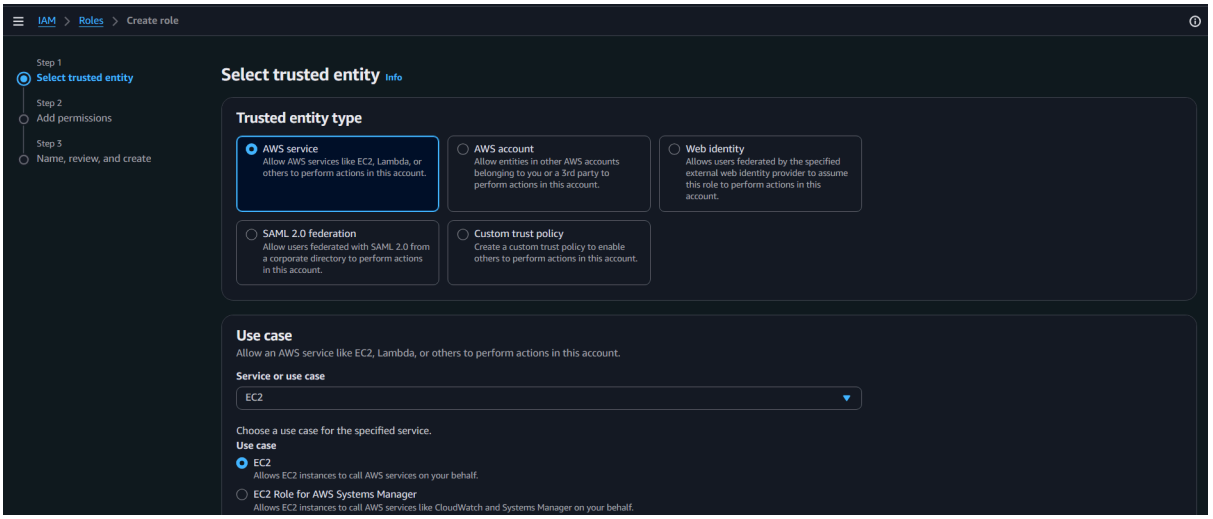
An IAM user is an identity with long-term credentials that is used to interact with AWS in an account.

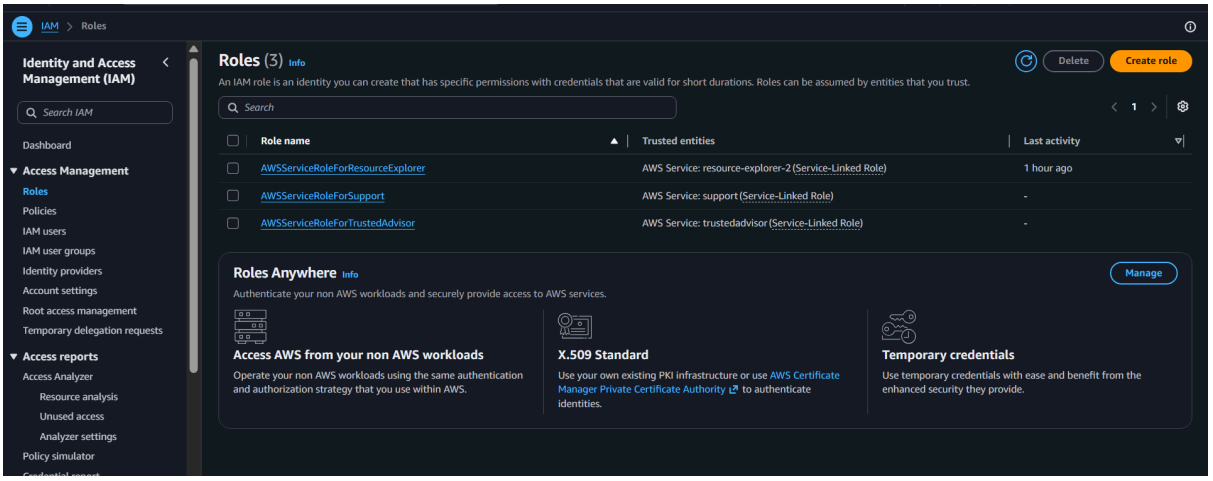
Delete user | Create user

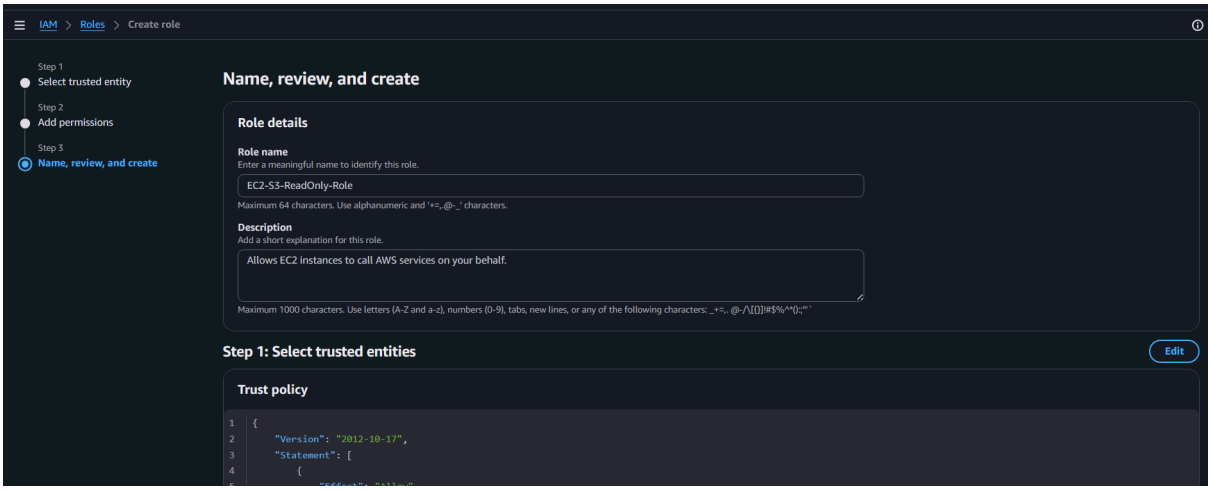
Search

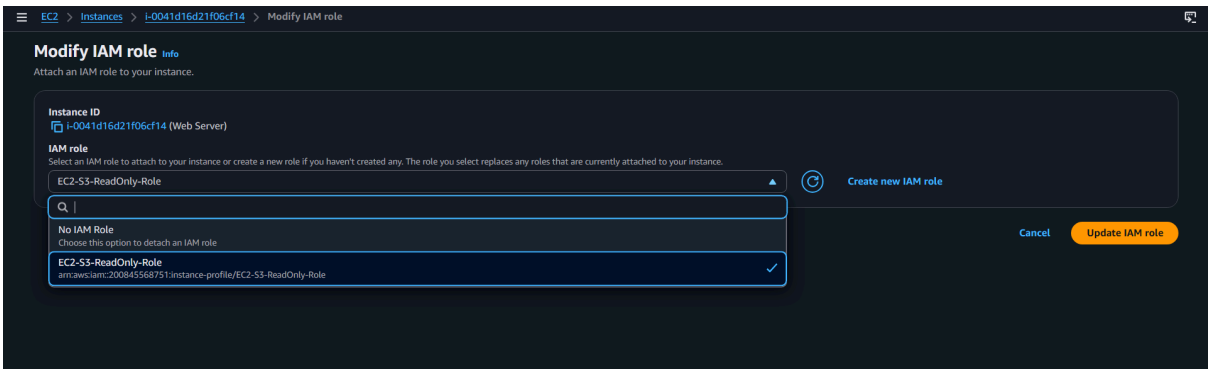
1

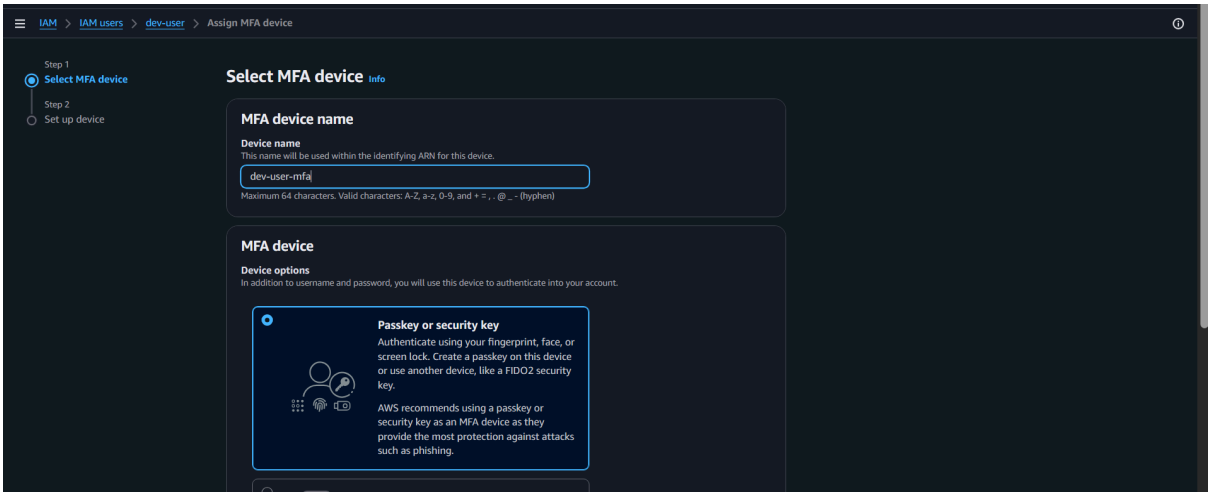
User name	Path	Groups	Last activity	MFA	Password age	Console last sign-in	Access key ID
admin	/	1	-	-	-	-	-
dev-user	/	1	-	-	1 minute	-	-

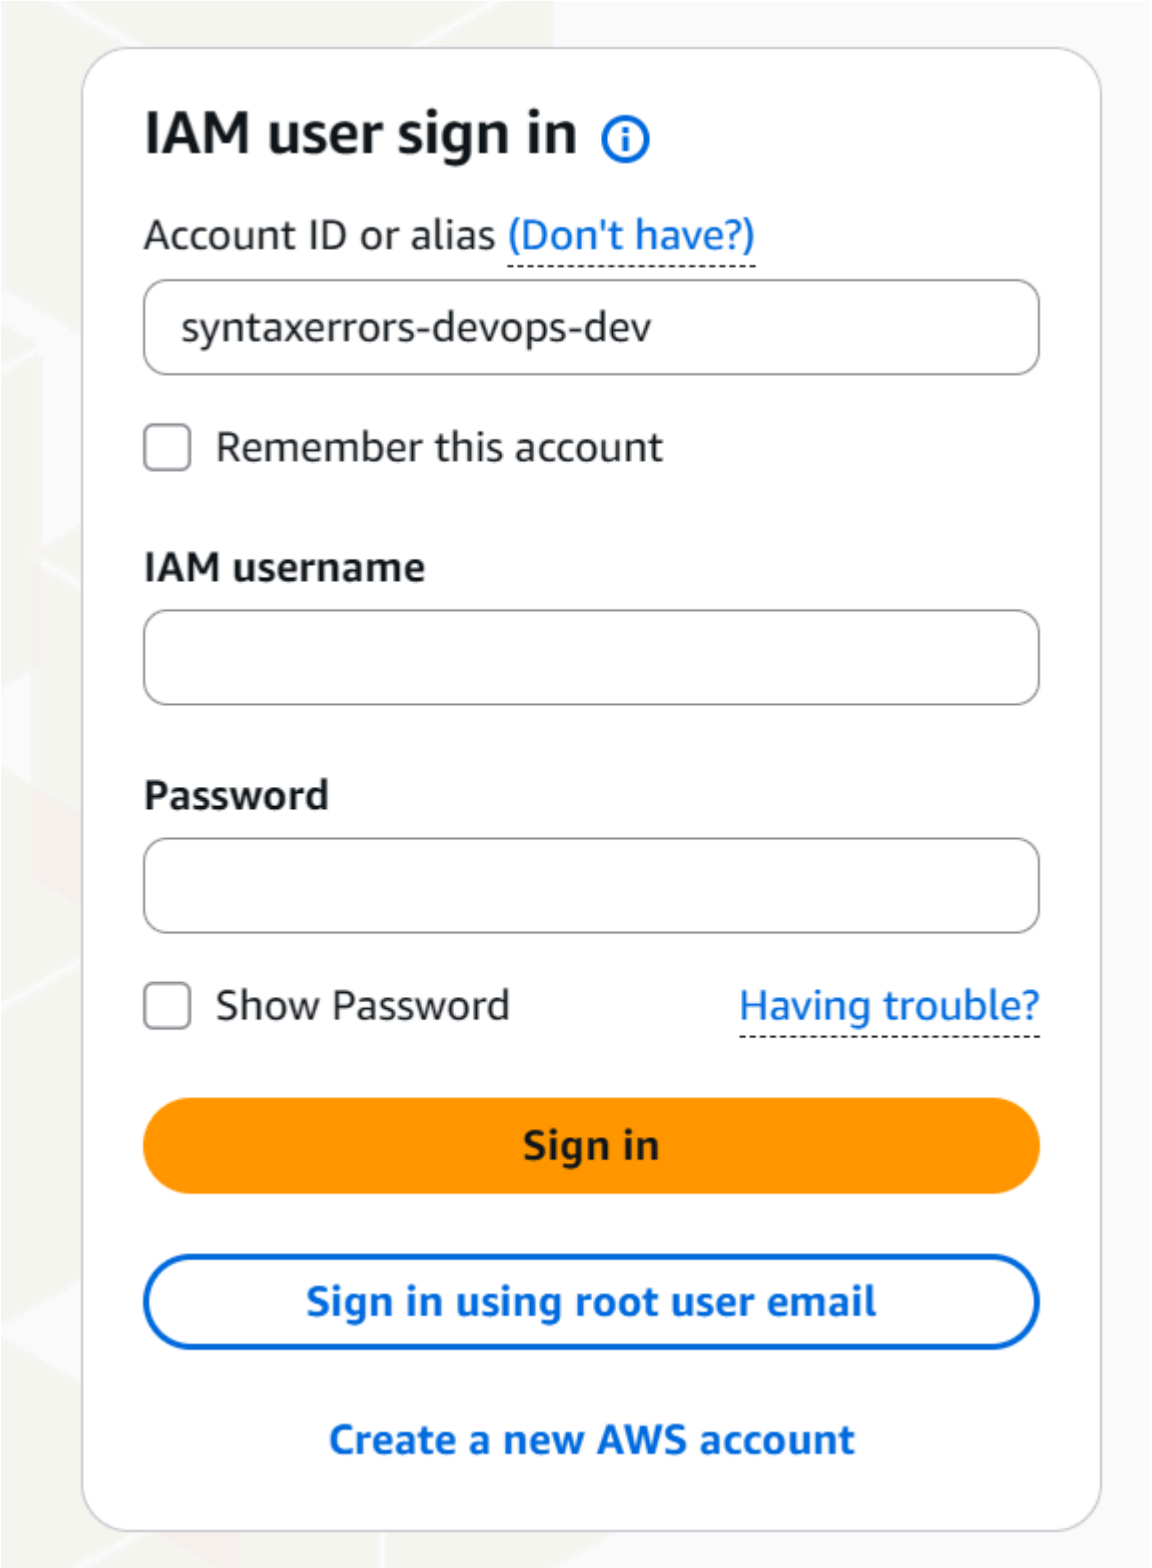

IAM > Roles > Create role
Step 1
Select trusted entity
Step 2
Add permissions
Step 3
Name, review, and create
Select trusted entity Info
Trusted entity type
AWS service
Allow AWS services like EC2, Lambda, or others to perform actions in this account.
AWS account
Allow entities in other AWS accounts belonging to you or a 3rd party to perform actions in this account.
Web identity
Allows users federated by the specified external web identity provider to assume this role to perform actions in this account.
SAML 2.0 federation
Allow users federated with SAML 2.0 from a corporate directory to perform actions in this account.
Custom trust policy
Create a custom trust policy to enable others to perform actions in this account.
Use case
Allow an AWS service like EC2, Lambda, or others to perform actions in this account.
Service or use case
EC2
Choose a use case for the specified service.
Use case
EC2
Allows EC2 instances to call AWS services on your behalf.
EC2 Role for AWS Systems Manager
Allows EC2 instances to call AWS services like CloudWatch and Systems Manager on your behalf.

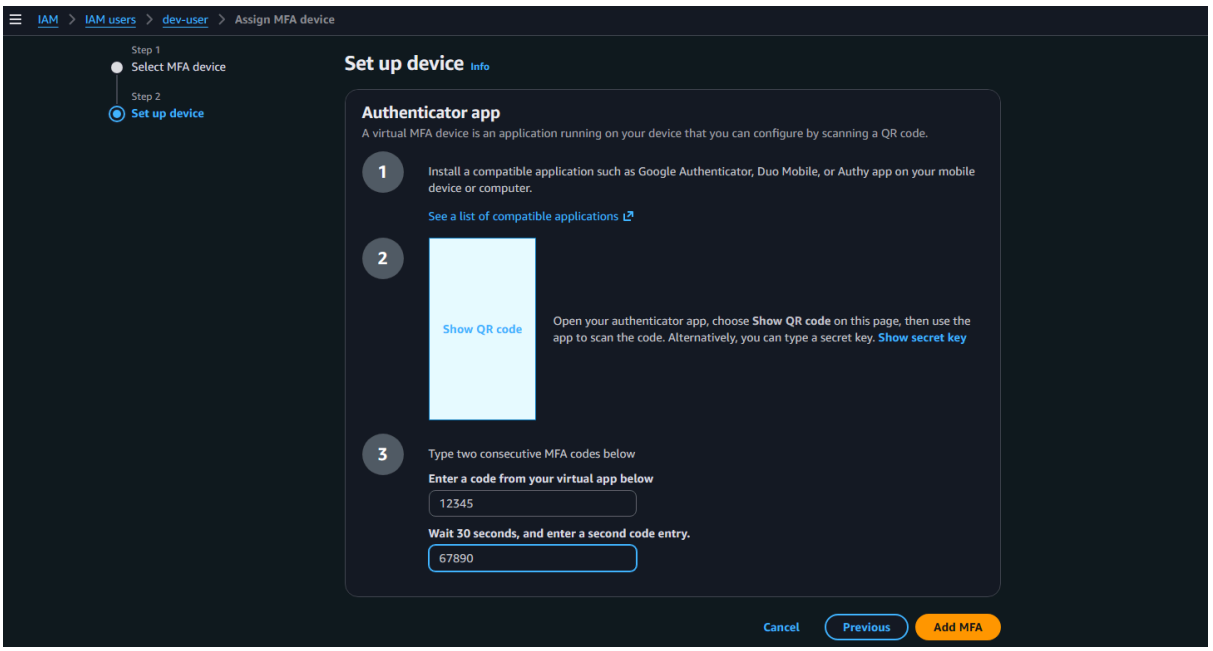

IAM > Roles
Identity and Access Management (IAM)
Search IAM
Dashboard
Access Management
Roles
Policies
IAM users
IAM user groups
Identity providers
Account settings
Root access management
Temporary delegation requests
Access reports
Access Analyzer
Resource analysis
Unused access
Analyzer settings
Policy simulator
Roles (3) Info
An IAM role is an identity you can create that has specific permissions with credentials that are valid for short durations. Roles can be assumed by entities that you trust.
Delete
Create role
Search
Role name
Trusted entities
Last activity
AWSServiceRoleForResourceExplorer
AWS Service: resource-explorer-2 (Service-Linked Role)
1 hour ago
AWSServiceRoleForSupport
AWS Service: support (Service-Linked Role)
-
AWSServiceRoleForTrustedAdvisor
AWS Service: trustedadvisor (Service-Linked Role)
-
Roles Anywhere Info
Manage
Authenticate your non AWS workloads and securely provide access to AWS services.
Access AWS from your non AWS workloads
Operate your non AWS workloads using the same authentication and authorization strategy that you use within AWS.
X.509 Standard
Use your own existing PKI infrastructure or use AWS Certificate Manager Private Certificate Authority to authenticate identities.
Temporary credentials
Use temporary credentials with ease and benefit from the enhanced security they provide.

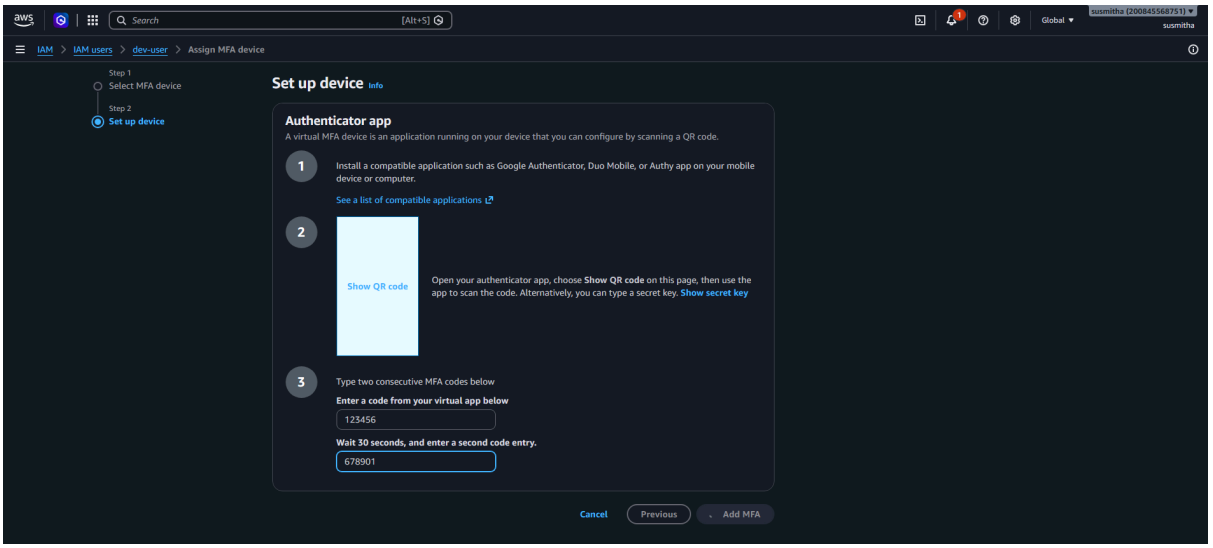

IAM > Roles > Create role
Step 1
Select trusted entity
Step 2
Add permissions
Step 3
Name, review, and create
Name, review, and create
Role details
Role name
Enter a meaningful name to identify this role.
EC2-S3-ReadOnly-Role
Maximum 64 characters. Use alphanumeric and '+=,.@-_' characters.
Description
Add a short explanation for this role.
Allows EC2 instances to call AWS services on your behalf.
Maximum 1000 characters. Use letters (A-Z and a-z), numbers (0-9), tabs, new lines, or any of the following characters: _+=,. @-/\[{}]!#$%^*();:"'`
Step 1: Select trusted entities
Edit
Trust policy
{
"Version": "2012-10-17",
"Statement": [
{

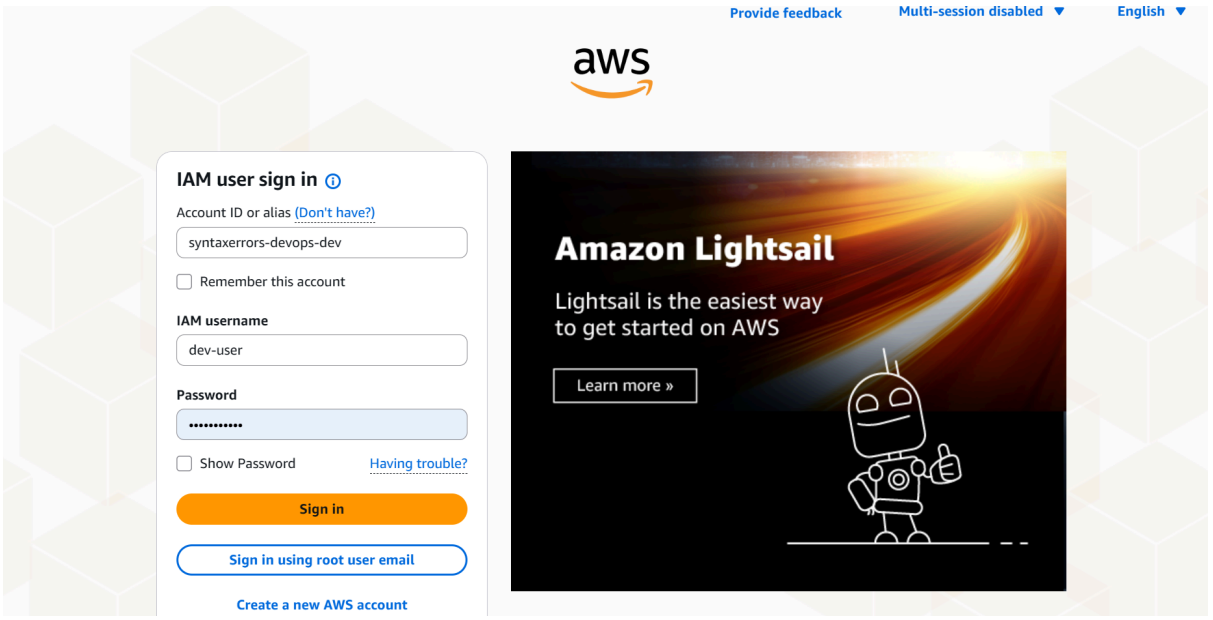

EC2 > Instances > i-0041d16d21f06cf14 > Modify IAM role
Modify IAM role Info
Attach an IAM role to your instance.
Instance ID
i-0041d16d21f06cf14 (Web Server)
IAM role
Select an IAM role to attach to your instance or create a new role if you haven't created any. The role you select replaces any roles that are currently attached to your instance.
EC2-S3-ReadOnly-Role
Create new IAM role
No IAM Role
Choose this option to detach an IAM role
EC2-S3-ReadOnly-Role
arn:aws:iam::200845568751:instance-profile/EC2-S3-ReadOnly-Role
Cancel
Update IAM role


IAM > IAM users > dev-user > Assign MFA device
Step 1
Select MFA device
Step 2
Set up device
Select MFA device Info
MFA device name
Device name
This name will be used within the identifying ARN for this device.
dev-user-mfa
Maximum 64 characters. Valid characters: A-Z, a-z, 0-9, and + = , . @ _ - (hyphen)
MFA device
Device options
In addition to username and password, you will use this device to authenticate into your account.
Passkey or security key
Authenticate using your fingerprint, face, or screen lock. Create a passkey on this device or use another device, like a FIDO2 security key.
AWS recommends using a passkey or security key as an MFA device as they provide the most protection against attacks such as phishing.


IAM user sign in
Account ID or alias (Don't have?)
syntaxerrors-devops-dev
Remember this account
IAM username
Password
Show Password
Having trouble?
Sign in
Sign in using root user email
Create a new AWS account


IAM > IAM users > dev-user > Assign MFA device
Step 1
Select MFA device
Step 2
Set up device
Set up device Info
Authenticator app
A virtual MFA device is an application running on your device that you can configure by scanning a QR code.
1
Install a compatible application such as Google Authenticator, Duo Mobile, or Authy app on your mobile device or computer.
See a list of compatible applications
2
Show QR code
Open your authenticator app, choose Show QR code on this page, then use the app to scan the code. Alternatively, you can type a secret key. Show secret key
3
Type two consecutive MFA codes below
Enter a code from your virtual app below
12345
Wait 30 seconds, and enter a second code entry.
67890
Cancel
Previous
Add MFA


Search
[Alt+S]
Global
susmitha
IAM > IAM users > dev-user > Assign MFA device
Step 1
Select MFA device
Step 2
Set up device
Set up device Info
Authenticator app
A virtual MFA device is an application running on your device that you can configure by scanning a QR code.
1
Install a compatible application such as Google Authenticator, Duo Mobile, or Authy app on your mobile device or computer.
See a list of compatible applications
2
Show QR code
Open your authenticator app, choose Show QR code on this page, then use the app to scan the code. Alternatively, you can type a secret key. Show secret key
3
Type two consecutive MFA codes below
Enter a code from your virtual app below
123456
Wait 30 seconds, and enter a second code entry.
678901
Cancel
Previous
Add MFA


Provide feedback
Multi-session disabled
English
aws
IAM user sign in
Account ID or alias (Don't have?)
syntaxerrors-devops-dev
Remember this account
IAM username
dev-user
Password
Show Password
Having trouble?
Sign in
Sign in using root user email
Create a new AWS account
Amazon Lightsail
Lightsail is the easiest way to get started on AWS
Learn more »

Additional verification required

Your account is protected with **multi-factor authentication (MFA)** .

To finish signing in, enter the code from your MFA device below.

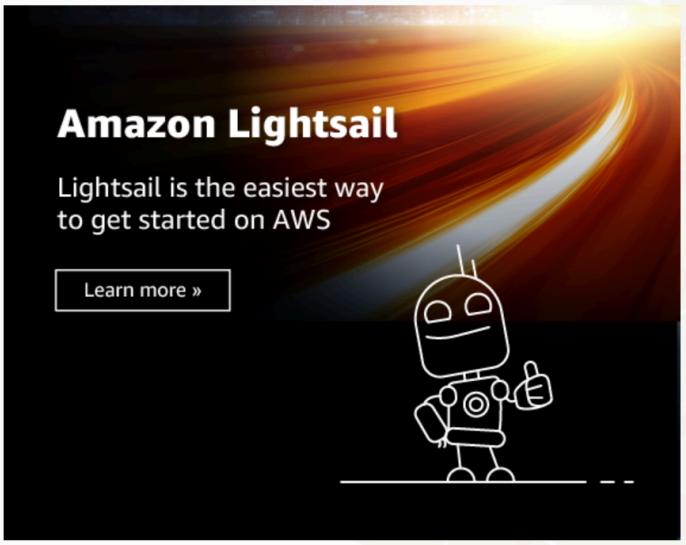
MFA code

200998

Sign in

Sign in to a different account

Trouble signing in?



© 2026 Amazon Web Services, Inc. or its affiliates. All rights reserved.

Password reset

Your account **(200845568751)** password has expired or requires a reset.

To continue, please verify your old and set a new password for **dev-user (not you?)**.

Old Password

Show Password

New Password

Confirm New Password

Show Password

Confirm Password Change

Sign in to a different account

© 2026 Amazon Web Services, Inc. or its affiliates. All rights reserved.

Password reset

Your account **(200845568751)** password has expired or requires a reset.

To continue, please verify your old and set a new password for **dev-user** **(not you?)**.

Old Password

••••••••••••

Show Password

New Password

••••••••••••••

Confirm New Password

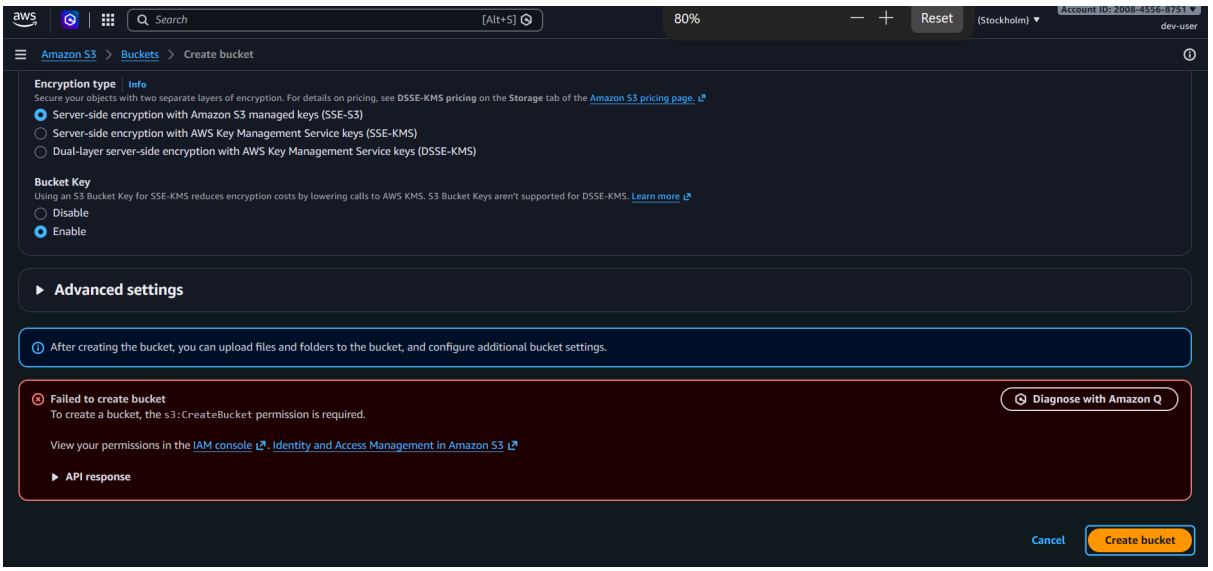
••••••••••••••

Show Password Matches

Confirm Password Change

Sign in to a different account

© 2026 Amazon Web Services, Inc. or its affiliates. All rights reserved.


Search
[Alt+S]
80%
Reset
(Stockholm)
Account ID: 2008-4556-8751
dev-user
Amazon S3 > Buckets > Create bucket
Encryption type Info
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the Amazon S3 pricing page.
Server-side encryption with Amazon S3 managed keys (SSE-S3)
Server-side encryption with AWS Key Management Service keys (SSE-KMS)
Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. Learn more
Disable
Enable
Advanced settings
After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.
Failed to create bucket
To create a bucket, the s3:CreateBucket permission is required.
Diagnose with Amazon Q
View your permissions in the IAM console, Identity and Access Management in Amazon S3
API response
Cancel
Create bucket